


Contractor shall demolish all flooring, base, wall covering, handrail, crash rail, and corner guards in area identified in hatch. Contractor shall prep floor and provide new flooring, wall protection, handrail, crash rail, wall covering and paint as referenced in finish schedule and finish drawings. Contractor shall replace all lights in area identified in hatch, and attached lighting plan. Contractor shall demolish existing and provide new ceiling grid and ceiling tile in all areas identified in hatched area.





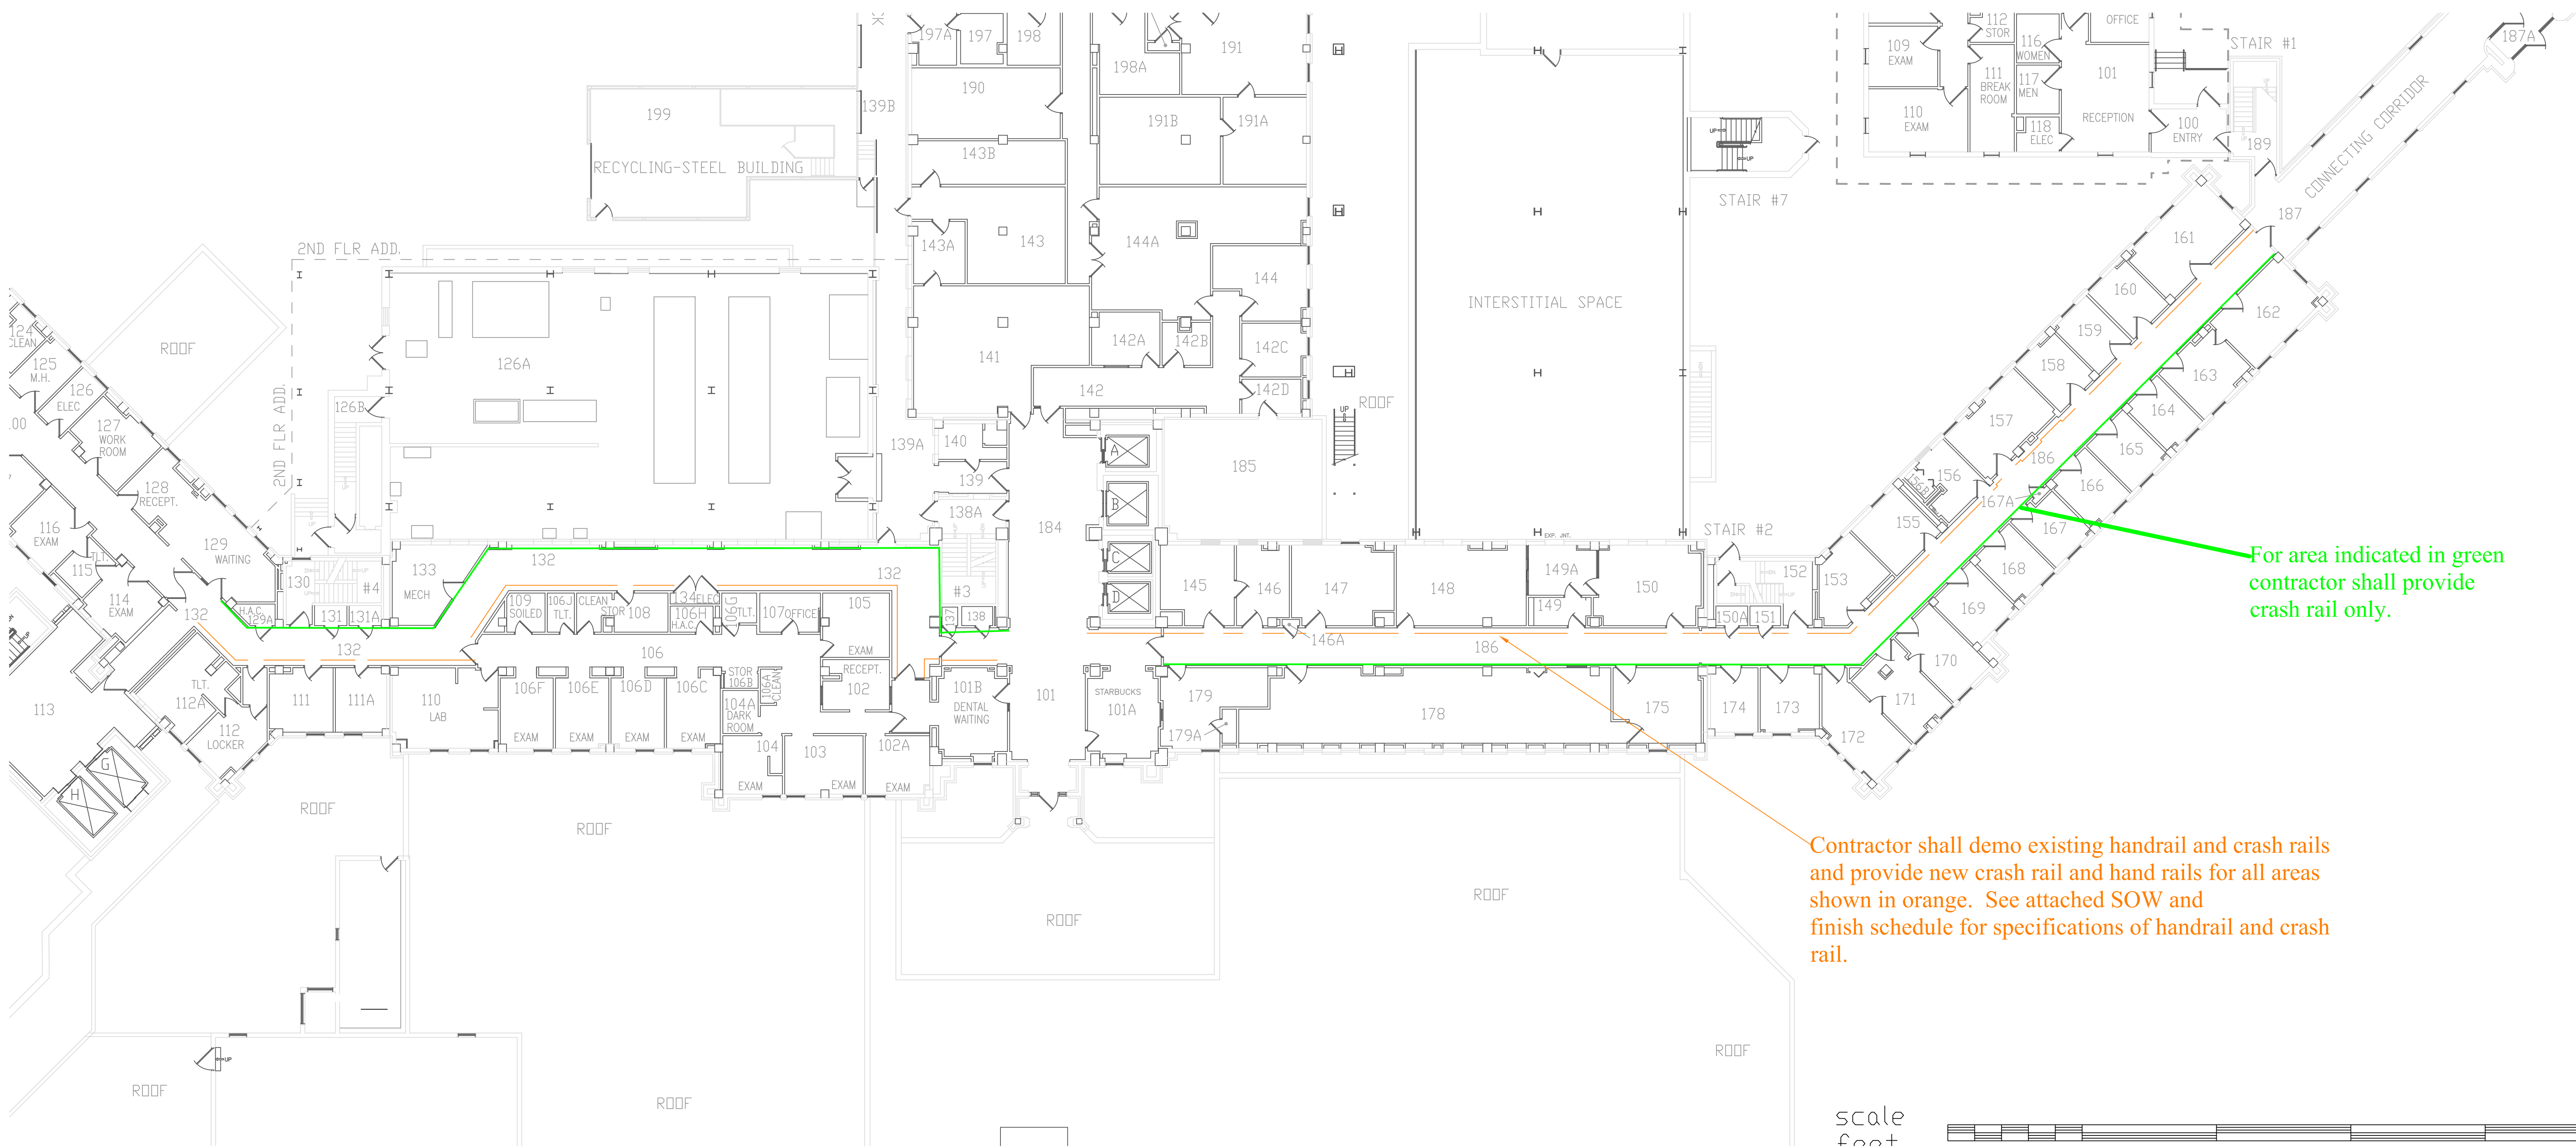


For area indicated in green contractor shall provide crash rail only.

Contractor shall demo existing handrail and crash rails and provide new crash rail and hand rails for all areas shown in orange. See attached SOW and finish schedule for specifications of handrail and crash rail.





BUILDING 52

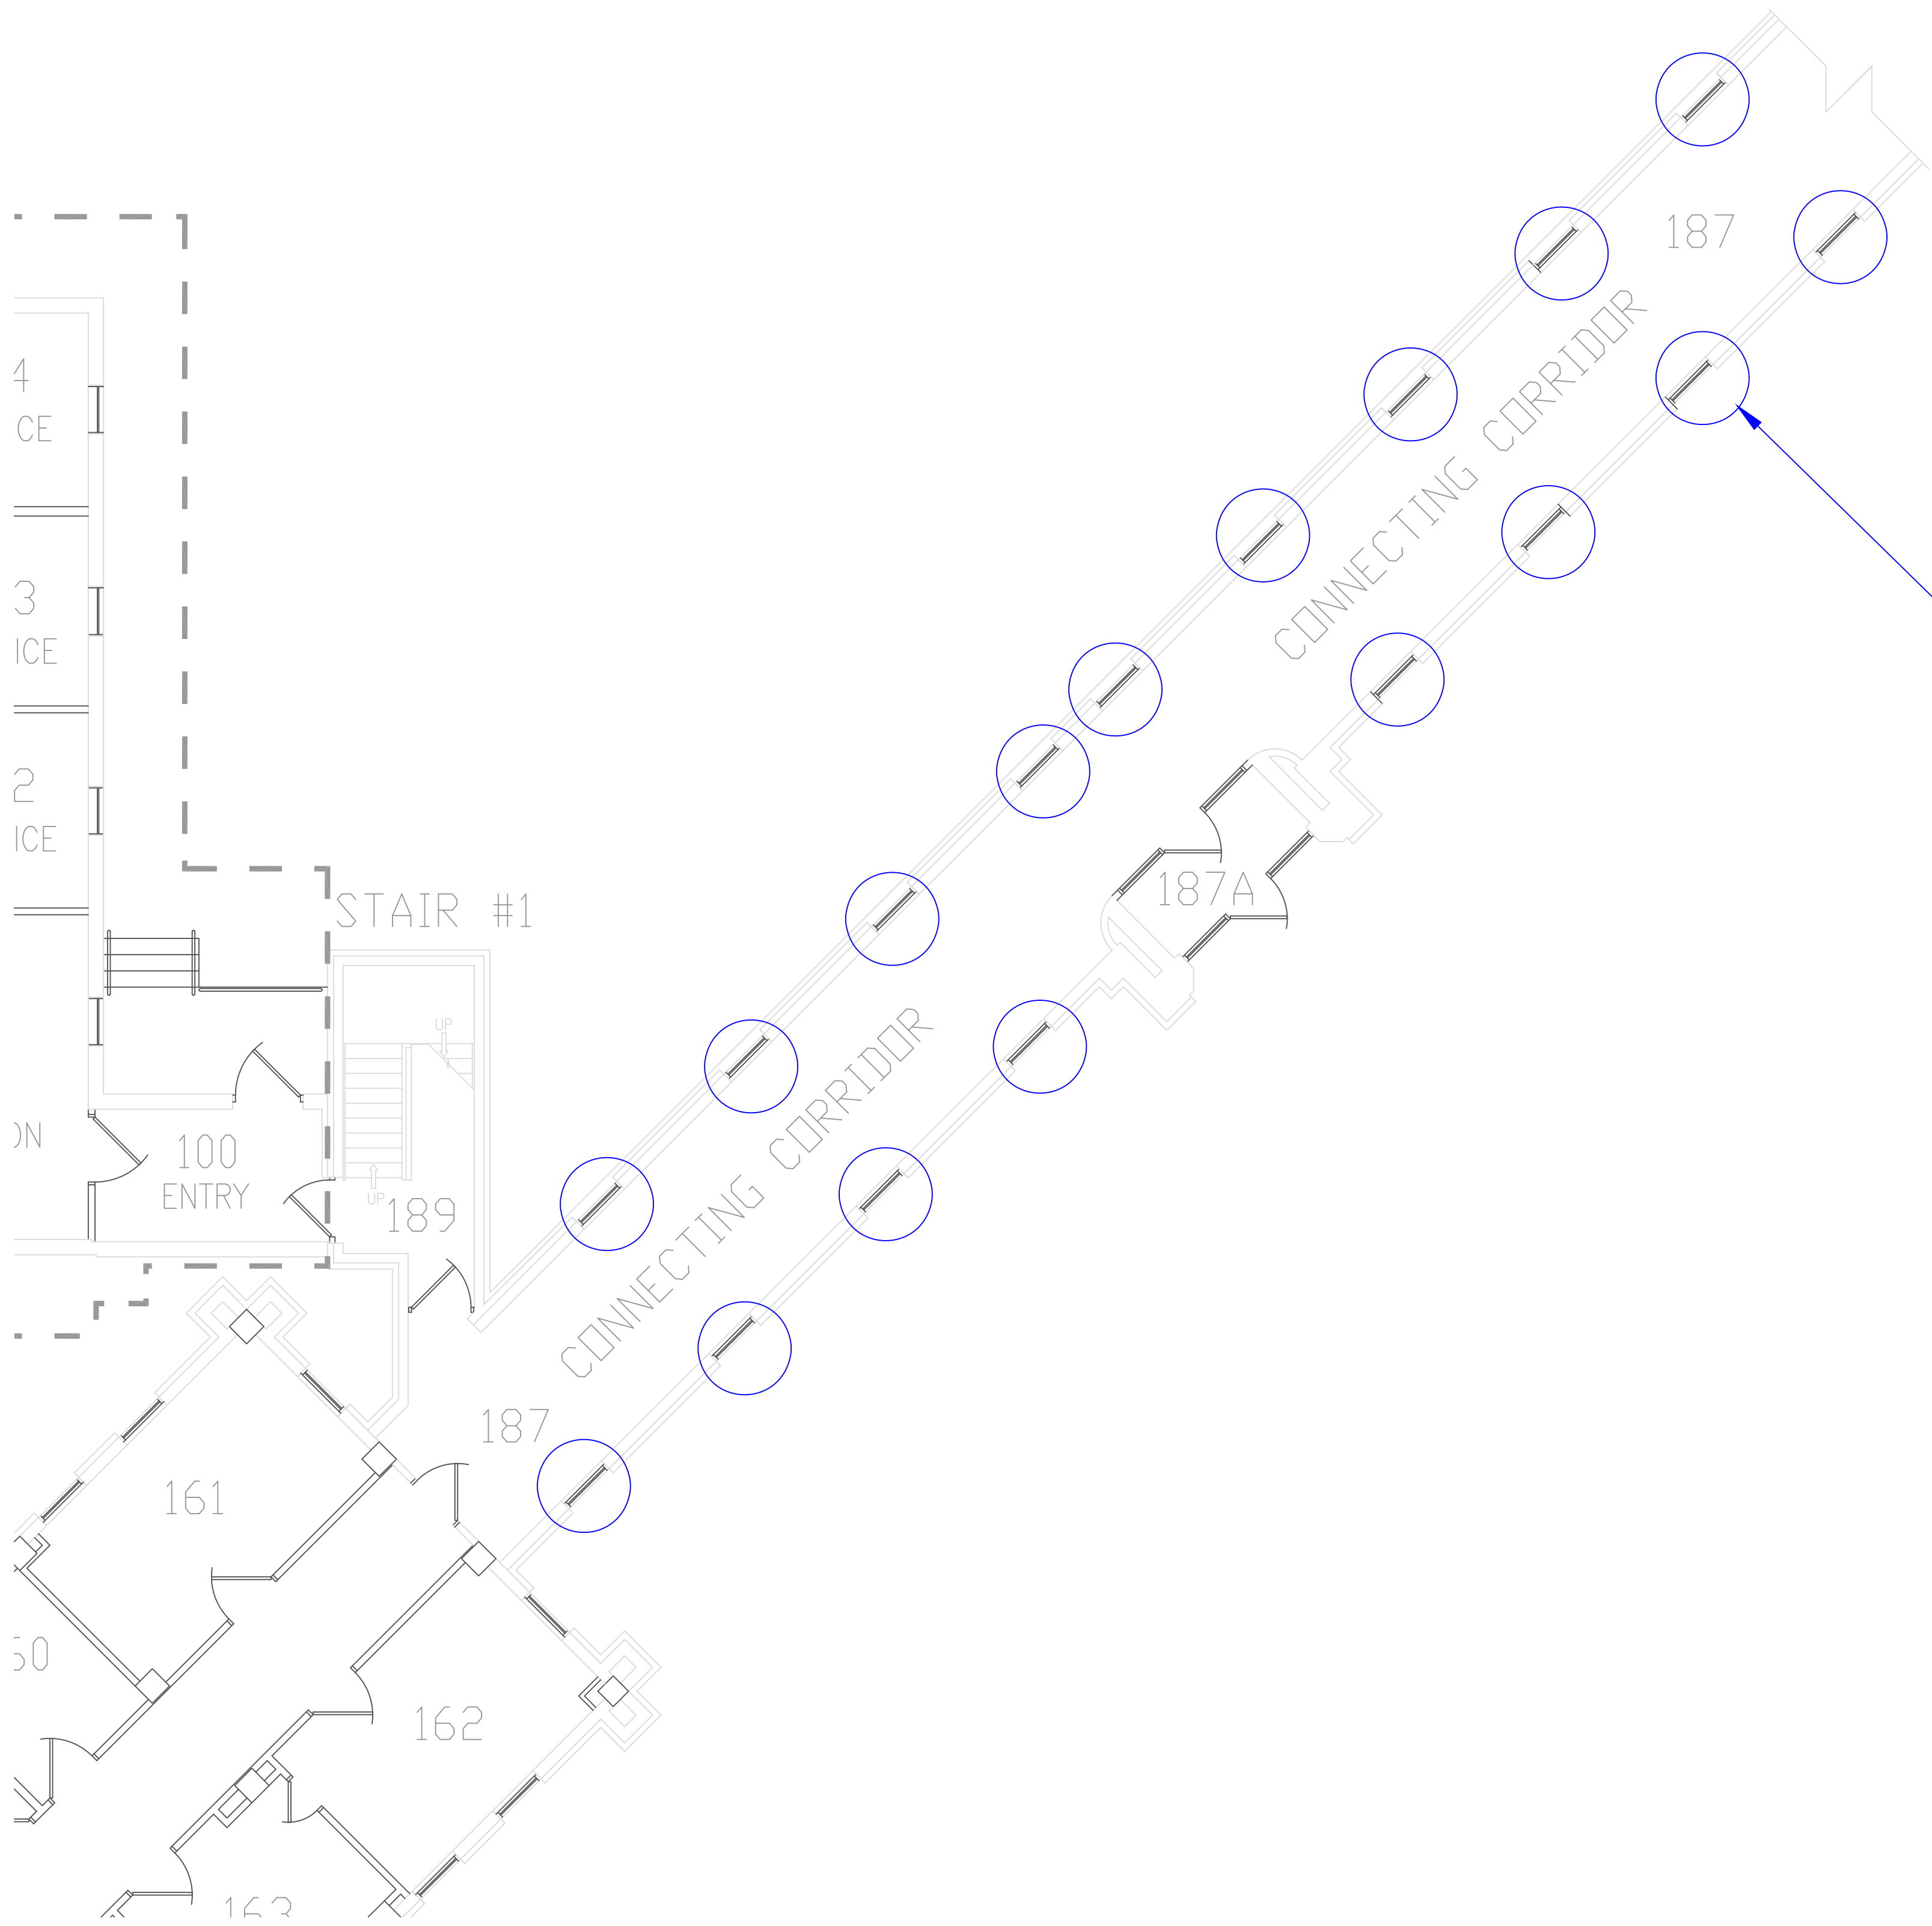

Contractor shall demolish existing and replace window sills and window shades for all windows shown. Contractor shall sandblast and repaint all steam vent covers under each window shown. See attached finish schedule for window sill, steam vent cover paint and window shade specifications.