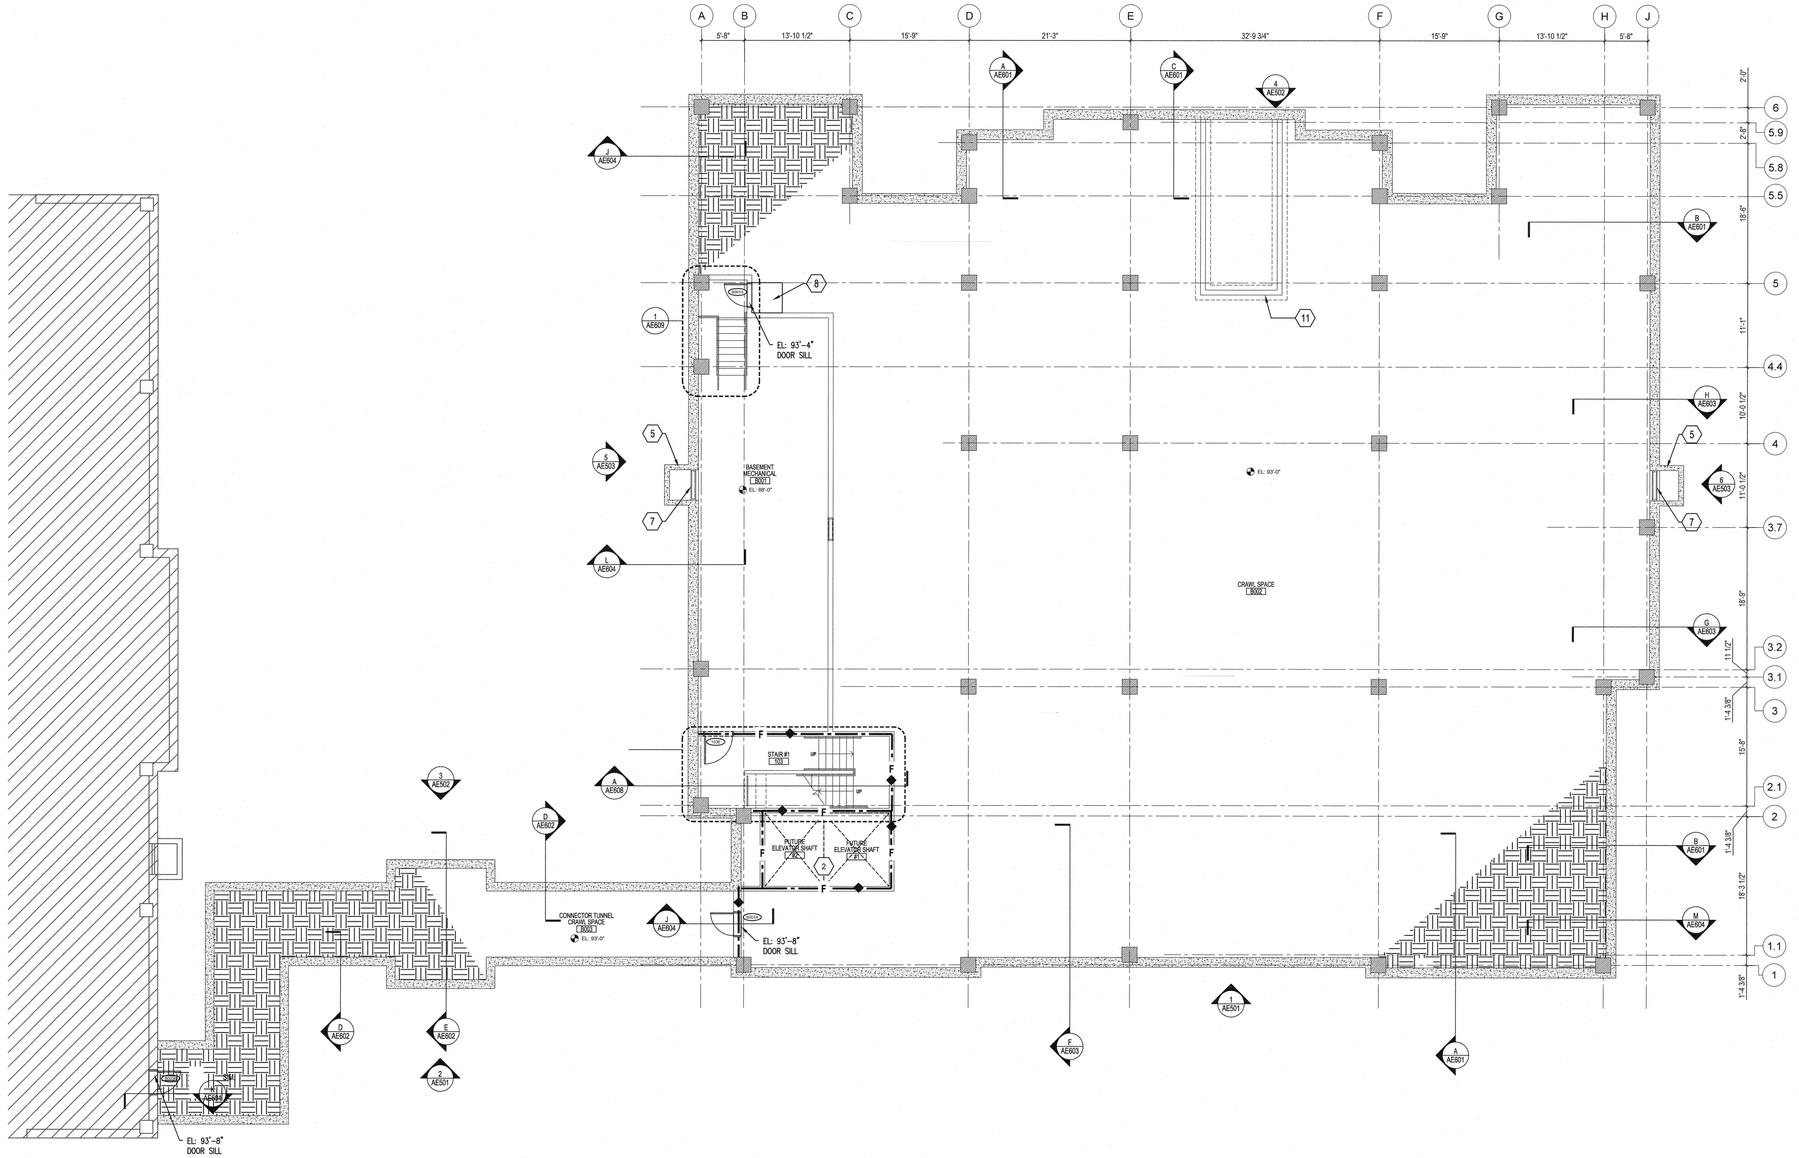

F1 BASEMENT/CRAWL SPACE REFERENCE PLAN
1/8" = 1'-0"

REFERENCE PLAN LEGEND

- SB — FIRE–RATED, SMOKE BARRIER LINE, 1 HOUR
- FB — FIRE–RATED, FIRE BARRIER LINE, 1 HOUR
- 0128B — DOOR SCHEDULE TAG (REFER TO SHEET AE0.0 FOR ADDITIONAL INFORMATION)
- ROOM NAME 0000 — ROOM NAME TAG (REFER TO SHEET AE0.0 FOR ADDITIONAL INFORMATION)
- 2 — CODE NOTE TAG
- 00 — WINDOW TAG (REFER TO SHEET AE0.0 FOR ADDITIONAL INFORMATION)
- 00 / AE000 — INTERIOR ELEVATION TAG
- 00 / AE000 — EXTERIOR ELEVATION TAG
- 00 / AE000 — WALL SECTION TAG

REFERENCE PLAN CODED NOTES:

1. PRE–FINISHED OPEN–FACE ALUMINUM DOWNSPOUTS; CONNECT TO UNDERGROUND STORM LINE.
2. FUTURE ELEVATOR SHAFT AND PIT, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
3. IN–GROUND MOUNTED 6" SQUARE 42" HIGH BOLLARD WITH SURFACE–MOUNTED PUSH PLATE DOOR ACTIVATOR. REFER TO ELECTRICAL DRAWINGS AND SPECIFICATIONS (PUSH PLATE ACTIVATOR) FOR ADDITIONAL INFORMATION.

   ⚠2 BOLLARD BASIS OF DESIGN MFR: WIKK INDUSTRIES BOLLARD SQ2
   PART #: B–6SQ–RT–DB–SM–SG
   MATERIAL: ALUMINUM
   FINISH: DARK BRONZE ANODIZED (710)
4. 4" HIGH CONCRETE HOUSEKEEPING PAD, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
5. CONCRETE AREA WELL, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
6. AREA WELL METAL GRATING, REFER TO WALL SECTIONS AND SPECIFICATIONS FOR ADDITIONAL INFORMATION.
7. AREA WELL METAL LOUVER, REFER TO OPENING SCHEDULE AND SPECIFICATIONS FOR ADDITIONAL INFORMATION.
8. 4' X 4' X 6" REINFORCED CONCRETE STOOP WITH #4 REBAR AT 12" O.C. IN BOTH DIRECTION.
9. REINFORCED CONCRETE MECHANICAL HOUSEKEEPING PAD, REFER TO STRUCTURAL FOR ADDITIONAL INFORMATION.
10. TWO–TIER METAL LOCKERS 15"W X 18"D X 36"H (PER LOCKER)
11. CONCRETE WALL AND FOOTING FOR SUPPORT OF FUTURE CMU STAIRWELL WALLS. REFER TO STRUCTRUAL DRAWINGS FOR ADDITIONAL INFORMATION.

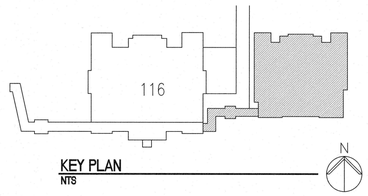

KEY PLAN
NTS

FULLY SPRINKLED
BID DOCUMENTS
FOR CONSTRUCTION

Revisions	Date
⚠ADDENDUM 2	04/19/21

CONSULTANTS:

ARCHITECT/ENGINEERS:

paradigm
Architecture | Engineering | Design-Build
200 Envoy Circle #201, Louisville KY 40299 – PH: 502.339.8511 – www.paradigmusa.com

STATE OF MICHIGAN
BLAINE CAMIEL VAN GANSBEKE
ENGINEER
No. 6201055550
REGISTERED PROFESSIONAL ENGINEER
4/19/21

Drawing Title: BASEMENT/CRAWL SPACE REFERENCE PLAN
Approved Project Director:
Project Title: ST CLOUD ADH AND EC SUPPORT
Location: ST CLOUD VA HEALTH CARE SYSTEM, 4801 VETERANS DRIVE, ST. CLOUD MN 56303
Date: 12–27–2019
Checked: AB
Drawn: AB
Project Number: 656-343
Building Number: ---
Drawing Number: ⚠ AE105

Office of Construction and Facilities Management
Department of Veterans Affairs

VA FORM 08–6231

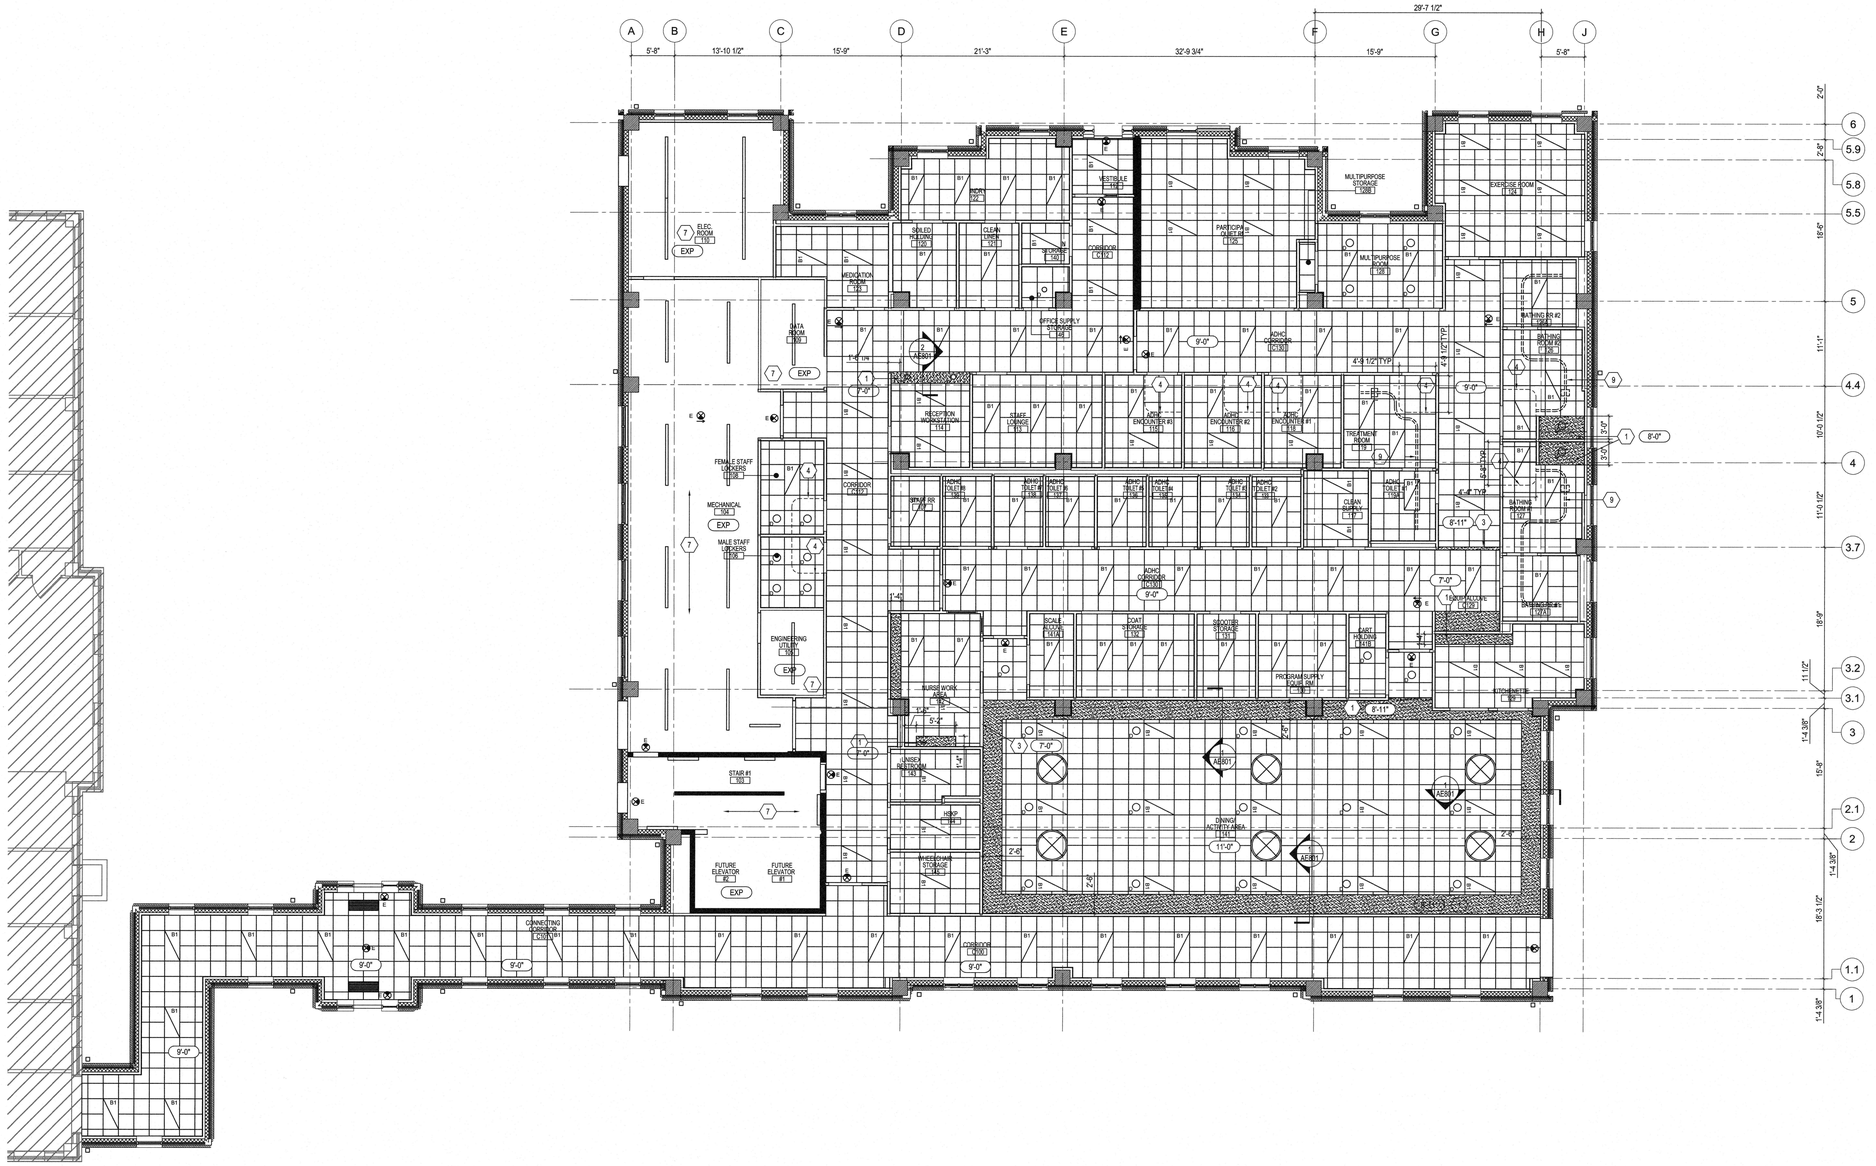

F1 FIRST FLOOR REFLECTED CEILING PLAN
1/8" = 1'-0"



F2 STAIR #1 REFLECTED CEILING PLAN (ROOF)
1/8" = 1'-0"

REFLECTED CEILING PLAN LEGEND

- 2' X 4' ACOUSTICAL TILE CEILING
- 2' X 2' ACOUSTICAL TILE CEILING
- RECESSED CAN LIGHT
- PENDANT LIGHT
- WALL SCONE LIGHT
- 2' X 4' FLUORESCENT LIGHT
- SUSPENDED LINEAR LIGHT
- DECORATIVE BOWL SURFACE MOUNTED LIGHT FIXTURE
- E — EMERGENCY EXIT SIGN
- HVAC RETURN
- HVAC SUPPLY
- EXHAUST
- NEW GYPSUM BOARD CEILING/BULKHEAD
- NEW GYPSUM BOARD CEILING/BULKHEAD

GENERAL NOTES:

1. NOT ALL SYMBOLS ARE USE IN THIS PROJECT.
2. REFER TO ROOM FINISH SCHEDULE FOR CEILING HEIGHTS.
3. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION ON LIGHTING AND LAYOUT.
4. REFER TO MECHANICAL DRAWINGS FOR LOCATIONS SUPPLY/RETURN GRILLS

CODED NOTES:

1. DRYWALL SOFFIT (PAINTED), REFER TO DETAIL ON SHEET A801 FOR ADDITIONAL INFORMATION.
2. SUSPENDED NON-RATED DRYWALL CEILING ASSEMBLY: 5/8" WATER-RESISTANCE GYPSUM BOARD OVER 7/8" 22GA HAT CHANNELS AT 24" O.C. ON 2-1/2" 22GA "C" CHANNELS AT 24" O.C. PERPENDICULARLY
3. DRYWALL BULKHEAD (PAINTED), REFER TO DETAIL ON SHEET A801 FOR ADDITIONAL INFORMATION.
4. CUBICAL CURTAIN TRACK ASSEMBLY, REFER TO DETAILS ON SHEET AE801 AND SPECIFICATIONS FOR ADDITIONAL INFORMATION
5. RATED FLOOR ACCESS DOOR ASSEMBLY, REFER TO DOOR SCHEDULE AND SPECIFICATIONS FOR ADDITIONAL INFORMATION.
6. PRECAST CONCRETE BEAMS, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
7. PRECAST HOLLOW CORE PLANKS, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
8. ONE HOUR RATED DRYWALL CEILING (PAINTED): 5/8" TYPE "C" GYPSUMBOARD OVER 1/2" RESILIENT CHANNELS AT 12" O.C.; SIMILAR TO UL # P533.
9. CEILING MOUNTED BARIATRIC LIFT, REFER TO EQUIPMENT SCHEDULE FOR ADDITIONAL INFORMATION.

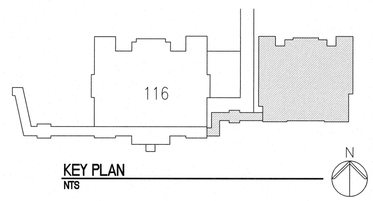

KEY PLAN
NTS

FULLY SPRINKLED
BID DOCUMENTS
FOR CONSTRUCTION

Revisions:	Date
⚠1 ADDENDUM 1 – BID AND CONSTRUCTION DOCUMENTS	05/29/20

CONSULTANTS:

ARCHITECT/ENGINEERS:

paradigm
Architecture | Engineering | Design-Build
200 Envoy Circle #201, Louisville KY 40299 – PH: 502.339.8511 – www.paradigmusa.com

STATE OF KENTUCKY
BLAINE CAMIEL VAN GANSBEKE
24,738
LICENSED PROFESSIONAL ENGINEER

Drawing Title: FIRST FLOOR REFLECTED CEILING PLAN
Approved Project Director:
Project Title: ST CLOUD ADH AND EC SUPPORT
Location: ST CLOUD VA HEALTH CARE SYSTEM, 4801 VETERANS DRIVE, ST. CLOUD MN 56303
Date: 12-27-2019 | Checked: TMB | Drawn: TMB
Project Number: 656-343
Building Number: ---
Drawing Number: AE106

Office of Construction and Facilities Management
Department of Veterans Affairs

VA FORM 08-6231

three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot

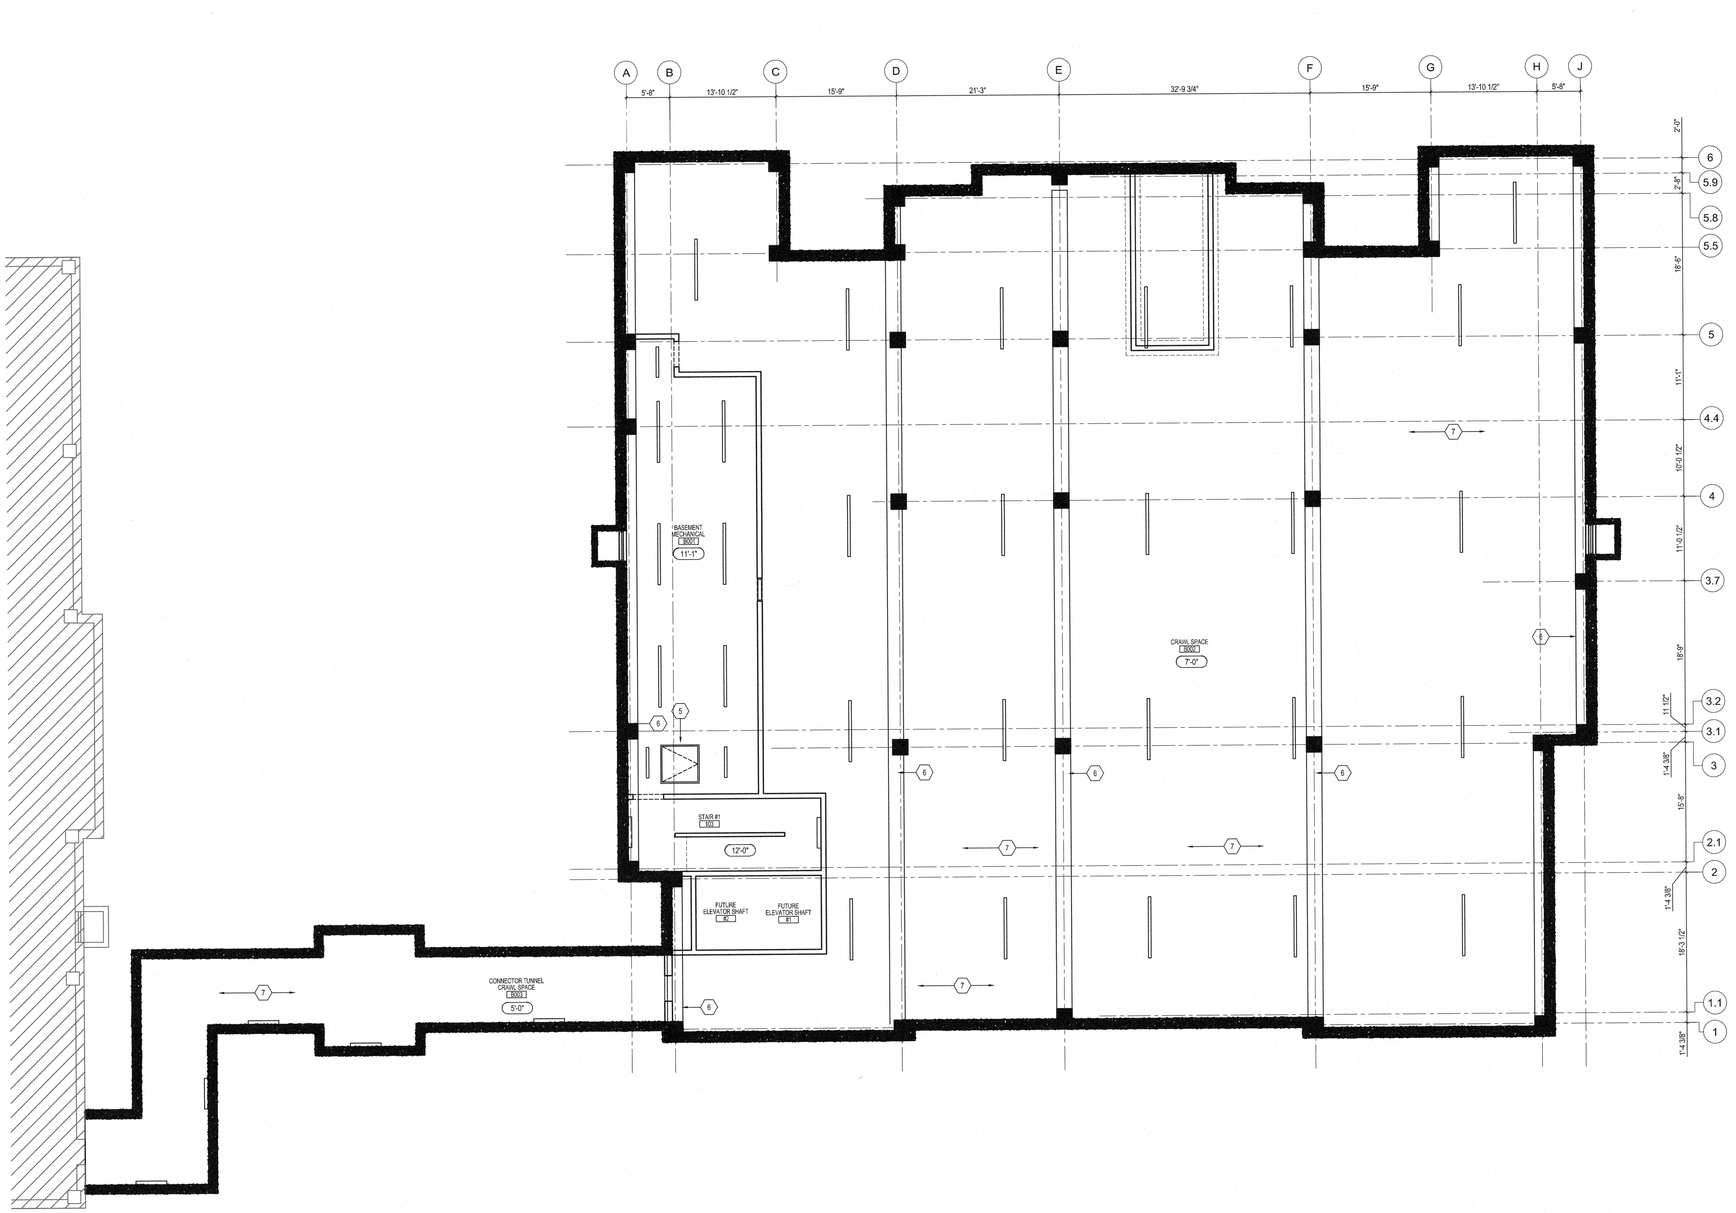

F1 BASEMENT REFLECTED CEILING PLAN
1/8" = 1'-0"

REFLECTED CEILING PLAN LEGEND

	2' X 4' ACOUSTICAL TILE CEILING
	2' X 2' ACOUSTICAL TILE CEILING
	RECESSED CAN LIGHT
	PENDANT LIGHT
	WALL SCONE LIGHT
	2' X 4' FLUORESCENT LIGHT
	SUSPENDED LINEAR LIGHT
	DECORATIVE BOWL SURFACE MOUNTED LIGHT FIXTURE
E	EMERGENCY EXIT SIGN
	HVAC RETURN
	HVAC SUPPLY
	EXHAUST
	NEW GYPSUM BOARD CEILING/BULKHEAD
	NEW GYPSUM BOARD CEILING/BULKHEAD

GENERAL NOTES:

1. NOT ALL SYMBOLS ARE USE IN THIS PROJECT.
2. REFER TO ROOM FINISH SCHEDULE FOR CEILING HEIGHTS.
3. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION ON LIGHTING AND LAYOUT.
4. REFER TO MECHANICAL DRAWINGS FOR LOCATIONS SUPPLY/RETURN GRILLS

CODED NOTES:

1. DRYWALL SOFFIT (PAINTED), REFER TO DETAIL ON SHEET A801 FOR ADDITIONAL INFORMATION.
2. SUSPENDED NON–RATED DRYWALL CEILING ASSEMBLY: 5/8" WATER–RESISTANCE GYPSUM BOARD OVER 7/8" 22GA HAT CHANNELS AT 24" O.C. ON 2–1/2" 22GA "C" CHANNELS AT 24" O.C. PERPENDICULARLY
3. DRYWALL BULKHEAD (PAINTED), REFER TO DETAIL ON SHEET A801 FOR ADDITIONAL INFORMATION.
4. CUBICAL CURTAIN TRACK ASSEMBLY, REFER TO DETAILS ON SHEET AE801 AND SPECIFICATIONS FOR ADDITIONAL INFORMATION
5. RATED FLOOR ACCESS DOOR ASSEMBLY, REFER TO DOOR SCHEDULE AND SPECIFICATIONS FOR ADDITIONAL INFORMATION.
6. PRECAST CONCRETE BEAMS, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
7. PRECAST HOLLOW CORE PLANKS, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
8. ONE HOUR RATED DRYWALL CEILING (PAINTED): 5/8" TYPE "C" GYPSUMBOARD OVER 1/2" RESILIENT CHANNELS AT 12" O.C.; SIMILAR TO UL # P533.
9. CEILING MOUNTED BARIATRIC LIFT, REFER TO EQUIPMENT SCHEDULE FOR ADDITIONAL INFORMATION.

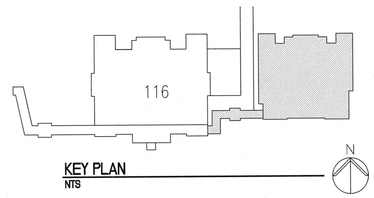

KEY PLAN
NTS

FULLY SPRINKLED
BID DOCUMENTS
FOR CONSTRUCTION

Revisions:	Date
ADDENDUM 1 – BID AND CONSTRUCTION DOCUMENTS	05/29/20

CONSULTANTS:

ARCHITECT/ENGINEERS:

paradigm
Architecture | Engineering | Design-Build
200 Envoy Circle #201, Louisville KY 40299 – PH: 502.339.8511 – www.paradigmusa.com

STATE OF KENTUCKY
ELAINE CAMISE VAN GANSBEKE
24,788
LICENSED PROFESSIONAL ENGINEER
22 JUN 2020

Drawing Title	BASEMENT REFLECTED CEILING PLAN
Approved Project Director	
Project Title	ST CLOUD ADH AND EC SUPPORT
Location	ST CLOUD VA HEALTH CARE SYSTEM, 4801 VETERANS DRIVE, ST. CLOUD MN 56303
Date	12-27-2019
Checked	BVQ
Drawn	AB
Project Number	656-343
Building Number	---
Drawing Number	AE107

Office of Construction and Facilities Management
Department of Veterans Affairs

VA FORM 08-6231