

VA Black Hills Health Care System

DOM Renovation Building 8

Hot Springs, South Dakota

VA Project # 568A4-21-208

VA



**U.S. Department
of Veterans Affairs**

Specifications – Volume 1

Divisions 00 through 14

Final Construction Documents


April 04, 2025




STONE GROUP
ARCHITECTS

**VA Black Hills Health Care System
Renovate and Consolidate Inpatient Services
Fort Meade, South Dakota**

VA PROJECT #568-14-110

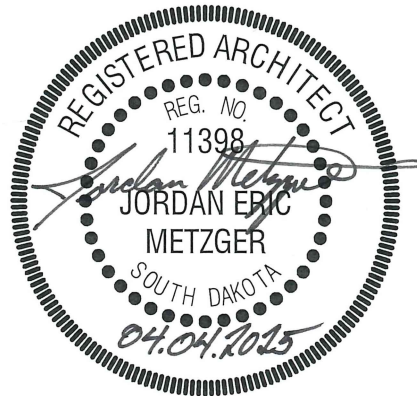

ARCHITECT OF RECORD
Stone Group Architects, Inc.
600 East 7th Street
Sioux Falls, SD 57103
(605) 271-1144

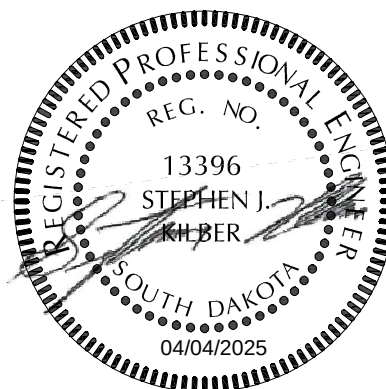


STRUCTURAL ENGINEER
Albertson Engineering, Inc.
3202 W. Main St. | Suite C
Rapid City, SD 57702
(314) 645-1132



MECHANICAL ENGINEER

West Plains Engineering, Inc.
1750 Rand Road
Rapid City, SD 57702
(605) 348-7455

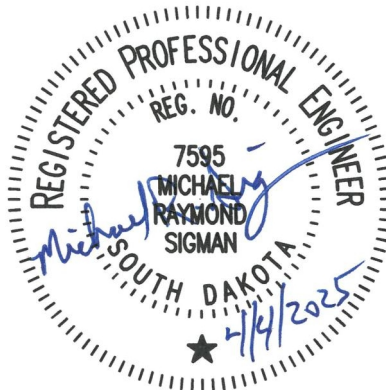

ELECTRICAL ENGINEER

West Plains Engineering, Inc.
1750 Rand Road
Rapid City, SD 57702
(605) 348-7455



FIRE PROTECTION

West Plains Engineering, Inc.
1750 Rand Road
Rapid City, SD 57702
(605) 348-7455

VA Project #568-14-110

**DEPARTMENT OF VETERANS AFFAIRS
VHA MASTER SPECIFICATIONS**

**TABLE OF CONTENTS
Section 00 01 10**

SECTION NO.	DIVISION AND SECTION TITLES	DATE
	DIVISION 00 - SPECIAL SECTIONS	
00 01 15	List of Drawing Sheets	05-20
	DIVISION 01 - GENERAL REQUIREMENTS	
01 00 00	General Requirements	05-21
01 32 16.15	Project Schedules (Small Projects - Design/Bid/Build	03-20
01 33 23	Shop Drawings, Product Data, and Samples	06-21
01 35 26	Safety Requirements	07-20
01 42 19	Reference Standards	11-20
01 45 00	Quality Control	02-21
01 45 29	Testing Laboratory Services	11-18
01 45 35	Special Inspections	06-21
01 57 19	Temporary Environmental Controls	01-21
01 58 16	Temporary Interior Signage	07-15
01 74 19	Construction Waste Management	01-21
01 81 13	Sustainable Construction Requirements	10-17
01 91 00	General Commissioning Requirements	10-15
	DIVISION 02 - EXISTING CONDITIONS	
02 41 00	Demolition	08-17
02 82 11	Traditional Asbestos Abatement	01-21
02 83 33.13	Lead-Based Paint Removal and Disposal	01-21
02 84 16	Handling of Fluorescent Tubes, Ballasts, Thermostats, And Batteries	
	DIVISION 03 - CONCRETE	
03 30 00	Cast-in-Place Concrete	01-21
	DIVISION 04 - MASONRY	
04 01 00	Maintenance of Masonry	01-21
04 05 13	Masonry Mortaring	10-17
04 05 16	Masonry Grouting	01-21
04 20 00	Unit Masonry	08-17
04 72 00	Cast Stone Masonry	01-21
	DIVISION 05 - METALS	
05 12 00	Structural Steel Framing	11-18
05 36 00	Composite Metal Decking	01-21
05 40 00	Cold-Formed Metal Framing	01-21

SECTION NO.	DIVISION AND SECTION TITLES	DATE
05 50 00	Metal Fabrications	08-18
05 51 00	Metal Stairs	01-21
05 51 33.23	Alternating Tread Steel Stairs	
	DIVISION 06 - WOOD, PLASTICS AND COMPOSITES	
06 10 00	Rough Carpentry	10-17
06 20 00	Finish Carpentry	01-21
	DIVISION 07 - THERMAL AND MOISTURE PROTECTION	
07 01 50.19	Preparation for Re-Roofing	01-21
07 13 52	Modified Bituminous Sheet Waterproofing	01-21
07 21 13	Thermal Insulation	01-21
07 32 13	Clay Roof Tiles	01-21
07 60 00	Flashing and Sheet Metal	01-21
07 81 00	Applied Fireproofing	10-17
07 84 00	Firestopping	01-21
07 92 00	Joint Sealants	10-17
	DIVISION 08 - OPENINGS	
08 11 13	Hollow Metal Doors and Frames	01-21
08 14 00	Interior Wood Doors	01-21
08 17 10	Integrated Door Assemblies	01-21
08 31 13	Access Doors and Frames	01-21
08 33 43	Overhead Coiling Smoke Curtains for Elevator Doors	
08 71 00	Door Hardware	01-21
08 71 13	Automatic Door Operators	01-21
08 80 00	Glazing	01-21
08 88 16	Integrated Blinds Glazing	01-21
08 90 00	Louvers and Vents	01-21
	DIVISION 09 - FINISHES	
09 05 16	Subsurface Preparation for Floor Finishes	01-21
09 22 16	Non-Structural Metal Framing	06-18
09 29 00	Gypsum Board	04-20
09 30 13	Ceramic/Porcelain Tiling	01-21
09 51 00	Acoustical Ceilings	12-18
09 65 13	Resilient Base and Accessories	01-21
09 65 16	Resilient Sheet Flooring	05-18
09 65 19	Resilient Tile Flooring	05-18
09 67 23.20	Resinous Epoxy Base with Vinyl Chip Broadcast	01-21
09 68 00	Carpeting	01-21
09 91 00	Painting	01-21
09 96 59	Specialty Glazed Coatings Systems	01-21
	DIVISION 10 - SPECIALTIES	
10 14 00	Signage	01-21

SECTION NO.	DIVISION AND SECTION TITLES	DATE
01 14 01	Signage Schedule	
10 26 00	Wall and Door Protection	01-21
10 28 00	Toilet, Bath, and Laundry Accessories	01-21
10 44 13	Fire Extinguisher Cabinets	08-18
10 51 16	Lockers	
	DIVISION 11 - EQUIPMENT	
11 05 12	General Motor Requirements for Equipment	01-21
	DIVISION 12 - FURNISHINGS	
12 24 00	Window Shades	08-17
12 24 21	Lightproof Shades	05-15
	DIVISION 14- CONVEYING EQUIPEMENT	
14 24 00	New Hydraulic Elevator	08-20
	DIVISION 21- FIRE SUPPRESSION	
21 08 00	Commissioning of Fire Suppression System	11-16
21 13 13	Wet-Pipe Sprinkler Systems	06-15
	DIVISION 22 - PLUMBING	
22 05 11	Common Work Results for Plumbing	09-20
22 05 12	General Motor Requirements for Plumbing Equipment	09-20
22 05 19	Meters and Gages for Plumbing Piping	09-20
22 05 23	General-Duty Valves for Plumbing Piping	09-20
22 07 11	Plumbing Insulation	09-19
22 08 00	Commissioning of Plumbing Systems	11-16
22 11 00	Facility Water Distribution	05-21
22 13 00	Facility Sanitary and Vent Piping	09-20
22 40 00	Plumbing Fixtures	09-15
	DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)	
23 05 11	Common Work Results for HVAC	02-20
23 05 12	General Motor Requirements for HVAC and Steam Generation Equipment	02-20
23 05 41	Noise and Vibration Control for HVAC Piping and Equipment	02-20
23 05 93	Testing, Adjusting, and Balancing for HVAC	02-20
23 08 00	Commissioning of HVAC Systems	02-20
23 09 23	Direct-Digital Control System for HVAC	09-11
23 21 13	Hydronic Piping	02-20
23 21 23	Hydronic Pumps	02-20
23 25 00	HVAC Water Treatment	02-20
23 31 00	HVAC Ducts and Casings	02-20

SECTION NO.	DIVISION AND SECTION TITLES	DATE
23 37 00	Air Outlets and Inlets	02-20
23 40 00	HVAC Air Cleaning Devices	03-20
23 64 00	Packaged Water Chillers	03-20
23 72 00	Air-to-Air Energy Recovery Equipment	03-20
	DIVISION 26 - ELECTRICAL	
26 05 11	Requirements for Electrical Installations	01-16
26 05 19	Low-Voltage Electrical Power Conductors and Cables	01-17
26 05 26	Grounding and Bonding for Electrical Systems	01-17
26 05 33	Raceway and Boxes for Electrical Systems	01-18
26 05 73	Overcurrent Protective Device Coordination Study	01-18
26 08 00	Commissioning of Electrical Systems	11-16
26 09 23	Lighting Controls	01-18
26 24 16	Panelboards	01-18
26 27 26	Wiring Devices	01-18
26 29 11	Motor Controllers	01-18
26 29 21	Enclosed Switches and Circuit Breakers	01-17
26 36 23	Automatic Transfer Switches	01-17
26 43 13	Surge Protective Devices	01-17
26 51 00	Interior Lighting	01-18
	DIVISION 31 - EARTHWORK	
31 63 20	Micropiles	
	DIVISION 32 - EXTERIOR IMPROVEMENTS	
32 05 23	Cement and Concrete for Exterior Improvements	08-16
32 31 13	Chain Link Fences and Gates	06-18

SECTION 00 01 15
LIST OF DRAWING SHEETS

The drawings listed below accompanying this specification form a part of
the contract.

<u>Drawing No.</u>	<u>Title</u>
GENERAL	
GI000	COVER SHEET
GI001	ARCH / INT NOTES
GI011	ACCESSIBILITY DETAILS
GI012	ACCESSIBILITY DETAILS
GI013	ACCESSIBILITY DETAILS
GI014	CODE REVIEW, PCRA, ICRA, ISLM, GEN NOTES
GI100	LIFE SAFETY PLAN - BASEMENT
GI101	LIFE SAFETY PLAN - 1ST FLOOR
GI102	LIFE SAFETY PLAN - 2ND FLOOR
GI121	ARCHITECTURAL SITE PLANS
HAZARDOUS MATERIALS	
HA100	HAZARDOUS ABATEMENT PLAN - BASEMENT
HA101	HAZARDOUS ABATEMENT PLAN - 1ST FLOOR
HA102	HAZARDOUS ABATEMENT PLAN - 2ND FLOOR
STRUCTURAL	
SE-001	STRUCTURAL NOTES
SE-002	INSPECTION TABLES
SD-101	BASEMENT DEMOLITION PLAN
SD-102	FIRST FLOOR DEMOLITION PLAN
SD-103	SECOND FLOOR DEMOLITION PLAN
SD-104	ATTIC DEMOLITION PLAN
SD-105	ROOF DEMOLITION PLAN
SE-101	BASEMENT FOUNDATION PLAN
SE-102	FIRST FLOOR FRAMING PLAN
SE-103	SECOND FLOOR FRAMING PLAN
SE-104	ATTIC FRAMING PLAN
SE-105	ROOF FRAMING PLAN
SE-111	FIRST FLOOR PORCH FRAMING PLAN
SE-112	SECOND FLOOR PORCH FRAMING PLAN
SE-201	PORCH DEMOLITION & REPLACEMENT PHOTOGRAPHS

SE-202	PORCH DEMOLITION & REPLACEMENT PHOTOGRAPHS
SE-203	PORCH DEMOLITION & REPLACEMENT PHOTOGRAPHS
SE-204	MISCELLANEOUS ANNOTATED PORCH PHOTOGRAPHS
SE-501	BUILDING DETAILS
SE-502	BUILDING DETAILS
SE-503	BUILDING DETAILS
SE-504	BUILDING DETAILS
SE-505	BUILDING DETAILS
SE-511	PORCH DETAILS
SE-512	PORCH DETAILS
SE-513	TEMPORARY SHORING POSTS & DETAILS
SE-601	TYP DETAILS & SCHEDULES

ARCHITECTURAL DEMOLITION

AD100	DEMOLITION PLAN - BASEMENT
AD101	DEMOLITION PLAN - 1ST FLOOR
AD102	DEMOLITION PLAN - 2ND FLOOR
AD103	DEMOLITION PLAN - ATTIC
AD110	DEMOLITION RCP - BASEMENT
AD111	DEMOLITION RCP - 1ST FLOOR
AD112	DEMOLITION RCP - 2ND FLOOR
AD301	DEMOLITION SECTIONS

ARCHITECTURAL

AE100	ARCHITECTURAL FLOOR PLAN - BASEMENT
AE101	ARCHITECTURAL FLOOR PLAN - 1ST FLOOR
AE102	ARCHITECTURAL FLOOR PLAN - 2ND FLOOR
AE103	ARCHITECTURAL FLOOR PLAN - ATTIC
AE104	ARCHITECTURAL DIMENSION PLAN - BASEMENT
AE105	ARCHITECTURAL DIMENSION PLAN - 1ST FLOOR
AE106	ARCHITECTURAL DIMENSION PLAN - 2ND FLOOR
AE110	REFLECTED CEILING PLAN - BASEMENT
AE111	REFLECTED CEILING PLAN - 1ST FLOOR
AE112	REFLECTED CEILING PLAN - 2ND FLOOR
AE120	ROOF PLAN
AE201	EXTERIOR ELEVATIONS
AE301	BUILDING SECTIONS
AE311	WALL SECTIONS
AE501	DETAILS

AE502	DETAILS
AE503	DETAILS
AE601	SCHEDULES
AE701	CIRCULATION PLANS
AE702	CIRCULATION PLANS AND SECTIONS

ARCHITECTURAL INTERIORS

AI100	FINISH AND SIGNAGE PLAN - BASEMENT
AI101	FINISH AND SIGNAGE PLAN - 1ST FLOOR
AI102	FINISH AND SIGNAGE PLAN - 2ND FLOOR
AI103	FINISH AND SIGNAGE SCHEDULES
AI450	INTERIOR ELEVATIONS
AI451	INTERIOR ELEVATIONS
AI501	CASEWORK AND FINISH DETAILS
AI801	ELEVATOR CAB DETAILS

MECHANICAL

FX-101	FIRE PROTECTION PLANS
PD-101	BASEMENT & FIRST FLOOR PLUMBING DEMOLITION PLANS
PD-102	SECOND FLOOR & ATTIC PLUMBING DEMOLITION PLAN
PP-101	BELOW BASEMENT & BASEMENT WASTE & VENT PLANS
PP-102	FIRST & SECOND FLOOR WASTE & VENT PLANS
PP-103	ATTIC WASTE & VENT PLAN
PP-104	BASEMENT & FIRST FLOOR PLUMBING PLANS
PP-105	SECOND FLOOR PLUMBING PLAN
PJ-101	DETAILS & SCHEDULES
MD-101	BASEMENT & FIRST FLOOR PIPING DEMOLITION PLANS
MD-102	SECOND FLOOR & ATTIC PIPING DEMOLITION PLANS
MD-103	BASEMENT & FIRST FLOOR HVAC DEMOLITION PLANS
MD-104	SECOND FLOOR & ATTIC HVAC DEMOLITION PLANS
MP-101	BASEMENT & FIRST FLOOR PIPING PLANS
MP-102	SECOND FLOOR & ATTIC PIPING PLANS
MH-101	BASEMENT & FIRST FLOOR HVAC PLANS
MH-102	SECOND FLOOR & ATTIC HVAC PLANS
MJ-101	SYMBOLS AND DETAILS
MJ-102	SCHEDULES
MJ-103	MECHANICAL SECTIONS
MP-104	MECHANICAL SCHEDULES

ELECTRICAL

ED-101 BASEMENT & FIRST FLOOR ELECTRICAL DEMOLITION PLANS
ED-102 SECOND FLOOR & ATTIC ELECTRICAL DEMOLITION PLANS
EL-101 BASEMENT & FIRST FLOOR LIGHTING PLANS
EL-102 SECOND FLOOR & ATTIC LIGHTING PLANS
EP-201 BASEMENT & FIRST FLOOR POWER PLANS
EP-202 FIRST FLOOR POWER PLANS
EP-203 SECOND FLOOR & ATTIC POWER PLANS
ES-001 FIBER SITE PLAN
ES-301 BASEMENT SIGNAL PLAN
ES-302 FIRST FLOOR SIGNAL PLAN
ES-303 SECOND FLOOR & ATTIC SIGNAL PLANS
EJ-401 ELECTRICAL DETAILS
EJ-402 ELECTRICAL DETAILS & SCHEDULES
EJ-403 ELECTRICAL SCHEDULES
EJ-404 ELECTRICAL SPECIFICATIONS
EJ-405 ELECTRICAL SPECIFICATIONS

TOTAL SHEET COUNT: 113

- - - E N D - - -

SECTION 01 00 00
GENERAL REQUIREMENTS

GENERAL

1.1 SAFETY REQUIREMENTS

- A. Refer to Section 01 35 26, SAFETY REQUIREMENTS for safety and infection control requirements.

1.2 GENERAL INTENTION

- A. Contractor shall completely prepare site for building operations, including demolition and removal of existing structures, and furnish labor and materials and perform work for the VA Black Hills Health Care System in Fort Meade and Hot Springs as required by drawings and specifications.
- B. Visits to the site by Bidders may be made only by appointment with the Contracting Officer's Representative (COR).
- C. Offices of Stone Group Architects, as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.
- D. Before placement and installation of work subject to tests by testing laboratory retained by Department of Veterans Affairs, the Contractor shall notify the COR in sufficient time to enable testing laboratory personnel to be present at the site in time for proper taking and testing of specimens and field inspection. Such prior notice shall be not less than three workdays unless otherwise designated by the COR.
- E. All employees of general contractor and subcontractors shall comply with VA security management program and obtain

permission of the VA police, be identified by project and employer, and restricted from unauthorized access.

1.3 STATEMENT OF BID ITEM(S)

- A. GENERAL CONSTRUCTION: The Contractor shall provide all labor, materials, tools and equipment, and necessary supervision to perform all work associated with this project as indicated on the contract documents.

1.4 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR

- A. Drawings and contract documents may be obtained from the website where the solicitation is posted. Additional copies will be at Contractor's expense.

1.5 CONSTRUCTION SECURITY REQUIREMENTS

A. Security Plan:

1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
2. The General Contractor is responsible for assuring that all sub-contractors working on the project and their employees also comply with these regulations.

B. Security Procedures:

1. General Contractor's employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.
2. No photography of VA premises is allowed without written permission of the Contracting Officer. Patients and staff are not to be photographed at any time.
3. VA reserves the right to close down or shut down the project site and order General Contractor's employees off the premises in the event of a national emergency. The

General Contractor may return to the site only with the written approval of the Contracting Officer.

C. Key Control:

1. The General Contractor shall provide duplicate keys and lock combinations to the Contracting Officer's Representative (COR) for the purpose of security inspections of every area of project including toolboxes and parked machines and take any emergency action.
2. The General Contractor shall turn over all permanent lock cylinders to the VA locksmith for permanent installation. See Section 08 71 00, DOOR HARDWARE and coordinate.

D. Document Control:

1. Before starting any work, the General Contractor/Sub Contractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of "sensitive information".
2. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This information shall be shared only with those with a specific need to accomplish the project.
3. Certain documents, sketches, videos or photographs and drawings may be marked "Law Enforcement Sensitive" or "Sensitive Unclassified". Secure such information in separate containers and limit the access to only those who will need it for the project Return the information to the Contracting Officer upon request.
4. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.
5. All paper waste or electronic media such as CD's and diskettes shall be shredded and destroyed in a manner acceptable to the VA.

6. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of "sensitive information".
7. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
 - a) Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
 - b) "Sensitive information" including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.

E. Motor Vehicle Restrictions

1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted 24 hours before the date and time of access. Access shall be restricted to picking up and dropping off materials and supplies.
2. A limited number of permits shall be issued for General Contractor and its employees for parking in designated areas only. Contractor to coordinate with VA Medical Center Facility Manager.

1.6 OPERATIONS AND STORAGE AREAS (FAR 52.236-10)

- A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.
- B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built

with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.

- c. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.
- D. Working space and space available for storing materials shall be as determined by the COR.
- E. Workers are subject to rules of the Medical Center applicable to their conduct.
- F. Execute work in such a manner as to interfere as little as possible with work being done by others. Keep roads clear of construction materials, debris, standing construction equipment and vehicles at all times.
- G. Execute work so as to interfere as little as possible with normal functioning of the Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are

not permitted in buildings that are occupied, during construction, jointly by patients or medical personnel, and Contractor's personnel, except as permitted by the COR where required by limited working space.

1. Do not store materials and equipment in other than assigned areas.
 2. Schedule delivery of materials and equipment to immediate construction working areas within buildings in use by Department of Veterans Affairs in quantities sufficient for not more than two workdays. Provide unobstructed access to the Medical Center areas required to remain in operation.
 3. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractor's materials and equipment will be permitted subject to fire and safety requirements.
- H. Utilities Services: Where necessary to cut existing pipes, electrical wires, conduits, cables, etc., of utility services, or of fire protection systems or communications systems (except telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by the COR. All such actions shall be coordinated with the Utility Company involved:
1. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.
- I. Phasing:
1. The Medical Center must maintain its operation 24 hours a day 7 days a week. Therefore, any interruption in service

must be scheduled and coordinated with the COR to ensure that no lapses in operation occur. It is the CONTRACTOR'S responsibility to develop a work plan and schedule detailing, at a minimum, the procedures to be employed, the equipment and materials to be used, the interim life safety measure to be used during the work, and a schedule defining the duration of the work with milestone subtasks. The work to be outlined shall include, but not be limited to:

2. To ensure such executions, Contractor shall furnish the COR with a schedule of approximate dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the COR two weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such dates to ensure accomplishment of this work in successive phases mutually agreeable to the COR and Contractor.
- J. Building (s) No. 103 will be vacated by Government in accordance with above phasing beginning immediately after date of receipt of Notice to Proceed and turned over to Contractor.
1. Contractor shall take all measures and provide all material necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected areas to be used in the Medical Centers operations will not be hindered. Contractor shall permit access to Department of Veterans Affairs personnel and patients through other construction areas which serve as routes of access to such affected areas and equipment. These routes whether access or egress shall be isolated from the construction

- area by temporary partitions and have walking surfaces, lighting etc. to facilitate patient and staff access. Coordinate alteration work in areas occupied by Department of Veterans Affairs so that Medical Center operations will continue during the construction period.
2. Immediate areas of alterations not mentioned in preceding Subparagraph 1 will be temporarily vacated while alterations are performed.
- K. Construction Fence: Before construction operations begin, Contractor shall provide a chain link construction fence, 2.1m (seven feet) minimum height, around the construction area indicated on the drawings. Provide gates as required for access with necessary hardware, including hasps and padlocks. Fasten fence fabric to terminal posts with tension bands and to line posts and top and bottom rails with tie wires spaced at maximum 375mm (15 inches). Bottom of fences shall extend to 25mm (one inch) above grade. Remove the fence when directed by the COR.
- L. When a building and/or construction site is turned over to Contractor, Contractor shall accept entire responsibility including upkeep and maintenance therefore:
1. Contractor shall maintain a minimum temperature of 4 degrees C (40 degrees F) at all times, except as otherwise specified.
 2. Contractor shall maintain in operating condition existing fire protection and alarm equipment. In connection with fire alarm equipment, Contractor shall make arrangements for pre-inspection of site with Fire Department or Company (Department of Veterans Affairs or municipal) whichever will be required to respond to an alarm from Contractor's employee or watchman.

M. Utilities Services: Maintain existing utility services for the Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by the COR.

1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of the COR. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without a detailed work plan, the Medical Center Director's prior knowledge and written approval. Refer to specification Sections 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS and 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY for additional requirements.
2. Contractor shall submit a request to interrupt any such services to the COR, in writing, 7 days in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations

of the Medical Center. Interruption time approved by Medical Center may occur at other than Contractor's normal working hours and at no additional cost to the Government.

4. Major interruptions of any system must be requested, in writing, at least 15 calendar days prior to the desired time and shall be performed as directed by the COR.
 5. In case of a contract construction emergency, service will be interrupted on approval of the COR. Such approval will be confirmed in writing as soon as practical.
 6. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.
- N. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, shall be removed back to their source. Those which are indicated to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged at the main, branch or panel they originate from. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.
- O. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:
1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles.

- P. Coordinate the work for this contract with other construction operations as directed by the COR. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.

1.7 ALTERATIONS

- A. Survey: Before any work is started, the Contractor shall make a thorough survey with the COR and a representative of VA Supply Service of the building in which alterations occur and areas which are anticipated routes of access, and furnish a report, signed by both, to the Contracting Officer. This report shall list by rooms and spaces:
1. Existing condition and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout the building.
 2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, venetian blinds, shades, etc., required by drawings to be either reused or relocated, or both.
 3. Shall note any discrepancies between drawings and existing conditions at site.
 4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur and which have been agreed upon by Contractor and the COR.
- B. Any items required by drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of the COR, to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by Contractor with new items in accordance with specifications which will be furnished by Government. Provided the contract work is changed by reason of this subparagraph B, the contract will

be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4).

c. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and the COR together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:

1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and will form basis for determining extent of repair work required of Contractor to restore damage caused by Contractor's workers in executing work of this contract.

d. Protection: Provide the following protective measures:

1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
3. Protect interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

1.8 DISPOSAL AND RETENTION

A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:

1. Reserved items which are to remain property of the Government are noted on drawings or in specifications as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by the COR.
2. Items not reserved shall become property of the Contractor and be removed by Contractor from the Medical Center.
3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.

1.9 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS (FAR 52.236-9)

A. The Contractor shall preserve and protect all structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which are not to be removed and which do not unreasonably interfere with the work required under this contract. The Contractor shall only remove trees when specifically authorized to do so and shall avoid damaging vegetation that will remain in place.

If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment, or by workers, the Contractor shall trim those limbs or branches with a clean cut and paint the cut with a tree-pruning compound as directed by the Contracting Officer.

- B. The Contractor shall protect from damage all existing improvements and utilities at or near the work site and on adjacent property of a third party, the locations of which are made known to or should be known by the Contractor. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.
- C. Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, for additional requirements on protecting vegetation, soils and the environment. Refer to Articles, "Alterations", "Restoration", and "Operations and Storage Areas" for additional instructions concerning repair of damage to structures and site improvements.

1.10 RESTORATION

- A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the COR. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the COR before it is

disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.

- B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.
- C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workers to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which are not scheduled for discontinuance or abandonment.
- D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2).

1.11 PROFESSIONAL SURVEYING SERVICES

- A. A registered professional land surveyor or registered civil engineer whose services are retained and paid for by the Contractor shall perform services specified herein and in other specification sections. The Contractor shall certify that the land surveyor or civil engineer is not one who is a regular employee of the Contractor, and that the land

surveyor or civil engineer has no financial interest in this contract.

1.12 LAYOUT OF WORK

- A. The Contractor shall lay out the work from Government established base lines and benchmarks, indicated on the drawings, and shall be responsible for all measurements in connection with the layout. The Contractor shall furnish, at Contractor's own expense, all stakes, templates, platforms, equipment, tools, materials, and labor required to lay out any part of the work. The Contractor shall be responsible for executing the work to the lines and grades that may be established or indicated by the Contracting Officer. The Contractor shall also be responsible for maintaining and preserving all stakes and other marks established by the Contracting Officer until authorized to remove them. If such marks are destroyed by the Contractor or through Contractor's negligence before their removal is authorized, the Contracting Officer may replace them and deduct the expense of the replacement from any amounts due or to become due to the Contractor.

1.13 AS-BUILT DRAWINGS

- A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.
- B. All variations shall be shown in the same general detail as used in the contract drawings. To ensure compliance, as-built drawings shall be made available for the COR review, as often as requested.
- C. Contractor shall deliver two approved completed sets of as-built drawings in the electronic version (scanned PDF) to

the COR within 15 calendar days after each completed phase and after the acceptance of the project by the COR.

D. Paragraphs A, B, & C shall also apply to all shop drawings.

1.14 WARRANTY MANAGEMENT

A. Warranty Management Plan: Develop a warranty management plan which contains information relevant to FAR 52.246-21 Warranty of Construction in at least 30 days before the planned pre-warranty conference, submit two sets of the warranty management plan. Include within the warranty management plan all required actions and documents to assure that the Government receives all warranties to which it is entitled. The plan must be in narrative form and contain sufficient detail to render it suitable for use by future maintenance and repair personnel, whether tradesman, or of engineering background, not necessarily familiar with this contract. The term "status" as indicated below must include due date and whether item has been submitted or was approved. Warranty information made available during the construction phase must be submitted to the Contracting Officer for approval prior to each monthly invoice for payment. Assemble approved information in a binder and turn over to the Government upon acceptance of the work. The construction warranty period will begin on the date of the project acceptance and continue for the product warranty period. A joint 4 month warranty inspection will be conducted, measured from time of acceptance, by the Contactor and the Contracting Officer. Include in the warranty management plan, but not limited to, the following:

1. Roles and responsibilities of all personnel associated with the warranty process, including points of contact and telephone numbers within the company of the

Contractor, subcontractors, manufacturers or suppliers involved.

2. Furnish with each warranty the name, address and telephone number of each of the guarantor's representatives nearest project location.
3. Listing and status of delivery of all Certificates of Warranty for extended warranty items, to include roofs, HVAC balancing, pumps, motors, transformers and for all commissioned systems such as fire protection and alarm systems, sprinkler systems and lightning protection systems, etc.
4. A list for each warranted equipment item, feature of construction or system indicating:
 - a. Name of item.
 - b. Model and serial numbers.
 - c. Location where installed.
 - d. Name and phone numbers of manufacturers and suppliers.
 - e. Name and phone numbers of manufacturers or suppliers.
 - f. Names, addresses and phone numbers of sources of spare parts.
 - g. Warranties and terms of warranty. Include one-year overall warranty of construction, including the starting date of warranty of construction. Items which have extended warranties must be indicated with separate warranty expiration dates.
 - h. Starting point and duration of warranty period.
 - i. Summary of maintenance procedures required to continue the warranty in force.
 - j. Cross-reference to specific pertinent Operation and Maintenance manuals.
 - k. Organizations, names and phone numbers of persons to call for warranty service.

1. Typical response time and repair time expected for various warranted equipment.
 5. The plans for attendance at the 4 and 9-month post construction warranty inspections conducted by the government.
 6. Procedure and status of tagging of all equipment covered by extended warranties.
 7. Copies of instructions to be posted near selected pieces of equipment where operation is critical for warranty and/or safety reasons.
- B. Performance & Payment Bonds: The Performance & Payment Bonds must remain effective throughout the construction period.
1. In the event the Contractor fails to commence and diligently pursue any construction warranty work required, the Contracting Officer will have the work performed by others, and after completion of the work, will charge the remaining construction warranty funds of expenses incurred by the Government while performing the work, including, but not limited to administrative expenses.
 2. In the event sufficient funds are not available to cover the construction warranty work performed by the Government at the contractor's expenses, the Contracting Officer will have the right to recoup expenses from the bonding company.
 3. Following oral or written notification of required construction warranty repair work, the Contractor shall respond in a timely manner. Written verification will follow oral instructions. Failure to respond will be cause for the Contracting Officer to proceed against the Contractor.

C. Pre-Warranty Conference: Prior to contract completion, and at a time designated by the Contracting Officer, the Contractor shall meet with the Contracting Officer to develop a mutual understanding with respect to the requirements of this section. Communication procedures for Contractor notification of construction warranty defects, priorities with respect to the type of defect, reasonable time required for Contractor response, and other details deemed necessary by the Contracting Officer for the execution of the construction warranty will be established/reviewed at this meeting. In connection with these requirements and at the time of the Contractor's quality control completion inspection, furnish the name, telephone number and address of a licensed and bonded company which is authorized to initiate and pursue construction warranty work action on behalf of the Contractor. This point of contract will be located within the local service area of the warranted construction, be continuously available and be responsive to Government inquiry on warranty work action and status. This requirement does not relieve the Contractor of any of its responsibilities in conjunction with other portions of this provision.

D. Contractor's Response to Construction Warranty Service Requirements:

E. Following oral or written notification by the Contracting Officer, the Contractor shall respond to construction warranty service requirements in accordance with the "Construction Warranty Service Priority List" and the three categories of priorities listed below. Submit a report on any warranty item that has been repaired during the warranty period. Include within the report the cause of the problem, date reported, corrective action taken, and when

the repair was completed. If the Contractor does not perform the construction warranty within the timeframe specified, the Government will perform the work and back charge the construction warranty payment item established.

1. First Priority Code 1. Perform onsite inspection to evaluate situation, and determine course of action within 4 hours, initiate work within 6 hours and work continuously to completion or relief.
2. Second Priority Code 2. Perform onsite inspection to evaluate situation, and determine course of action within 8 hours, initiate work within 24 hours and work continuously to completion or relief.
3. Third Priority Code 3. All other work to be initiated within 3 workdays and work continuously to completion or relief.
4. The "Construction Warranty Service Priority List" is as follows:
 - a) Code 1-Life Safety Systems
 - 1) Fire suppression systems.
 - 2) Fire alarm system(s).
 - b) Code 1-Air Conditioning Systems
 - 1) Air conditioning leak in part of the building, if causing damage.
 - 2) Air conditioning system not cooling properly.
 - c) Code 1 Doors
 - 1) Overhead doors not operational, causing a security, fire or safety problem.
 - 1) Interior, exterior personnel doors or hardware, not functioning properly, causing security, fire or safety problem.
 - d) Code 3-Doors
 - 1) Overhead doors not operational.

- 2) Interior/exterior personnel doors or hardware not functioning properly.

e) Code 1-Electrical

- 1) Power failure (entire area or any building operational after 1600 hours).
- 2) Security lights.
- 3) Smoke detectors.

f) Code 2-Electrical

- 1) Power failure (no power to a room or part of building). Receptacle and lights not operational (in a room or part of building).

g) Code 3-Electrical

- 1) Exterior lights not operational.

h) Code 1-Gas

- 1) Leaks and pipeline breaks.

i) Code 1-Heat

- 1) Power failure affecting heat.

j) Code 1-Plumbing

- 1) Hot water heater failure.
- 2) Leaking water supply pipes

k) Code 2-Plumbing

- 1) Flush valves not operating properly
- 2) Fixture drain, supply line or any water pipe leaking.
- 3) Toilet leaking at base.

l) Code 3- Plumbing

- 1) Leaky faucets.

m) Code 3-Interior

- 1) Floors damaged.
- 2) Paint chipping or peeling.
- 3) Casework damaged.

n) Code 1-Roof Leaks

1) Damage to property is occurring.

o) Code 2-Water (Exterior)

1) No water to facility.

p) Code 2-Water (Hot)

1) No hot water in portion of building listed.

q) Code 3

1) All work not listed above.

F. Warranty Tags: At the time of installation, tag each warranted item with a durable, oil and water-resistant tag approved by the Contracting Officer. Attach each tag with a copper wire and spray with a silicone waterproof coating. Also submit two record copies of the warranty tags showing the layout and design. The date of acceptance and the QC signature must remain blank until the project is accepted for beneficial occupancy. Show the following information on the tag.

Warranty Tags
Type of product/material
Model number
Serial number
Contract number
Warranty period from/to
Inspector's signature
Construction Contractor
Address
Telephone number
Warranty Contact
Address
Telephone number
Warranty response time priority code

1.15 USE OF ROADWAYS

- A. For hauling, use only established public roads and roads on the Medical Center property and, when authorized by the COR, such temporary roads which are necessary in the performance of contract work. Temporary roads shall be constructed and restoration performed by the Contractor at Contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by well-constructed bridges.
- B. When new permanent roads are to be a part of this contract, Contractor may construct them immediately for use to facilitate building operations. These roads may be used by all who have business thereon within zone of building operations.
- C. When certain buildings (or parts of certain buildings) are required to be completed in advance of general date of completion, all roads leading thereto must be completed and available for use at time set for completion of such buildings or parts thereof.

1.16 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT

- A. Use of new installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to written approval and compliance with the following provisions:
 - 1. Permission to use each unit or system must be given by the COR in writing. If the equipment is not installed and maintained in accordance with the written agreement and following provisions, the COR will withdraw permission for use of the equipment.
 - 2. Electrical installations used by the equipment shall be completed in accordance with the drawings and specifications to prevent damage to the equipment and the

electrical systems, i.e., transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Installation of temporary electrical equipment or devices shall be in accordance with NFPA 70, National Electrical Code, (2014 Edition), Article 590, *Temporary Installations*. Voltage supplied to each item of equipment shall be verified to be correct and it shall be determined that motors are not overloaded. The electrical equipment shall be thoroughly cleaned before using it and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.

3. Units shall be properly lubricated, balanced, and aligned. Vibrations must be eliminated.
 4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.
 5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements shall be replaced at completion of construction and prior to testing and balancing of system.
 6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government.
- B. Prior to final inspection, the equipment or parts used which show wear and tear beyond normal, shall be replaced

with identical replacements, at no additional cost to the Government.

- C. This paragraph shall not reduce the requirements of the mechanical and electrical specifications sections.
- D. Any damage to the equipment or excessive wear due to prolonged use will be repaired replaced by the contractor at the contractor's expense.

1.17 TEMPORARY USE OF EXISTING ELEVATORS

- A. Contractor will not be allowed the use of existing elevators on the Medical Center campus. Outside type hoist shall be used by Contractor for transporting materials and equipment.

1.18 TEMPORARY USE OF NEW ELEVATORS

- A. The Contractor and his personnel shall be permitted use of new elevator(s) subject to the following provisions:
 - 1. Contractor shall make arrangements with the COR for use of elevator(s). Contractor may obtain elevator(s) for exclusive use.
 - 2. Prior to the use of elevator(s), the Contractor shall have the elevator(s) inspected and accepted by an ASME accredited, certified elevator safety inspector. The acceptance report shall be submitted to the COR.
 - 3. Submit to the COR the schedule and procedures for maintaining equipment. Indicate the day or days of the week and total hours required for maintenance. A report shall be submitted to the COR monthly indicating the type of maintenance conducted, hours used, and any repairs made to the elevator(s).
 - 4. The Contractor shall be responsible for enforcing the maintenance procedures as per VA and manufacturers recommendations and requirements.

5. During temporary use of elevator(s) all repairs, equipment replacement and cost of maintenance shall be the responsibility of the Contractor.
6. Personnel for operating elevator(s) shall not be provided by the Department of Veterans Affairs.
7. Contractor shall cover and provide maximum protection of the entire elevator(s) installation.
8. The Contractor shall arrange for the elevator company to perform operation of the elevator(s) so that an ASME accredited, certified elevator safety inspector can evaluate the equipment. The Contractor shall be responsible for any costs of the elevator company.
9. All elevator(s) parts worn or damaged during temporary use shall be removed and replaced with new parts at the contractor's expense. This shall be determined by an ASME accredited certified elevator safety inspector after temporary use and before acceptance by the Government. Submit report to the COR for approval.
10. Elevator shall be tested as required by the testing section of the elevator(s) specifications before acceptance by the Department of Veterans Affairs. The Contractor shall be responsible for all cost associated with testing and inspection.

1.19 TEMPORARY TOILETS

- A. Contractor may have for use of Contractor's workers such toilet accommodations as may be assigned to Contractor by the Medical Center. Contractor shall keep such places clean and be responsible for any damage done thereto by Contractor's workers. Failure to maintain satisfactory condition in toilets will deprive Contractor of the privilege to use such toilets.

1.20 AVAILABILITY AND USE OF UTILITY SERVICES

- A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as specified in the contract. The amount to be paid by the Contractor for chargeable electrical services shall be the prevailing rates charged to the Government. The Contractor shall carefully conserve any utilities furnished without charge.
- B. The Contractor, at Contractor's expense and in a workmanlike manner, in compliance with code and as satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines, and all meters required to measure the amount of electricity used for the purpose of determining charges. Before final acceptance of the work by the Government, the Contractor shall remove all the temporary connections, distribution lines, meters, and associated paraphernalia and repair restore the infrastructure as required.
- C. Contractor shall install meters at Contractor's expense and furnish the Medical Center a monthly record of the Contractor's usage of electricity as hereinafter specified.
- D. Heat: Furnish temporary heat necessary to prevent injury to work and materials through dampness and cold. Use of open salamanders or any temporary heating devices which may be fire hazards or may smoke and damage finished work, will not be permitted. Maintain minimum temperatures as specified for various materials:
 - 1. Obtain heat by connecting to the Medical Center heating distribution system.
 - a) Steam is available at no cost to Contractor.

E. Electricity (for Construction and Testing): Furnish all temporary electric services.

1. Obtain electricity by connecting to the Medical Center electrical distribution system. The Contractor shall meter and pay for electricity required for electric cranes and hoisting devices, electrical welding devices and any electrical heating devices providing temporary heat. Electricity for all other uses is available at no cost to the Contractor.

F. Water (for Construction and Testing): Furnish temporary water service.

1. Obtain water by connecting to the Medical Center water distribution system. Provide reduced pressure backflow preventer at each connection as per code. Water is available at no cost to the Contractor.
2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes will be cause for revocation (at COR discretion) of use of water from the Medical Center's system.

1.21 NEW TELEPHONE EQUIPMENT

- A. The contractor shall coordinate with the work of installation of telephone equipment by others. This work shall be completed before the building is turned over to VA.

1.22 TESTS

- A. As per specification section 23 05 93 the contractor shall provide a written testing and commissioning plan complete with component level, equipment level, sub-system level and system level breakdowns. The plan will provide a schedule and a written sequence of what will be tested, how and what the expected outcome will be. This document will be submitted for approval prior to commencing work. The

contractor shall document the results of the approved plan and submit for approval with the as built documentation.

- B. Pre-test mechanical and electrical equipment and systems and make corrections required for proper operation of such systems before requesting final tests. Final test will not be conducted unless pre-tested.
- C. Conduct final tests required in various sections of specifications in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.
- D. Mechanical and electrical systems shall be balanced, controlled and coordinated. A system is defined as the entire system which must be coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one part of entire system which provides comfort conditions for a building. Other related components are return air, exhaust air, steam, chilled water, refrigerant, hot water, controls and electricity, etc. Another example of a system which involves several components of different disciplines is a boiler installation. Efficient and acceptable boiler operation depends upon the coordination and proper operation of fuel, combustion air, controls, steam, feedwater, condensate and other related components.
- E. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonably period of time during which operating and environmental conditions remain reasonably constant and are typical of the design conditions.

- F. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

1.23 INSTRUCTIONS

- A. Contractor shall furnish Maintenance and Operating manuals (hard copies and electronic) and verbal instructions when required by the various sections of the specifications and as hereinafter specified.
- B. Manuals: Maintenance and operating manuals and one compact disc (four hard copies and one electronic copy each) for each separate piece of equipment shall be delivered to the COR coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.

c. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed training to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the COR and shall be considered concluded only when the COR is satisfied in regard to complete and thorough coverage. The contractor shall submit a course outline with associated material to the COR for review and approval prior to scheduling training to ensure the subject matter covers the expectations of the VA and the contractual requirements. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the COR, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

1.24 GOVERNMENT-FURNISHED PROPERTY

A. The Government shall deliver to the Contractor, the Government-furnished property shown on the schedule and drawings.

- B. Equipment furnished by Government to be installed by Contractor will be furnished to Contractor at the Medical Center.
- C. Contractor shall be prepared to receive this equipment from Government and store or place such equipment not less than 90 days before Completion Date of project.
 - 1. Storage space for equipment will be provided by the Government and the Contractor shall be prepared to unload and store such equipment therein upon its receipt at the Medical Center.
- D. Notify Contracting Officer in writing, 60 days in advance, of date on which Contractor will be prepared to receive equipment furnished by Government. Arrangements will then be made by the Government for delivery of equipment.
 - 1. Immediately upon delivery of equipment, Contractor shall arrange for a joint inspection thereof with a representative of the Government. At such time the Contractor shall acknowledge receipt of equipment described, make notations, and immediately furnish the Government representative with a written statement as to its condition or shortages.
 - 2. Contractor thereafter is responsible for such equipment until such time as acceptance of contract work is made by the Government.
- E. Equipment furnished by the Government will be delivered in a partially assembled (knock down) condition in accordance with existing standard commercial practices, complete with all fittings, fastenings, and appliances necessary for connections to respective services installed under contract. All fittings and appliances (i.e., couplings, ells, tees, nipples, piping, conduits, cables, and the like) necessary to make the connection between the

Government furnished equipment item and the utility stub-up shall be furnished and installed by the contractor at no additional cost to the Government.

- F. Completely assemble and install the Government furnished equipment in place ready for proper operation in accordance with specifications and drawings.
- G. Furnish supervision of installation of equipment at construction site by qualified factory trained technicians regularly employed by the equipment manufacturer.

1.25 RELOCATED EQUIPMENT AND OTHER ITEMS

- A. Contractor shall disconnect, dismantle as necessary, remove and reinstall in new location, all existing equipment and items indicated or otherwise shown to be relocated by the Contractor.
- B. Perform relocation of such equipment or items at such times and in such a manner as directed by the COR.
- C. Suitably cap existing service lines, such as steam, condensate return, water, drain, gas, air, vacuum and/or electrical, at the main whenever such lines are disconnected from equipment to be relocated. Remove abandoned lines in finished areas and cap as specified herein before under paragraph "Abandoned Lines".
- D. Provide all mechanical and electrical service connections, fittings, fastenings and any other materials necessary for assembly and installation of relocated equipment; and leave such equipment in proper operating condition.
- E. All service lines such as noted above for relocated equipment shall be in place at point of relocation ready for use before any existing equipment is disconnected. Make relocated existing equipment ready for operation or use immediately after reinstallation.

1.26 STORAGE SPACE FOR DEPARTMENT OF VETERANS AFFAIRS EQUIPMENT

- A. Contractor shall complete approximately 20 square meters (215 square feet) of space in building accessible from ground level without use of elevators for storage of certain materials and equipment by Department of Veterans Affairs.
1. Provide such space with adequate light, ventilation and heat in season and lock for adequate security. Contractor shall also install and connect portion of nearest specified fire protection system including all apparatus for instant use to provide water for adequate fire protection of storage space.
 2. Storage space shall be turned over to Contracting Officer ninety days prior to Completion Date of the buildings involved.
 3. Forward two sets of drawings to Contracting Officer through the COR 120 days prior to Completion Date of building; drawings shall indicate those areas which will be made available to Department of Veterans Affairs for temporary storage.
 4. All cost for utility services for such storage space shall be borne by Contractor until entire building is turned over for occupancy.
- B. "Completion Date" shall mean that date as established by Contracting Officer upon which Contractor will turn over entire project or portions thereof to the Government.

1.27 HISTORIC PRESERVATION

- A. Where the Contractor or any of the Contractor's employees, prior to, or during the construction work, are advised of or discover any possible archeological, historical and/or cultural resources, the Contractor shall immediately notify the COR verbally, and then with a written follow up.

- - - E N D - - -

SECTION 01 32 16.15
PROJECT SCHEDULES
(SMALL PROJECTS - DESIGN/BID/BUILD)

PART 1- GENERAL

1.1 DESCRIPTION:

- A. The Contractor shall develop a Critical Path Method (CPM) plan and schedule demonstrating fulfillment of the contract requirements (Project Schedule), and shall keep the Project Schedule up-to-date in accordance with the requirements of this section and shall utilize the plan for scheduling, coordinating and monitoring work under this contract (including all activities of subcontractors, equipment vendors and suppliers). Conventional Critical Path Method (CPM) technique shall be utilized to satisfy both time and cost applications.

1.2 CONTRACTOR'S REPRESENTATIVE:

- A. The Contractor shall designate an authorized representative responsible for the Project Schedule including preparation, review and progress reporting with and to the Contracting Officer's Representative (COTR).
- B. The Contractor's representative shall have direct project control and complete authority to act on behalf of the Contractor in fulfilling the requirements of this specification section.
- C. The Contractor's representative shall have the option of developing the project schedule within their organization or to engage the services of an outside consultant. If an outside scheduling consultant is utilized, Section 1.3 of this specification will apply.

1.3 CONTRACTOR'S CONSULTANT:

- A. The Contractor shall submit a qualification proposal to the COTR, within 10 days of bid acceptance. The qualification proposal shall include:
1. The name and address of the proposed consultant.
 2. Information to show that the proposed consultant has the qualifications to meet the requirements specified in the preceding paragraph.
 3. A representative sample of prior construction projects, which the proposed consultant has performed complete project scheduling services. These representative samples shall be of similar size and scope.
- B. The Contracting Officer has the right to approve or disapprove the proposed consultant and will notify the Contractor of the VA decision

within seven calendar days from receipt of the qualification proposal. In case of disapproval, the Contractor shall resubmit another consultant within 10 calendar days for renewed consideration. The Contractor shall have their scheduling consultant approved prior to submitting any schedule for approval.

1.4 COMPUTER PRODUCED SCHEDULES

- A. The contractor shall provide monthly, to the Department of Veterans Affairs (VA), all computer-produced time/cost schedules and reports generated from monthly project updates. This monthly computer service will include: three copies of up to five different reports (inclusive of all pages) available within the user defined reports of the scheduling software approved by the Contracting Officer; a hard copy listing of all project schedule changes, and associated data, made at the update and an electronic file of this data; and the resulting monthly updated schedule in PDM format. These must be submitted with and substantively support the contractor's monthly payment request and the signed look ahead report. The COTR shall identify the five different report formats that the contractor shall provide.
- B. The contractor shall be responsible for the correctness and timeliness of the computer-produced reports. The Contractor shall also responsible for the accurate and timely submittal of the updated project schedule and all CPM data necessary to produce the computer reports and payment request that is specified.
- C. The VA will report errors in computer-produced reports to the Contractor's representative within ten calendar days from receipt of reports. The Contractor shall reprocess the computer-produced reports and associated diskette(s), when requested by the Contracting Officer's representative, to correct errors which affect the payment and schedule for the project.

1.5 THE COMPLETE PROJECT SCHEDULE SUBMITTAL

- A. Within 45 calendar days after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review; three blue line copies of the interim schedule on sheets of paper 765 x 1070 mm (30 x 42 inches) and an electronic file in the previously approved CPM schedule program. The submittal shall also include three copies of a computer-produced activity/event ID schedule showing project duration; phase completion dates; and other data, including event cost. Each activity/event on the computer-produced schedule shall contain as

a minimum, but not limited to, activity/event ID, activity/event description, duration, budget amount, early start date, early finish date, late start date, late finish date and total float. Work activity/event relationships shall be restricted to finish-to-start or start-to-start without lead or lag constraints. Activity/event date constraints, not required by the contract, will not be accepted unless submitted to and approved by the Contracting Officer. The contractor shall make a separate written detailed request to the Contracting Officer identifying these date constraints and secure the Contracting Officer's written approval before incorporating them into the network diagram. The Contracting Officer's separate approval of the Project Schedule shall not excuse the contractor of this requirement. Logic events (non-work) will be permitted where necessary to reflect proper logic among work events but must have zero duration. The complete working schedule shall reflect the Contractor's approach to scheduling the complete project. **The final Project Schedule in its original form shall contain no contract changes or delays which may have been incurred during the final network diagram development period and shall reflect the entire contract duration as defined in the bid documents.** These changes/delays shall be entered at the first update after the final Project Schedule has been approved. The Contractor should provide their requests for time and supporting time extension analysis for contract time as a result of contract changes/delays, after this update, and in accordance with Article, ADJUSTMENT OF CONTRACT COMPLETION.

- B. Within 30 calendar days after receipt of the complete project interim Project Schedule and the complete final Project Schedule, the Contracting Officer or his representative, will do one or both of the following:
1. Notify the Contractor concerning his actions, opinions, and objections.
 2. A meeting with the Contractor at or near the job site for joint review, correction or adjustment of the proposed plan will be scheduled if required. Within 14 calendar days after the joint review, the Contractor shall revise and shall submit three blue line copies of the revised Project Schedule, three copies of the revised computer-produced activity/event ID schedule and a revised electronic file as specified by the Contracting Officer. The revised

submission will be reviewed by the Contracting Officer and, if found to be as previously agreed upon, will be approved.

- C. The approved baseline schedule and the computer-produced schedule(s) generated there from shall constitute the approved baseline schedule until subsequently revised in accordance with the requirements of this section.
- D. The Complete Project Schedule shall contain approximately 100 work activities/events.

1.6 WORK ACTIVITY/EVENT COST DATA

- A. The Contractor shall cost load all work activities/events except procurement activities. The cumulative amount of all cost loaded work activities/events (including alternates) shall equal the total contract price. Prorate overhead, profit and general conditions on all work activities/events for the entire project length. The contractor shall generate from this information cash flow curves indicating graphically the total percentage of work activity/event dollar value scheduled to be in place on early finish, late finish. These cash flow curves will be used by the Contracting Officer to assist him in determining approval or disapproval of the cost loading. Negative work activity/event cost data will not be acceptable, except on VA issued contract changes.
- B. The Contractor shall cost load work activities/events for guarantee period services, test, balance and adjust various systems in accordance with the provisions in Article, FAR 52.232 - 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.232 - Article 70 Without NAS-CPM for (PAYMENTS UNDER FIXED PRICE CONSTRUCTION).
- C. In accordance with FAR 52.236 - 1 (PERFORMANCE OF WORK BY THE CONTRACTOR) and VAAR 852.236 - 72 (PERFORMANCE OF WORK BY THE CONTRACTOR), the Contractor shall submit, simultaneously with the cost per work activity/event of the construction schedule required by this Section, a responsibility code for all activities/events of the project for which the Contractor's forces will perform the work.
- D. The Contractor shall cost load work activities/events for all BID ITEMS including ASBESTOS ABATEMENT. The sum of each BID ITEM work shall equal the value of the bid item in the Contractors' bid.

1.7 PROJECT SCHEDULE REQUIREMENTS

A. Show on the project schedule the sequence of work activities/events required for complete performance of all items of work. The Contractor Shall:

1. Show activities/events as:

- a. Contractor's time required for submittal of shop drawings, templates, fabrication, delivery and similar pre-construction work.
- b. Contracting Officer's and Architect-Engineer's review and approval of shop drawings, equipment schedules, samples, template, or similar items.
- c. Interruption of VA Facilities utilities, delivery of Government furnished equipment, and rough-in drawings, project phasing and any other specification requirements.
- d. Test, balance and adjust various systems and pieces of equipment, maintenance and operation manuals, instructions and preventive maintenance tasks.
- e. VA inspection and acceptance activity/event with a minimum duration of five work days at the end of each phase and immediately preceding any VA move activity/event required by the contract phasing for that phase.

2. Show not only the activities/events for actual construction work for each trade category of the project, but also trade relationships to indicate the movement of trades from one area, floor, or building, to another area, floor, or building, for at least five trades who are performing major work under this contract.

3. Break up the work into activities/events of a duration no longer than 20 work days each or one reporting period, except as to non-construction activities/events (i.e., procurement of materials, delivery of equipment, concrete and asphalt curing) and any other activities/events for which the COTR may approve the showing of a longer duration. The duration for VA approval of any required submittal, shop drawing, or other submittals will not be less than 20 work days.

4. Describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled "start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.

5. The schedule shall be generally numbered in such a way to reflect either discipline, phase or location of the work.
- B. The Contractor shall submit the following supporting data in addition to the project schedule:
 1. The appropriate project calendar including working days and holidays.
 2. The planned number of shifts per day.
 3. The number of hours per shift.Failure of the Contractor to include this data shall delay the review of the submittal until the Contracting Officer is in receipt of the missing data.
- C. To the extent that the Project Schedule or any revised Project Schedule shows anything not jointly agreed upon, it shall not be deemed to have been approved by the COTR. Failure to include any element of work required for the performance of this contract shall not excuse the Contractor from completing all work required within any applicable completion date of each phase regardless of the COTR's approval of the Project Schedule.
- D. Compact Disk Requirements and CPM Activity/Event Record Specifications: Submit to the VA an electronic file(s) containing one file of the data required to produce a schedule, reflecting all the activities/events of the complete project schedule being submitted.

1.8 PAYMENT TO THE CONTRACTOR:

- A. Monthly, the contractor shall submit an application and certificate for payment using VA Form 10-6001a or the AIA application and certificate for payment documents G702 & G703 reflecting updated schedule activities and cost data in accordance with the provisions of the following Article, PAYMENT AND PROGRESS REPORTING, as the basis upon which progress payments will be made pursuant to Article, FAR 52.232 - 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.232 - Article 70 Without NAS-CPM for (PAYMENTS UNDER FIXED PRICE CONSTRUCTION). The Contractor shall be entitled to a monthly progress payment upon approval of estimates as determined from the currently approved updated project schedule. Monthly payment requests shall include: a listing of all agreed upon project schedule changes and associated data; and an electronic file (s) of the resulting monthly updated schedule.

- B. Approval of the Contractor's monthly Application for Payment shall be contingent, among other factors, on the submittal of a satisfactory monthly update of the project schedule.

1.9 PAYMENT AND PROGRESS REPORTING

- A. Monthly schedule update meetings will be held on dates mutually agreed to by the COTR and the Contractor. Contractor and their CPM consultant (if applicable) shall attend all monthly schedule update meetings. The Contractor shall accurately update the Project Schedule and all other data required and provide this information to the COTR three work days in advance of the schedule update meeting. Job progress will be reviewed to verify:
1. Actual start and/or finish dates for updated/completed activities/events.
 2. Remaining duration for each activity/event started, or scheduled to start, but not completed.
 3. Logic, time and cost data for change orders, and supplemental agreements that are to be incorporated into the Project Schedule.
 4. Changes in activity/event sequence and/or duration which have been made, pursuant to the provisions of following Article, ADJUSTMENT OF CONTRACT COMPLETION.
 5. Completion percentage for all completed and partially completed activities/events.
 6. Logic and duration revisions required by this section of the specifications.
 7. Activity/event duration and percent complete shall be updated independently.
- B. After completion of the joint review, the contractor shall generate an updated computer-produced calendar-dated schedule and supply the Contracting Officer's representative with reports in accordance with the Article, COMPUTER PRODUCED SCHEDULES, specified.
- C. After completing the monthly schedule update, the contractor's representative or scheduling consultant shall rerun all current period contract change(s) against the prior approved monthly project schedule. The analysis shall only include original workday durations and schedule logic agreed upon by the contractor and resident engineer for the contract change(s). When there is a disagreement on logic and/or durations, the Contractor shall use the schedule logic and/or durations provided and approved by the resident engineer. After each rerun

update, the resulting electronic project schedule data file shall be appropriately identified and submitted to the VA in accordance to the requirements listed in articles 1.4 and 1.7. This electronic submission is separate from the regular monthly project schedule update requirements and shall be submitted to the resident engineer within fourteen (14) calendar days of completing the regular schedule update. **Before inserting the contract changes durations, care must be taken to ensure that only the original durations will be used for the analysis, not the reported durations after progress. In addition, once the final network diagram is approved, the contractor must recreate all manual progress payment updates on this approved network diagram and associated reruns for contract changes in each of these update periods as outlined above for regular update periods. This will require detailed record keeping for each of the manual progress payment updates.**

- D. Following approval of the CPM schedule, the VA, the General Contractor, its approved CPM Consultant, RE office representatives, and all subcontractors needed, as determined by the SRE, shall meet to discuss the monthly updated schedule. The main emphasis shall be to address work activities to avoid slippage of project schedule and to identify any necessary actions required to maintain project schedule during the reporting period. The Government representatives and the Contractor should conclude the meeting with a clear understanding of those work and administrative actions necessary to maintain project schedule status during the reporting period. This schedule coordination meeting will occur after each monthly project schedule update meeting utilizing the resulting schedule reports from that schedule update. If the project is behind schedule, discussions should include ways to prevent further slippage as well as ways to improve the project schedule status, when appropriate.

1.10 RESPONSIBILITY FOR COMPLETION

- A. If it becomes apparent from the current revised monthly progress schedule that phasing or contract completion dates will not be met, the Contractor shall execute some or all of the following remedial actions:
1. Increase construction manpower in such quantities and crafts as necessary to eliminate the backlog of work.

2. Increase the number of working hours per shift, shifts per working day, working days per week, the amount of construction equipment, or any combination of the foregoing to eliminate the backlog of work.
 3. Reschedule the work in conformance with the specification requirements.
- B. Prior to proceeding with any of the above actions, the Contractor shall notify and obtain approval from the COTR for the proposed schedule changes. If such actions are approved, the representative schedule revisions shall be incorporated by the Contractor into the Project Schedule before the next update, at no additional cost to the Government.

1.11 CHANGES TO THE SCHEDULE

- A. Within 30 calendar days after VA acceptance and approval of any updated project schedule, the Contractor shall submit a revised electronic file (s) and a list of any activity/event changes including predecessors and successors for any of the following reasons:
1. Delay in completion of any activity/event or group of activities/events, which may be involved with contract changes, strikes, unusual weather, and other delays will not relieve the Contractor from the requirements specified unless the conditions are shown on the CPM as the direct cause for delaying the project beyond the acceptable limits.
 2. Delays in submittals, or deliveries, or work stoppage are encountered which make rescheduling of the work necessary.
 3. The schedule does not represent the actual prosecution and progress of the project.
 4. When there is, or has been, a substantial revision to the activity/event costs regardless of the cause for these revisions.
- B. CPM revisions made under this paragraph which affect the previously approved computer-produced schedules for Government furnished equipment, vacating of areas by the VA Facility, contract phase(s) and sub phase(s), utilities furnished by the Government to the Contractor, or any other previously contracted item, shall be furnished in writing to the Contracting Officer for approval.
- C. Contracting Officer's approval for the revised project schedule and all relevant data is contingent upon compliance with all other paragraphs of this section and any other previous agreements by the Contracting Officer or the VA representative.

- D. The cost of revisions to the project schedule resulting from contract changes will be included in the proposal for changes in work as specified in FAR 52.243 - 4 (Changes), and will be based on the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.
- E. The cost of revisions to the Project Schedule not resulting from contract changes is the responsibility of the Contractor.

1.12 ADJUSTMENT OF CONTRACT COMPLETION

- A. The contract completion time will be adjusted only for causes specified in this contract. Request for an extension of the contract completion date by the Contractor shall be supported with a justification, CPM data and supporting evidence as the COTR may deem necessary for determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract. Submission of proof based on revised activity/event logic, durations (in work days) and costs is obligatory to any approvals. The schedule must clearly display that the Contractor has used, in full, all the float time available for the work involved in this request. The Contracting Officer's determination as to the total number of days of contract extension will be based upon the current computer-produced calendar-dated schedule for the time period in question and all other relevant information.
- B. Actual delays in activities/events which, according to the computer-produced calendar-dated schedule, do not affect the extended and predicted contract completion dates shown by the critical path in the network, will not be the basis for a change to the contract completion date. The Contracting Officer will within a reasonable time after receipt of such justification and supporting evidence, review the facts and advise the Contractor in writing of the Contracting Officer's decision.
- C. The Contractor shall submit each request for a change in the contract completion date to the Contracting Officer in accordance with the provisions specified under FAR 52.243 - 4 (Changes). The Contractor shall include, as a part of each change order proposal, a sketch showing all CPM logic revisions, duration (in work days) changes, and cost changes, for work in question and its relationship to other activities on the approved network diagram.

D. All delays due to non-work activities/events such as RFIs, WEATHER, STRIKES, and similar non-work activities/events shall be analyzed on a month by month basis.

- - - E N D - - -

SECTION 01 33 23
SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This specification defines the general requirements and procedures for submittals. A submittal is information submitted for VA review to establish compliance with the contract documents.
- B. Detailed submittal requirements are found in the technical sections of the contract specifications. The Contracting Officer's Representative (COR) may request submittals in addition to those specified when deemed necessary to adequately describe the work covered in the respective technical specifications at no additional cost to the government.
- C. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor's expense.

1.2 DEFINITIONS

- A. Preconstruction Submittals: Submittals which are required prior to issuing contract notice to proceed or starting construction. For example, Certificates of insurance; Surety bonds; Site-specific safety plan; Construction progress schedule; Schedule of values; Submittal register; List of proposed subcontractors.
- B. Shop Drawings: Drawings, diagrams, and schedules specifically prepared to illustrate some portion of the work. Drawings prepared by or for the Contractor to show how multiple systems and interdisciplinary work will be integrated and coordinated.
- C. Product Data: Catalog cuts, illustrations, schedules, diagrams, performance charts, instructions, and brochures, which describe and illustrate size, physical appearance, and other characteristics of materials, systems, or equipment for some portion of the work. Samples of warranty language when the contract requires extended product warranties.
- D. Samples: Physical examples of materials, equipment, or workmanship that illustrate functional and aesthetic characteristics of a material or product and establish standards by which the work can be judged. Color

samples from the manufacturer's standard line (or custom color samples if specified) to be used in selecting or approving colors for the project. Field samples and mock-ups constructed to establish standards by which the ensuing work can be judged.

- E. Design Data: Calculations, mix designs, analyses, or other data pertaining to a part of work.
- F. Test Reports: Report which includes findings of a test required to be performed by the Contractor on an actual portion of the work. Report which includes finding of a test made at the job site or on sample taken from the job site, on portion of work during or after installation.
- G. Certificates: Document required of Contractor, or of a manufacturer, supplier, installer, or subcontractor through Contractor. The purpose is to document procedures, acceptability of methods, or personnel qualifications for a portion of the work.
- H. Manufacturer's Instructions: Pre-printed material describing installation of a product, system, or material, including special notices and MSDS concerning impedances, hazards, and safety precautions.
- I. Manufacturer's Field Reports: Documentation of the testing and verification actions taken by manufacturer's representative at the job site on a portion of the work, during or after installation, to confirm compliance with manufacturer's standards or instructions. The documentation must indicate whether the material, product, or system has passed or failed the test.
- J. Operation and Maintenance Data: Manufacturer data that is required to operate, maintain, troubleshoot, and repair equipment, including manufacturer's help, parts list, and product line documentation. This data shall be incorporated in an operations and maintenance manual.
- K. Closeout Submittals: Documentation necessary to properly close out a construction contract. For example, Record Drawings and as-built drawings. Also, submittal requirements necessary to properly close out a phase of construction on a multi-phase contract.

1.3 SUBMITTAL REGISTER

- A. The submittal register will list items of equipment and materials for which submittals are required by the specifications. This list may not be all inclusive and additional submittals may be required by the specifications. The Contractor is not relieved from supplying submittals required by the contract documents but which have been omitted from the submittal register.

- B. The submittal register will serve as a scheduling document for submittals and will be used to control submittal actions throughout the contract period.
- C. The VA will provide the initial submittal register in electronic format. Thereafter, the Contractor shall track all submittals by maintaining a complete list, including completion of all data columns, including dates on which submittals are received and returned by the VA.



ENG_FORM_4288-R.
pdf

- D. The Contractor shall update the submittal register as submittal actions occur and maintain the submittal register at the project site until final acceptance of all work by Contracting Officer.
- E. The Contractor shall submit formal monthly updates to the submittal register in electronic format. Each monthly update shall document actual submission and approval dates for each submittal.

1.4 SUBMITTAL SCHEDULING

- A. Submittals are to be scheduled, submitted, reviewed, and approved prior to the acquisition of the material or equipment.
- B. Coordinate scheduling, sequencing, preparing, and processing of submittals with performance of work so that work will not be delayed by submittal processing. Allow time for potential resubmittal.
- C. No delay costs or time extensions will be allowed for time lost in late submittals or resubmittals.
- D. All submittals are required to be approved prior to the start of the specified work activity.

1.5 SUBMITTAL PREPARATION

- A. Each submittal is to be complete and in sufficient detail to allow ready determination of compliance with contract requirements.
- B. Collect required data for each specific material, product, unit of work, or system into a single submittal. Prominently mark choices, options, and portions applicable to the submittal. Partial submittals will not be accepted for expedition of construction effort. Submittal will be returned without review if incomplete.

- C. If available product data is incomplete, provide Contractor-prepared documentation to supplement product data and satisfy submittal requirements.
- D. All irrelevant or unnecessary data shall be removed from the submittal to facilitate accuracy and timely processing. Submittals that contain the excessive amount of irrelevant or unnecessary data will be returned with review.
- E. Provide a transmittal form for each submittal with the following information:
 - 1. Project title, location and number.
 - 2. Construction contract number.
 - 3. Date of the drawings and revisions.
 - 4. Name, address, and telephone number of subcontractor, supplier, manufacturer, and any other subcontractor associated with the submittal.
 - 5. List paragraph number of the specification section and sheet number of the contract drawings by which the submittal is required.
 - 6. When a resubmission, add alphabetic suffix on submittal description. For example, submittal 18 would become 18A, to indicate resubmission.
 - 7. Product identification and location in project.
- F. The Contractor is responsible for reviewing and certifying that all submittals are in compliance with contract requirements before submitting for VA review. Proposed deviations from the contract requirements are to be clearly identified. All deviations submitted must include a side by side comparison of item being proposed against item specified. Failure to point out deviations will result in the VA requiring removal and replacement of such work at the Contractor's expense.
- G. Stamp, sign, and date each submittal transmittal form indicating action taken.
- H. Stamp used by the Contractor on the submittal transmittal form to certify that the submittal meets contract requirements is to be similar to the following:

CONTRACTOR
(Firm Name)
_____ Approved
_____ Approved with corrections as noted on submittal data and/or attached sheets(s)
SIGNATURE: _____
TITLE: _____
DATE: _____

1.6 SUBMITTAL FORMAT AND TRANSMISSION

- A. Provide submittals in electronic format, except for material samples. Use PDF as the electronic format, unless otherwise specified or directed by the Contracting Officer.
- B. Compile the electronic submittal file as a single, complete document. Name the electronic submittal file specifically according to its contents.
- C. Electronic files must be of sufficient quality that all information is legible. Generate PDF files from original documents so that the text included in the PDF file is both searchable and can be copied. If documents are scanned, Optical Character Resolution (OCR) routines are required.
- D. E-mail electronic submittal documents smaller than 5MB in size to e-mail addresses as directed by the Contracting Officer.

- E. Provide electronic documents over 5MB through an electronic FTP file sharing system. Confirm that the electronic FTP file sharing system can be accessed from the VA computer network. The Contractor is responsible for setting up, providing, and maintaining the electronic FTP file sharing system for the construction contract period of performance.
- F. Provide hard copies of submittals when requested by the Contracting Officer. Up to 3 additional hard copies of any submittal may be requested at the discretion of the Contracting Officer, at no additional cost to the VA.

1.7 SAMPLES

- A. Submit two sets of physical samples showing range of variation, for each required item.
- B. Where samples are specified for selection of color, finish, pattern, or texture, submit the full set of available choices for the material or product specified.
- C. When color, texture, or pattern is specified by naming a particular manufacturer and style, include one sample of that manufacturer and style, for comparison.
- D. Before submitting samples, the Contractor is to ensure that the materials or equipment will be available in quantities required in the project. No change or substitution will be permitted after a sample has been approved.
- E. The VA reserves the right to disapprove any material or equipment which previously has proven unsatisfactory in service.
- F. Physical samples supplied maybe requested back for use in the project after reviewed and approved.

1.8 OPERATION AND MAINTENANCE DATA

- A. Submit data specified for a given item within 30 calendar days after the item is delivered to the contract site.
- B. In the event the Contractor fails to deliver O&M Data within the time limits specified, the COR may withhold from progress payments 50 percent of the price of the item with which such O&M Data are applicable.

1.9 TEST REPORTS

- A. SRE may require specific test after work has been installed or completed which could require contractor to repair test area at no additional cost to contract.

1.10 VA REVIEW OF SUBMITTALS AND RFIS

- A. The VA will review all submittals for compliance with the technical requirements of the contract documents. The Architect-Engineer for this project will assist the VA in reviewing all submittals and determining contractual compliance. Review will be only for conformance with the applicable codes, standards and contract requirements.
- B. Period of review for submittals begins when the VA COR receives submittal from the Contractor.
- C. Period of review for each resubmittal is the same as for initial submittal.
- D. VA review period is 10 working days for submittals.
- E. VA review period is 10 working days for RFIs.
- F. The VA will return submittals to the Contractor with the following notations:
 - 1. "Approved": authorizes the Contractor to proceed with the work covered.
 - 2. "Approved as noted": authorizes the Contractor to proceed with the work covered provided the Contractor incorporates the noted comments and makes the noted corrections.
 - 3. "Disapproved, revise and resubmit": indicates noncompliance with the contract requirements or that submittal is incomplete. Resubmit with appropriate changes and corrections. No work shall proceed for this item until resubmittal is approved.
 - 4. "Not reviewed": indicates submittal does not have evidence of being reviewed and approved by Contractor or is not complete. A submittal marked "not reviewed" will be returned with an explanation of the reason it is not reviewed. Resubmit submittals after taking appropriate action.

1.11 APPROVED SUBMITTALS

- A. The VA approval of submittals is not to be construed as a complete check, and indicates only that the general method of construction, materials, detailing, and other information are satisfactory.
- B. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project.

Non-compliant material incorporated in the work will be removed and replaced at the Contractor's expense.

- C. After submittals have been approved, no resubmittal for the purpose of substituting materials or equipment will be considered unless accompanied by an explanation of why a substitution is necessary.
- D. Retain a copy of all approved submittals at project site, including approved samples.

1.12 WITHHOLDING OF PAYMENT

Payment for materials incorporated in the work will not be made if required approvals have not been obtained.

- - - E N D - - -

SECTION 01 35 26**SAFETY REQUIREMENTS****TABLE OF CONTENTS**

1.1	APPLICABLE PUBLICATIONS	2
1.2	DEFINITIONS	3
1.3	REGULATORY REQUIREMENTS	4
1.4	ACCIDENT PREVENTION PLAN (APP)	4
1.5	ACTIVITY HAZARD ANALYSES (AHAs)	9
1.6	PRECONSTRUCTION CONFERENCE	10
1.7	"SITE SAFETY AND HEALTH OFFICER" (SSHO) and "COMPETENT PERSON" (CP) ..	10
1.8	TRAINING	11
1.9	INSPECTIONS	12
1.10	ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS	13
1.11	PERSONAL PROTECTIVE EQUIPMENT (PPE)	14
1.12	INFECTION CONTROL	14
1.13	TUBERCULOSIS SCREENING	21
1.14	FIRE SAFETY	21
1.15	ELECTRICAL	23
1.16	FALL PROTECTION	25
1.17	SCAFFOLDS AND OTHER WORK PLATFORMS	25
1.18	EXCAVATION AND TRENCHES	26
1.19	CRANES	28
1.20	CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT)	29
1.21	CONFINED SPACE ENTRY	29
1.22	WELDING AND CUTTING	29
1.23	LADDERS	29
1.24	FLOOR & WALL OPENINGS	30

**SECTION 01 35 26
SAFETY REQUIREMENTS**

1.1 APPLICABLE PUBLICATIONS:

A. Latest publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

B. American Society of Safety Engineers (ASSE):

A10.1-2011.....Pre-Project & Pre-Task Safety and Health
Planning

A10.34-2012.....Protection of the Public on or Adjacent to
Construction Sites

A10.38-2013.....Basic Elements of an Employer's Program to
Provide a Safe and Healthful Work Environment
American National Standard Construction and
Demolition Operations

C. American Society for Testing and Materials (ASTM):

E84-2013.....Surface Burning Characteristics of Building
Materials

D. The Facilities Guidelines Institute (FGI):

FGI Guidelines-2010Guidelines for Design and Construction of
Healthcare Facilities

E. National Fire Protection Association (NFPA):

10-2018.....Standard for Portable Fire Extinguishers

30-2018.....Flammable and Combustible Liquids Code

51B-2019.....Standard for Fire Prevention During Welding,
Cutting and Other Hot Work

70-2020.....National Electrical Code

70B-2019.....Recommended Practice for Electrical Equipment
Maintenance

70E-2018 Standard for Electrical Safety in the Workplace

99-2018.....Health Care Facilities Code

241-2019.....Standard for Safeguarding Construction,
Alteration, and Demolition Operations

F. The Joint Commission (TJC)

TJC Manual Comprehensive Accreditation and Certification
Manual

G. U.S. Nuclear Regulatory Commission

- 10 CFR 20 Standards for Protection Against Radiation
- H. U.S. Occupational Safety and Health Administration (OSHA):
- 29 CFR 1910 Safety and Health Regulations for General
Industry
- 29 CFR 1926 Safety and Health Regulations for Construction
Industry
- I. VHA Directive 2005-007

1.2 DEFINITIONS:

- A. Critical Lift. A lift with the hoisted load exceeding 75% of the crane's maximum capacity; lifts made out of the view of the operator (blind picks); lifts involving two or more cranes; personnel being hoisted; and special hazards such as lifts over occupied facilities, loads lifted close to power-lines, and lifts in high winds or where other adverse environmental conditions exist; and any lift which the crane operator believes is critical.
- B. OSHA "Competent Person" (CP). One who is capable of identifying existing and predictable hazards in the surroundings and working conditions which are unsanitary, hazardous or dangerous to employees, and who has the authorization to take prompt corrective measures to eliminate them (see 29 CFR 1926.32(f)).
- C. "Qualified Person" means one who, by possession of a recognized degree, certificate, or professional standing, or who by extensive knowledge, training and experience, has successfully demonstrated his ability to solve or resolve problems relating to the subject matter, the work, or the project.
- D. High Visibility Accident. Any mishap which may generate publicity or high visibility.
- E. Accident/Incident Criticality Categories:
1. No impact - near miss incidents that should be investigated but are not required to be reported to the VA.
 2. Minor incident/impact - incidents that require first aid or result in minor equipment damage (less than \$5000). These incidents must be investigated but are not required to be reported to the VA.
 3. Moderate incident/impact - Any work-related injury or illness that results in:
 - a. Days away from work (any time lost after day of injury/illness onset).
 - b. Restricted work.

- c. Transfer to another job.
 - d. Medical treatment beyond first aid;
 - e. Loss of consciousness.
 - 4. A significant injury or illness diagnosed by a physician or other licensed health care professional, even if it did not result in (1) through (5) above or,
 - 5. ny incident that leads to major equipment damage (greater than \$5000) .
- F. These incidents must be investigated and are required to be reported to the VA.
- 1 Major incident/impact - Any mishap that leads to fatalities, hospitalizations, amputations, and losses of an eye as a result of contractors' activities. Or any incident which leads to major property damage (greater than \$20,000) and/or may generate publicity or high visibility. These incidents must be investigated and are required to be reported to the VA as soon as practical, but not later than 2 hours after the incident.
- G. Medical Treatment. Treatment administered by a physician or by registered professional personnel under the standing orders of a physician. Medical treatment does not include first aid treatment even if provided by physician or registered personnel.

1.3 REGULATORY REQUIREMENTS:

- A. In addition to the detailed requirements included in the provisions of this contract, comply with 29 CFR 1926, comply with 29 CFR 1910 as incorporated by reference within 29 CFR 1926, comply with ASSE A10.34, and all applicable federal, state, and local laws, ordinances, criteria, rules and regulations. Submit matters of interpretation of standards for resolution before starting work. Where the requirements of this specification, applicable laws, criteria, ordinances, regulations, and referenced documents vary, the most stringent requirements govern except with specific approval and acceptance by the COR.

1.4 ACCIDENT PREVENTION PLAN (APP):

- A. The APP (aka Construction Safety & Health Plan) shall interface with the Contractor's overall safety and health program. Include any portions of the Contractor's overall safety and health program referenced in the APP in the applicable APP element and ensure it is site-specific. The Government considers the Prime Contractor to be the

"controlling authority" for all worksite safety and health of each subcontractor(s). Contractors are responsible for informing their subcontractors of the safety provisions under the terms of the contract and the penalties for noncompliance, coordinating the work to prevent one craft from interfering with or creating hazardous working conditions for other crafts, and inspecting subcontractor operations to ensure that accident prevention responsibilities are being carried out.

B. The APP shall be prepared as follows:

1. Written in English by a qualified person who is employed by the Prime Contractor articulating the specific work and hazards pertaining to the contract (model language can be found in ASSE A10.33). Specifically articulating the safety requirements found within these VA contract safety specifications.
2. Address both the Prime Contractors and the subcontractors work operations.
3. State measures to be taken to control hazards associated with materials, services, or equipment provided by suppliers.
4. Address all the elements/sub-elements and in order as follows:
 - a. **SIGNATURE SHEET.** Title, signature, and phone number of the following:
 - 1) Plan preparer (Qualified Person such as corporate safety staff person or contracted Certified Safety Professional with construction safety experience).
 - 2) Plan approver (company/corporate officers authorized to obligate the company).
 - 3) Plan concurrence (e.g., Chief of Operations, Corporate Chief of Safety, Corporate Industrial Hygienist, project manager or superintendent, project safety professional). Provide concurrence of other applicable corporate and project personnel (Contractor).
 - b. **BACKGROUND INFORMATION.** List the following:
 - 1) Contractor.
 - 2) Contract number.
 - 3) Project name.
 - 4) Brief project description, description of work to be performed, and location; phases of work anticipated (these will require an AHA).

- c. **STATEMENT OF SAFETY AND HEALTH POLICY.** Provide a copy of current corporate/company Safety and Health Policy Statement, detailing commitment to providing a safe and healthful workplace for all employees. The Contractor's written safety program goals, objectives, and accident experience goals for this contract should be provided.
- d. **RESPONSIBILITIES AND LINES OF AUTHORITIES.** Provide the following:
- 1) A statement of the employer's ultimate responsibility for the implementation of his SOH program;
 - 2) Identification and accountability of personnel responsible for safety at both corporate and project level. Contracts specifically requiring safety or industrial hygiene personnel shall include a copy of their resumes.
 - 3) The names of Competent and/or Qualified Person(s) and proof of competency/qualification to meet specific OSHA Competent/Qualified Person(s) requirements must be attached.;
 - 4) Requirements that no work shall be performed unless a designated competent person is present on the job site;
 - 5) Requirements for pre-task Activity Hazard Analysis (AHAs);
 - 6) Lines of authority;
 - 7) Policies and procedures regarding noncompliance with safety requirements (to include disciplinary actions for violation of safety requirements) should be identified;
- e. **SUBCONTRACTORS AND SUPPLIERS.** If applicable, provide procedures for coordinating SOH activities with other employers on the job site:
- 1) Identification of subcontractors and suppliers (if known);
 - 2) Safety responsibilities of subcontractors and suppliers.
- f. **TRAINING.**
- 1) Site-specific SOH orientation training at the time of initial hire or assignment to the project for every employee before working on the project site is required.
 - 2) Mandatory training and certifications that are applicable to this project (e.g., explosive actuated tools, crane operator, rigger, crane signal person, fall protection, electrical lockout/NFPA 70E, machine/equipment lockout, confined space, etc...) and any requirements for periodic retraining/recertification are required.

- 3) Procedures for ongoing safety and health training for supervisors and employees shall be established to address changes in site hazards/conditions.
- 4) OSHA 10-hour training is required for all workers on site and the OSHA 30-hour training is required for Trade Competent Persons (CPs)

g. SAFETY AND HEALTH INSPECTIONS.

- 1) Specific assignment of responsibilities for a minimum daily job site safety and health inspection during periods of work activity: Who will conduct (e.g., "Site Safety and Health CP"), proof of inspector's training/qualifications, when inspections will be conducted, procedures for documentation, deficiency tracking system, and follow-up procedures.
- 2) Any external inspections/certifications that may be required (e.g., contracted CSP or CSHT)

h. ACCIDENT/INCIDENT INVESTIGATION & REPORTING. The Contractor shall conduct mishap investigations of all Moderate and Major as well as all High Visibility Incidents. The APP shall include accident/incident investigation procedure and identify person(s) responsible to provide the following to the COR:

- 1) Exposure data (man-hours worked);
- 2) Accident investigation reports;
- 3) Project site injury and illness logs.

i. PLANS (PROGRAMS, PROCEDURES) REQUIRED. Based on a risk assessment of contracted activities and on mandatory OSHA compliance programs, the Contractor shall address all applicable occupational, patient, and public safety risks in site-specific compliance and accident prevention plans. These Plans shall include but are not be limited to procedures for addressing the risks associates with the following:

- 1) Emergency response;
- 2) Contingency for severe weather;
- 3) Fire Prevention;
- 4) Medical Support;
- 5) Posting of emergency telephone numbers;
- 6) Prevention of alcohol and drug abuse;
- 7) Site sanitation (housekeeping, drinking water, toilets);
- 8) Night operations and lighting;

- 9) Hazard communication program;
- 10) Welding/Cutting "Hot" work;
- 11) Electrical Safe Work Practices (Electrical LOTO/NFPA 70E);
- 12) General Electrical Safety;
- 13) Hazardous energy control (Machine LOTO);
- 14) Site-Specific Fall Protection & Prevention;
- 15) Excavation/trenching;
- 16) Asbestos abatement;
- 17) Lead abatement;
- 18) Crane Critical lift;
- 19) Respiratory protection;
- 20) Health hazard control program;
- 21) Radiation Safety Program;
- 22) Abrasive blasting;
- 23) Heat/Cold Stress Monitoring;
- 24) Crystalline Silica Monitoring (Assessment);
- 25) Demolition plan (to include engineering survey);
- 26) Formwork and shoring erection and removal;
- 27) PreCast Concrete;
- 28) Public (Mandatory compliance with ANSI/ASSE A10.34-2012).

- C. Submit the APP to the COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES 15 calendar days prior to the date of the preconstruction conference for acceptance. Work cannot proceed without an accepted APP.
- D. Once accepted by the COR, the APP and attachments will be enforced as part of the contract. Disregarding the provisions of this contract or the accepted APP will be cause for stopping of work, at the discretion of the Contracting Officer in accordance with FAR Clause 52.236-13, *Accident Prevention*, until the matter has been rectified.
- E. Once work begins, changes to the accepted APP shall be made with the knowledge and concurrence of the COR. Should any severe hazard exposure, i.e. imminent danger, become evident, stop work in the area, secure the area, and develop a plan to remove the exposure and control the hazard. Notify the Contracting Officer within 24 hours of discovery. Eliminate/remove the hazard. In the interim, take all necessary action to restore and maintain safe working conditions in

order to safeguard onsite personnel, visitors, the public and the environment.

1.5 ACTIVITY HAZARD ANALYSES (AHAS) :

- A. AHAs are also known as Job Hazard Analyses, Job Safety Analyses, and Activity Safety Analyses. Before beginning each work activity involving a type of work presenting hazards not experienced in previous project operations or where a new work crew or sub-contractor is to perform the work, the Contractor(s) performing that work activity shall prepare an AHA (Example electronic AHA forms can be found on the US Army Corps of Engineers web site)
- B. AHAs shall define the activities being performed and identify the work sequences, the specific anticipated hazards, site conditions, equipment, materials, and the control measures to be implemented to eliminate or reduce each hazard to an acceptable level of risk.
- C. Work shall not begin until the AHA for the work activity has been accepted by the COR and discussed with all engaged in the activity, including the Contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.
 - 1. The names of the Competent/Qualified Person(s) required for a particular activity (for example, excavations, scaffolding, fall protection, other activities as specified by OSHA and/or other State and Local agencies) shall be identified and included in the AHA. Certification of their competency/qualification shall be submitted to the COR for acceptance prior to the start of that work activity.
 - 2. The AHA shall be reviewed and modified as necessary to address changing site conditions, operations, or change of competent/qualified person(s).
 - a. If more than one Competent/Qualified Person is used on the AHA activity, a list of names shall be submitted as an attachment to the AHA. Those listed must be Competent/Qualified for the type of work involved in the AHA and familiar with current site safety issues.
 - b. If a new Competent/Qualified Person (not on the original list) is added, the list shall be updated (an administrative action not requiring an updated AHA). The new person shall acknowledge in writing that he or she has reviewed the AHA and is familiar with current site safety issues.

3. Submit AHAs to the COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES for review at least 15 calendar days prior to the start of each phase. Subsequent AHAs as shall be formatted as amendments to the APP. The analysis should be used during daily inspections to ensure the implementation and effectiveness of the activity's safety and health controls.
4. The AHA list will be reviewed periodically (at least monthly) at the Contractor supervisory safety meeting and updated as necessary when procedures, scheduling, or hazards change.
5. Develop the activity hazard analyses using the project schedule as the basis for the activities performed. All activities listed on the project schedule will require an AHA. The AHAs will be developed by the contractor, supplier, or subcontractor and provided to the prime contractor for review and approval and then submitted to COR.

1.6 PRECONSTRUCTION CONFERENCE:

- A. Contractor representatives who have a responsibility or significant role in implementation of the accident prevention program, as required by 29 CFR 1926.20(b)(1), on the project shall attend the preconstruction conference to gain a mutual understanding of its implementation. This includes the project superintendent, subcontractor superintendents, and any other assigned safety and health professionals.
- B. Discuss the details of the submitted APP to include incorporated plans, programs, procedures and a listing of anticipated AHAs that will be developed and implemented during the performance of the contract. This list of proposed AHAs will be reviewed at the conference and an agreement will be reached between the Contractor and the Contracting Officer's representative as to which phases will require an analysis. In addition, establish a schedule for the preparation, submittal, review, and acceptance of AHAs to preclude project delays.
- C. Deficiencies in the submitted APP will be brought to the attention of the Contractor within 14 days of submittal, and the Contractor shall revise the plan to correct deficiencies and re-submit it for acceptance. Do not begin work until there is an accepted APP.

1.7 "SITE SAFETY AND HEALTH OFFICER" (SSHO) AND "COMPETENT PERSON" (CP):

- A. The Prime Contractor shall designate a minimum of one SSHO at each project site that will be identified as the SSHO to administer the

Contractor's safety program and government-accepted Accident Prevention Plan. Each subcontractor shall designate a minimum of one CP in compliance with 29 CFR 1926.20 (b) (2) that will be identified as a CP to administer their individual safety programs.

- B. Further, all specialized Competent Persons for the work crews will be supplied by the respective contractor as required by 29 CFR 1926 (i.e., Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations).
- C. These Competent Persons can have collateral duties as the subcontractor's superintendent and/or work crew lead persons as well as fill more than one specialized CP role (i.e., Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations). However, the SSHO has be a separate qualified individual from the Prime Contractor's Superintendent and/or Quality Control Manager with duties only as the SSHO.
- D. The SSHO or an equally-qualified Designated Representative/alternate will maintain a presence on the site during construction operations in accordance with FAR Clause 52.236-6: *Superintendence by the Contractor*. CPs will maintain presence during their construction activities in accordance with above mentioned clause. A listing of the designated SSHO and all known CPs shall be submitted prior to the start of work as part of the APP with the training documentation and/or AHA as listed in Section 1.8 below.
- E. The repeated presence of uncontrolled hazards during a contractor's work operations will result in the designated CP as being deemed incompetent and result in the required removal of the employee in accordance with FAR Clause 52.236-5: Material and Workmanship, Paragraph (c).

1.8 TRAINING:

- A. The designated Prime Contractor SSHO must meet the requirements of all applicable OSHA standards and be capable (through training, experience, and qualifications) of ensuring that the requirements of 29 CFR 1926.16 and other appropriate Federal, State and local requirements are met for the project. As a minimum the SSHO must have completed the OSHA 30-hour Construction Safety class and have five (5) years of construction industry safety experience or three (3) years if he/she possesses a

Certified Safety Professional (CSP) or certified Construction Safety and Health Technician (CSHT) certification or have a safety and health degree from an accredited university or college.

- B. All designated CPs shall have completed the OSHA 30-hour Construction Safety course within the past 5 years.
- C. In addition to the OSHA 30 Hour Construction Safety Course, all CPs with high hazard work operations such as operations involving asbestos, electrical, cranes, demolition, work at heights/fall protection, fire safety/life safety, ladder, rigging, scaffolds, and trenches/excavations shall have a specialized formal course in the hazard recognition & control associated with those high hazard work operations. Documented "repeat" deficiencies in the execution of safety requirements will require retaking the requisite formal course.
- D. All other construction workers shall have the OSHA 10-hour Construction Safety Outreach course and any necessary safety training to be able to identify hazards within their work environment.
- E. Submit training records associated with the above training requirements to the COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES 15 calendar days prior to the date of the preconstruction conference for acceptance.
- F. Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the SSHO or his/her designated representative. As a minimum, this briefing shall include information on the site-specific hazards, construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, emergency procedures, accident reporting etc. Documentation shall be provided to the Resident Engineer that individuals have undergone contractor's safety briefing.
- G. Ongoing safety training will be accomplished in the form of weekly documented safety meeting.

1.9 INSPECTIONS:

- A. The SSHO shall conduct frequent and regular safety inspections (daily) of the site and each of the subcontractors CPs shall conduct frequent and regular safety inspections (daily) of their work operations as required by 29 CFR 1926.20(b)(2). Each week, the SSHO shall conduct a formal documented inspection of the entire construction areas with the subcontractors' "Trade Safety and Health CPs" present in their work

areas. Coordinate with, and report findings and corrective actions weekly to the COR.

- B. A Certified Safety Professional (CSP) with specialized knowledge in construction safety or a certified Construction Safety and Health Technician (CSHT) shall randomly conduct a monthly site safety inspection. The CSP or CSHT can be a corporate safety professional or independently contracted. The CSP or CSHT will provide their certificate number on the required report for verification as necessary.
 - 1. Results of the inspection will be documented with tracking of the identified hazards to abatement.
 - 2. The COR will be notified immediately prior to start of the inspection and invited to accompany the inspection.
 - 3. Identified hazard and controls will be discussed to come to a mutual understanding to ensure abatement and prevent future reoccurrence.
 - 4. A report of the inspection findings with status of abatement will be provided to the COR within one week of the onsite inspection.

1.10 ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS:

- A. The prime contractor shall establish and maintain an accident reporting, recordkeeping, and analysis system to track and analyze all injuries and illnesses, high visibility incidents, and accidental property damage (both government and contractor) that occur on site. Notify the COR as soon as practical, but no more than four hours after any accident meeting the definition of a Moderate or Major incidents, High Visibility Incidents, , or any weight handling and hoisting equipment accident. Within notification include contractor name; contract title; type of contract; name of activity, installation or location where accident occurred; date and time of accident; names of personnel injured; extent of property damage, if any; extent of injury, if known, and brief description of accident (to include type of construction equipment used, PPE used, etc.). Preserve the conditions and evidence on the accident site until the COR determines whether a government investigation will be conducted.
- B. Conduct an accident investigation for all Minor, Moderate and Major incidents as defined in paragraph DEFINITIONS, and property damage accidents resulting in at least \$20,000 in damages, to establish the root cause(s) of the accident. Complete the VA Form 2162 (or equivalent) and provide the report to the COR within 5 calendar days of

the accident. The COR will provide copies of any required or special forms.

- C. A summation of all man-hours worked by the contractor and associated sub-contractors for each month will be reported to the COR monthly.
- D. A summation of all Minor, Moderate, and Major incidents experienced on site by the contractor and associated sub-contractors for each month will be provided to the COR monthly. The contractor and associated sub-contractors' OSHA 300 logs will be made available to the COR as requested.

1.11 PERSONAL PROTECTIVE EQUIPMENT (PPE) :

- A. PPE is governed in all areas by the nature of the work the employee is performing. For example, specific PPE required for performing work on electrical equipment is identified in NFPA 70E, Standard for Electrical Safety in the Workplace.
- B. Mandatory PPE includes:
 - 1. Hard Hats - unless written authorization is given by the COR in circumstances of work operations that have limited potential for falling object hazards such as during finishing work or minor remodeling. With authorization to relax the requirement of hard hats, if a worker becomes exposed to an overhead falling object hazard, then hard hats would be required in accordance with the OSHA regulations.
 - 2. Safety glasses - unless written authorization is given by the COR in circumstances of no eye hazards, appropriate safety glasses meeting the ANSI Z.87.1 standard must be worn by each person on site.
 - 3. Appropriate Safety Shoes - based on the hazards present, safety shoes meeting the requirements of ASTM F2413-11 shall be worn by each person on site unless written authorization is given by the COR in circumstances of no foot hazards.
 - 4. Hearing protection - Use personal hearing protection at all times in designated noise hazardous areas or when performing noise hazardous tasks.

1.12 INFECTION CONTROL

- A. Infection Control is critical in all medical center facilities. Interior construction activities causing disturbance of existing dust, or creating new dust, must be conducted within ventilation-controlled areas that minimize the flow of airborne particles into patient areas.

Exterior construction activities causing disturbance of soil or creates dust in some other manner must be controlled.

- B. An AHA associated with infection control will be performed by VA personnel in accordance with FGI Guidelines (i.e. Infection Control Risk Assessment (ICRA)). The ICRA procedure found on the American Society for Healthcare Engineering (ASHE) website will be utilized. Risk classifications of Class II or lower will require approval by the COR or Government Designated Authority before beginning any construction work. Risk classifications of Class III or higher will require a permit before beginning any construction work. Infection Control permits will be issued by the COR. The Infection Control Permits will be posted outside the appropriate construction area. More than one permit may be issued for a construction project if the work is located in separate areas requiring separate classes. The primary project scope area for this project is: **Class IV**, however, work outside the primary project scope area may vary. The required infection control precautions with each class are as follows:

1. Class I requirements:

a. During Construction Work:

- 1) Notify the COR.
- 2) Execute work by methods to minimize raising dust from construction operations.
- 3) Ceiling tiles: Immediately replace a ceiling tile displaced for visual inspection.

b. Upon Completion:

- 1) Clean work area upon completion of task
- 2) Notify the COR.

2. Class II requirements:

a. During Construction Work:

- 1) Notify the COR.
- 2) Provide active means to prevent airborne dust from dispersing into atmosphere such as wet methods or tool mounted dust collectors where possible.
- 3) Water mist work surfaces to control dust while cutting.
- 4) Seal unused doors with duct tape.
- 5) Block off and seal air vents.
- 6) Remove or isolate HVAC system in areas where work is being performed.

- b. Upon Completion:
 - 1) Wipe work surfaces with cleaner/disinfectant.
 - 2) Contain construction waste before transport in tightly covered containers.
 - 3) Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area.
 - 4) Upon completion, restore HVAC system where work was performed
 - 5) Notify the COR.
- 3. Class III requirements:
 - a. During Construction Work:
 - 1) Obtain permit from the COR.
 - 2) Remove or Isolate HVAC system in area where work is being done to prevent contamination of duct system.
 - 3) Complete all critical barriers i.e., sheetrock, plywood, plastic, to seal area from non-work area or implement control cube method (cart with plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins. Install construction barriers and ceiling protection carefully, outside of normal work hours.
 - 4) Maintain negative air pressure, 0.01 inches of water gauge, within work site utilizing HEPA equipped air filtration units and continuously monitored with a digital display, recording and alarm instrument, which must be calibrated on installation, maintained with periodic calibration and monitored by the contractor.
 - 5) Contain construction waste before transport in tightly covered containers.
 - 6) Cover transport receptacles or carts. Tape covering unless solid lid.
 - b. Upon Completion:
 - 1) Do not remove barriers from work area until completed project is inspected by the COR and thoroughly cleaned by the VA Environmental Services Department.
 - 2) Remove construction barriers and ceiling protection carefully to minimize spreading of dirt and debris associated with construction, outside of normal work hours.
 - 3) Vacuum work area with HEPA filtered vacuums.
 - 4) Wet mop area with cleaner/disinfectant.

- 5) Upon completion, restore HVAC system where work was performed.
 - 6) Return permit to the COR.
4. Class IV requirements:
- a. During Construction Work:
 - 1) Obtain permit from the COR.
 - 2) Isolate HVAC system in area where work is being done to prevent contamination of duct system.
 - 3) Complete all critical barriers i.e., sheetrock, plywood, plastic, to seal area from non-work area or implement control cube method (cart with plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins. Install construction barriers and ceiling protection carefully, outside of normal work hours.
 - 4) Maintain negative air pressure, 0.01 inches of water gauge, within work site utilizing HEPA equipped air filtration units and continuously monitored with a digital display, recording and alarm instrument, which must be calibrated on installation, maintained with periodic calibration and monitored by the contractor.
 - 5) Seal holes, pipes, conduits, and punctures.
 - 6) Construct anteroom and require all personnel to pass through this room so they can be vacuumed using a HEPA vacuum cleaner before leaving work site or they can wear cloth or paper coveralls that are removed each time they leave work site.
 - 7) All personnel entering work site are required to wear shoe covers. Shoe covers must be changed each time the worker exits the work area.
 - b. Upon Completion:
 - 1) Do not remove barriers from work area until completed project is inspected by the COR with thorough cleaning by the VA Environmental Services Dept.
 - 2) Remove construction barriers and ceiling protection carefully to minimize spreading of dirt and debris associated with construction, outside of normal work hours.
 - 3) Contain construction waste before transport in tightly covered containers.
 - 4) Cover transport receptacles or carts. Tape covering unless solid lid.

- 5) Vacuum work area with HEPA filtered vacuums.
- 6) Wet mop area with cleaner/disinfectant.
- 7) Upon completion, restore HVAC system where work was performed.
- 8) Return permit to the COR.

C. Barriers shall be erected as required based upon classification (Class III & IV requires barriers) and shall be constructed as follows:

1. Class III and IV - closed door with masking tape applied over the frame and door is acceptable for projects that can be contained in a single room.
2. Construction, demolition or reconstruction not capable of containment within a single room must have the following barriers erected and made presentable on hospital occupied side:
 - a. Class III & IV (where dust control is the only hazard, and an agreement is reached with the Resident Engineer and Medical Center) - Airtight plastic barrier that extends from the floor to ceiling. Seams must be sealed with duct tape to prevent dust and debris from escaping
 - b. Class III & IV - Drywall barrier erected with joints covered or sealed to prevent dust and debris from escaping.
 - c. Class III & IV - Seal all penetrations in existing barrier airtight
 - d. Class III & IV - Barriers at penetration of ceiling envelopes, chases and ceiling spaces to stop movement air and debris
 - e. Class IV only - Anteroom or double entrance openings that allow workers to remove protective clothing or vacuum off existing clothing
 - f. Class III & IV - At elevators shafts or stairways within the field of construction, overlapping flap minimum of two feet wide of polyethylene enclosures for personnel access.

D. Products and Materials:

1. Sheet Plastic: Fire retardant polystyrene, 6-mil thickness meeting local fire codes
2. Barrier Doors: Self Closing, One-hour fire-rated, solid core wood in steel frame, painted
3. Dust proof, one-hour fire-rated drywall
4. High Efficiency Particulate Air-Equipped filtration machine rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. HEPA filters should have ASHRAE 85 or other prefilter to

- extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Maintenance of equipment and replacement of the HEPA filters and other filters will be in accordance with manufacturer's instructions.
5. Exhaust Hoses: Heavy duty, flexible steel reinforced; Ventilation Blower Hose
 6. Adhesive Walk-off Mats: Provide minimum size mats of 24 inches x 36 inches
 7. Disinfectant: Hospital-approved disinfectant or equivalent product
 8. Portable Ceiling Access Module
- E. Before any construction on site begins, all contractor personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center.
- F. A dust control program will be established and maintained as part of the contractor's infection preventive measures in accordance with the FGI Guidelines for Design and Construction of Healthcare Facilities. Prior to start of work, prepare a plan detailing project-specific dust protection measures with associated product data, including periodic status reports, and submit to the COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- G. Medical center Infection Control personnel will monitor for airborne disease (e.g., aspergillosis) during construction. A baseline of conditions will be established by the medical center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality with safe thresholds established.
- H. In general, the following preventive measures shall be adopted during construction to keep down dust and prevent mold.
1. Contractor shall verify that construction exhaust to exterior is not reintroduced to the medical center through intake vents or building openings. HEPA filtration is required where the exhaust dust may reenter the medical center.
 2. Exhaust hoses shall be exhausted so that dust is not reintroduced to the medical center.
 3. Adhesive Walk-off/Carpet Walk-off Mats shall be used at all interior transitions from the construction area to occupied medical center

- area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
4. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as it is created. Transport these outside the construction area in containers with tightly fitting lids.
 5. The contractor shall not haul debris through patient-care areas without prior approval of the COR and the Medical Center. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.
 6. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.
 7. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.
- I. Final Cleanup:
1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
 2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
 3. All new air ducts shall be cleaned prior to final inspection.
- J. Exterior Construction
1. Contractor shall verify that dust will not be introduced into the medical center through intake vents or building openings. HEPA filtration on intake vents is required where dust may be introduced.
 2. Dust created from disturbance of soil such as from vehicle movement will be wetted with use of a water truck as necessary

3. All cutting, drilling, grinding, sanding, or disturbance of materials shall be accomplished with tools equipped with either local exhaust ventilation (i.e., vacuum systems) or wet suppression controls.

1.13 TUBERCULOSIS SCREENING

- A. Contractor shall provide written certification that all contract employees assigned to the work site have had a pre-placement tuberculin screening within 90 days prior to assignment to the worksite and been found have negative TB screening reactions. Contractors shall be required to show documentation of negative TB screening reactions for any additional workers who are added after the 90-day requirement before they will be allowed to work on the work site. NOTE: This can be the Center for Disease Control (CDC) and Prevention and two-step skin testing or a Food and Drug Administration (FDA)-approved blood test.
 1. Contract employees manifesting positive screening reactions to the tuberculin shall be examined according to current CDC guidelines prior to working on VHA property.
 2. Subsequently, if the employee is found without evidence of active (infectious) pulmonary TB, a statement documenting examination by a physician shall be on file with the employer (construction contractor), noting that the employee with a positive tuberculin screening test is without evidence of active (infectious) pulmonary TB.
 3. If the employee is found with evidence of active (infectious) pulmonary TB, the employee shall require treatment with a subsequent statement to the fact on file with the employer before being allowed to return to work on VHA property.

1.14 FIRE SAFETY

- A. Fire Safety Plan: Establish and maintain a site-specific fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to the COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. This plan may be an element of the Accident Prevention Plan.
- B. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.

- C. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).
- D. Temporary Construction Partitions:
1. Install and maintain temporary construction partitions to provide smoke-tight separations between construction areas and adjoining areas. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on both sides of fire retardant treated wood or metal steel studs. Extend the partitions through suspended ceilings to floor slab deck or roof. Seal joints and penetrations. At door openings, install Class C, $\frac{3}{4}$ hour fire/smoke rated doors with self-closing devices.
 2. Install fire-rated temporary construction partitions as shown on drawings to maintain integrity of existing exit stair enclosures, exit passageways, fire-rated enclosures of hazardous areas, horizontal exits, smoke barriers, vertical shafts and openings enclosures.
 3. Close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials in accordance with Section 07 84 00, FIRESTOPPING.
- E. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.
- F. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with the COR.
- G. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to the COR.
- H. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.
- I. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.
- K. Sprinklers: Install, test and activate new automatic sprinklers prior to removing existing sprinklers.

- L. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with the COR. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the Resident Engineer.
- M. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with the COR.
- N. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with the COR. Obtain permits from the COR at least 24 hours in advance. Designate contractor's responsible project-site fire prevention program manager to permit hot work.
- O. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to the COR.
- P. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate and detached buildings under construction, smoking is prohibited except in designated smoking rest areas.
- Q. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.
- R. If required, submit documentation to the COR that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.

1.15 ELECTRICAL

- A. All electrical work shall comply with NFPA 70 (NEC), NFPA 70B, NFPA 70E, 29 CFR Part 1910 Subpart J - General Environmental Controls, 29 CFR Part 1910 Subpart S - Electrical, and 29 CFR 1926 Subpart K in addition to other references required by contract.
- B. All qualified persons performing electrical work under this contract shall be licensed journeyman or master electricians. All apprentice electricians performing under this contract shall be deemed unqualified persons unless they are working under the immediate supervision of a licensed electrician or master electrician.

- C. All electrical work will be accomplished de-energized and in the Electrically Safe Work Condition (refer to NFPA 70E for Work Involving Electrical Hazards, including Exemptions to Work Permit). Any Contractor, subcontractor or temporary worker who fails to fully comply with this requirement is subject to immediate termination in accordance with FAR clause 52.236-5(c). Only in rare circumstance where achieving an electrically safe work condition prior to beginning work would increase or cause additional hazards or is infeasible due to equipment design or operational limitations is energized work permitted. The COR with approval of the Medical Center Director will make the determination if the circumstances would meet the exception outlined above. An AHA and permit specific to energized work activities will be developed, reviewed, and accepted by the VA prior to the start of that activity.
1. Development of a Hazardous Electrical Energy Control Procedure is required prior to de-energization. A single Simple Lockout/Tagout Procedure for multiple work operations can only be used for work involving qualified person(s) de-energizing one set of conductors or circuit part source. Task specific Complex Lockout/Tagout Procedures are required at all other times.
 2. Verification of the absence of voltage after de-energization and lockout/tagout is considered "energized electrical work" (live work) under NFPA 70E, and shall only be performed by qualified persons wearing appropriate shock protective (voltage rated) gloves and arc rate personal protective clothing and equipment, using Underwriters Laboratories (UL) tested and appropriately rated contact electrical testing instruments or equipment appropriate for the environment in which they will be used.
 3. Personal Protective Equipment (PPE) and electrical testing instruments will be readily available for inspection by the COR.
- D. Before beginning any electrical work, an Activity Hazard Analysis (AHA) will be conducted to include Shock Hazard and Arc Flash Hazard analyses (NFPA Tables can be used only as a last alternative and it is strongly suggested a full Arc Flash Hazard Analyses be conducted). Work shall not begin until the AHA for the work activity and permit for energized work has been reviewed and accepted by the COR and discussed with all engaged in the activity, including the Contractor, subcontractor(s),

and Government on-site representatives at preparatory and initial control phase meetings.

- E. Ground-fault circuit interrupters. GFCI protection shall be provided where an employee is operating or using cord- and plug-connected tools related to construction activity supplied by 125-volt, 15-, 20-, or 30-ampere circuits. Where employees operate or use equipment supplied by greater than 125-volt, 15-, 20-, or 30- ampere circuits, GFCI protection or an assured equipment grounding conductor program shall be implemented in accordance with NFPA 70E - 2015, Chapter 1, Article 110.4(C) (2).

1.16 FALL PROTECTION

- A. The fall protection (FP) threshold height requirement is 6 ft (1.8 m) for ALL WORK, unless specified differently or the OSHA 29 CFR 1926 requirements are more stringent, to include steel erection activities, systems-engineered activities (prefabricated) metal buildings, residential (wood) construction and scaffolding work.
1. The use of a Safety Monitoring System (SMS) as a fall protection method is prohibited.
 2. The use of Controlled Access Zone (CAZ) as a fall protection method is prohibited.
 3. A Warning Line System (WLS) may ONLY be used on floors or flat or low-sloped roofs (between 0 - 18.4 degrees or 4:12 slope) and shall be erected around all sides of the work area (See 29 CFR 1926.502(f) for construction of WLS requirements). Working within the WLS does not require FP. No worker shall be allowed in the area between the roof or floor edge and the WLS without FP. FP is required when working outside the WLS.
 4. Fall protection while using a ladder will be governed by the OSHA requirements.

1.17 SCAFFOLDS AND OTHER WORK PLATFORMS

- A. All scaffolds and other work platforms construction activities shall comply with 29 CFR 1926 Subpart L.
- B. The fall protection (FP) threshold height requirement is 6 ft (1.8 m) as stated in Section 1.16.
- C. The following hierarchy and prohibitions shall be followed in selecting appropriate work platforms.

1. Scaffolds, platforms, or temporary floors shall be provided for all work except that can be performed safely from the ground or similar footing.
 2. Ladders less than 20 feet may be used as work platforms only when use of small hand tools or handling of light material is involved.
 3. Ladder jacks, lean-to, and prop-scaffolds are prohibited.
 4. Emergency descent devices shall not be used as working platforms.
- D. Contractors shall use a scaffold tagging system in which all scaffolds are tagged by the Competent Person. Tags shall be color-coded: green indicates the scaffold has been inspected and is safe to use; red indicates the scaffold is unsafe to use. Tags shall be readily visible, made of materials that will withstand the environment in which they are used, be legible and shall include:
1. The Competent Person's name and signature.
 2. Dates of initial and last inspections.
- E. Mast Climbing work platforms: When access ladders, including masts designed as ladders, exceed 20 ft (6 m) in height, positive fall protection shall be used.

1.18 EXCAVATION AND TRENCHES

- A. All excavation and trenching work shall comply with 29 CFR 1926 Subpart P. Excavations less than 5 feet in depth require evaluation by the contractor's "Competent Person" (CP) for determination of the necessity of an excavation protective system where kneeling, laying in, or stooping within the excavation is required.
- B. All excavations and trenches 24 inches in depth or greater shall require a written trenching and excavation permit (NOTE - some States and other local jurisdictions require separate state/jurisdiction-issued excavation permits). The permit shall have two sections, one section will be completed prior to digging or drilling and the other will be completed prior to personnel entering the excavations greater than 5 feet in depth. Each section of the permit shall be provided to the COR prior to proceeding with digging or drilling and prior to proceeding with entering the excavation. After completion of the work and prior to opening a new section of an excavation, the permit shall be closed out and provided to the COR. The permit shall be maintained onsite and the first section of the permit shall include the following:
1. Estimated start time & stop time
 2. Specific location and nature of the work.

3. Indication of the contractor's "Competent Person" (CP) in excavation safety with qualifications and signature. Formal course in excavation safety is required by the contractor's CP.
 4. Indication of whether soil or concrete removal to an offsite location is necessary.
 5. Indication of whether soil samples are required to determined soil contamination.
 6. Indication of coordination with local authority (i.e., "One Call") or contractor's effort to determine utility location with search and survey equipment.
 7. Indication of review of site drawings for proximity of utilities to digging/drilling.
- C. The second section of the permit for excavations greater than five feet in depth shall include the following:
1. Determination of OSHA classification of soil. Soil samples will be from freshly dug soil with samples taken from different soil type layers as necessary and placed at a safe distance from the excavation by the excavating equipment. A pocket penetrometer will be utilized in determination of the unconfined compression strength of the soil for comparison against OSHA table (Less than 0.5 Tons/FT² - Type C, 0.5 Tons/FT² to 1.5 Tons/FT² - Type B, greater than 1.5 Tons/FT² - Type A without condition to reduce to Type B).
 2. Indication of selected protective system (sloping/benching, shoring, shielding). When soil classification is identified as "Type A" or "Solid Rock", only shoring or shielding or Professional Engineer designed systems can be used for protection. A Sloping/Benching system may only be used when classifying the soil as Type B or Type C. Refer to Appendix B of 29 CFR 1926, Subpart P for further information on protective systems designs.
 3. Indication of the spoil pile being stored at least 2 feet from the edge of the excavation and safe access being provided within 25 feet of the workers.
 4. Indication of assessment for a potential toxic, explosive, or oxygen deficient atmosphere where oxygen deficiency (atmospheres containing less than 19.5 percent oxygen) or a hazardous atmosphere exists or could reasonably be expected to exist. Internal combustion engine equipment is not allowed in an excavation without providing force air ventilation to lower the concentration to below OSHA PELs,

- providing sufficient oxygen levels, and atmospheric testing as necessary to ensure safe levels are maintained.
- D. As required by OSHA 29 CFR 1926.651(b) (1), the estimated location of utility installations, such as sewer, telephone, fuel, electric, water lines, or any other underground installations that reasonably may be expected to be encountered during excavation work, shall be determined prior to opening an excavation.
1. The planned dig site will be outlined/marked in white prior to locating the utilities.
 2. Used of the American Public Works Association Uniform Color Code is required for the marking of the proposed excavation and located utilities.
 3. 811 will be called two business days before digging on all local or State lands and public Right-of Ways.
 4. Digging will not commence until all known utilities are marked.
 5. Utility markings will be maintained
- E. Excavations will be hand dug or excavated by other similar safe and acceptable means as excavation operations approach within 3 to 5 feet of identified underground utilities. Exploratory bar or other detection equipment will be utilized as necessary to further identify the location of underground utilities.
- F. Excavations greater than 20 feet in depth require a Professional Engineer designed excavation protective system.

1.19 CRANES

- A. All crane work shall comply with 29 CFR 1926 Subpart CC.
- B. Prior to operating a crane, the operator must be licensed, qualified or certified to operate the crane. Thus, all the provisions contained with Subpart CC are effective and there is no "Phase In" date.
- C. A detailed lift plan for all lifts shall be submitted to the COR 14 days prior to the scheduled lift complete with route for truck carrying load, crane load analysis, siting of crane and path of swing and all other elements of a critical lift plan where the lift meets the definition of a critical lift. Critical lifts require a more comprehensive lift plan to minimize the potential of crane failure and/or catastrophic loss. The plan must be reviewed and accepted by the General Contractor before being submitted to the VA for review. The lift will not be allowed to proceed without prior acceptance of this document.

- D. Crane operators shall not carry loads
 - 1. over the general public or VAMC personnel
 - 2. over any occupied building unless
 - a. the top two floors are vacated
 - b. or overhead protection with a design live load of 300 psf is provided

1.20 CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT)

- A. All installation, maintenance, and servicing of equipment or machinery shall comply with 29 CFR 1910.147 except for specifically referenced operations in 29 CFR 1926 such as concrete & masonry equipment [1926.702(j)], heavy machinery & equipment [1926.600(a)(3)(i)], and process safety management of highly hazardous chemicals (1926.64). Control of hazardous electrical energy during the installation, maintenance, or servicing of electrical equipment shall comply with Section 1.15 to include NFPA 70E and other VA specific requirements discussed in the section.

1.21 CONFINED SPACE ENTRY

- A. All confined space entry shall comply with 29 CFR 1926, Subpart AA except for specifically referenced operations in 29 CFR 1926 such as excavations/trenches [1926.651(g)].
- B. A site-specific Confined Space Entry Plan (including permitting process) shall be developed and submitted to the COR.

1.22 WELDING AND CUTTING

As specified in section 1.14, Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with the COR. Obtain permits from the COR at least 24 hours in advance. Designate contractor's responsible project-site fire prevention program manager to permit hot work.

1.23 LADDERS

- A. All Ladder use shall comply with 29 CFR 1926 Subpart X.
- B. All portable ladders shall be of sufficient length and shall be placed so that workers will not stretch or assume a hazardous position.
- C. Manufacturer safety labels shall be in place on ladders
- D. Step Ladders shall not be used in the closed position
- E. Top steps or cap of step ladders shall not be used as a step
- F. Portable ladders, used as temporary access, shall extend at least 3 ft (0.9 m) above the upper landing surface.

1. When a 3 ft (0.9-m) extension is not possible, a grasping device (such as a grab rail) shall be provided to assist workers in mounting and dismounting the ladder.
 2. In no case shall the length of the ladder be such that ladder deflection under a load would, by itself, cause the ladder to slip from its support.
- G. Ladders shall be inspected for visible defects on a daily basis and after any occurrence that could affect their safe use. Broken or damaged ladders shall be immediately tagged "DO NOT USE," or with similar wording, and withdrawn from service until restored to a condition meeting their original design.

1.24 FLOOR & WALL OPENINGS

- A. All floor and wall openings shall comply with 29 CFR 1926 Subpart M.
- B. Floor and roof holes/openings are any that measure over 2 in (51 mm) in any direction of a walking/working surface which persons may trip or fall into or where objects may fall to the level below. Skylights located in floors or roofs are considered floor or roof hole/openings.
- C. All floor, roof openings or hole into which a person can accidentally walk or fall through shall be guarded either by a railing system with toeboards along all exposed sides or a load-bearing cover. When the cover is not in place, the opening or hole shall be protected by a removable guardrail system or shall be attended when the guarding system has been removed, or other fall protection system.
1. Covers shall be capable of supporting, without failure, at least twice the weight of the worker, equipment and material combined.
 2. Covers shall be secured when installed, clearly marked with the word "HOLE", "COVER" or "Danger, Roof Opening-Do Not Remove" or color-coded or equivalent methods (e.g., red or orange "X"). Workers must be made aware of the meaning for color coding and equivalent methods.
 3. Roofing material, such as roofing membrane, insulation or felts, covering or partly covering openings or holes, shall be immediately cut out. No hole or opening shall be left unattended unless covered.
 4. Non-load-bearing skylights shall be guarded by a load-bearing skylight screen, cover, or railing system along all exposed sides.
 5. Workers are prohibited from standing/walking on skylights.

- - - E N D - - -

SECTION 01 42 19
REFERENCE STANDARDS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)

- A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to - GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.
- B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)

The specifications and standards cited in this solicitation can be examined at the following location:

DEPARTMENT OF VETERANS AFFAIRS

Office of Construction & Facilities Management

Facilities Quality Service (00CFM1A)

425 Eye Street N.W, (sixth floor)

Washington, DC 20001

Telephone Numbers: (202) 632-5249 or (202) 632-5178

Between 9:00 AM - 3:00 PM

1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3) (JUN 1988)

The specifications cited in this solicitation may be obtained from the associations or organizations listed below.

AA	Aluminum Association Inc. http://www.aluminum.org
AABC	Associated Air Balance Council https://www.aabc.com
AAMA	American Architectural Manufacturer's Association http://www.aamanet.org
AASHTO	American Association of State Highway and Transportation Officials http://www.aashto.org
AATCC	American Association of Textile Chemists and Colorists http://www.aatcc.org
ACGIH	American Conference of Governmental Industrial Hygienists http://www.acgih.org
ACI	American Concrete Institute http://www.aci-int.net
ACPA	American Concrete Pipe Association http://www.concrete-pipe.org
ACPPA	American Concrete Pressure Pipe Association http://www.acppa.org
ADC	Air Diffusion Council http://flexibleduct.org
AGA	American Gas Association http://www.aga.org
AGC	Associated General Contractors of America http://www.agc.org
AGMA	American Gear Manufacturers Association, Inc. http://www.agma.org
AH	American Hort https://www.americanhort.org
AHAM	Association of Home Appliance Manufacturers http://www.aham.org
AIA	American Institute of Architects http://www.aia.org

AISC American Institute of Steel Construction
<http://www.aisc.org>

AISI American Iron and Steel Institute
<http://www.steel.org>

AITC American Institute of Timber Construction
<https://aitc-glulam.org>

AMCA Air Movement and Control Association, Inc.
<http://www.amca.org>

ANSI American National Standards Institute, Inc.
<http://www.ansi.org>

APA The Engineered Wood Association
<http://www.apawood.org>

ARI Air-Conditioning and Refrigeration Institute
<http://www.ari.org>

ARPM Association for Rubber Product Manufacturers
<https://arpm.com>

ASABE American Society of Agricultural and Biological Engineers
<https://www.asabe.org>

ASCE American Society of Civil Engineers
<http://www.asce.org>

ASHRAE American Society of Heating, Refrigerating, and
Air-Conditioning Engineers
<http://www.ashrae.org>

ASME American Society of Mechanical Engineers
<http://www.asme.org>

ASSE American Society of Sanitary Engineering International
<http://www.asse-plumbing.org>

ASTM American Society for Testing and Materials International
<http://www.astm.org>

AWI Architectural Woodwork Institute
<https://www.awinet.org>

AWS American Welding Society
<https://www.aws.org>

AWWA American Water Works Association
<https://www.awwa.org>

BHMA Builders Hardware Manufacturers Association
<https://www.buildershardware.com>

BIA The Brick Industry Association
<http://www.gobrick.com>

CAGI Compressed Air and Gas Institute
<https://www.cagi.org>

CGA Compressed Gas Association, Inc.
<https://www.cganet.com>

CI The Chlorine Institute, Inc.
<https://www.chlorineinstitute.org>

CISCA Ceilings and Interior Systems Construction Association
<https://www.cisca.org>

CISPI Cast Iron Soil Pipe Institute
<https://www.cispi.org>

CLFMI Chain Link Fence Manufacturers Institute
<https://www.chainlinkinfo.org>

CPA Composite Panel Association
<https://www.compositepanel.org>

CPMB Concrete Plant Manufacturers Bureau
<https://www.cpmc.org>

CRA California Redwood Association
<http://www.calredwood.org>

CRSI Concrete Reinforcing Steel Institute
<https://www.crsi.org>

CTI Cooling Technology Institute
<https://www.cti.org>

DHA Decorative Hardwoods Association
<https://www.decorativehardwoods.org>

DHI Door and Hardware Institute
<https://www.dhi.org>

EGSA Electrical Generating Systems Association
<http://www.egsa.org>

EEI Edison Electric Institute
<https://www.eei.org>

EPA United States Environmental Protection Agency
<https://www.epa.gov>

ETL ETL Testing Services
<http://www.intertek.com>

FAA Federal Aviation Administration
<https://www.faa.gov>

FCC	Federal Communications Commission https://www.fcc.gov
FPS	Forest Products Society http://www.forestprod.org
GANA	Glass Association of North America http://www.glasswebsite.com
FM	Factory Mutual Global Insurance https://www.fmglobal.com
GA	Gypsum Association https://gypsum.org
GSA	General Services Administration https://www.gsa.gov
HI	Hydraulic Institute http://www.pumps.org
ICC	International Code Council https://shop.iccsafe.org
ICEA	Insulated Cable Engineers Association https://www.icea.net
ICAC	Institute of Clean Air Companies http://www.icac.com
IEEE	Institute of Electrical and Electronics Engineers https://www.ieee.org/
IGMA	Insulating Glass Manufacturers Alliance https://www.igmaonline.org
IMSA	International Municipal Signal Association http://www.imsasafety.org
MBMA	Metal Building Manufacturers Association https://www.mbma.com
MSS	Manufacturers Standardization Society of the Valve and Fittings Industry http://msshq.org
NAAMM	National Association of Architectural Metal Manufacturers https://www.naamm.org
PHCC	Plumbing-Heating-Cooling Contractors Association https://www.phccweb.org
NBS	National Bureau of Standards See - NIST

NBBI The National Board of Boiler and Pressure Vessel Inspectors
<https://www.nationalboard.org>

NEC National Electric Code
See - NFPA National Fire Protection Association

NEMA National Electrical Manufacturers Association
<https://www.nema.org>

NFPA National Fire Protection Association
<https://www.nfpa.org>

NHLA National Hardwood Lumber Association
<https://www.nhla.com>

NIH National Institute of Health
<https://www.nih.gov>

NIST National Institute of Standards and Technology
<https://www.nist.gov>

NELMA Northeastern Lumber Manufacturers Association, Inc.
<http://www.nelma.org>

NPA National Particleboard Association
(See CPA, Composite Panel Association)

NSF National Sanitation Foundation
<http://www.nsf.org>

OSHA Occupational Safety and Health Administration
Department of Labor
<https://www.osha.gov>

PCA Portland Cement Association
<https://www.cement.org>

PCI Precast Prestressed Concrete Institute
<https://www.pci.org>

PPI Plastics Pipe Institute
<https://www.plasticpipe.org>

PEI Porcelain Enamel Institute
<http://www.porcelainenamel.com>

PTI Post-Tensioning Institute
<http://www.post-tensioning.org>

RFCI Resilient Floor Covering Institute
<https://www.rfci.com>

RIS Redwood Inspection Service
(See Western Wood Products Association)
<https://www.wwpa.org>

SCMA Southern Cypress Manufacturers Association
<http://www.cypressinfo.org>

SDI Steel Door Institute
<http://www.steeldoor.org>

SJI Steel Joist Institute
<https://www.steeljoist.org>

SMACNA Sheet Metal & Air-Conditioning Contractors'
National Association
<https://www.smacna.org>

SSPC The Society for Protective Coatings
<https://www.sspc.org>

STI Steel Tank Institute
<https://www.steeltank.com>

SWI Steel Window Institute
<https://www.steelwindows.com>

TCNA Tile Council of North America
<https://www.tcnatile.com>

TEMA Tubular Exchanger Manufacturers Association
<http://www.tema.org>

TPI Truss Plate Institute
<https://www.tpinst.org>

UBC The Uniform Building Code
(See ICC)

UL Underwriters' Laboratories Incorporated
<https://www.ul.com>

ULC Underwriters' Laboratories of Canada
<https://www.ulc.ca>

WCLB West Coast Lumber Inspection Bureau
<http://www.wclib.org>

WDMA Window and Door Manufacturers Association
<https://www.wdma.com>

WRCLA Western Red Cedar Lumber Association
<https://www.realcedar.com>

WWPA Western Wood Products Association
<http://www.wwpa.org>

- - - E N D - - -

SECTION 01 45 00
QUALITY CONTROL

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies requirements for Contractor Quality Control (CQC) for Design-Bid-Build (DBB) construction projects. This section can be used for both project types.

1.2 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.
- B. ASTM International (ASTM)
1. D3740 - (2012a) Minimum Requirements for Agencies Engaged in the Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction
 2. E329 - (2014a) Standard Specification for Agencies Engaged in the Testing and/or Inspection of Materials Used in Construction

1.3 SUBMITTALS

- A. Government approval is required for all submittals. CQC inspection reports shall be submitted under this Specification section and follow the [Applicable CQC Control Phase (Preparatory, Initial, or Follow-Up)]: [Applicable Specification section] naming convention.
1. Preconstruction Submittals
 - a. Interim CQC Plan
 - b. CQC Plan
 - c. Additional Requirements for Design Quality Control (DQC) Plan
 2. Design Data
 - a. Discipline-Specific Checklists
 - b. Design Quality Control
 3. Test Reports
 - a. Verification Statement

PART 2 PRODUCTS - NOT USED

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

- A. Establish and maintain an effective quality control (QC) system. that complies with the FAR Clause 52.246.12 titled "Inspection of Construction". QC consists of plans, procedures, and organization necessary to produce an end product which complies with the Contract

requirements. The QC system covers all design and construction operations, both onsite and offsite, and be keyed to the proposed design and construction sequence. The project superintendent will be held responsible for the quality of work and is subject to removal by the Contracting Office or Authorized designee for non-compliance with the quality requirements specified in the Contract. In this context the highest level manager responsible for the overall construction activities at the site, including quality and production is the project superintendent. The project superintendent maintains a physical presence at the site at all times and is responsible for all construction and related activities at the site, except as otherwise acceptable to the Contracting Officer.

3.2 CQC PLAN:

- A. Submit the CQC Plan no later than 30 days after receipt of Notice to Proceed (NTP) proposed to implement the requirements of the FAR Clause 52.246.12 titled "Inspection of Construction". The Government will consider an Interim CQC Plan for the first 30 days of operation, which must be accepted within 10 days of NTP. Design and/or construction will be permitted to begin only after acceptance of the CQC Plan or acceptance of an Interim plan applicable to the particular feature of work to be started. Work outside of the accepted Interim CQC Plan will not be permitted to begin until acceptance of a CQC Plan or another Interim CQC Plan containing the additional work scope is accepted.
- B. Content of the CQC Plan: Include, as a minimum, the following to cover all design and construction operations, both onsite and offsite, including work by subcontractors, designers of record consultants, architects/engineers (A/E), fabricators, suppliers, and purchasing agents:
 1. A description of the QC organization, including a chart showing lines of authority and acknowledgement that the CQC staff will implement the three phase control system for all aspects of the work specified. Include a CQC System Manager that reports to the project superintendent.
 2. The name, qualifications (in resume format) duties, responsibilities, and authorities of each person assigned a CQC function.
 3. A copy of the letter to the CQC System Manager signed by an authorized official of the firm which describes the responsibilities

- and delegates sufficient authorities to adequately perform the functions of the CQC System Manager, including authority to stop work which is not in compliance with the Contract. Letters of direction to all other various quality control representatives outlining duties, authorities, and responsibilities will be issued by the CQC System Manager. Furnish copies of these letters to the COR.
4. Procedures for scheduling, reviewing, certifying, and managing submittals including those of subcontractors, designers of record, consultants, A/E's offsite fabricators, suppliers and purchasing agents. These procedures must be in accordance with Section 01 33 23 Shop Drawings, Product Data, and Samples.
 5. Control, verification, and acceptance of testing procedures for each specific test to include the test name, specification paragraph requiring test, feature of work to be tested, test frequency, and person responsible for each test. (Laboratory facilities approved by the COR are required to be used.)
 6. Procedures for tracking Preparatory, Initial, and Follow-Up control phases and control, verification, and acceptance tests including documentation.
 7. Procedures for tracking design and construction deficiencies from identification through acceptable corrective action. Establish verification procedures that identified deficiencies have been corrected.
 8. Reporting procedures, including proposed reporting formats.
 9. A list of the definable features of work. A definable feature of work is a task which is separate and distinct from other tasks has separate control requirements, and is identified by different trades or disciplines, or it is work by the same trade in a different environment. Although each section of specifications can generally be considered as a definable feature of work, there are frequently more than one definable feature under a particular section. This list will be agreed upon during the Coordination meeting.
 10. Coordinate schedule work with Special Inspections required by Section 01 45 35 Special Inspections, the Statement of Special Inspections and Schedule of Special Inspections. Where the applicable Code issue by the International Code Council (ICC) calls for inspections by the Building Official, the Contractor must

include the inspections in the CQC Plan and must perform the inspections required by the applicable ICC. The Contractor must perform these inspections using independent qualified inspectors.

Include the Special Inspection Plan requirements in the CQC Plan.

- C. Acceptance of Plan: Acceptance of the Contractor's plan is required prior to the start of design and construction. Acceptance is conditional and will be predicated on satisfactory performance during the design and construction. The Government reserves the right to require the Contractor to make changes in the CQC Plan and operations including removal of personnel as necessary, to obtain the quality specified.
- D. Notification of Changes: After acceptance of the CQC Plan, notify the Contracting Officer or Authorized designee in writing of any proposed change. Proposed changes are subject to acceptance by the Government prior to implementation by the Contractor.

3.3 COORDINATION MEETING:

After the Preconstruction Conference Post-award Conference before start of design or construction, and prior to acceptance by the Government of the CQC Plan, meet with the COR to discuss the Contractor's quality control system. Submit the CQC Plan a minimum of 5 business days prior to the Coordination Meeting. During the meeting, a mutual understanding of the system details must be developed, including the forms for recording the CC operations, design activities (if applicable), control activities, testing, administration of the system for both onsite and offsite work, and the interrelationship of Contractor's Management and control with the Government's Quality Assurance. Minutes of the meeting will be prepared by the Government, signed by both the Contractor and Contracting Officer or Authorized designee and will become a part of the contract file. There can be occasions when subsequent conferences will be called by either party to reconfirm mutual understandings or address deficiencies in the CQC system or procedures which can require corrective action by the Contractor.

3.4 QUALITY CONTROL ORGANIZATION:

- A. Personnel Requirements: The requirements for the CQC organization are a Safety and Health Manager, CQC System Manager, a Design Quality Manager (if applicable), and sufficient number of additional qualified personnel to ensure safety and Contract compliance. The Safety and Health Manager shall satisfy the requirements of Specification 01 35 26

Safety Requirements and reports directly to a senior project (or corporate) official independent from the CQC System Manager. The Safety and Health Manager will also serve as a member of the CQC Staff. Personnel identified in the technical provisions as requiring specialized skills to assure the required work is being performed properly will also be included as part of the CQC organization. The Contractor's CQC staff maintains a presence at the site at all times during progress of the work and have complete authority and responsibility to take any action necessary to ensure Contract compliance. The CQC staff will be subject to acceptance by the COR. Provide adequate office space, filing systems, and other resources as necessary to maintain an effective and fully functional CQC organization. Promptly complete and furnish all letters, material submittals, shop drawings submittals, schedules and all other project documentation to the CQC organization. The CQC organization is responsible for maintaining these documents and records at the site at all times, except as otherwise acceptable to the Government.

- B. CQC System Manager: Identify as CQC System Manager an individual within the onsite work organization that is responsible for overall management of CQC and has the authority to act in all CQC matters for the Contractor. The CQC system Manager is required to be a graduate engineer, graduate architect, or a graduate of construction management, with a minimum of 5 years construction experience on construction similar to the scope of this Contract. This CQC System manager is on the site at all times during construction and is employed by the General Contractor. The CQC System Manger is assigned as CQC System Manager but has duties as project superintendent in addition to quality control. Identify in the plan an alternate to serve in the event of the CDQC System Manager's absence. The requirements for the alternate are the same as the CQC System Manager.
- C. CQC Personnel: In addition to CQC personnel specified elsewhere in the contract, provide as part of the CQC organization specialized personnel to assist in the CQC System Manager for the following areas, as applicable: electrical, mechanical, civil, structural, environmental, architectural, materials technician submittals clerk, Commissioning Agent/LEED specialist, and low voltage systems. These individuals or specified technical companies are employees of the prime or subcontractor; be responsible to the CQC System Manager; be physically

present at the construction site during work on the specialized personnel's areas of responsibility; have the necessary education or experience in accordance with the Experience Matrix listed herein. These individuals can perform other duties but need to be allowed sufficient time to perform the specialized personnel's assigned quality controls duties as described in the CQC Plan. A single person can cover more than one area provided that the single person is qualified to perform QC activities in each designated and that workload allows.

EXPERIENCE MATRIX

Area	Qualifications
Civil	Graduate Civil Engineer or Construction Manager with 2 years' experience in the type of work being performed on this project or technician with 5 years related experience.
Mechanical	Graduate Mechanical Engineer with 2 years' experience or construction professional with 5 years of experience supervising mechanical features of work in the field with a construction company.
Electrical	Graduate Electrical Engineer with 2 years related experience or construction professional with 5 years of experience supervising electrical features of work in the field with a construction company.
Structural	Graduate Civil Engineer (with Structural Track or Focus), Structural Engineer, or Construction Manager with 2 years' experience or construction professional with 5 years' experience supervising structural features of work in the field with a construction company.
Architectural	Graduate Architect with 2 years' experience or construction professional with 5 years of related experience.
Environmental	Graduate Environmental Engineer with 3 years' experience.
Submittals	Submittal Clerk with 1 year experience.
Concrete, Pavement, and Soils	Materials Technician with 2 years' experience for the appropriate area.
Testing, Adjusting, and Balancing (TAB)	Specialist must be a member of AABC or an experienced technician of the firm certified by the NEBB.

Area	Qualifications
Design Quality Control Manager	Registered Architect or Professional Engineer

- D. **Additional Requirements:** In addition to the above experience and education requirements, the CQC System Manager and Alternate CQC System Manager are required to have completed the Construction Quality Management (CQM) for Construction course. If the CQC System Manager does not have a current specification, obtain the CQM for Contractors course identification within 90 days of award. This course is periodically offered by the Naval Facilities Engineering Command and the Army Corps of Engineers. Contact the COR designee for information on the next scheduled class.
- E. **Organizational Changes:** Maintain the CQC staff at full strength at all times. When it is necessary to make changes to the CQC staff, revise the CQC Plan to reflect the changes and submit the changes to the COR for acceptance.

3.5 SUBMITTALS AND DELIVERABLES: Submittals have to comply with the requirements in Section 01 33 23 Shop Drawings, Product Data, and Samples. The CQC organization is responsible for certifying that all submittals and deliverables are in compliance with the contract requirements. When Section 01 91 00 General Commissioning Requirements is included in the contract, the submittals required by the section have to be coordinated with the Section 01 33 23 Shop Drawings, Product Data, and Samples to ensure adequate time is allowed for each type of submittal required.

3.6 CONTROL:

- A. CQC is the means by which the Contractor ensures that the construction, to include that of subcontractors and suppliers, complies with the requirements of the contract. At least three phases of control are required to be conducted by the CQC System Manager for each definable feature of the construction work as follows:
1. **Preparatory Phase:** This phase is performed prior to beginning work on each definable feature of work after all required plans/documents/materials are approved/accepted, and after copies are at the work site. This phase includes:
 - a. A review of each paragraph of applicable specifications, references codes, and standards. Make available during the preparatory inspection a copy of those sections of referenced codes and standards applicable to that portion of the work to be

accomplished in the field. Maintain and make available in the field for use by Government personnel until final acceptance of the work.

- b. Review of the Contract drawings.
- c. Check to assure that all materials and equipment have been tested, submitted, and approved.
- d. Review of provisions that have been made to provide required control inspection and testing.
- e. Review Special Inspections required by Section 01 45 35 Special Inspections, that Statement of Special Inspections and the Schedule of Specials Inspections.
- f. Examination of the work area to assure that all required preliminary work has been completed and is in compliance with the Contract.
- g. Examination of required materials, equipment, and sample work to assure that they are on hand conform to approved shop drawings or submitted data, and are properly stored.
- h. Review of the appropriate Activity Hazard Analysis (AHA) to assure safety requirements are met.
- i. Discussion of procedures for controlling quality of the work including repetitive deficiencies. Document construction tolerances and workmanship standards - contract defined or industry standard if not contract defined - for that feature of work.
- j. Check to ensure that the portion of the plan for the work to be performed has been accepted by the COR.
- k. Discussion of the initial control phase.
- l. The Government needs to be notified at least 48 hours or 2 business days in advance of beginning the Preparatory control phase. Include a meeting conducted by the CQC System Manager and attended by the superintendent, other CQC personnel (as applicable), and the foreman responsible for the definable feature. Document the results of the Preparatory phase actions by separate minutes prepared by the CQC System Manager and attach to the daily CQC report. Instruct applicable workers as to the acceptable level of workmanship required in order to meet contract specifications.

- B. Initial Phase: This phase is accomplished at the beginning of a definable feature of work. Accomplish the following:
1. Check work to ensure that it is in full compliance with contract requirements. Review minutes of the Preparatory meeting.
 2. Verify adequacy of controls to ensure full contract compliance. Verify the required control inspection and testing is in compliance with the contract.
 3. Establish level of workmanship and verify that it meets minimum acceptable workmanship standards. Compare with required sample panels as appropriate.
 4. Resolve all differences.
 5. Check safety to include compliance with an upgrading of the safety plan and activity hazard analysis. Review the activity analysis with each worker.
 6. The Government needs to be notified at least 48 hours or 2 business days in advance of beginning the initial phase for definable features of work. Prepare separate minutes of this phase by the CQC System Manager and attach to the daily CQC report. Indicate the exact location of initial phase for definable feature of work for future reference and comparison with Follow-Up phases.
 7. The initial phase for each definable feature of work is repeated for each new crew to work onsite, or any time acceptable specified quality standards are not being met.
 8. Coordinate scheduled work with Special Inspections required by Section 01 45 35 Special Inspections, the Statement of Special Inspections, and the Schedule of Special Inspections.
- C. Follow-Up Phase: Perform daily checks to assure control activities, including control testing, are providing continued compliance with contract requirements until the completion of the particular feature of work. Record the checks in the CQC documentation. Conduct final Follow-Up checks and correct all deficiencies prior to the start of additional features of work which may be affected by the deficient work. Do not build upon nor conceal non-conforming work. Coordinate scheduled work with Special Inspections required by Section 01 45 35 Special Inspections, the Statement of Special Inspections, and the Schedule of Special Inspections
- D. Additional Preparatory and Initial Phases on the same definable features of work if: the quality ongoing work is unacceptable; if there

are changes in the applicable CQC staff, onsite production supervision or work crew; if work on a definable feature is resumed after a substantial period of inactivity, or if other problems develop.

3.7 TESTS

- A. Testing Procedure: Perform specified or required tests to verify that control measures are adequate to provide a product which conforms to contract requirements. Upon request, furnish to the Government duplicate samples of test specimens for possible testing by the Government. Testing includes operation and acceptance test when specified. Procure the services of a Department of Veteran Affairs approved testing laboratory or establish an approved testing laboratory at the project site. Perform the following activities and record and provide the following data:
1. Verify that testing procedures comply with contract requirements.
 2. Verify that facilities and testing equipment are available and comply with testing standards.
 3. Check test instrument calibration data against certified standards.
 4. Verify that recording forms and test identification control number system, including all of the test documentation requirements, have been prepared.
 5. Record results of all tests taken, both passing and failing on the CQC report for the date taken. Specification paragraph reference, location where tests were taken, and the unique sequential control number identifying the test. If approved by the COR, actual test reports are submitted later with a reference to the test number and date taken. Provide an information copy of tests performed by an offsite or commercial test facility directly to the COR. Failure to submit timely test reports as stated results in nonpayment for related work performed and disapproval of the test facility for this Contract.
- B. Testing Laboratories: All testing laboratories must be validated through the procedures contained in Specification section 01 45 29 Testing Laboratory Services.
1. Capability Check: The Government reserves the right to check laboratory equipment in the proposed laboratory for compliance with the standards set forth in the contract specifications and to check the laboratory technician's testing procedures and techniques.

Laboratories utilized for testing soils, concrete, asphalt and steel is required to meet criteria detailed in ASTM D3740 and ASTM E329.

2. Capability Recheck: If the selected laboratory fails the capability check, the Contractor will be assessed a charge equal to value of recheck to reimburse the Government for each succeeding recheck of the laboratory or the checking of a subsequently selected laboratory. Such costs will be deducted from the Contract amount due the Contractor.

- C. Onsite Laboratory: The Government reserves the right to utilize the Contractor's control testing laboratory and equipment to make assurance tests, and to check the Contractor's testing procedures, techniques, and test results at no additional cost to the Government.

3.8 COMPLETION INSPECTION

- A. Punch-Out Inspection: Conduct an inspection of the work by the CQC system Manager near the end of the work, or any increment of the work established by the specifications. Prepare and include in the CQC documentation a punch list of items which do not conform to the approved drawings and specifications. Include within the list of deficiencies the estimated date by which the deficiencies will be corrected. Make a second inspection the CQC System Manager or staff to ascertain that all deficiencies have been corrected. Once this is accomplished, notify the Government that the facility is ready for the Government Pre-Final Inspection.
- B. Pre-Final Inspection: The Government will perform the Pre-Final Inspection to verify that the facility is complete and ready to be occupied. A Government Pre-Final Punch List may be developed as a result of this inspection. Ensure that all items on this list have been corrected before notifying the Government, so that a Final Acceptance Inspection with the customer can be scheduled. Correct any items noted on the Pre-Final Inspection in a timely manner. These inspections and any deficiency corrections required by this paragraph need to be accomplished within the time slated for completion of the entire work or any particular increment of the work if the project is divided into increments by separate construction completion dates.
- C. Final Acceptance Inspection: The Contractor's QC Inspection personnel, plus the superintendent or other primary management person, and the COR is required to be in attendance at the Final Acceptance Inspection. Additional Government personnel can also be in attendance. The Final

Acceptance Inspection will be formally scheduled by the COR based upon results of the Pre-Final Inspection. Notify the Contracting Officer through the COR's office at least 14 days prior to the Final Acceptance Inspection and include the Contractor's assurance that all specific items previously identified to the Contractor as being unacceptable, along with all remaining work performed under the contract, will be complete and acceptable by the date schedule for the Final Acceptance Inspection. Failure of the Contractor to have all contract work acceptably complete for this inspection will be cause for the Contracting Officer to bill the Contractor for the Government's additional inspection cost in accordance with FAR Clause 52.246-12 titled "Inspection of Construction".

3.9 DOCUMENTATION

- A. Quality Control Activities: Maintain current records providing factual evidence that required QC activities and tests have been performed. Include in these records the work of subcontractors and suppliers on an acceptable form that includes, as a minimum, the following information:
1. The name and area of responsibility of the Contractor/Subcontractor
 2. Operating plant/equipment with hours worked, idle, or down for repair.
 3. Work performed each day, giving location, description, and by whom. When Network Analysis (NAS) is used, identify each phase of work performed each day by NAS activity number.
 4. Test and control activities performed with results and references to specification/drawing requirements. Identify the Control Phase (Preparatory, Initial, and/or Follow-Up). List deficiencies noted, along with corrective action.
 5. Quantity of materials received at the site with statement as to acceptability, storage, and reference to specification/drawing requirements.
 6. Submittals and deliverables reviewed, with Contract reference, by whom, and action taken.
 7. Offsite surveillance activities, including actions taken.
 8. Job safety evaluations stating what was checked, results, and instructions or corrective actions.
 9. Instructions given/received and conflicts in plans and specifications.

10. Provide documentation of design quality control activities. For independent design reviews, provide, as a minimum, identification of the Independent Technical Reviewer (ITR) team, the ITR review comments, responses, and the record of resolution of the comments.

- B. Verification Statement: Indicate a description of trades working on the project; the number of personnel working; weather conditions encountered; and any delays encountered. Cover both conforming and deficient features and include a statement that equipment and materials incorporated in the work and workmanship comply with the Contract. Furnish the original and one copy of these records in report form to the Government daily with 1 week after the date covered by the report. Reports need not be submitted for days on which no work is performed. As a minimum, prepare and submit on report for every 7 days of no work and on the last day of a no work period. All calendar days need to be accounted for throughout the life of the contract. The first report following a day of no work will be for that day only. Reports need to be signed and dated by the CQC System Manager. Include copies of test reports and copies of reports prepared by all subordinate QC personnel within the CQC System Manager Report.

3.10 SAMPLE FORMS

Templates of various quality control reports can be found on the Whole Building Design Guide website at https://www.wbdg.org/FFC/NAVGRAPH/01%2045%2000.00%2020_quality_control_reports.pdf

- 3.11 NOTIFICATION OF NONCOMPLIANCE:** The COR will notify the Contractor of any detected noncompliance with the foregoing requirements. The Contractor should take immediate corrective action after receipt of such notice. Such notice, when delivered to the Contractor at the work site will be deemed sufficient for the purpose of notification. If the Contractor fails or refuses to comply promptly, the Contracting Officer can issue an order stopping all or part of the work until satisfactory corrective action has been taken. No part of the time lost due to such stop orders will be made the subject of claim for extension of time or for excess costs or damages by the Contractor.

- - - E N D - - -

SECTION 01 45 29
TESTING LABORATORY SERVICES

PART 1 - GENERAL**1.1 DESCRIPTION:**

- A. This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained by the General Contractor.

1.2 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.
- B. American Association of State Highway and Transportation Officials (AASHTO):
- T27-11.....Standard Method of Test for Sieve Analysis of Fine and Coarse Aggregates
- T96-02 (R2006).....Standard Method of Test for Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
- T99-10.....Standard Method of Test for Moisture-Density Relations of Soils Using a 2.5 Kg (5.5 lb.) Rammer and a 305 mm (12 in.) Drop
- T104-99 (R2007).....Standard Method of Test for Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate
- T180-10.....Standard Method of Test for Moisture-Density Relations of Soils using a 4.54 kg (10 lb.) Rammer and a 457 mm (18 in.) Drop
- T191-02 (R2006).....Standard Method of Test for Density of Soil In-Place by the Sand-Cone Method
- T310-13.....Standard Method of Test for In-place Density and Moisture Content of Soil and Soil-aggregate by Nuclear Methods (Shallow Depth)
- C. American Concrete Institute (ACI):
- 506.4R-94 (R2004).....Guide for the Evaluation of Shotcrete
- D. American Society for Testing and Materials (ASTM):
- A370-12.....Standard Test Methods and Definitions for Mechanical Testing of Steel Products

A416/A416M-10.....Standard Specification for Steel Strand,
Uncoated Seven-Wire for Prestressed Concrete

C31/C31M-10.....Standard Practice for Making and Curing
Concrete Test Specimens in the Field

C33/C33M-11a.....Standard Specification for Concrete Aggregates

C39/C39M-12.....Standard Test Method for Compressive Strength
of Cylindrical Concrete Specimens

C109/C109M-11b.....Standard Test Method for Compressive Strength
of Hydraulic Cement Mortars

C136-06.....Standard Test Method for Sieve Analysis of Fine
and Coarse Aggregates

C138/C138M-10b.....Standard Test Method for Density (Unit Weight),
Yield, and Air Content (Gravimetric) of
Concrete

C140-12.....Standard Test Methods for Sampling and Testing
Concrete Masonry Units and Related Units

C143/C143M-10a.....Standard Test Method for Slump of Hydraulic
Cement Concrete

C172/C172M-10.....Standard Practice for Sampling Freshly Mixed
Concrete

C173/C173M-10b.....Standard Test Method for Air Content of freshly
Mixed Concrete by the Volumetric Method

C330/C330M-09.....Standard Specification for Lightweight
Aggregates for Structural Concrete

C567/C567M-11.....Standard Test Method for Density Structural
Lightweight Concrete

C780-11.....Standard Test Method for Pre-construction and
Construction Evaluation of Mortars for Plain
and Reinforced Unit Masonry

C1019-11.....Standard Test Method for Sampling and Testing
Grout

C1064/C1064M-11.....Standard Test Method for Temperature of Freshly
Mixed Portland Cement Concrete

C1077-11c.....Standard Practice for Agencies Testing Concrete
and Concrete Aggregates for Use in Construction
and Criteria for Testing Agency Evaluation

C1314-11a.....Standard Test Method for Compressive Strength
of Masonry Prisms

D422-63(2007).....Standard Test Method for Particle-Size Analysis
of Soils

D698-07e1.....Standard Test Methods for Laboratory Compaction
Characteristics of Soil Using Standard Effort

D1140-00(2006).....Standard Test Methods for Amount of Material in
Soils Finer than No. 200 Sieve

D1143/D1143M-07e1.....Standard Test Methods for Deep Foundations
Under Static Axial Compressive Load

D1188-07e1.....Standard Test Method for Bulk Specific Gravity
and Density of Compacted Bituminous Mixtures
Using Coated Samples

D1556-07.....Standard Test Method for Density and Unit
Weight of Soil in Place by the Sand-Cone Method

D1557-09.....Standard Test Methods for Laboratory Compaction
Characteristics of Soil Using Modified Effort
(56,000ft lbf/ft³ (2,700 KNm/m³))

D2166-06.....Standard Test Method for Unconfined Compressive
Strength of Cohesive Soil

D2167-08).....Standard Test Method for Density and Unit
Weight of Soil in Place by the Rubber Balloon
Method

D2216-10.....Standard Test Methods for Laboratory
Determination of Water (Moisture) Content of
Soil and Rock by Mass

D2974-07a.....Standard Test Methods for Moisture, Ash, and
Organic Matter of Peat and Other Organic Soils

D3666-11.....Standard Specification for Minimum Requirements
for Agencies Testing and Inspecting Road and
Paving Materials

D3740-11.....Standard Practice for Minimum Requirements for
Agencies Engaged in Testing and/or Inspection
of Soil and Rock as used in Engineering Design
and Construction

D6938-10.....Standard Test Method for In-Place Density and
Water Content of Soil and Soil-Aggregate by
Nuclear Methods (Shallow Depth)

E94-04(2010).....Standard Guide for Radiographic Examination

E164-08.....Standard Practice for Contact Ultrasonic
Testing of Weldments

E329-11c.....Standard Specification for Agencies Engaged in
Construction Inspection, Testing, or Special
Inspection

E543-09.....Standard Specification for Agencies Performing
Non-Destructive Testing

E605-93 (R2011).....Standard Test Methods for Thickness and Density
of Sprayed Fire Resistive Material (SFRM)
Applied to Structural Members

E709-08.....Standard Guide for Magnetic Particle
Examination

E1155-96 (R2008).....Determining FF Floor Flatness and FL Floor
Levelness Numbers

F3125/F3125M-15.....Standard Specification for High Strength
Structural Bolts, Steel and Alloy Steel, Heat
Treated, 120 ksi (830 MPa) and 150 ksi (1040
MPa) Minimum Tensile Strength, Inch and Metric
Dimensions

E. American Welding Society (AWS):

D1.D1.1M-10.....Structural Welding Code-Steel

1.3 REQUIREMENTS:

- A. Accreditation Requirements: Construction materials testing laboratories must be accredited by a laboratory accreditation authority and will be required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory's scope of accreditation must include the appropriate ASTM standards (i.e.; E329, C1077, D3666, D3740, A880, E543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the "Corporate Office."
- B. Inspection and Testing: Testing laboratory shall inspect materials and workmanship and perform tests described herein and additional tests requested by the COR. When it appears materials furnished, or work performed by Contractor fail to meet construction contract requirements, Testing Laboratory shall direct attention of the COR to such failure.

C. Written Reports: Testing laboratory shall submit test reports to the COR, Contractor, unless other arrangements are agreed to in writing by the COR. Submit reports of tests that fail to meet construction contract requirements on colored paper.

D. Verbal Reports: Give verbal notification to the COR immediately of any irregularity.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 EARTHWORK:

A. General: The Testing Laboratory shall provide qualified personnel, materials, equipment, and transportation as required to perform the services identified/required herein, within the agreed to schedule and/or time frame. The work to be performed shall be as identified herein and shall include but not be limited to the following:

1. Observe fill and subgrades during proof-rolling to evaluate suitability of surface material to receive fill or base course. Provide recommendations to the COR regarding suitability or unsuitability of areas where proof-rolling was observed. Where unsuitable results are observed, witness excavation of unsuitable material and recommend to the COR extent of removal and replacement of unsuitable materials and observe proof-rolling of replaced areas until satisfactory results are obtained.
2. Provide part time observation of fill placement and compaction and field density testing in building areas and provide part time observation of fill placement and compaction and field density testing in pavement areas to verify that earthwork compaction obtained is in accordance with contract documents.
3. Provide supervised geotechnical technician to inspect excavation, subsurface preparation, and backfill for structural fill.

B. Testing Compaction:

1. Determine maximum density and optimum moisture content for each type of fill, backfill and subgrade material used, in compliance with ASTM D698 and/or ASTM D1557.
2. Make field density tests in accordance with the primary testing method following ASTM D6938 wherever possible. Field density tests utilizing ASTM D1556 shall be utilized on a case by case basis only if there are problems with the validity of the results from the primary method due to specific site field conditions. Should the

testing laboratory propose these alternative methods, they should provide satisfactory explanation to the COR before the tests are conducted.

- a. Pavement Subgrade: One test for each 335 m² (400 square yards), but in no case fewer than two tests.
- b. Curb, Gutter, and Sidewalk: One test for each 90 m (300 feet), but in no case fewer than two tests.
- c. Trenches: One test at maximum 30 m (100 foot) intervals per 1200 mm (4 foot) of vertical lift and at changes in required density, but in no case fewer than two tests.
- d. Footing Subgrade: At least one test for each layer of soil on which footings will be placed. Subsequent verification and approval of each footing subgrade may be based on a visual comparison of each subgrade with related tested subgrade when acceptable to the COR. In each compacted fill layer below wall footings, perform one field density test for every 30 m (100 feet) of wall. Verify subgrade is level, all loose or disturbed soils have been removed, and correlate actual soil conditions observed with those indicated by test borings.
- C. Fill and Backfill Material Gradation: One test per 50 cubic yards stockpiled or in-place source material. Gradation of fill and backfill material shall be determined in accordance with ASTM C136.
- D. Testing for Footing Bearing Capacity: Evaluate if suitable bearing capacity material is encountered in footing subgrade.
- E. Testing Materials: Test suitability of on-site and off-site borrow as directed by the COR.

3.2 LANDSCAPING:

- A. Test topsoil for organic materials, pH, phosphate, potash content, and gradation of particles.
 - 1. Test for organic material by using ASTM D2974.
 - 2. Determine percent of silt, sand, clay, and foreign materials such as rock, roots, and vegetation.
- B. Submit laboratory test report of topsoil to the COR.

3.3 ASPHALT CONCRETE PAVING:

- A. Aggregate Base Course:
 - 1. Determine maximum density and optimum moisture content for aggregate base material in accordance with AASHTO T180, Method D.

2. Make a minimum of three field density tests on each day's final compaction on each aggregate course in accordance with AASHTO T191.
3. Sample and test aggregate as necessary to insure compliance with specification requirements for gradation, wear, and soundness as specified in the applicable state highway standards and specifications.

B. Asphalt Concrete:

1. Aggregate: Sample and test aggregates in stock pile and hot-bins as necessary to insure compliance with specification requirements for gradation (AASHTO T27), wear (AASHTO T96), and soundness (AASHTO T104).
2. Temperature: Check temperature of each load of asphalt concrete at mixing plant and at site of paving operation.
3. Density: Make a minimum of two field density tests in accordance with ASTM D1188 of asphalt base and surface course for each day's paving operation.

3.4 SITE WORK CONCRETE:

- A. Test site work concrete including materials for concrete as required in Article CONCRETE of this section.

3.5 CONCRETE:

A. Batch Plant Inspection and Materials Testing:

1. Perform continuous batch plant inspection until concrete quality is established to satisfaction of the COR with concurrence of Contracting Officer and perform periodic inspections thereafter as determined by the COR.
2. Periodically inspect and test batch proportioning equipment for accuracy and report deficiencies to the COR.
3. Sample and test mix ingredients as necessary to insure compliance with specifications.
4. Sample and test aggregates daily and as necessary for moisture content. Test the dry rodded weight of the coarse aggregate whenever a sieve analysis is made, and when it appears there has been a change in the aggregate.
5. Certify, in duplicate, ingredients and proportions and amounts of ingredients in concrete conform to approved trial mixes. When concrete is batched or mixed off immediate building site, certify (by signing, initialing or stamping thereon) on delivery slips (duplicate) that ingredients in truck-load mixes conform to

proportions of aggregate weight, cement factor, and water-cement ratio of approved trial mixes.

B. Field Inspection and Materials Testing:

1. Provide a technician at site of placement at all times to perform concrete sampling and testing.
2. Review the delivery tickets of the ready-mix concrete trucks arriving on-site. Notify the Contractor if the concrete cannot be placed within the specified time limits or if the type of concrete delivered is incorrect. Reject any loads that do not comply with the Specification requirements. Rejected loads are to be removed from the site at the Contractor's expense. Any rejected concrete that is placed will be subject to removal.
3. Take concrete samples at point of placement in accordance with ASTM C172. Mold and cure compression test cylinders in accordance with ASTM C31. Make at least three cylinders for each 40 m³ (50 cubic yards) or less of each concrete type, and at least three cylinders for any one day's pour for each concrete type. After good concrete quality control has been established and maintained as determined by the COR make three cylinders for each 80 m³ (100 cubic yards) or less of each concrete type, and at least three cylinders from any one day's pour for each concrete type. Label each cylinder with an identification number. The COR may require additional cylinders to be molded and cured under job conditions.
4. Perform slump tests in accordance with ASTM C143. Test the first truck each day, and every time test cylinders are made. Test pumped concrete at the hopper and at the discharge end of the hose at the beginning of each day's pumping operations to determine change in slump.
5. Determine the air content of concrete per ASTM C173. For concrete required to be air-entrained, test the first truck and every 20 m³ (25 cubic yards) thereafter each day. For concrete not required to be air-entrained, test every 80 m³ (100 cubic yards) at random. For pumped concrete, initially test concrete at both the hopper and the discharge end of the hose to determine change in air content.
6. If slump or air content fall outside specified limits, make another test immediately from another portion of same batch.

7. Perform unit weight tests in compliance with ASTM C138 for normal weight concrete and ASTM C567 for lightweight concrete. Test the first truck and each time cylinders are made.
8. Notify laboratory technician at batch plant of mix irregularities and request materials and proportioning check.
9. Verify that specified mixing has been accomplished.
10. Environmental Conditions: Determine the temperature per ASTM C1064 for each truckload of concrete during hot weather and cold weather concreting operations:
 - a. When ambient air temperature falls below 4.4 degrees C (40 degrees F), record maximum and minimum air temperatures in each 24 hour period; record air temperature inside protective enclosure; record minimum temperature of surface of hardened concrete.
 - b. When ambient air temperature rises above 29.4 degrees C (85 degrees F), record maximum and minimum air temperature in each 24 hour period; record minimum relative humidity; record maximum wind velocity; record maximum temperature of surface of hardened concrete.
11. Inspect the reinforcing steel placement, including bar size, bar spacing, top and bottom concrete cover, proper tie into the chairs, and grade of steel prior to concrete placement. Submit detailed report of observations.
12. Observe conveying, placement, and consolidation of concrete for conformance to specifications.
13. Observe condition of formed surfaces upon removal of formwork prior to repair of surface defects and observe repair of surface defects.
14. Observe curing procedures for conformance with specifications, record dates of concrete placement, start of preliminary curing, start of final curing, end of curing period.
15. Observe preparations for placement of concrete:
 - a. Inspect handling, conveying, and placing equipment, inspect vibrating and compaction equipment.
 - b. Inspect preparation of construction, expansion, and isolation joints.
16. Observe preparations for protection from hot weather, cold weather, sun, and rain, and preparations for curing.
17. Observe concrete mixing:

- a. Monitor and record amount of water added at project site.
 - b. Observe minimum and maximum mixing times.
18. Measure concrete flatwork for levelness and flatness as follows:
- a. Perform Floor Tolerance Measurements F_F and F_L in accordance with ASTM E1155. Calculate the actual overall F - numbers using the inferior/superior area method.
 - b. Perform all floor tolerance measurements within 48 hours after slab installation and prior to removal of shoring and formwork.
 - c. Provide the Contractor and the COR with the results of all profile tests, including a running tabulation of the overall F_F and F_L values for all slabs installed to date, within 72 hours after each slab installation.
19. Other inspections:
- a. Grouting under base plates.
 - b. Grouting anchor bolts and reinforcing steel in hardened concrete.
- C. Laboratory Tests of Field Samples:
- 1. Test compression test cylinders for strength in accordance with ASTM C39. For each test series, test one cylinder at 7 days and one cylinder at 28 days. Use remaining cylinder as a spare tested as directed by the COR. Compile laboratory test reports as follows: Compressive strength test shall be result of one cylinder, except when one cylinder shows evidence of improper sampling, molding or testing, in which case it shall be discarded and strength of spare cylinder shall be used.
 - 2. Make weight tests of hardened lightweight structural concrete in accordance with ASTM C567.
 - 3. Furnish certified compression test reports (duplicate) to the COR. In test report, indicate the following information:
 - a. Cylinder identification number and date cast.
 - b. Specific location at which test samples were taken.
 - c. Type of concrete, slump, and percent air.
 - d. Compressive strength of concrete in MPa (psi).
 - e. Weight of lightweight structural concrete in kg/m^3 (pounds per cubic feet).
 - f. Weather conditions during placing.
 - g. Temperature of concrete in each test cylinder when test cylinder was molded.
 - h. Maximum and minimum ambient temperature during placing.

- i. Ambient temperature when concrete sample in test cylinder was taken.
- j. Date delivered to laboratory and date tested.

3.6 REINFORCEMENT:

- A. Review mill test reports furnished by Contractor.
- B. Make one tensile and one bend test in accordance with ASTM A370 from each pair of samples obtained.
- C. Written report shall include, in addition to test results, heat number, manufacturer, type and grade of steel, and bar size.
- D. Perform tension tests of mechanical and welded splices in accordance with ASTM A370.

3.7 ARCHITECTURAL PRECAST CONCRETE:

- A. Inspection at Plant: Forms, placement of reinforcing steel, concrete cover, and placement and finishing of concrete.
- B. Concrete Testing: Test concrete including materials for concrete as required in Article CONCRETE of this section, except make two test cylinders for each day's production of each strength of concrete produced.
- C. Inspect members to insure specification requirements for curing and finishes have been met.

3.8 MASONRY:

- A. Mortar Tests:
 - 1. Laboratory compressive strength test:
 - a. Comply with ASTM C780.
 - b. Obtain samples during or immediately after discharge from batch mixer.
 - c. Furnish molds with 50 mm (2 inch), 3 compartment gang cube.
 - d. Test one sample at 7 days and 2 samples at 28 days.
 - 2. Two tests during first week of operation; one test per week after initial test until masonry completion.
- B. Grout Tests:
 - 1. Laboratory compressive strength test:
 - a. Comply with ASTM C1019.
 - b. Test one sample at 7 days and 2 samples at 28 days.
 - c. Perform test for each 230 m² (2500 square feet) of masonry.
- C. Masonry Unit Tests:
 - 1. Laboratory Compressive Strength Test:
 - a. Comply with ASTM C140.

- b. Test 3 samples for each 460 m² (5000 square feet) of wall area.
- D. Prism Tests: For each type of wall construction indicated, test masonry prisms per ASTM C1314 for each 460 m² (5000 square feet) of wall area. Prepare one set of prisms for testing at 7 days and one set for testing at 28 days.

3.9 STRUCTURAL STEEL:

- A. General: Provide shop and field inspection and testing services to certify structural steel work is done in accordance with contract documents. Welding shall conform to AWS D1.1 Structural Welding Code.
- B. Prefabrication Inspection:
 - 1. Review design and shop detail drawings for size, length, type and location of all welds to be made.
 - 2. Approve welding procedure qualifications either by pre-qualification or by witnessing qualifications tests.
 - 3. Approve welder qualifications by certification or retesting.
 - 4. Approve procedure for control of distortion and shrinkage stresses.
 - 5. Approve procedures for welding in accordance with applicable sections of AWS D1.1.
- C. Fabrication and Erection:
 - 1. Weld Inspection:
 - a. Inspect welding equipment for capacity, maintenance and working condition.
 - b. Verify specified electrodes and handling and storage of electrodes in accordance with AWS D1.1.
 - c. Inspect preparation and assembly of materials to be welded for conformance with AWS D1.1.
 - d. Inspect preheating and interpass temperatures for conformance with AWS D1.1.
 - e. Measure 25 percent of fillet welds.
 - f. Welding Magnetic Particle Testing: Test in accordance with ASTM E709 for a minimum of:
 - 1) 20 percent of all shear plate fillet welds at random, final pass only.
 - 2) 20 percent of all continuity plate and bracing gusset plate fillet welds, at random, final pass only.
 - 3) 100 percent of tension member fillet welds (i.e., hanger connection plates and other similar connections) for root and final passes.

- 4) 20 percent of length of built-up column member partial penetration and fillet welds at random for root and final passes.
 - 5) 100 percent of length of built-up girder member partial penetration and fillet welds for root and final passes.
 - g. Welding Ultrasonic Testing: Test in accordance with ASTM E164 and AWS D1.1 for 100 percent of all full penetration welds, braced and moment frame column splices, and a minimum of 20 percent of all other partial penetration column splices, at random.
 - h. Verify that correction of rejected welds are made in accordance with AWS D1.1.
 - i. Testing and inspection do not relieve the Contractor of the responsibility for providing materials and fabrication procedures in compliance with the specified requirements.
2. Bolt Inspection:
- a. Inspect high-strength bolted connections in accordance AISC Specifications for Structural Joints Using ASTM F3125 Bolts.
 - b. Slip-Critical Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in each connection in accordance with AISC Specifications for Structural Joints Using ASTM F3125 Bolts. Inspect all bolts in connection when one or more are rejected.
 - c. Fully Pre-tensioned Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in 25 percent of connections in accordance with AISC Specification for Structural Joints Using ASTM F3125 Bolts. Inspect all bolts in connection when one or more are rejected.
 - d. Bolts installed by turn-of-nut tightening may be inspected with calibrated wrench when visual inspection was not performed during tightening.
 - e. Snug Tight Connections: Inspect 10 percent of connections verifying that plies of connected elements have been brought into snug contact.
 - f. Inspect field erected assemblies; verify locations of structural steel for plumbness, level, and alignment.
- D. Submit inspection reports, record of welders and their certification, and identification, and instances of noncompliance to the COR.

3.10 STEEL DECKING:

- A. Provide field inspection of welds of metal deck to the supporting steel, and testing services to insure steel decking has been installed in accordance with contract documents and manufacturer's requirements.
- B. Qualification of Field Welding: Qualify welding processes and welding operators in accordance with "Welder Qualification" procedures of AWS D1.1. Refer to the "Plug Weld Qualification Procedure" in Part 3 "Field Quality Control."
- C. Submit inspection reports, certification, and instances of noncompliance to the COR.

3.11 SHEAR CONNECTOR STUDS:

- A. Provide field inspection and testing services required by AWS D.1 to insure shear connector studs have been installed in accordance with contract documents.
- B. Tests: Test 20 percent of headed studs for fastening strength in accordance with AWS D1.1.
- C. Submit inspection reports, certification, and instances of noncompliance to the COR.

3.12 SPRAYED-ON FIREPROOFING:

- A. Provide field inspection and testing services to certify sprayed-on fireproofing has been applied in accordance with contract documents.
- B. Obtain a copy of approved submittals from the COR
- C. Use approved installation in test areas as criteria for inspection of work.
- D. Test sprayed-on fireproofing for thickness and density in accordance with ASTM E605.
 - 1. Thickness gauge specified in ASTM E605 may be modified for pole extension so that overhead sprayed material can be reached from floor.
- E. Location of test areas for field tests as follows:
 - 1. Thickness: Select one bay per floor, or one bay for each 930 m² (10,000 square feet) of floor area, whichever provides for greater number of tests. Take thickness determinations from each of following locations: Metal deck, beam, and column.
 - 2. Density: Take density determinations from each floor, or one test from each 930 m² (10,000 square feet) of floor area, whichever provides for greater number of tests, from each of the following areas: Underside of metal deck, beam flanges, and beam web.

F. Submit inspection reports, certification, and instances of noncompliance to the COR.

3.13 TYPE OF TEST:

Approximate Number of Tests Required

A. Earthwork:

Laboratory Compaction Test, Soils:

(AASHTO T180) 1

Field Density, Soils (AASHTO T191, T205, or T310) 1

Penetration Test, Soils 1

B. Landscaping:

Topsoil Test 1

C. Aggregate Base:

Laboratory Compaction, (AASHTO T180) 1

Field Density, (AASHTO T191) 1

Aggregate, Base Course Gradation (AASHTO T27) 1

Wear (AASHTO T96) 1

Soundness (AASHTO T104) 1

D. Asphalt Concrete:

Field Density, (AASHTO T230) 1

Aggregate, Asphalt Concrete Gradation (AASHTO T27) 1

Wear (AASHTO T96) 1

Soundness (AASHTO T104) 1

E. Concrete:

Making and Curing Concrete Test Cylinders (ASTM C31) 5

Compressive Strength, Test Cylinders (ASTM C39) 5

Concrete Slump Test (ASTM C143) 5

Concrete Air Content Test (ASTM C173) 5

Unit Weight, Lightweight Concrete (ASTM C567) 5

Aggregate, Normal Weight: Gradation (ASTM C33) 5

Deleterious Substances (ASTM C33) 5

Soundness (ASTM C33) 5

Abrasion (ASTM C33) 5

Aggregate, Lightweight Gradation (ASTM C330) 5

Deleterious Substances (ASTM C330) 5

Unit Weight (ASTM C330) 5

Flatness and Levelness Readings (ASTM E1155) (number of days) 5

F. Reinforcing Steel:

Tensile Test (ASTM A370) 1

Bend Test (ASTM A370)	<u><u>1</u></u>
Mechanical Splice (ASTM A370)	<u><u>1</u></u>
Welded Splice Test (ASTM A370)	<u><u>1</u></u>
G. Masonry:	
Making and Curing Test Cubes (ASTM C109)	<u><u>1</u></u>
Compressive Strength, Test Cubes (ASTM C109)	<u><u>1</u></u>
Sampling and Testing Mortar, Comp. Strength (ASTM C780)	<u><u>1</u></u>
Sampling and Testing Grout, Comp. Strength (ASTM C1019)	<u><u>1</u></u>
Masonry Unit, Compressive Strength (ASTM C140)	<u><u>1</u></u>
Prism Tests (ASTM C1314)	<u><u>1</u></u>
H. Structural Steel:	
Ultrasonic Testing of Welds (ASTM E164)	<u><u>2</u></u>
Magnetic Particle Testing of Welds (ASTM E709)	<u><u>2</u></u>
Radiographic Testing of Welds (ASTM E94)	<u><u>2</u></u>
I. Sprayed-On Fireproofing:	
Thickness and Density Tests (ASTM E605)	<u><u>1</u></u>
J. Inspection:	
Technical Personnel (Man-days)	<u><u>20</u></u>

- - - E N D - - -

**SECTION 01 45 35
SPECIAL INSPECTIONS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This guide specification will be applicable to both new buildings and existing building rehabilitations/renovations. In addition to the Special Inspection and testing specified requirements, a registered design professional must perform structural observations during construction. All observed deficiencies will be immediately reported to the Contracting Officer. The registered design professional performing these observations will be a representative of the Designer of Record (DOR) for the building being constructed.
- B. Structural observations are required for the following project conditions per IBC Chapter 17:
 - 1. Seismic Design Category D, E or F; and assigned to Risk Cat III, IV or V.
 - 2. Seismic Design Category D, E or F; and with a height greater than 22860 mm 75 ft.
 - 3. Seismic Design Category E, assigned to Risk Category I or II and the building is greater than two stories above grade plane.
 - 4. Nominal design wind speed in excess of 49 m/sec (110 mph); and assigned to Risk Cat III, IV or V.
 - 5. Nominal design wind speed in excess of 49 m/sec (110 mph); and with a height greater than 23 m (75 ft).

1.2 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.
- B. American Society of Civil Engineers (ASCE)
 - 1. ASCE 7 - (2010; Errata 2011; Supp 2 2013) Minimum Design Loads for Buildings and Other Structures
- C. International Code Council (ICC)
 - 2. ICC IBC - (2015) International Building Code

1.3 GENERAL REQUIREMENTS

- A. Perform Special Inspections in accordance with the Statement of Special Inspections, Schedule of Special Inspections and Chapter 17 of ICC IBC. The Statement of Special Inspections and Schedule of Special Inspections

are included as an attachment to this specification. Special Inspections are to be performed by an independent third party and are intended to ensure that the work of the prime contractor is in accordance with the Contract Documents and applicable building codes. Special inspections do not take the place of the three phases of control inspections performed by the Contractor's QC Manager or any testing and inspections required by other sections of the specifications.

- B. Structural observations will be performed by the Government. The contractor must provide notification to the Contracting Officer 14 days prior to the following points of construction that structural observations need to occur:

1. The Government shall perform structural observations during construction on the following dates: EVERY 2 WEEKS.

1.4 **DEFINITIONS**

- A. Continuous Special Inspections - The constant monitoring of specific tasks by a special inspector. These inspections must be carried out continuously over the duration of the particular tasks.
- B. Periodic Special Inspections - Special Inspections by the special inspector who is intermittently present where the work to be inspected has been or is being performed. Specific time interval on a specific Special Inspection should be indicated on the Schedule of Special Inspections.
- C. Perform - Perform these Special Inspections tasks for each welded joint or member.
- D. Observe - Observe these Special Inspections items on a random daily basis. Operations need not be delayed pending these inspections.
- E. Special Inspector (SI) - A qualified person retained by the contractor and approved by the Contracting Officer as having the competence necessary to inspect a particular type of construction requiring Special Inspections. The SI must be an independent third party hired directly by the Prime Contractor.
- F. Associate Special Inspector (ASI) - A qualified person who assists the SI in performing Special Inspections but must perform inspection under the direct supervision of the SI and cannot perform inspections without the SI on site.
- G. Third Party - A third party inspector must not be company employee of the Contractor or any Sub-Contractor performing the work to be inspected.

- H. Special Inspector of Record (SIOR) - SIOR must be an independent third party hired directly by the Prime Contractor and is required for the following project conditions:
1. Seismic Design Category D, E, or F; and assigned to Risk Category III, IV, or V.
 2. Seismic Design Category D, E, or F; and with a height greater than 22860mm 75 ft.
 3. Seismic Design Category E, assigned to Risk Category I or II and the building is greater than two (2) stories above grade plane.
 4. Nominal design wind speed in excess of 49 m/sec 100 mph; and assigned to Risk Category III, IV, or V.
 5. Nominal design wind speed in excess of 49 mm/sec 100mph; and with a height greater than 23m 75ft.
 6. In addition to these conditions, the DOR is encouraged to consider using an SIOR on large magnitude or critical projects where this additional level of quality control is affordable.
- I. Contracting Officer - The Government official having overall authority for administrative contracting actions. Certain contracting actions may be delegated to the Contracting Officer's Representative (COR).
- J. Contractor's Quality Control (QC) Manager - An individual retained by the prime contractor and qualified in accordance with the Section 01 45 00.00 10 QUALITY CONTROL having the overall responsibility for the contractor's QC organization.
- K. Designer of Record (DOR) - A registered design professional is contracted by the Government as an A/E responsible for the overall design and review of submittal documents prepared by others. The DOR is registered or licensed to practice their respective design profession as defined by the statutory requirements of the professional registration laws in state in which the design professional works. The DOR is also referred to as the Engineer of Record (EOR) in design code documents.
- L. Statement of Special Inspections (SSI) - A document developed by the DOR identifying the material, systems, components and work required to have Special Inspections and covering the following:
1. List of the Architectural Designated Seismic Systems - these components are in or attached to a Risk Category IV or V structure and are needed for continued operation of the facility or their failure could impair the continued operation of the facility.

2. List of the Mechanical Designated Seismic Systems
 - a. For Seismic Design Category C or Risk V, list the following:
 - 1) Heating, ventilation, and air-conditioning (HVAC) ductwork containing hazardous materials and anchorage of such ductwork
 - 2) Piping systems and mechanical units containing flammable, combustible, or highly toxic materials.
 - b. For Seismic Design Category D, E, or F or Risk Category V list mechanical system that meet one of the following:
 - 1) Life safety component required to function after an earthquake
 - 2) Component that contains hazardous content,
 - 3) All components in an essential facility needed for continued operation after an earthquake.
3. List of the Electrical Designated Systems
 - a. For Seismic Design Category C or Risk V, list the anchorage of electrical equipment used for emergency or standby power systems.
 - b. For Seismic Design Category D, E or F list electrical system that meet one of the following:
 - 1) Life safety component required to function after an earthquake
 - 2) Component that contains hazardous content,
 - 3) All components in an essential facility needed for continued operation after an earthquake.
4. List of elements that are part of the progressive collapse resistance system.
 - a. Provide a description of the following as they apply:
 - 1) Elements of the tie force system consisting of internal longitudinal and transverse, vertical, and peripheral tie.
 - 2) Elements of the alternate path system.
 - 3) Elements having enhanced local resistance. The Statement of Special Inspections and the Schedule of Special Inspections will be included as an attachment to this specification
 - a) Schedule of Special Inspections - A schedule which lists each of the required Special Inspections, the extent to which each Special Inspections is to be performed, and the required frequency for each in accordance with ICC IBC Chapter 17. Template found here:

b) Designated Seismic System - Those nonstructural components that require design in accordance with ASCE 7 Chapter 13 and for which the component importance factor, I_p , is greater than 1.0. This designation applies to systems that are required to be operational following the Design Earthquake for RC I - IV structures and following the MCER for RC V structures. All systems in RC V facilities designated as MC-1 in accordance with UFC 3-310-04 are considered part of the Designated Seismic Systems.

M. Submittals: Government approval is required for all submittals. CQC Special Inspection reports shall be submitted under this Specification section and follow the [Special Inspection]: [Applicable Specification section or description] naming convention. Submit the following:

1. SD-01 Preconstruction Submittals;
2. SIOR Letter of Acceptance;
3. Special Inspections Project Manual;
4. Special Inspections Agency's Written Practices
5. NDT Procedures and Equipment' Calibration Records;
6. SD-06 Test Reports;
7. Special Inspections
8. Daily Reports;
9. Special Inspections; Biweekly Reports;
10. SD-07 Certificates;
11. Fabrication Plant
12. Steel Truss Plant;
13. Wood Truss Plant;
14. AC472 Accreditation;
15. Steel Joist Institute Membership;
16. Precast Concrete Institute (PCI) Certified Plant;
17. Certificate of Compliance;
18. Special Inspector of Record Qualifications;
19. Special Inspector Qualifications;
20. Qualification Records for NDT technicians;
21. SD-11 Closeout Submittals;
22. Interim Final Report of Special Inspections;
23. Comprehensive Final Report of Special Inspections;

N. Special Inspector Qualifications: Submit qualifications for each SI, ASI, and the SIOR from the following certifying associations:

Associated Air Balance Council (AABC); American Concrete Institute (ACI); Association of the Wall and Ceiling Industry (AWCI); American Welding Society (AWS); Factory Mutual (FM); International Code Council (ICC); Nondestructive Testing (NDT); National Institute for Certification in Engineering Technologies (NICET); Precast/Prestressed Concrete Institute (PCI); Post-Tensioning Institute (PTI); Underwriters Laboratories (UL). Qualifications should be in accordance with the following minimums; PM or SRE can restrict qualifications to the higher standards shown if multiple options are shown for a role based on complexity of project.

QUALIFICATIONS

Area	Special Inspector	Associated Special Inspector	SIOR
Steel Construction and High Strength Bolting	ICC Structural Steel and Bolting Special Inspector certificate with on year of related experience, or Registered Professional Engineer with related experience.	Engineer-In-Training with one year of related experience.	
Welding Structural Steel (For highly complex steel use only AWS Certified Welding Inspectors)	ICC Welding Special Inspector certificate with one year of related experience or AWS Certified Welding Inspector	AWS Certified Associate Welding Inspector	
Nondestructive Testing of Welds	NDT Level II Certificate	NDT Level II Certificate plus one year of related experience	

Area	Special Inspector	Associated Special Inspector	SIOR
Cold Formed Steel Framing	ICC Structural Steel and Bolting Special Inspector certificate with on year of related experience, or ICC Commercial Building Inspector with one year of experience; or Registered Professional Engineer with related experience.	Engineer-In-Training with one year of related experience.	
Concrete Construction	ICC Reinforced Concrete Special Inspector Certificate with one year of related experience, or ACI Concrete Construction Special Inspector, or NICET Concrete Technician Level III Certificate in Construction Materials Testing, or, Registered Professional Engineer with related experience	ACI Concrete Construction Special Inspector in Training, or Engineer-In-Training with one year of related experience	
Prestressed Concrete Construction	ICC Pre-stressed Special Inspector Certificate with one year of related experience, or PCI Quality Control Technician/ Inspector Level II Certificate with one year of related experience, or Registered Professional Engineer with related experience.	PCI Quality Control Technician/ Inspector Level I Certificate with one year of related experience, or Engineer-In-Training with one year of related experience	

Area	Special Inspector	Associated Special Inspector	SIOR
Post-Tensioned Concrete Construction	PTI Level 2 Unbonded PT Inspector Certificate, or Registered Professional Engineer with related experience	PTI Level 1 Unbonded PT Inspector Certificate with one year of related experience, or Engineer-In-Training with one year of related experience	
Masonry Construction	ICC Structural Masonry Special Inspector Certificate with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience	
Wood	ICC Commercial Building Inspector Certificate with one year of related experience, or ICC Residential Building Inspector with one year of experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience	

Area	Special Inspector	Associated Special Inspector	SIOR
Verification of Site Soil Condition, Fill Placement, and Load-Bearing Requirements	ICC Soils Special Inspector Certificate with one year of related experience, or NICET Soils Technician Level II Certificate in Construction Material Testing, or NICET Geotechnical Engineering Technician Level II Construction or Generalist Certificate, or Geologist-In-Training with one year of related experience, or Registered Professional Engineer with related experience	NICET Soils Technician Level I Certificate in Construction Material Testing with one year of related experience, or NICET Geotechnical Engineering Technician Level I Construction, or Generalist Certificate with one year of related experience, or Engineer-In-Training with one year of related experience	
Deep Foundations	NICET Soils Technician Level II Certificate in Construction Material Testing, or NICET Geotechnical Engineering Technician Level II Construction or Generalist Certificate, or Geologist-In-Training with one year of related experience, or Registered Professional Engineer with related experience	NICET Soils Technician Level I Certificate in Construction Material Testing with one year of related experience, or NICET Geotechnical Engineering Technician Level I Construction or Generalist Certificate with one year of related experience, or Engineer-In-Training with one year of related experience	

Area	Special Inspector	Associated Special Inspector	SIOR
Sprayed Fire Resistant Manual	ICC Spray-applied Fireproofing Special Inspector Certificate, or ICC Fire Inspector I Certificate with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience	
Mastic and Intumescent Fire Resistant Coatings	ICC Spray-applied Fireproofing Special Inspector Certificate, or ICC Fire Inspector I Certificate with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience.	
Exterior Insulation and Finish Systems (EIFS)	AWCI EIFS Inspector Certificate, or Exterior Design Institute Certificate, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience	
Fire-Resistant Penetrations and Joints	Passed the UL Firestop Exam with one year of related experience, or Passed the FM Firestop Exam with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience.	

Area	Special Inspector	Associated Special Inspector	SIOR
Smoke Control	AABC Technician Certification with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience.	
SIOR			Registered Professional Engineer

PART 2 – PRODUCTS

2.1 FABRICATORS SPECIAL INSPECTION

- A. Special Inspections of fabricator's work performed in the fabricator's shop is required to be inspected in accordance with the Statement of Special Inspections and the Schedule of Special Inspections unless the fabricator is certified by the approved agency to perform such work without Special Inspections. Submit the applicable certification(s) from the following list to the Contracting Officer for information to allow work performed in the fabricator's shop to not be subjected to Special Inspections.
- B. The following certifications meet the requirements for fabricator approval in accordance with paragraph 1704.2.5.2 of IBC:
 1. American Institute of Steel Construction (AISC) Certified Fabrication Plant, Category STD.
 2. Truss Plate Institute (TPI) steel truss plate quality assurance program certification.
 3. Truss Plate Institute (TPI) wood truss plate quality assurance program certification.
 4. International Accreditation Service, AC472 Accreditation Steel Joist Institute Membership
 5. Precast Concrete Institute (PCI) Certified Plant, Group C
- C. At the completion of fabrication, submit a certificate of compliance, to be included with the comprehensive final report of Special **Inspections, stating that the materials supplied and work performed by the fabricator are in accordance the construction documents.**

PART 3 - EXECUTION**3.1 RESPONSIBILITIES MATRIX**

Inspector	Responsibility	Condition
SIOR	a. Supervise all Special Inspectors required by the contract documents and the IBC. b. Submit a SIOR Letter of Acceptance to the Contracting Officer attesting to acceptance of the duties of SIOR, signed and sealed by the SIOR. c. Verify the qualifications of all of the Special Inspectors. d. Verify the qualifications of fabricators.	Applicable when SIOR is required
	e. Submit Special Inspections agency's written practices for the monitoring and control of the agency's operations to include the following: 1. The agency's procedures for the selection and administration of inspection personnel, describing the training, experience and examination requirements for qualifications and certification of inspection personnel. 2. The agency's inspection procedures, including general inspection, material controls, and visual welding inspection. f. Submit qualification records for nondestructive testing (NDT) technicians designated for the project. Submit NDT procedures and equipment calibration records for NDT to be performed and equipment to be used for the project.	Applicable when SIOR is required and when the structural design is required to follow AISC341 for seismic design of steel structures
	g. Prepare a Special Inspections Project Manual, which will cover the following: 1. Roles and responsibilities of the following individuals during Special Inspections: SIOR, SI, General Contractor, Subcontractors, QC Manager, and DOR. 2. Organizational chart and/or communication plan, indicating lines of communication 3. Contractor's internal plan for scheduling inspections. Address items such as timeliness of inspection requests, who to contact for inspection requests, and availability of alternate inspectors. Contractor's internal plan for scheduling inspections. Address items such as timeliness of inspection requests, who to contact for inspection requests, and availability of alternate inspectors. 4. Indicate the government reporting procedures.	Applicable when SIOR is required

Inspector	Responsibility	Condition
	5. Propose forms or templates to be used by SI and SIOR to document inspections. 6. Indicate procedures for tracking nonconforming work and verification that corrective work is complete. 7. Indicate how the SIOR and/or SI will participate in weekly QC meetings. 8. Indicate how Special Inspections of shop fabricated items will be handled when the fabricator's shop is not certified per paragraph FABRICATOR SPECIAL INSPECTIONS. 9. Include a section in the manual that covers each specific item requiring Special Inspections that is indicated on the Schedule of Special Inspections. Provide names and qualifications of each special inspector who will be performing the Special Inspections for each specific item. Provide detail on how the Special Inspections are to be carried out for each item so that the expectations are clear for the General Contractor and the Subcontractor performing the work. Make a copy of the Special Inspections Project Manual available on the job site during construction. Submit a copy of the Special Inspections Project Manual for approval. h. Attend coordination and mutual understanding meeting where the information in the Special Inspections Project Manual will be reviewed to verify that all parties have a clear understanding of the Special Inspections provisions and the individual duties and responsibilities of each party. i. Maintain a 3- ring binder for the Special Inspector's daily and biweekly reports and the Special Inspections Project Manual. This file must be located in a conspicuous place in the project trailer/office to allow review by the Contracting Officer and the DOR. j. Submit a copy of the Special Inspector's daily reports to the QC Manager. k. Discrepancies that are observed during Special Inspections must be reported to the QC Manager for correction. If discrepancies are not corrected before the special inspector leaves the site the observed discrepancies must be documented in the daily report. l. Submit a biweekly Special Inspections report until all work requiring Special Inspections is complete. A report is required for each biweekly	

Inspector	Responsibility	Condition
	period in which Special Inspections activity occurs, and must include the following: 1. A brief summary of the work performed during the reporting time frame. 2. Changes and/or discrepancies with the drawings, specifications, and mechanical or electrical component certification if they require seismic systems, that were observed during the reporting period. 3. Discrepancies which were resolved or corrected. 4. A list of nonconforming items requiring resolution. 5. All applicable test results including nondestructive testing reports.	
QC Manager	a. If there is no SIOR, QC Manager must Supervise all Special Inspectors required by the contract documents and the IBC; Verify the qualifications of all of the Special Inspectors; Verify the qualifications of fabricators; Maintain a 3-ring binder for the Special Inspector's daily and biweekly reports. This file must be located in a conspicuous place in the project trailer/office to allow review by the Contracting Officer and the DOR.	Applicable when SIOR is not required
	b. Maintain a rework items list that includes discrepancies noted on the Special Inspectors daily report.	n/a
Special Inspectors	a. Inspect all elements of the project for which the special inspector is qualified to inspect and are identified in the Schedule of Special Inspections. b. Attend preparatory phase meetings related to the Definable Feature of Work (DFOW) for which the special inspector is qualified to inspect.	
	c. Submit Special Inspections agency's written practices for the monitoring and control of the agency's operations to include the following: 1. The agency's procedures for the selection and administration of inspection personnel, describing the training, experience and examination requirements for qualifications and certification of inspection personnel. 2. The agency's inspection procedures, including general inspection, material controls, and visual welding inspection.	Applicable when SIOR is NOT required and when the structural design is required to follow AISC 341 for seismic design of

Inspector	Responsibility	Condition
	d. Submit qualification records for nondestructive testing (NDT) technicians designated for the project. e. Submit NDT procedures and equipment calibration records for NDT to be performed and equipment to be used for the project.]	steel structures
	f. Submit a copy of the daily reports to the QC Manager. g. Discrepancies that are observed during Special Inspections must be reported to the QC Manager for correction. If discrepancies are not corrected before the special inspector leaves the site the observed discrepancies must be documented in the daily report. h. Submit a biweekly Special Inspection Report until all inspections are complete. A report is required for each biweekly period in which Special Inspections activity occurs, and must include the following: 1. A brief summary of the work performed during the reporting time frame 2. Changes and/or discrepancies with the drawings, specifications, and mechanical or electrical component certification if they require seismic systems that were observed during the reporting period. 3. Discrepancies which were resolved or corrected. 4. A list of nonconforming items requiring resolution. 5. All applicable test result including nondestructive testing reports. j. At the completion of the project submit a comprehensive final report of Special Inspections that documents the Special Inspections completed for the project and corrections of all discrepancies noted in the daily reports. The comprehensive final report of Special Inspections must be signed, dated and indicate the certification of the special inspector qualifying them to conduct the inspection.	Applicable when SIOR is not required
	k. Submit daily reports to the SIOR	Applicable when SIOR is required

3.2 DEFECTIVE WORK

Check work as it progresses, but failure to detect any defective work or materials must in no way prevent later rejection if defective work or materials are discovered, nor obligate the Government to accept such work.

- - - E N D - - -

SECTION 01 57 19
TEMPORARY ENVIRONMENTAL CONTROLS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the control of environmental pollution and damage that the Contractor must consider for air, water, and land resources. It includes management of visual aesthetics, noise, solid waste, radiant energy, and radioactive materials, as well as other pollutants and resources encountered or generated by the Contractor. The Contractor is obligated to consider specified control measures with the costs included within the various contract items of work.
- B. Environmental pollution and damage are defined as the presence of chemical, physical, or biological elements or agents which:
1. Adversely affect human health or welfare,
 2. Unfavorably alter ecological balances of importance to human life,
 3. Effect other species of importance to humankind, or;
 4. Degrade the utility of the environment for aesthetic, cultural, and historical purposes.
- C. Definitions of Pollutants:
1. Chemical Waste: Petroleum products, bituminous materials, salts, acids, alkalis, herbicides, pesticides, organic chemicals, and inorganic wastes.
 2. Debris: Combustible and noncombustible wastes, such as leaves, tree trimmings, ashes, and waste materials resulting from construction or maintenance and repair work.
 3. Sediment: Soil and other debris that has been eroded and transported by runoff water.
 4. Solid Waste: Rubbish, debris, garbage, and other discarded solid materials resulting from industrial, commercial, and agricultural operations and from community activities.
 5. Surface Discharge: The term "Surface Discharge" implies that the water is discharged with possible sheeting action and subsequent soil erosion may occur. Waters that are surface discharged may terminate in drainage ditches, storm sewers, creeks, and/or "water of the United States" and would require a permit to discharge water from the governing agency.
 6. Rubbish: Combustible and noncombustible wastes such as paper, boxes, glass and crockery, metal and lumber scrap, tin cans, and bones.

7. Sanitary Wastes:

- a. Sewage: Domestic sanitary sewage and human and animal waste.
- b. Garbage: Refuse and scraps resulting from preparation, cooking, dispensing, and consumption of food.

1.2 QUALITY CONTROL

- A. Establish and maintain quality control for the environmental protection of all items set forth herein.
- B. Record on daily reports any problems in complying with laws, regulations, and ordinances. Note any corrective action taken.

1.3 REFERENCES

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.
- B. U.S. National Archives and Records Administration (NARA):
33 CFR 328.....Definitions

1.4 SUBMITTALS

- A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
 - 1. Environmental Protection Plan: After the contract is awarded and prior to the commencement of the work, the Contractor shall meet with the Contracting Officer's Representative (COR) to discuss the proposed Environmental Protection Plan and to develop mutual understanding relative to details of environmental protection. Not more than 20 days after the meeting, the Contractor shall prepare and submit to the COR for approval, a written and/or graphic Environmental Protection Plan including, but not limited to, the following:
 - a. Name(s) of person(s) within the Contractor's organization who is (are) responsible for ensuring adherence to the Environmental Protection Plan.
 - b. Name(s) and qualifications of person(s) responsible for manifesting hazardous waste to be removed from the site.
 - c. Name(s) and qualifications of person(s) responsible for training the Contractor's environmental protection personnel.
 - d. Description of the Contractor's environmental protection personnel training program.
 - e. A list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control,

noise control and abatement that are applicable to the Contractor's proposed operations and the requirements imposed by those laws, regulations, and permits.

- f. Methods for protection of features to be preserved within authorized work areas including trees, shrubs, vines, grasses, ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, and archeological and cultural resources.
 - g. Procedures to provide the environmental protection that comply with the applicable laws and regulations. Describe the procedures to correct pollution of the environment due to accident, natural causes, or failure to follow the procedures as described in the Environmental Protection Plan.
 - h. Permits, licenses, and the location of the solid waste disposal area.
 - i. Drawings showing locations of any proposed temporary excavations or embankments for haul roads, material storage areas, structures, sanitary facilities, and stockpiles of excess or spoil materials. Include as part of an Erosion Control Plan approved by the District Office of the U.S. Soil Conservation Service and the Department of Veterans Affairs.
 - j. Environmental Monitoring Plans for the job site including land, water, air, and noise.
 - k. Work Area Plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas. This plan may be incorporated within the Erosion Control Plan.
 - l. Inclusion of "best management practices" and methodologies.
- B. Approval of the Contractor's Environmental Protection Plan will not relieve the Contractor of responsibility for adequate and continued control of pollutants and other environmental protection measures.

1.5 PROTECTION OF ENVIRONMENTAL RESOURCES

- A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period of this contract. Confine activities to areas defined by the specifications and drawings.
- B. Protection of Land Resources: Prior to construction, identify all land resources to be preserved within the work area. Do not remove, cut,

deface, injure, or destroy land resources including trees, shrubs, vines, grasses, topsoil, and landforms without permission from the COR. Do not fasten or attach ropes, cables, or guys to trees for anchorage unless specifically authorized, or where special emergency use is permitted. Provide erosion control plans, in phases where required.

1. Work Area Limits: Prior to any construction, mark the areas that require work to be performed under this contract. Mark or fence isolated areas within the general work area that are to be saved and protected. Protect monuments, works of art, and markers before construction operations begin. Convey to all personnel the purpose of marking and protecting all necessary objects.
2. Protection of Landscape: Protect trees, shrubs, vines, grasses, landforms, and other landscape features shown on the drawings to be preserved by marking, fencing, or using any other approved techniques.
 - a. Box and protect from damage existing trees and shrubs to remain on the construction site.
 - b. Immediately repair all damage to existing trees and shrubs by trimming, cleaning, and painting with antiseptic tree paint.
 - c. Do not store building materials or perform construction activities closer to existing trees or shrubs than the farthest extension of their limbs.
3. Reduction of Exposure of Unprotected Erodible Soils: Plan and conduct earthwork to minimize the duration of exposure of unprotected soils. Clear areas in reasonably sized increments only as needed to use. Form earthwork to final grade as shown. Immediately protect side slopes and back slopes upon completion of rough grading.
4. Temporary Protection of Disturbed Areas: Construct diversion ditches, benches, and berms to retard and divert runoff from the construction site to protected drainage areas.
 - a. Sediment Basins: Trap sediment from construction areas in temporary or permanent sediment basins that accommodate the runoff of a local 100-year storm. After each storm, pump the basins dry and remove the accumulated sediment. Control overflow/drainage with paved weirs or by vertical overflow pipes, draining from the surface.

- b. Institute effluent quality monitoring programs as required by Federal, State, and local environmental agencies.
- 5. Erosion and Sedimentation Control Devices: The erosion and sediment controls selected and maintained by the Contractor shall be such that water quality standards are not violated as a result of the Contractor's activities. Construct or install all temporary and permanent erosion and sedimentation control features shown on the Environmental Protection Plan. Maintain temporary erosion and sediment control measures such as berms, dikes, drains, sedimentation basins, grassing, and mulching, until permanent drainage and erosion control facilities are completed and operative.
- 6. Manage borrow areas on and off Government property to minimize erosion and to prevent sediment from entering nearby water courses or lakes.
- 7. Manage and control spoil areas on and off Government property to limit spoil to areas and prevent erosion of soil or sediment from entering nearby water courses or lakes.
- 8. Protect adjacent areas from despoilment by temporary excavations and embankments.
- 9. Handle and dispose of solid wastes in such a manner that will prevent contamination of the environment. Place solid wastes (excluding clearing debris) in containers that are emptied on a regular schedule. Transport all solid waste off Government property and dispose of waste in compliance with Federal, State, and local requirements.
- 10. Store chemical waste away from the work areas in corrosion resistant containers and dispose of waste in accordance with Federal, State, and local regulations.
- 11. Handle discarded materials other than those included in the solid waste category as directed by the COR.
- C. Protection of Water Resources: Keep construction activities under surveillance, management, and control to avoid pollution of surface and ground waters and sewer systems. Implement management techniques to control water pollution by the listed construction activities that are included in this contract.
 - 1. Washing and Curing Water: Do not allow wastewater directly derived from construction activities to enter water areas. Collect and place

- wastewater in retention ponds allowing the suspended material to settle, the pollutants to separate, or the water to evaporate.
2. Control movement of materials and equipment at stream crossings during construction to prevent violation of water pollution control standards of the Federal, State, or local government.
 3. Monitor water areas affected by construction.
- D. Protection of Fish and Wildlife Resources: Keep construction activities under surveillance, management, and control to minimize interference with, disturbance of, or damage to fish and wildlife. Prior to beginning construction operations, list species that require specific attention along with measures for their protection.
- E. Protection of Air Resources: Keep construction activities under surveillance, management, and control to minimize pollution of air resources. Burning is not permitted on the job site. Keep activities, equipment, processes, and work operated or performed, in strict accordance with the State of South Dakota and Federal emission and performance laws and standards. Maintain ambient air quality standards set by the Environmental Protection Agency, for those construction operations and activities specified.
1. Particulates: Control dust particles, aerosols, and gaseous by-products from all construction activities, processing, and preparation of materials (such as from asphaltic batch plants) at all times, including weekends, holidays, and hours when work is not in progress.
 2. Particulates Control: Maintain all excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and all other work areas within or outside the project boundaries free from particulates which would cause a hazard or a nuisance. Sprinklering, chemical treatment of an approved type, light bituminous treatment, baghouse, scrubbers, electrostatic precipitators, or other methods are permitted to control particulates in the work area.
 3. Hydrocarbons and Carbon Monoxide: Control monoxide emissions from equipment to Federal and State allowable limits.
 4. Odors: Control odors of construction activities and prevent obnoxious odors from occurring.
- F. Reduction of Noise: Minimize noise using every action possible. Perform noise-producing work in less sensitive hours of the day or week as

directed by the COR. Maintain noise-produced work at or below the decibel levels and within the time periods specified.

1. Perform construction activities involving repetitive, high-level impact noise only between 8:00 AM and 6:00 PM unless otherwise permitted by local ordinance or the COR. Repetitive impact noise on the property shall not exceed the following dB limitations:

Time Duration of Impact Noise	Sound Level in dB
More than 12 minutes in any hour	70
Less than 30 seconds of any hour	85
Less than three minutes of any hour	80
Less than 12 minutes of any hour	75

2. Provide sound-deadening devices on equipment and take noise abatement measures that are necessary to comply with the requirements of this contract, consisting of, but not limited to, the following:
 - a. Maintain maximum permissible construction equipment noise levels at 15 meter (50 feet) (dBA):

EARTHMOVING		MATERIALS HANDLING	
FRONT LOADERS	75	CONCRETE MIXERS	75
BACKHOES	75	CONCRETE PUMPS	75
TRUCKS	75	ROCK DRILLS	80
PAVERS, STATIONARY	80	PNEUMATIC TOOLS	80
GENERATORS	75	SAWS	75
COMPRESSORS	75	VIBRATORS	75

- b. Use shields or other physical barriers to restrict noise transmission.
 - c. Provide soundproof housings or enclosures for noise-producing machinery.
 - d. Use efficient silencers on equipment air intakes.
 - e. Use efficient intake and exhaust mufflers on internal combustion engines that are maintained so equipment performs below noise levels specified.
 - f. Line hoppers and storage bins with sound deadening material.
 - g. Conduct truck loading, unloading, and hauling operations so that noise is kept to a minimum.

3. Measure sound level for noise exposure due to the construction at least once every five successive working days while work is being performed above 55 dB(A) noise level. Measure noise exposure at the property line or 15 m (50 feet) from the noise source, whichever is greater. Measure the sound levels on the A weighing network of a General Purpose sound level meter at slow response. To minimize the effect of reflective sound waves at buildings, take measurements at 900 to 1800 mm (three to six feet) in front of any building face. Submit the recorded information to the COR noting any problems and the alternatives for mitigating actions.

- G. Restoration of Damaged Property: If any direct or indirect damage is done to public or private property resulting from any act, omission, neglect, or misconduct, the Contractor shall restore the damaged property to a condition equal to that existing before the damage at no additional cost to the Government. Repair, rebuild, or restore property as directed or make good such damage in an acceptable manner.
- H. Final Clean-up: On completion of project and after removal of all debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the COR. Cleaning shall include off the station disposal of all items and materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

- - - E N D - - -

SECTION 01 58 16
TEMPORARY INTERIOR SIGNAGE

PART 1 GENERAL**DESCRIPTION**

- A. This section specifies temporary interior signs.

PART 2 PRODUCTS**2.1 TEMPORARY SIGNS**

- A. Fabricate from 50 Kg (110 pound) mat finish white paper.
- B. Cut to 100 mm (4-inch) wide by 300 mm (12 inch) long size tag.
- C. Punch 3 mm (1/8-inch) diameter hole centered on 100 mm (4-inch) dimension of tag. Edge of Hole spaced approximately 13 mm (1/2-inch) from one end on tag.
- D. Reinforce hole on both sides with gummed cloth washer or other suitable material capable of preventing tie pulling through paper edge.
- E. Ties: Steel wire 0.3 mm (0.0120-inch) thick, attach to tag with twist tie, leaving 150 mm (6-inch) long free ends.

PART 3 EXECUTION**3.1 INSTALLATION**

- A. Install temporary signs attached to room door frame or room door knob, lever, or pull for doors on corridor openings.
- B. Mark on signs with felt tip marker having approximately 3 mm (1/8-inch) wide stroke for clearly legible numbers or letters.
- C. Identify room with numbers as designated on floor plans.

3.2 LOCATION

- A. Install on doors that have room, corridor, and space numbers shown.
- B. Doors that do not require signs are as follows:
1. Corridor barrier doors (cross-corridor) in corridor with same number.
 2. Folding doors or partitions.
 3. Toilet or bathroom doors within and between rooms.
 4. Communicating doors in partitions between rooms with corridor entrance doors.
 5. Closet doors within rooms.
- C. Replace missing, damaged, or illegible signs.

- - - E N D - - -

SECTION 01 74 19
CONSTRUCTION WASTE MANAGEMENT

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.
- B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.
- C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:
- D. Waste Management Plan development and implementation.
- E. Techniques to minimize waste generation.
- F. Sorting and separating of waste materials.
- G. Salvage of existing materials and items for reuse or resale.
- H. Recycling of materials that cannot be reused or sold.
- I. At a minimum the following waste categories shall be diverted from landfills:
- J. Soil.
- K. Inerts (eg, concrete, masonry and asphalt).
- L. Clean dimensional wood and palette wood.
- M. Green waste (biodegradable landscaping materials).
- N. Engineered wood products (plywood, particle board and I-joists, etc).
- O. Metal products (eg, steel, wire, beverage containers, copper, etc).
- P. Sheathings
- Q. Cardboard, paper and packaging.
- R. Bitumen roofing materials.
- S. Plastics (eg, ABS, PVC).
- T. Carpet and/or pad.
- U. Gypsum board.
- V. Insulation.
- W. Paint.
- X. Fluorescent lamps.

1.2 RELATED WORK

- A. Section 02 41 00, DEMOLITION.

B. Section 01 00 00, GENERAL REQUIREMENTS.

C. Lead Paint: Section 02 83 33.13, LEAD BASED PAINT REMOVAL AND DISPOSAL.

D. Division 1 Sustainability specifications

1.3 QUALITY ASSURANCE

A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction /Demolition waste includes products of the following:

1. Excess or unusable construction materials.
2. Packaging used for construction products.
3. Poor planning and/or layout.
4. Construction error.
5. Over ordering.
6. Weather damage.
7. Contamination.
8. Mishandling.
9. Breakage.

B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.

C. Contractor shall develop and implement procedures to recycle construction and demolition waste to a minimum of 50 percent.

D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.

E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations.

F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.

G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.

- H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

1.4 TERMINOLOGY

- A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.
- B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.
- C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.
- D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.
- E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).
- F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.
- G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.
- H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.
- I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.
- J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.
- K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.
- L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in

the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.

1. On-site Recycling - Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
 2. Off-site Recycling - Materials hauled to a location and used in an altered form in the manufacture of new products.
- M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facility permit or be regulated by the local enforcement agency.
- N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.
- O. Return: To give back reusable items or unused products to vendors for credit.
- P. Salvage: To remove waste materials from the site for resale or re-use by a third party.
- Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.
- R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.
- S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

1.5 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:
- B. Prepare and submit to the COR a written demolition debris management plan. The plan shall include, but not be limited to, the following information:
 1. Procedures to be used for debris management.
 2. Techniques to be used to minimize waste generation.
 3. Analysis of the estimated job site waste to be generated:
 - a. List of each material and quantity to be salvaged, reused, recycled.

- b. List of each material and quantity proposed to be taken to a landfill.
- 4. Detailed description of the Means/Methods to be used for material handling.
 - a. On site: Material separation, storage, protection where applicable.
 - b. Off site: Transportation means and destination. Include list of materials.
 - 1) Description of materials to be site-separated and self-hauled to designated facilities.
 - 2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
 - a) The names and locations of mixed debris reuse and recycling facilities or sites.
 - b) The names and locations of trash disposal landfill facilities or sites.
 - c) Documentation that the facilities or sites are approved to receive the materials.
- C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.
- D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.
- E. Target waste diversion rate by material and an overall diversion rate.
- F. Final report documenting the results of implementation of the preconstruction waste management plan.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.

1.7 RECORDS

- A. Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. List of each material and quantity to be salvaged, recycled, reused.
- B. List of each material and quantity proposed to be taken to a landfill.
- C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

PART 3 - EXECUTION**3.1 COLLECTION**

- A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.
- B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.
- C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

3.2 DISPOSAL

- A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.
- B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

3.3 REPORT

- A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.
- B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.
- C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

- - - E N D - - -

SECTION 01 81 13
SUSTAINABLE CONSTRUCTION REQUIREMENTS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This Section describes general requirements and procedures to comply with federal mandates and U.S. Department of Veterans Affairs (VA) policies for sustainable construction.
- B. The Design Professional has selected materials and utilized integrated design processes that achieve the Government's objectives. Contractor is responsible to maintain and support these objectives in developing means and methods for performing work and in proposing product substitutions or changes to specified processes. Obtain approval from Contracting Officer for all changes and substitutions to materials or processes. Proposed changes must meet, or exceed, materials or processes specified.

1.2 RELATED WORK

- A. Section 01 57 19 TEMPORARY ENVIRONMENTAL CONTROLS.
- B. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT.
- C. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

1.3 DEFINITIONS

- A. Recycled Content: Recycled content of materials is defined according to Federal Trade Commission Guides for the Use of Environmental Marketing Claims (16 CFR Part 260). Recycled content value of a material assembly is determined by weight. Recycled fraction of assembly is multiplied by cost of assembly to determine recycled content value.
 - 1. "Post-Consumer" material is defined as waste material generated by households or by commercial, industrial, and institutional facilities in their role as end users of the product, which can no longer be used for its intended purpose.
 - 2. "Pre-Consumer" material is defined as material diverted from waste stream during the manufacturing process. Excluded is reutilization of materials such as rework, regrind, or scrap generated in a process and capable of being reclaimed within the same process that generated it.
- B. Biobased Products: Biobased products are derived from plants and other renewable agricultural, marine, and forestry materials and provide an alternative to conventional petroleum derived products. Biobased

products include diverse categories such as lubricants, cleaning products, inks, fertilizers, and bioplastics.

- C. Low Pollutant-Emitting Materials: Materials and products which are minimally odorous, irritating, or harmful to comfort and well-being of installers and occupants.
- D. Volatile Organic Compounds (VOC): Chemicals that are emitted as gases from certain solids or liquids. VOCs include a variety of chemicals, some of which may have short- and long-term adverse health effects.

1.4 REFERENCE STANDARDS

- A. Carpet and Rug Institute Green Label Plus program.
- B. U.S. Department of Agriculture BioPreferred program (USDA BioPreferred).
- C. U.S. Environmental Protection Agency Comprehensive Procurement Guidelines (CPG).
- D. U.S. Environmental Protection Agency WaterSense Program (WaterSense).
- E. U.S. Environmental Protection Agency ENERGY STAR Program (ENERGY STAR).
- F. U. S. Department of Energy Federal Energy Management Program (FEMP).
- G. Green Electronic Council EPEAT Program (EPEAT).

1.5 SUBMITTALS

- A. All submittals to be provided by contractor to COR.
- B. Sustainability Action Plan:
 - 1. Submit documentation as required by this section; provide additional copies of typical submittals required under technical sections when sustainable construction requires copies of record submittals.
 - 2. Within 30 days after Preconstruction Meeting provide a narrative plan for complying with requirements stipulated within this section.
 - 3. Sustainability Action Plan must:
 - a. Make reference to sustainable construction submittals defined by this section.
 - b. Address all items listed under PERFORMANCE CRITERIA.
 - c. Indicate individual(s) responsible for implementing the plan.
- C. Low Pollutant-Emitting Materials Tracking Spreadsheet: Within 30 days after Preconstruction Meeting provide a preliminary Low Pollutant-Emitting Materials Tracking Spreadsheet. The Low Pollutant-Emitting Materials Tracking Spreadsheet must be an electronic file and include all materials on Project in categories described under Low Pollutant-Emitting Materials in 01 81 13.
- D. Construction Indoor Air Quality (IAQ) Management Plan:

1. Not more than 30 days after Preconstruction Meeting provide a Construction IAQ Management Plan as an electronic file including descriptions of the following:
 - a. Instruction procedures for meeting or exceeding minimum requirements of ANSI/SMACNA 008-2008, Chapter 3, including procedures for HVAC Protection, Source Control, Pathway Interruption, Housekeeping, and Scheduling.
 - b. Instruction procedures for protecting absorptive materials stored on-site or installed from moisture damage.
 - c. Schedule of submission of photographs of on-site construction IAQ management measures such as protection of ducts and on-site stored oil installed absorptive materials.
 - d. Instruction procedures if air handlers must be used during construction, including a description of filtration media to be used at each return air grille.
 - e. Instruction procedure for replacing all air-filtration media immediately prior to occupancy after completion of construction, including a description of filtration media to be used at each air handling or air supply unit.
 - f. Instruction procedures and schedule for implementing building flush-out.

E. Product Submittals:

1. Recycled Content: Submit product data from manufacturer indicating percentages by weight of post-consumer and pre-consumer recycled content for products having recycled content (excluding MEP systems equipment and components).
2. Biobased Content: Submit product data for products to be installed or used which are included in any of the USDA BioPreferred program's product categories. Data to include percentage of biobased content and source of biobased material.
3. Low Pollutant-Emitting Materials: Submit product data confirming compliance with relevant requirements for all materials on Project in categories described under Low Pollutant-Emitting Materials in 01 81 13.
4. For applicable products and equipment, submit product documentation confirming ENERGY STAR label, FEMP certification, WaterSense, and/or EPEAT certification.

- F. Sustainable Construction Progress Reports: Concurrent with each Application for Payment, submit a Sustainable Construction Progress Report to confirm adherence with Sustainability Action Plan.
1. Include narratives of revised strategies for bringing work progress into compliance with plan and product submittal data.
 2. Include updated and current Low Pollutant-Emitting Materials Tracking Spreadsheet.
 3. Include construction waste tracking, in tons or cubic yards, including waste description, whether diverted or landfilled, hauler, and percent diverted for comingled quantities; and excluding land-clearing debris and soil. Provide haul receipts and documentation of diverted percentages for comingled wastes.
- G. Closeout Submittals: Within 14 days after Substantial Completion provide the following:
1. Final version of Low Pollutant-Emitting Materials Tracking Spreadsheet.
 2. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for filtration media installed at return air grilles during construction if permanently installed air handling units are used during construction.
 3. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for final filtration media in air handling units.
 4. Minimum 18 construction photographs including six photographs taken on three different occasions during construction of ANSI/SMACNA 008-2008, Chapter 3 approaches employed, along with a brief description of each approach, documenting implementation of IAQ management measures, such as protection of ducts and on-site stored or installed absorptive materials.
 5. Flush-out Documentation:
 - a. Product data for filtration media used during flush-out.
 - b. Product data for filtration media installed immediately prior to occupancy.
 - c. Signed statement describing building air flush-out procedures including dates when flush-out was begun and completed and statement that filtration media was replaced after flush-out.

1.6 QUALITY ASSURANCE

- A. Preconstruction Meeting: After award of Contract and prior to commencement of Work, schedule and conduct meeting with COR/Resident Engineer and Architect to discuss the Project Sustainable Action Plan content as it applies to submittals, project delivery, required Construction Indoor Air Quality (IAQ) Management Plan, and other Sustainable Construction Requirements. The purpose of this meeting is to develop a mutual understanding of the Sustainable Construction Requirements and coordination of contractor's management of these requirements with the Contracting Officer and the Construction Quality Manager.
- B. Construction Job Conferences: Status of compliance with Sustainable Construction Requirements of these specifications will be an agenda item at regular job meetings conducted during the course of work at the site.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only. Comply with applicable provisions and recommendations of the following, except as otherwise shown or specified.
- B. Green Seal Standard GS-11, Paints, 1st Edition, May 20, 1993.
- C. Green Seal Standard GC-03, Anti-Corrosive Paints, 2nd Edition, January 7, 1997.
- D. Green Seal Standard GC-36, Commercial Adhesives, October 19, 2000.
- E. South Coast Air Quality Management District (SCAQMD) Rule 1113, Architectural Coatings, rules in effect on January 1, 2004.
- F. South Coast Air Quality Management District (SCAQMD) Rule 1168, July 1, 2005 and rule amendment date of January 7, 2005.
- G. Sheet Metal and Air Conditioning National Contractors' Association (SMACNA) IAQ Guidelines for Occupied Buildings under Construction, 2nd Edition (ANSI/SMACNA 008-2008), Chapter 3.
- H. California Department of Public Health Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers, Version 1.1, Emission Testing method for California Specification 01350 (CDPH Standard Method V1.1-2010).
- I. Federal Trade Commission Guides for the Use of Environmental Marketing Claims (16 CFR Part 260).
- J. ASHRAE Standard 52.2-2007.

PART 2 - PRODUCTS

2.1 PERFORMANCE CRITERIA

- A. Construction waste diversion from landfill disposal must comprise at least 50 percent of total construction waste, excluding land clearing debris and soil. Alternative daily cover (ADC) does not qualify as material diverted from disposal.
- B. Low Pollutant-Emitting Materials:
 - 1. Adhesives, sealants and sealant primers applied on site within the weatherproofing membrane must comply with VOC limits of SCAQMD Rule 1168:
 - a. Flooring Adhesives and Sealants:
 - 1) Indoor carpet adhesives: 50 g/L.
 - 2) Wood Flooring Adhesive: 100 g/L.
 - 3) Rubber Floor Adhesives: 60 g/L.
 - 4) Subfloor Adhesives: 50 g/L.
 - 5) Ceramic Tile Adhesives and Grout: 65 g/L.
 - 6) Cove Base Adhesives: 50 g/L.
 - 7) Multipurpose Construction Adhesives: 70 g/L.
 - 8) Porous Material (Except Wood) Substrate: 50 g/L.
 - 9) Wood Substrate: 30 g/L.
 - 10) Architectural Non-Porous Sealant Primer: 250 g/L.
 - 11) Architectural Porous Sealant Primer: 775 g/L.
 - 12) Other Sealant Primer: 750 g/L.
 - 13) Structural Wood Member Adhesive: 140 g/L.
 - 14) Sheet-Applied Rubber Lining Operations: 850 g/L.
 - 15) Top and Trim Adhesive: 250 g/L.
 - 16) Architectural Sealant: 250 g/L.
 - 17) Other Sealant: 420 g/L.
 - b. Non-Flooring Adhesives and Sealants:
 - 1) Drywall and Panel Adhesives: 50 g/L.
 - 2) Multipurpose Construction Adhesives: 70 g/L.
 - 3) Structural Glazing Adhesives: 100 g/L.
 - 4) Metal-to-Metal Substrate Adhesives: 30 g/L.
 - 5) Plastic Foam Substrate Adhesive: 50 g/L.
 - 6) Porous Material (Except Wood) Substrate Adhesive: 50 g/L.
 - 7) Wood Substrate Adhesive: 30 g/L.
 - 8) Fiberglass Substrate Adhesive: 80 g/L.
 - 9) Architectural Non-Porous Sealant Primer: 250 g/L.

- 10) Architectural Porous Sealant Primer: 775 g/L.
 - 11) Other Sealant Primer: 750 g/L.
 - 12) PVC Welding Adhesives: 510 g/L.
 - 13) CPVC Welding Adhesives: 490 g/L.
 - 14) ABS Welding Adhesives: 325 g/L.
 - 15) Plastic Cement Welding Adhesives: 250 g/L.
 - 16) Adhesive Primer for Plastic: 550 g/L.
 - 17) Contact Adhesive: 80 g/L.
 - 18) Special Purpose Contact Adhesive: 250 g/L.
 - 19) Structural Wood Member Adhesive: 140 g/L.
 - 20) Sheet Applied Rubber Lining Operations: 850 g/L.
 - 21) Top and Trim Adhesive: 250 g/L.
 - 22) Architectural Sealants: 250 g/L.
 - 23) Other Sealants: 420 g/L.
2. Aerosol adhesives applied on site within the weatherproofing membrane must comply with the following Green Seal GS-36.
 - a. Aerosol Adhesive, General-Purpose Mist Spray: 65 percent VOCs by weight.
 - b. Aerosol Adhesive, General-Purpose Web Spray: 55 percent VOCs by weight.
 - c. Special-Purpose Aerosol Adhesive (All Types): 70 percent VOCs by weight.
 3. Paints and coatings applied on site within the weatherproofing membrane must comply with the following criteria:
 - a. VOC content limits for paints and coatings established in Green Seal Standard GS-11.
 - b. VOC content limit for anti-corrosive and anti-rust paints applied to interior ferrous metal substrates of 250 g/L established in Green Seal GC-03.
 - c. Clear wood finishes, floor coatings, stains, primers, sealers, and shellacs applied to interior elements must not exceed VOC content limits established in SCAQMD Rule 1113.
 - d. Comply with the following VOC content limits:
 - 1) Anti-Corrosive/Antirust Paints: 250 g/L.
 - 2) Clear Wood Finish, Lacquer: 550 g/L.
 - 3) Clear Wood Finish, Sanding Sealer: 350 g/L.
 - 4) Clear Wood Finish, Varnish: 350 g/L.
 - 5) Floor Coating: 100 g/L.

- 6) Interior Flat Paint, Coating or Primer: 50 g/L.
 - 7) Interior Non-Flat Paint, Coating or Primer: 150 g/L.
 - 8) Sealers and Undercoaters: 200 g/L.
 - 9) Shellac, Clear: 730 g/L.
 - 10) Shellac, Pigmented: 550 g/L.
 - 11) Stain: 250 g/L.
 - 12) Clear Brushing Lacquer: 680 g/L.
 - 13) Concrete Curing Compounds: 350 g/L.
 - 14) Japans/Faux Finishing Coatings: 350 g/L.
 - 15) Magnesite Cement Coatings: 450 g/L.
 - 16) Pigmented Lacquer: 550 g/L.
 - 17) Waterproofing Sealers: 250 g/L.
 - 18) Wood Preservatives: 350 g/L.
 - 19) Low-Solids Coatings: 120 g/L.
4. Carpet installed in building interior must comply with one of the following:
 - a. Meet testing and product requirements of the Carpet and Rug Institute Green Label Plus program.
 - b. Maximum VOC concentrations specified in CDPH Standard Method V1.1-2010, using office scenario at the 14 day time point.
 5. Each non-carpet flooring element installed in building interior which is not inherently non-emitting (stone, ceramic, powder-coated metals, plated or anodized metal, glass, concrete, clay brick, and unfinished or untreated solid wood flooring) must comply with one of the following:
 - a. Meet requirements of the FloorScore standard as shown with testing by an independent third-party.
 - b. Maximum VOC concentrations specified in CDPH Standard Method V1.1-2010, using office scenario at 14 day time point.
 6. Composite wood and agrifiber products used within the weatherproofing membrane must contain no added urea-formaldehyde resins.
 7. Laminating adhesives used to fabricate on-site and shop-applied composite wood and agrifiber assemblies must not contain added urea-formaldehyde.
- C. Recycled Content:
1. Any products being installed or used that are listed on EPA Comprehensive Procurement Guidelines designated product list must

meet or exceed the EPA's recycled content recommendations. The EPA Comprehensive Procurement Guidelines categories include:

- a. Building insulation.
- b. Cement and concrete.
- c. Consolidated and reprocessed latex paint.
- d. Floor tiles.
- e. Flowable fill.
- f. Laminated paperboard.
- g. Modular threshold ramps.
- h. Nonpressure pipe.
- i. Patio blocks.
- j. Railroad grade crossing surfaces.
- k. Roofing materials.
- l. Shower and restroom dividers/partitions.
- m. Structural fiberboard.
- n. Nylon carpet and nylon carpet backing.
- o. Compost and fertilizer made from recovered organic materials.
- p. Hydraulic mulch.
- q. Lawn and garden edging.
- r. Plastic lumber landscaping timbers and posts.
- s. Park benches and picnic tables.
- t. Plastic fencing.
- u. Playground equipment.
- v. Playground surfaces.
- w. Bike racks.

D. Biobased Content:

1. Materials and equipment being installed or used that are listed on the USDA BioPreferred program product category list must meet or exceed USDA's minimum biobased content threshold. Refer to individual specification sections for detailed requirements applicable to that section.

a. USDA BioPreferred program categories include:

- 1) Adhesive and Mastic Removers.
- 2) Carpets.
- 3) Cleaners.
- 4) Composite Panels.
- 5) Corrosion Preventatives.
- 6) Erosion Control Materials.

- 7) Dust Suppressants.
- 8) Fertilizers.
- 9) Floor Cleaners and Protectors.
- 10) Floor Coverings (Non-Carpet).
- 11) Glass Cleaners.
- 12) Hydraulic Fluids.
- 13) Industrial Cleaners.
- 14) Interior Paints and Coatings.
- 15) Mulch and Compost Materials.
- 16) Multipurpose Cleaners.
- 17) Multipurpose Lubricants.
- 18) Packaging Films.
- 19) Paint Removers.
- 20) Plastic Insulating Foam.
- 21) Pneumatic Equipment Lubricants.
- 22) Roof Coatings.
- 23) Wastewater Systems Coatings.
- 24) Water Tank Coatings.
- 25) Wood and Concrete Sealers.
- 26) Wood and Concrete Stains.

E. Materials, products, and equipment being installed which fall into a category covered by the WaterSense program must be WaterSense-labeled or meet or exceed WaterSense program performance requirements, unless disallowed for infection control reasons.

1. WaterSense categories include:

- a. Bathroom Faucets
- b. Commercial Toilets
- c. Irrigation Controllers
- d. Pre-Rinse Spray Valves
- e. Residential Toilets
- f. Showerheads
- g. Spray Sprinkler Bodies
- h. Urinals

F. Materials, products, and equipment being installed which fall into any of the following product categories must be Energy Star-labeled.

1. Applicable Energy Star product categories as of 09/14/2017 include:

- a. Appliances:
 - 1) Air Purifiers and Cleaners.

- 2) Clothes Dryers (Residential).
- 3) Clothes Washers (Commercial & Residential).
- 4) Dehumidifiers.
- 5) Dishwashers (Residential).
- 6) Freezers (Residential).
- 7) Refrigerators (Residential).
- b. Electronics and Information Technology:
 - 1) Audio/Video Equipment.
 - 2) Computers.
 - 3) Data Center Storage.
 - 4) Digital Media Player.
 - 5) Enterprise Servers.
 - 6) Imaging Equipment.
 - 7) Monitors.
 - 8) Professional Displays.
 - 9) Set-Top and Cable Boxes.
 - 10) Telephones.
 - 11) Televisions.
 - 12) Uninterruptible Power Supplies.
 - 13) Voice over Internet Protocol (VoIP) Phones.
- c. Heating and Cooling Equipment:
 - 1) Air-Source Heat Pumps (Residential).
 - 2) Boilers.
 - 3) Ceiling Fans (Residential).
 - 4) Central Air Conditioners (Residential).
 - 5) Ductless Heating and Cooling (Residential).
 - 6) Furnaces (Residential).
 - 7) Water Heaters.
 - 8) Geothermal Heat Pumps (Residential).
 - 9) Light Commercial Heating and Cooling Equipment.
 - 10) Room Air Conditioners (Residential).
 - 11) Ventilation Fans (Residential).
- d. Other:
 - 1) Decorative Light Strings.
 - 2) Electric Vehicle Supply Equipment.
 - 3) Laboratory-Grade Refrigerators and Freezers.
 - 4) Light Bulbs.
 - 5) Light Fixtures.

- 6) Pool Pumps.
 - 7) Roof Products.
 - 8) Water Coolers.
 - 9) Windows, Doors, and Skylights.
- G. Materials, products, and equipment being installed which fall into any of the following categories must be FEMP-designated. FEMP-designated product categories as of 09/14/2017 include:
1. Boilers (Commercial).
 2. Dishwashers (Commercial).
 3. Electric Chillers, Air-Cooled (Commercial).
 4. Electric Chillers, Water-Cooled (Commercial).
 5. Exterior Lighting.
 6. Fluorescent Ballasts.
 7. Fluorescent Lamps, General Service.
 8. Ice Machines, Water-Cooled.
 9. Industrial Lighting (High/Low Bay).
 10. Light Emitting Diode (LED) Luminaires.
- H. Electronic products and equipment being installed which fall into any of the following categories shall be EPEAT registered. Electronic products and equipment covered by EPEAT program as of 09/14/2017 include:
1. Computers.
 2. Displays.
 3. Imaging Equipment.
 4. Televisions.

PART 3 - EXECUTION

3.1 FIELD QUALITY CONTROL

- A. Construction Indoor Air Quality Management:
1. During construction, meet or exceed recommended control measures of ANSI/SMACNA 008-2008, Chapter 3.
 2. Protect stored on-site and installed absorptive materials from moisture damage.
 3. If permanently installed air handlers are used during construction, filtration media with a minimum efficiency reporting value (MERV) of 8 must be used at each return air grille, as determined by ASHRAE Standard 52.2-1999 (with errata but without addenda). Replace all filtration media immediately prior to occupancy.
 4. Perform building flush-out as follows:

- a. After construction ends, prior to occupancy and with interior finishes installed, perform a building flush-out by supplying a total volume of 14000 cu. ft. of outdoor air per sq. ft. of floor area while maintaining an internal temperature of at least 60 degrees Fahrenheit and a relative humidity no higher than 60 percent. OR
- b. If occupancy is desired prior to flush-out completion, the space may be occupied following delivery of a minimum of 3500 cu. ft. of outdoor air per sq. ft. of floor area to the space. Once a space is occupied, it must be ventilated at a minimum rate of 0.30 cfm per sq. ft. of outside air or design minimum outside air rate determined until a total of 14000 cu. ft./sq. ft. of outside air has been delivered to the space. During each day of flush-out period, ventilation must begin a minimum of three hours prior to occupancy and continue during occupancy.

- - - E N D - - -

SECTION 01 91 00
GENERAL COMMISSIONING REQUIREMENTS

PART 1 - GENERAL

1.1 COMMISSIONING DESCRIPTION

- A. This Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS shall form the basis of the construction phase commissioning process and procedures. The Commissioning Agent shall add, modify, and refine the commissioning procedures, as approved by the Department of Veterans Affairs (VA), to suit field conditions and actual manufacturer's equipment, incorporate test data and procedure results, and provide detailed scheduling for all commissioning tasks.
- B. Various sections of the project specifications require equipment startup, testing, and adjusting services. Requirements for startup, testing, and adjusting services specified in the Division 7, Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 series sections of these specifications are intended to be provided in coordination with the commissioning services and are not intended to duplicate services. The Contractor shall coordinate the work required by individual specification sections with the commissioning services requirements specified herein.
- C. Where individual testing, adjusting, or related services are required in the project specifications and not specifically required by this commissioning requirements specification, the specified services shall be provided and copies of documentation, as required by those specifications shall be submitted to the VA and the Commissioning Agent to be indexed for future reference.
- D. Where training or educational services for VA are required and specified in other sections of the specifications, including but not limited to Division 7, Division 8, Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 series sections of the specification, these services are intended to be provided in addition to the training and educational services specified herein.
- E. Commissioning is a systematic process of verifying that the building systems perform interactively according to the construction documents and the VA's operational needs. The commissioning process shall encompass and coordinate the system documentation, equipment startup,

control system calibration, testing and balancing, performance testing and training. Commissioning during the construction and post-occupancy phases is intended to achieve the following specific objectives according to the contract documents:

1. Verify that the applicable equipment and systems are installed in accordance with the contract documents and according to the manufacturer's recommendations.
 2. Verify and document proper integrated performance of equipment and systems.
 3. Verify that Operations & Maintenance documentation is complete.
 4. Verify that all components requiring servicing can be accessed, serviced and removed without disturbing nearby components including ducts, piping, cabling or wiring.
 5. Verify that the VA's operating personnel are adequately trained to enable them to operate, monitor, adjust, maintain, and repair building systems in an effective and energy-efficient manner.
 6. Document the successful achievement of the commissioning objectives listed above.
- F. The commissioning process does not take away from or reduce the responsibility of the Contractor to provide a finished and fully functioning product.

1.2 CONTRACTUAL RELATIONSHIPS

- A. For this construction project, the Department of Veterans Affairs contracts with a Contractor to provide construction services. The contracts are administered by the VA Contracting Officer and the COR as the designated representative of the Contracting Officer. On this project, the authority to modify the contract in any way is strictly limited to the authority of the Contracting Officer.
- B. In this project, only two contract parties are recognized and communications on contractual issues are strictly limited to VA COR and the Contractor. It is the practice of the VA to require that communications between other parties to the contracts (Subcontractors and Vendors) be conducted through the COR and Contractor. It is also the practice of the VA that communications between other parties of the project (Commissioning Agent and Architect/Engineer) be conducted through the COR.
- C. Whole Building Commissioning is a process that relies upon frequent and direct communications, as well as collaboration between all parties to

the construction process. By its nature, a high level of communication and cooperation between the Commissioning Agent and all other parties (Architects, Engineers, Subcontractors, Vendors, third party testing agencies, etc.) is essential to the success of the Commissioning effort.

D. With these fundamental practices in mind, the commissioning process described herein has been developed to recognize that, in the execution of the Commissioning Process, the Commissioning Agent must develop effective methods to communicate with every member of the construction team involved in delivering commissioned systems while simultaneously respecting the exclusive contract authority of the Contracting Officer and COR. Thus, the procedures outlined in this specification must be executed within the following limitations:

1. No communications (verbal or written) from the Commissioning Agent shall be deemed to constitute direction that modifies the terms of any contract between the Department of Veterans Affairs and the Contractor.
2. Commissioning Issues identified by the Commissioning Agent will be delivered to the COR and copied to the designated Commissioning Representatives for the Contractor and subcontractors on the Commissioning Team for information only in order to expedite the communication process. These issues must be understood as the professional opinion of the Commissioning Agent and as suggestions for resolution.
3. In the event that any Commissioning Issues and suggested resolutions are deemed by the COR to require either an official interpretation of the construction documents or require a modification of the contract documents, the Contracting Officer or COR will issue an official directive to this effect.
4. All parties to the Commissioning Process shall be individually responsible for alerting the COR of any issues that they deem to constitute a potential contract change prior to acting on these issues.
5. Authority for resolution or modification of design and construction issues rests solely with the Contracting Officer or COR, with appropriate technical guidance from the Architect/Engineer and/or Commissioning Agent.

1.3 RELATED WORK

- A. Section 01 00 00 GENERAL REQUIREMENTS.
- B. Section 01 32.16.15 PROJECT SCHEDULES (SMALL PROJECTS - DESIGN/BID/BUILD)
- C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES
- D. Section 01 81 13 SUSTAINABLE CONSTRUCTION REQUIREMENTS
- E. Section 21 08 00 COMMISSIONING OF FIRE PROTECTION SYSTEMS.
- F. Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

1.4 SUMMARY

- A. This Section includes general requirements that apply to implementation of commissioning without regard to systems, subsystems, and equipment being commissioned.
- B. The commissioning activities have been developed to support the VA requirements to meet guidelines for Federal Leadership in Environmental, Energy, and Economic Performance.
- C. The commissioning activities have been developed to support the United States Green Building Council's (USGBC) LEED™ rating program and to support delivery of project performance in accordance with the VA requirements developed for the project to support the following credits:
 - 1. Commissioning activities and documentation for the LEED™ section on "Energy and Atmosphere" and the prerequisite of "Fundamental Building Systems Commissioning."
 - 2. Commissioning activities and documentation for the LEED™ section on "Energy and Atmosphere" requirements for the "Enhanced Building System Commissioning" credit.
 - 3. Activities and documentation for the LEED™ section on "Measurement and Verification" requirements for the Measurement and Verification credit.
- D. The commissioning activities have been developed to support the Green Buildings Initiative's Green Globes rating program and to support delivery of project performance in accordance with the VA requirements developed for the project.

1.5 ACRONYMS

List of Acronyms	
Acronym	Meaning
A/E	Architect / Engineer Design Team

List of Acronyms	
Acronym	Meaning
AHJ	Authority Having Jurisdiction
ASHRAE	Association Society for Heating Air Condition and Refrigeration Engineers
BOD	Basis of Design
BSC	Building Systems Commissioning
CCTV	Closed Circuit Television
CD	Construction Documents
CMMS	Computerized Maintenance Management System
CO	Contracting Officer (VA)
COR	Contracting Officer's Representative (see also VA-RE)
COBie	Construction Operations Building Information Exchange
CPC	Construction Phase Commissioning
Cx	Commissioning
CxA	Commissioning Agent
CxM	Commissioning Manager
CxR	Commissioning Representative
DPC	Design Phase Commissioning
FPT	Functional Performance Test
GBI-GG	Green Building Initiative - Green Globes
HVAC	Heating, Ventilation, and Air Conditioning
LEED	Leadership in Energy and Environmental Design
NC	Department of Veterans Affairs National Cemetery
NCA	Department of Veterans Affairs National Cemetery Administration
NEBB	National Environmental Balancing Bureau
O&M	Operations & Maintenance
OPR	Owner's Project Requirements
PFC	Pre-Functional Checklist
PFT	Pre-Functional Test
SD	Schematic Design
SO	Site Observation
TAB	Test Adjust and Balance
VA	Department of Veterans Affairs
VAMC	VA Medical Center
VA CFM	VA Office of Construction and Facilities Management

List of Acronyms	
Acronym	Meaning
VACO	VA Central Office
VA PM	VA Project Manager
VA-RE	VA COR
USGBC	United States Green Building Council

1.6 DEFINITIONS

Acceptance Phase Commissioning: Commissioning tasks executed after most construction has been completed, most Site Observations and Static Tests have been completed and Pre-Functional Testing has been completed and accepted. The main commissioning activities performed during this phase are verification that the installed systems are functional by conducting Systems Functional Performance tests and Owner Training.

Accuracy: The capability of an instrument to indicate the true value of a measured quantity.

Back Check: A back check is a verification that an agreed upon solution to a design comment has been adequately addressed in a subsequent design review

Basis of Design (BOD): The Engineer's Basis of Design is comprised of two components: the Design Criteria and the Design Narrative, these documents record the concepts, calculations, decisions, and product selections used to meet the Owner's Project Requirements (OPR) and to satisfy applicable regulatory requirements, standards, and guidelines.

Benchmarks: Benchmarks are the comparison of a building's energy usage to other similar buildings and to the building itself. For example, ENERGY STAR Portfolio Manager is a frequently used and nationally recognized building energy benchmarking tool.

Building Information Modeling (BIM): Building Information Modeling is a parametric database which allows a building to be designed and constructed virtually in 3D and provides reports both in 2D views and as schedules. This electronic information can be extracted and reused for pre-populating facility management CMMS systems. Building Systems Commissioning (BSC): NEBB acronym used to designate its commissioning program.

Calibrate: The act of comparing an instrument of unknown accuracy with a standard of known accuracy to detect, correlate, report, or eliminate by adjustment any variation in the accuracy of the tested instrument.

CCTV: Closed circuit Television. Normally used for security surveillance and alarm detections as part of a special electrical security system.

COBie: Construction Operations Building Information Exchange (COBie) is an electronic industry data format used to transfer information developed during design, construction, and commissioning into the Computer Maintenance Management Systems (CMMS) used to operate facilities. See the Whole Building Design Guide website for further information (<http://www.wbdg.org/resources/cobie.php>)

Commissionability: Defines a design component or construction process that has the necessary elements that will allow a system or component to be effectively measured, tested, operated and commissioned

Commissioning Agent (CxA): The qualified Commissioning Professional who administers the Cx process by managing the Cx team and overseeing the Commissioning Process. Where CxA is used in this specification it means the Commissioning Agent, members of his staff or appointed members of the commissioning team. Note that LEED uses the term Commissioning Authority in lieu of Commissioning Agent.

Commissioning Checklists: Lists of data or inspections to be verified to ensure proper system or component installation, operation, and function. Verification checklists are developed and used during all phases of the commissioning process to verify that the Owner's Project Requirements (OPR) is being achieved.

Commissioning Design Review: The commissioning design review is a collaborative review of the design professionals design documents for items pertaining to the following: owner's project requirements; basis of design; operability and maintainability (O&M) including documentation; functionality; training; energy efficiency, control systems' sequence of operations including building automation system features; commissioning specifications and the ability to functionally test the systems.

Commissioning Issue: A condition identified by the Commissioning Agent or other member of the Commissioning Team that adversely affects the commissionability, operability, maintainability, or functionality of a system, equipment, or component. A condition that is in conflict with the Contract Documents and/or performance requirements of the installed systems and components. (See also - Commissioning Observation).

Commissioning Manager (CxM): A qualified individual appointed by the Contractor to manage the commissioning process on behalf of the Contractor.

Commissioning Observation: An issue identified by the Commissioning Agent or other member of the Commissioning Team that does not conform to the project OPR, contract documents or standard industry best practices. (See also Commissioning Issue)

Commissioning Plan: A document that outlines the commissioning process, commissioning scope and defines responsibilities, processes, schedules, and the documentation requirements of the Commissioning Process.

Commissioning Process: A quality focused process for enhancing the delivery of a project. The process focuses upon verifying and documenting that the facility and all of its systems, components, and assemblies are planned, designed, installed, tested, can be operated, and maintained to meet the Owner's Project Requirements.

Commissioning Report: The final commissioning document which presents the commissioning process results for the project. Cx reports include an executive summary, the commissioning plan, issue log, correspondence, and all appropriate check sheets and test forms.

Commissioning Representative (CxR): An individual appointed by a sub-contractor to manage the commissioning process on behalf of the sub-contractor.

Commissioning Specifications: The contract documents that detail the objective, scope and implementation of the commissioning process as developed in the Commissioning Plan.

Commissioning Team: Individual team members whose coordinated actions are responsible for implementing the Commissioning Process.

Construction Phase Commissioning: All commissioning efforts executed during the construction process after the design phase and prior to the Acceptance Phase Commissioning.

Contract Documents (CD): Contract documents include design and construction contracts, price agreements and procedure agreements. Contract Documents also include all final and complete drawings, specifications and all applicable contract modifications or supplements.

Construction Phase Commissioning (CPC): All commissioning efforts executed during the construction process after the design phase and prior to the Acceptance Phase Commissioning.

Coordination Drawings: Drawings showing the work of all trades that are used to illustrate that equipment can be installed in the space allocated without compromising equipment function or access for maintenance and replacement. These drawings graphically illustrate and dimension manufacturers' recommended maintenance clearances. On mechanical projects, coordination drawings include structural steel, ductwork, major piping and electrical conduit and show the elevations and locations of the above components.

Data Logging: The monitoring and recording of temperature, flow, current, status, pressure, etc. of equipment using stand-alone data recorders.

Deferred System Test: Tests that cannot be completed at the end of the acceptance phase due to ambient conditions, schedule issues or other conditions preventing testing during the normal acceptance testing period.

Deficiency: See "Commissioning Issue".

Design Criteria: A listing of the VA Design Criteria outlining the project design requirements, including its source. These are used during the design process to show the design elements meet the OPR.

Design Intent: The overall term that includes the OPR and the BOD. It is a detailed explanation of the ideas, concepts, and criteria that are defined by the owner to be important. The design intent documents are utilized to provide a written record of these ideas, concepts and criteria.

Design Narrative: A written description of the proposed design solutions that satisfy the requirements of the OPR.

Design Phase Commissioning (DPC): All commissioning tasks executed during the design phase of the project.

Environmental Systems: Systems that use a combination of mechanical equipment, airflow, water flow and electrical energy to provide heating, ventilating, air conditioning, humidification, and dehumidification for the purpose of human comfort or process control of temperature and humidity.

Executive Summary: A section of the Commissioning report that reviews the general outcome of the project. It also includes any unresolved issues, recommendations for the resolution of unresolved issues and all deferred testing requirements.

Functionality: This defines a design component or construction process which will allow a system or component to operate or be constructed in a manner that will produce the required outcome of the OPR.

Functional Test Procedure (FTP): A written protocol that defines methods, steps, personnel, and acceptance criteria for tests conducted on components, equipment, assemblies, systems, and interfaces among systems.

Industry Accepted Best Practice: A design component or construction process that has achieved industry consensus for quality performance and functionality. Refer to the current edition of the NEBB Design Phase Commissioning Handbook for examples.

Installation Verification: Observations or inspections that confirm the system or component has been installed in accordance with the contract documents and to industry accepted best practices.

Integrated System Testing: Integrated Systems Testing procedures entail testing of multiple integrated systems performance to verify proper functional interface between systems. Typical Integrated Systems Testing includes verifying that building systems respond properly to loss of utility, transfer to emergency power sources, re-transfer from emergency power source to normal utility source; interface between HVAC controls and Fire Alarm systems for equipment shutdown, interface between Fire Alarm system and elevator control systems for elevator recall and shutdown; interface between Fire Alarm System and Security Access Control Systems to control access to spaces during fire alarm conditions; and other similar tests as determined for each specific project.

Issues Log: A formal and ongoing record of problems or concerns – and their resolution – that have been raised by members of the Commissioning Team during the course of the Commissioning Process.

Lessons Learned Workshop: A workshop conducted to discuss and document project successes and identify opportunities for improvements for future projects.

Maintainability: A design component or construction process that will allow a system or component to be effectively maintained. This includes adequate room for access to adjust and repair the equipment. Maintainability also includes components that have readily obtainable repair parts or service.

Manual Test: Testing using hand-held instruments, immediate control system readouts or direct observation to verify performance (contrasted to analyzing monitored data taken over time to make the 'observation').

Owner's Project Requirements (OPR): A written document that details the project requirements and the expectations of how the building and its systems will be used and operated. These include project goals, measurable performance criteria, cost considerations, benchmarks, success criteria, and supporting information.

Peer Review: A formal in-depth review separate from the commissioning review processes. The level of effort and intensity is much greater than a typical commissioning facilitation or extended commissioning review. The VA usually hires an independent third-party (called the IDIQ A/E) to conduct peer reviews.

Precision: The ability of an instrument to produce repeatable readings of the same quantity under the same conditions. The precision of an instrument refers to its ability to produce a tightly grouped set of values around the mean value of the measured quantity.

Pre-Design Phase Commissioning: Commissioning tasks performed prior to the commencement of design activities that includes project programming and the development of the commissioning process for the project

Pre-Functional Checklist (PFC): A form used by the contractor to verify that appropriate components are onsite, correctly installed, set up, calibrated, functional and ready for functional testing.

Pre-Functional Test (PFT): An inspection or test that is done before functional testing. PFT's include installation verification and system and component start up tests.

Procedure or Protocol: A defined approach that outlines the execution of a sequence of work or operations. Procedures are used to produce repeatable and defined results.

Range: The upper and lower limits of an instrument's ability to measure the value of a quantity for which the instrument is calibrated.

Resolution: This word has two meanings in the Cx Process. The first refers to the smallest change in a measured variable that an instrument can detect. The second refers to the implementation of actions that correct a tested or observed deficiency.

Site Observation Visit: On-site inspections and observations made by the Commissioning Agent for the purpose of verifying component,

equipment, and system installation, to observe contractor testing, equipment start-up procedures, or other purposes.

Site Observation Reports (SO): Reports of site inspections and observations made by the Commissioning Agent. Observation reports are intended to provide early indication of an installation issue which will need correction or analysis.

Special System Inspections: Inspections required by a local code authority prior to occupancy and are not normally a part of the commissioning process.

Static Tests: Tests or inspections that validate a specified static condition such as pressure testing. Static tests may be specification or code initiated.

Start Up Tests: Tests that validate the component or system is ready for automatic operation in accordance with the manufactures requirements.

Systems Manual: A system-focused composite document that includes all information required for the owners' operators to operate the systems.

Test Procedure: A written protocol that defines methods, personnel, and expectations for tests conducted on components, equipment, assemblies, systems, and interfaces among systems.

Testing: The use of specialized and calibrated instruments to measure parameters such as: temperature, pressure, vapor flow, air flow, fluid flow, rotational speed, electrical characteristics, velocity, and other data in order to determine performance, operation, or function.

Testing, Adjusting, and Balancing (TAB): A systematic process or service applied to heating, ventilating and air-conditioning (HVAC) systems and other environmental systems to achieve and document air and hydronic flow rates. The standards and procedures for providing these services are referred to as "Testing, Adjusting, and Balancing" and are described in the Procedural Standards for the Testing, Adjusting and Balancing of Environmental Systems, published by NEBB or AABC.

Thermal Scans: Thermographic pictures taken with an Infrared Thermographic Camera. Thermographic pictures show the relative temperatures of objects and surfaces and are used to identify leaks, thermal bridging, thermal intrusion, electrical overload conditions, moisture containment, and insulation failure.

Training Plan: A written document that details, in outline form the expectations of the operator training. Training agendas should include

instruction on how to obtain service, operate, startup, shutdown and maintain all systems and components of the project.

Trending: Monitoring over a period of time with the building automation system.

Unresolved Commissioning Issue: Any Commissioning Issue that, at the time that the Final Report or the Amended Final Report is issued that has not been either resolved by the construction team or accepted by the VA. Validation: The process by which work is verified as complete and operating correctly:

1. First party validation occurs when a firm or individual verifying the task is the same firm or individual performing the task.
2. Second party validation occurs when the firm or individual verifying the task is under the control of the firm performing the task or has other possibilities of financial conflicts of interest in the resolution (Architects, Designers, General Contractors and Third Tier Subcontractors or Vendors).
3. Third party validation occurs when the firm verifying the task is not associated with or under control of the firm performing or designing the task.

Verification: The process by which specific documents, components, equipment, assemblies, systems, and interfaces among systems are confirmed to comply with the criteria described in the Owner's Project Requirements.

Warranty Phase Commissioning: Commissioning efforts executed after a project has been completed and accepted by the Owner. Warranty Phase Commissioning includes follow-up on verification of system performance, measurement and verification tasks and assistance in identifying warranty issues and enforcing warranty provisions of the construction contract.

Warranty Visit: A commissioning meeting and site review where all outstanding warranty issues and deferred testing is reviewed and discussed.

Whole Building Commissioning: Commissioning of building systems such as Building Envelope, HVAC, Electrical, Special Electrical (Fire Alarm, Security & Communications), Plumbing and Fire Protection as described in this specification.

1.7 SYSTEMS TO BE COMMISSIONED

A. Commissioning of a system or systems specified for this project is part of the construction process. Documentation and testing of these systems, as well as training of the VA's Operation and Maintenance personnel, is required in cooperation with the VA and the Commissioning Agent.

B. The following systems will be commissioned as part of this project:

Systems To Be Commissioned	
System	Description
Conveying Equipment	
Elevators	Interface with other systems (fire alarm, etc.) [ASTM testing and certification by others]
Fire Suppression	
Fire Pump	Fire Pump, jockey pump, fire pump controller/ATS
Fire Sprinkler Systems	Wet pipe system, dry pipe system, pre-action system, special agent systems
HVAC	
Noise and Vibration Control	Noise and vibration levels for critical equipment such as Air Handlers, Chillers, Cooling Towers, Boilers, Generators, etc. will be commissioned as part of the system commissioning
Direct Digital Control System**	Operator Interface Computer, Operator Work Station (including graphics, point mapping, trends, alarms), Network Communications Modules and Wiring, Integration Panels. [DDC Control panels will be commissioned with the systems controlled by the panel]
Chilled Water System**	Chillers (centrifugal, rotary screw, air-cooled), pumps (primary, secondary, variable primary), VFDs associated with chilled water system components, DDC Control Panels (including integration with Building Control System)
Condenser Water System**	Cooling Towers, Fluid Coolers, heat exchangers/economizers, pumps, VFDs associated with condenser water system components, DDC control panels.

Systems To Be Commissioned	
System	Description
Steam/Heating Hot Water System**	Boilers, boiler feed water system, economizers/heat recovery equipment, condensate recovery, water treatment, boiler fuel system, controls, interface with facility DDC system.
HVAC Air Handling Systems**	Air handling Units, packaged rooftop AHU, Outdoor Air conditioning units, humidifiers, DDC control panels
HVAC Ventilation/Exhaust Systems	General exhaust, toilet exhaust, laboratory exhaust, isolation exhaust, room pressurization control systems
HVAC Energy Recovery Systems**	Heat Wheels, Heat Recovery Loops, AHU Integrated Heat Recovery
HVAC Terminal Unit Systems**	VAV Terminal Units, CAV terminal units, fan coil units, fin-tube radiation, unit heaters
Decentralized Unitary HVAC Systems*	Split-system HVAC systems, controls, interface with facility DDC
Unitary Heat Pump Systems**	Water-source heat pumps, controls, interface with facility DDC
Humidity Control Systems	Humidifiers, de-humidifiers, controls, interface with facility DDC
Hydronic Distribution Systems	Pumps, DDC control panels, heat exchangers,
Table Notes	
** Denotes systems that LEED requires to be commissioned to comply with the LEED Fundamental Commissioning pre-requisite.	

1.8 COMMISSIONING TEAM

A. The commissioning team shall consist of, but not be limited to, representatives of Contractor, including Project Superintendent and subcontractors, installers, schedulers, suppliers, and specialists deemed appropriate by the Department of Veterans Affairs (VA) and Commissioning Agent.

B. Members Appointed by Contractor:

1. Contractor' Commissioning Manager: The designated person, company, or entity that plans, schedules and coordinates the commissioning activities for the construction team.
2. Contractor's Commissioning Representative(s): Individual(s), each having authority to act on behalf of the entity he or she represents, explicitly organized to implement the commissioning process through coordinated actions.

C. Members Appointed by VA:

1. Commissioning Agent: The designated person, company, or entity that plans, schedules, and coordinates the commissioning team to implement the commissioning process. The VA will engage the CxA under a separate contract.
2. User: Representatives of the facility user and operation and maintenance personnel.
3. A/E: Representative of the Architect and engineering design professionals.

1.9 VA'S COMMISSIONING RESPONSIBILITIES

- A. Appoint an individual, company or firm to act as the Commissioning Agent.
- B. Assign operation and maintenance personnel and schedule them to participate in commissioning team activities including, but not limited to, the following:
 1. Coordination meetings.
 2. Training in operation and maintenance of systems, subsystems, and equipment.
 3. Testing meetings.
 4. Witness and assist in Systems Functional Performance Testing.
 5. Demonstration of operation of systems, subsystems, and equipment.
- C. Provide the Construction Documents, prepared by Architect and approved by VA, to the Commissioning Agent and for use in managing the commissioning process, developing the commissioning plan, systems manuals, and reviewing the operation and maintenance training plan.

1.10 CONTRACTOR'S COMMISSIONING RESPONSIBILITIES

- A. The Contractor shall assign a Commissioning Manager to manage commissioning activities of the Contractor, and subcontractors.
- B. The Contractor shall ensure that the commissioning responsibilities outlined in these specifications are included in all subcontracts and

that subcontractors comply with the requirements of these specifications.

- C. The Contractor shall ensure that each installing subcontractor shall assign representatives with expertise and authority to act on behalf of the subcontractor and schedule them to participate in and perform commissioning team activities including, but not limited to, the following:

1. Participate in commissioning coordination meetings.
2. Conduct operation and maintenance training sessions in accordance with approved training plans.
3. Verify that Work is complete, and systems are operational according to the Contract Documents, including calibration of instrumentation and controls.
4. Evaluate commissioning issues and commissioning observations identified in the Commissioning Issues Log, field reports, test reports or other commissioning documents. In collaboration with entity responsible for system and equipment installation, recommend corrective action.
5. Review and comment on commissioning documentation.
6. Participate in meetings to coordinate Systems Functional Performance Testing.
7. Provide schedule for operation and maintenance data submittals, equipment startup, and testing to Commissioning Agent for incorporation into the commissioning plan.
8. Provide information to the Commissioning Agent for developing commissioning plan.
9. Participate in training sessions for VA's operation and maintenance personnel.
10. Provide technicians who are familiar with the construction and operation of installed systems and who shall develop specific test procedures to conduct Systems Functional Performance Testing of installed systems.

1.11 COMMISSIONING AGENT'S RESPONSIBILITIES

- A. Organize and lead the commissioning team.
- B. Prepare the commissioning plan. See Paragraph 1.11-A of this specification Section for further information.
- C. Review and comment on selected submittals from the Contractor for general conformance with the Construction Documents. Review and comment

on the ability to test and operate the system and/or equipment, including providing gages, controls and other components required to operate, maintain, and test the system. Review and comment on performance expectations of systems and equipment and interfaces between systems relating to the Construction Documents.

- D. At the beginning of the construction phase, conduct an initial construction phase coordination meeting for the purpose of reviewing the commissioning activities and establishing tentative schedules for operation and maintenance submittals; operation and maintenance training sessions; TAB Work; Pre-Functional Checklists, Systems Functional Performance Testing; and project completion.
- E. Convene commissioning team meetings for the purpose of coordination, communication, and conflict resolution; discuss status of the commissioning processes. Responsibilities include arranging for facilities, preparing agenda and attendance lists, and notifying participants. The Commissioning Agent shall prepare and distribute minutes to commissioning team members and attendees within five workdays of the commissioning meeting.
- F. Observe construction and report progress, observations and issues. Observe systems and equipment installation for adequate accessibility for maintenance and component replacement or repair, and for general conformance with the Construction Documents.
- G. Prepare Project specific Pre-Functional Checklists and Systems Functional Performance Test procedures.
- H. Coordinate Systems Functional Performance Testing schedule with the Contractor.
- I. Witness selected systems startups.
- J. Verify selected Pre-Functional Checklists completed and submitted by the Contractor.
- K. Witness and document Systems Functional Performance Testing.
- L. Compile test data, inspection reports, and certificates and include them in the systems manual and commissioning report.
- M. Review and comment on operation and maintenance (O&M) documentation and systems manual outline for compliance with the Contract Documents. Operation and maintenance documentation requirements are specified in Paragraph 1.25, Section 01 00 00 GENERAL REQUIREMENTS.

- N. Review operation and maintenance training program developed by the Contractor. Verify training plans provide qualified instructors to conduct operation and maintenance training.
- O. Prepare commissioning Field Observation Reports.
- P. Prepare the Final Commissioning Report.
- Q. Return to the site at 10 months into the 12-month warranty period and review with facility staff the current building operation and the condition of outstanding issues related to the original and seasonal Systems Functional Performance Testing. Also interview facility staff and identify problems or concerns they have operating the building as originally intended. Make suggestions for improvements and for recording these changes in the O&M manuals. Identify areas that may come under warranty or under the original construction contract. Assist facility staff in developing reports, documents and requests for services to remedy outstanding problems.
- R. Assemble the final commissioning documentation, including the Final Commissioning Report and Addendum to the Final Commissioning Report.

1.12 COMMISSIONING DOCUMENTATION

- A. Commissioning Plan: A document, prepared by Commissioning Agent, that outlines the schedule, allocation of resources, and documentation requirements of the commissioning process, and shall include, but is not limited, to the following:
 - 1. Plan for delivery and review of submittals, systems manuals, and other documents and reports. Identification of the relationship of these documents to other functions and a detailed description of submittals that are required to support the commissioning processes. Submittal dates shall include the latest date approved submittals must be received without adversely affecting commissioning plan.
 - 2. Description of the organization, layout, and content of commissioning documentation (including systems manual) and a detailed description of documents to be provided along with identification of responsible parties.
 - 3. Identification of systems and equipment to be commissioned.
 - 4. Schedule of Commissioning Coordination meetings.
 - 5. Identification of items that must be completed before the next operation can proceed.
 - 6. Description of responsibilities of commissioning team members.
 - 7. Description of observations to be made.

8. Description of requirements for operation and maintenance training.
 9. Schedule for commissioning activities with dates coordinated with overall construction schedule.
 10. Process and schedule for documenting changes on a continuous basis to appear in Project Record Documents.
 11. Process and schedule for completing prestart and startup checklists for systems, subsystems, and equipment to be verified and tested.
 12. Preliminary Systems Functional Performance Test procedures.
- B. Systems Functional Performance Test Procedures: The Commissioning Agent will develop Systems Functional Performance Test Procedures for each system to be commissioned, including subsystems, or equipment and interfaces or interlocks with other systems. Systems Functional Performance Test Procedures will include a separate entry, with space for comments, for each item to be tested. Preliminary Systems Functional Performance Test Procedures will be provided to the VA, Architect/Engineer, and Contractor for review and comment. The Systems Performance Test Procedure will include test procedures for each mode of operation and provide space to indicate whether the mode under test responded as required. Each System Functional Performance Test procedure, regardless of system, subsystem, or equipment being tested, shall include, but not be limited to, the following:
1. Name and identification code of tested system.
 2. Test number.
 3. Time and date of test.
 4. Indication of whether the record is for a first test or retest following correction of a problem or issue.
 5. Dated signatures of the person performing test and of the witness, if applicable.
 6. Individuals present for test.
 7. Observations and Issues.
 8. Issue number, if any, generated as the result of test.
- C. Pre-Functional Checklists: The Commissioning Agent will prepare Pre-Functional Checklists. Pre-Functional Checklists shall be completed and signed by the Contractor, verifying that systems, subsystems, equipment, and associated controls are ready for testing. The Commissioning Agent will spot check Pre-Functional Checklists to verify accuracy and readiness for testing. Inaccurate or incomplete Pre-

Functional Checklists shall be returned to the Contractor for correction and resubmission.

- D. Test and Inspection Reports: The Commissioning Agent will record test data, observations, and measurements on Systems Functional Performance Test Procedure. The report will also include recommendation for system acceptance or non-acceptance. Photographs, forms, and other means appropriate for the application shall be included with data. Commissioning Agent Will compile test and inspection reports and test and inspection certificates and include them in systems manual and commissioning report.
- E. Corrective Action Documents: The Commissioning Agent will document corrective action taken for systems and equipment that fail tests. The documentation will include any required modifications to systems and equipment and/or revisions to test procedures, if any. The Commissioning Agent will witness and document any retesting of systems and/or equipment requiring corrective action and document retest results. Contractor responsible for all costs of Commissioning Agent and A/E team needed for retesting.
- F. Commissioning Issues Log: The Commissioning Agent will prepare and maintain Commissioning Issues Log that describes Commissioning Issues and Commissioning Observations that are identified during the Commissioning process. These observations and issues include, but are not limited to, those that are at variance with the Contract Documents. The Commissioning Issues Log will identify and track issues as they are encountered, the party responsible for resolution, progress toward resolution, and document how the issue was resolved. The Master Commissioning Issues Log will also track the status of unresolved issues.
 - 1. Creating a Commissioning Issues Log Entry:
 - a. Identify the issue with unique numeric or alphanumeric identifier by which the issue may be tracked.
 - b. Assign a descriptive title for the issue.
 - c. Identify date and time of the issue.
 - d. Identify test number of test being performed at the time of the observation, if applicable, for cross reference.
 - e. Identify system, subsystem, and equipment to which the issue applies.
 - f. Identify location of system, subsystem, and equipment.

- g. Include information that may be helpful in diagnosing or evaluating the issue.
 - h. Note recommended corrective action.
 - i. Identify commissioning team member responsible for corrective action.
 - j. Identify expected date of correction.
 - k. Identify person that identified the issue.
2. Documenting Issue Resolution:
- a. Log date correction is completed, or the issue is resolved.
 - b. Describe corrective action or resolution taken. Include description of diagnostic steps taken to determine root cause of the issue, if any.
 - c. Identify changes to the Contract Documents that may require action.
 - d. State that correction was completed, and system, subsystem, and equipment are ready for retest, if applicable.
 - e. Identify person(s) who corrected or resolved the issue.
 - f. Identify person(s) verifying the issue resolution.
- G. Final Commissioning Report: The Commissioning Agent will document results of the commissioning process, including unresolved issues, and performance of systems, subsystems, and equipment. The Commissioning Report will indicate whether systems, subsystems, and equipment have been properly installed and are performing according to the Contract Documents. This report will be used by the Department of Veterans Affairs when determining that systems will be accepted. This report will be used to evaluate systems, subsystems, and equipment and will serve as a future reference document during VA occupancy and operation. It shall describe components and performance that exceed requirements of the Contract Documents and those that do not meet requirements of the Contract Documents. The commissioning report will include, but is not limited to, the following:
- 1. Lists and explanations of substitutions; compromises; variances with the Contract Documents; record of conditions; and, if appropriate, recommendations for resolution. Design Narrative documentation maintained by the Commissioning Agent.
 - 2. Commissioning plan.
 - 3. Pre-Functional Checklists completed by the Contractor, with annotation of the Commissioning Agent review and spot check.

4. Systems Functional Performance Test Procedures, with annotation of test results and test completion.
 - 5, Commissioning Issues Log.
 6. Listing of deferred and off-season test(s) not performed, including the schedule for their completion.
- H. Addendum to Final Commissioning Report: The Commissioning Agent will prepare an Addendum to the Final Commissioning Report near the end of the Warranty Period. The Addendum will indicate whether systems, subsystems, and equipment are complete and continue to perform according to the Contract Documents. The Addendum to the Final Commissioning Report shall include, but is not limited to, the following:
1. Documentation of deferred and off-season test(s) results.
 2. Completed Systems Functional Performance Test Procedures for off season test(s).
 3. Documentation that unresolved system performance issues have been resolved.
 4. Updated Commissioning Issues Log, including status of unresolved issues.
 5. Identification of potential Warranty Claims to be corrected by the Contractor.
- I. Systems Manual: The Commissioning Agent will gather required information and compile the Systems Manual. The Systems Manual will include, but is not limited to, the following:
1. Design Narrative, including system narratives, schematics, single-line diagrams, flow diagrams, equipment schedules, and changes made throughout the Project.
 2. Reference to Final Commissioning Plan.
 3. Reference to Final Commissioning Report.
 4. Approved Operation and Maintenance Data as submitted by the Contractor.

1.13 SUBMITTALS

- A. Preliminary Commissioning Plan Submittal: The Commissioning Agent has prepared a Preliminary Commissioning Plan based on the final Construction Documents. The Preliminary Commissioning Plan is included as an Appendix to this specification section. The Preliminary Commissioning Plan is provided for information only. It contains preliminary information about the following commissioning activities:

1. The Commissioning Team: A list of commissioning team members by organization.
 2. Systems to be commissioned. A detailed list of systems to be commissioned for the project. This list also provides preliminary information on systems/equipment submittals to be reviewed by the Commissioning Agent; preliminary information on Pre-Functional Checklists that are to be completed; preliminary information on Systems Performance Testing, including information on testing sample size (where authorized by the VA).
 3. Commissioning Team Roles and Responsibilities: Preliminary roles and responsibilities for each Commissioning Team member.
 4. Commissioning Documents: A preliminary list of commissioning-related documents, include identification of the parties responsible for preparation, review, approval, and action on each document.
 5. Commissioning Activities Schedule: Identification of Commissioning Activities, including Systems Functional Testing, the expected duration and predecessors for the activity.
 6. Pre-Functional Checklists: Preliminary Pre-Functional Checklists for equipment, components, subsystems, and systems to be commissioned. These Preliminary Pre-Functional Checklists provide guidance on the level of detailed information the Contractor shall include on the final submission.
 7. Systems Functional Performance Test Procedures: Preliminary step-by-step System Functional Performance Test Procedures to be used during Systems Functional Performance Testing. These Preliminary Systems Functional Performance procedures provide information on the level of testing rigor, and the level of Contractor support required during performance of system's testing.
- B. Final Commissioning Plan Submittal: Based on the Final Construction Documents and the Contractor's project team, the Commissioning Agent will prepare the Final Commissioning Plan as described in this section. The Commissioning Agent will submit three hard copies and three sets of electronic files of Final Commissioning Plan. The Contractor shall review the Commissioning Plan and provide any comments to the VA. The Commissioning Agent will incorporate review comments into the Final Commissioning Plan as directed by the VA.
- C. Systems Functional Performance Test Procedure: The Commissioning Agent will submit preliminary Systems Functional Performance Test Procedures

to the Contractor, and the VA for review and comment. The Contractor shall return review comments to the VA and the Commissioning Agent. The VA will also return review comments to the Commissioning Agent. The Commissioning Agent will incorporate review comments into the Final Systems Functional Test Procedures to be used in Systems Functional Performance Testing.

- D. Pre-Functional Checklists: The Commissioning Agent will submit Pre-Functional Checklists to be completed by the Contractor.
- E. Test and Inspection Reports: The Commissioning Agent will submit test and inspection reports to the VA with copies to the Contractor and the Architect/Engineer.
- F. Corrective Action Documents: The Commissioning Agent will submit corrective action documents to the VA COR with copies to the Contractor and Architect.
- G. Preliminary Commissioning Report Submittal: The Commissioning Agent will submit three electronic copies of the preliminary commissioning report. One electronic copy, with review comments, will be returned to the Commissioning Agent for preparation of the final submittal.
- H. Final Commissioning Report Submittal: The Commissioning Agent will submit four sets of electronically formatted information of the final commissioning report to the VA. The final submittal will incorporate comments as directed by the VA.
- I. Data for Commissioning:
 - 1. The Commissioning Agent will request in writing from the Contractor specific information needed about each piece of commissioned equipment or system to fulfill requirements of the Commissioning Plan.
 - 2. The Commissioning Agent may request further documentation as is necessary for the commissioning process or to support other VA data collection requirements, including Construction Operations Building Information Exchange (COBIE), Building Information Modeling (BIM), etc.

1.14 COMMISSIONING PROCESS

- A. The Commissioning Agent will be responsible for the overall management of the commissioning process as well as coordinating scheduling of commissioning tasks with the VA and the Contractor. As directed by the VA, the Contractor shall incorporate Commissioning tasks, including,

but not limited to, Systems Functional Performance Testing (including predecessors) with the Master Construction Schedule.

- B. Within 14 days of contract award, the Contractor shall designate a specific individual as the Commissioning Manager (CxM) to manage and lead the commissioning effort on behalf of the Contractor. The Commissioning Manager shall be the single point of contact and communications for all commissioning related services by the Contractor.
- C. Within 14 days of contract award, the Contractor shall ensure that each subcontractor designates specific individuals as Commissioning Representatives (CXR) to be responsible for commissioning related tasks. The Contractor shall ensure the designated Commissioning Representatives participate in the commissioning process as team members providing commissioning testing services, equipment operation, adjustments, and corrections if necessary. The Contractor shall ensure that all Commissioning Representatives shall have sufficient authority to direct their respective staff to provide the services required, and to speak on behalf of their organizations in all commissioning related contractual matters.

1.15 QUALITY ASSURANCE

- A. Instructor Qualifications: Factory authorized service representatives shall be experienced in training, operation, and maintenance procedures for installed systems, subsystems, and equipment.
- B. Test Equipment Calibration: The Contractor shall comply with test equipment manufacturer's calibration procedures and intervals. Recalibrate test instruments immediately whenever instruments have been repaired following damage or dropping. Affix calibration tags to test instruments. Instruments shall have been calibrated within six months prior to use.

1.16 COORDINATION

- A. Management: The Commissioning Agent will coordinate the commissioning activities with the VA and Contractor. The Commissioning Agent will submit commissioning documents and information to the VA. All commissioning team members shall work together to fulfill their contracted responsibilities and meet the objectives of the contract documents.
- B. Scheduling: The Contractor shall work with the Commissioning Agent and the VA to incorporate the commissioning activities into the

construction schedule. The Commissioning Agent will provide sufficient information (including, but not limited to, tasks, durations and predecessors) on commissioning activities to allow the Contractor and the VA to schedule commissioning activities. All parties shall address scheduling issues and make necessary notifications in a timely manner in order to expedite the project and the commissioning process. The Contractor shall update the Master Construction as directed by the VA.

- C. Initial Schedule of Commissioning Events: The Commissioning Agent will provide the initial schedule of primary commissioning events in the Commissioning Plan and at the commissioning coordination meetings. The Commissioning Plan will provide a format for this schedule. As construction progresses, more detailed schedules will be developed by the Contractor with information from the Commissioning Agent.
- D. Commissioning Coordinating Meetings: The Commissioning Agent will conduct periodic Commissioning Coordination Meetings of the commissioning team to review status of commissioning activities, to discuss scheduling conflicts, and to discuss upcoming commissioning process activities.
- E. Pretesting Meetings: The Commissioning Agent will conduct pretest meetings of the commissioning team to review startup reports, Pre-Functional Checklist results, Systems Functional Performance Testing procedures, testing personnel and instrumentation requirements.
- F. Systems Functional Performance Testing Coordination: The Contractor shall coordinate testing activities to accommodate required quality assurance and control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting. The Contractor shall coordinate the schedule times for tests, inspections, obtaining samples, and similar activities.

PART 2 - PRODUCTS

2.1 TEST EQUIPMENT

- A. The Contractor shall provide all standard and specialized testing equipment required to perform Systems Functional Performance Testing. Test equipment required for Systems Functional Performance Testing will be identified in the detailed System Functional Performance Test Procedure prepared by the Commissioning Agent.
- B. Data logging equipment and software required to test equipment shall be provided by the Contractor.

C. All testing equipment shall be of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified in the Specifications. If not otherwise noted, the following minimum requirements apply: Temperature sensors and digital thermometers shall have a certified calibration within the past year to an accuracy of 0.5 °C (1.0 °F) and a resolution of + or - 0.1 °C (0.2 °F). Pressure sensors shall have an accuracy of + or - 2.0% of the value range being measured (not full range of meter) and have been calibrated within the last year. All equipment shall be calibrated according to the manufacturer's recommended intervals and following any repairs to the equipment. Calibration tags shall be affixed or certificates readily available.

PART 3 – EXECUTION**3.1 COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES**

A. The following table outlines the roles and responsibilities for the Commissioning Team members during the Construction Phase:

Construction Phase		CxA = Commissioning Agent RE = COR A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Meetings	Construction Commissioning Kick Off meeting	L	A	P	P	O	
	Commissioning Meetings	L	A	P	P	O	
	Project Progress Meetings	P	A	P	L	O	
	Controls Meeting	L	A	P	P	O	
Coordination	Coordinate with [OGC's, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support the OPR and BOD.	L	A	P	P	N/A	
Cx Plan & Spec	Final Commissioning Plan	L	A	R	R	O	
Schedules	Duration Schedule for Commissioning Activities	L	A	R	R	N/A	
OPR and BOD	Maintain OPR on behalf of Owner	L	A	R	R	O	
	Maintain BOD/DID on behalf of Owner	L	A	R	R	O	

Construction Phase		CxA = Commissioning Agent					L = Lead
Commissioning Roles & Responsibilities		RE = COR					P = Participate
		A/E = Design Arch/Engineer					A = Approve
		PC = Prime Contractor					R = Review
		O&M = Gov't Facility O&M					O = Optional
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Document Reviews	TAB Plan Review	L	A	R	R	O	
	Submittal and Shop Drawing Review	R	A	R	L	O	
	Review Contractor Equipment Startup Checklists	L	A	R	R	N/A	
	Review Change Orders, ASI, and RFI	L	A	R	R	N/A	
Site Observations	Witness Factory Testing	P	A	P	L	O	
	Construction Observation Site Visits	L	A	R	R	O	
Functional Test Protocols	Final Pre-Functional Checklists	L	A	R	R	O	
	Final Functional Performance Test Protocols	L	A	R	R	O	
Technical Activities	Issues Resolution Meetings	P	A	P	L	O	
Reports and Logs	Status Reports	L	A	R	R	O	
	Maintain Commissioning Issues Log	L	A	R	R	O	

B. The following table outlines the roles and responsibilities for the Commissioning Team members during the Acceptance Phase:

Acceptance Phase		CxA = Commissioning Agent RE = COR A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Meetings	Commissioning Meetings	L	A	P	P	O	
	Project Progress Meetings	P	A	P	L	O	
	Pre-Test Coordination Meeting	L	A	P	P	O	
	Lessons Learned and Commissioning Report Review Meeting	L	A	P	P	O	
Coordination	Coordinate with [OGC's, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support OPR and BOD	L	P	P	P	O	
Cx Plan & Spec	Maintain/Update Commissioning Plan	L	A	R	R	O	
Schedules	Prepare Functional Test Schedule	L	A	R	R	O	
OPR and BOD	Maintain OPR on behalf of Owner	L	A	R	R	O	
	Maintain BOD/DID on behalf of Owner	L	A	R	R	O	
Document Reviews	Review Completed Pre-Functional Checklists	L	A	R	R	O	
	Pre-Functional Checklist Verification	L	A	R	R	O	

Acceptance Phase		CxA = Commissioning Agent					L = Lead
Commissioning Roles & Responsibilities		RE = COR					P = Participate
		A/E = Design Arch/Engineer					A = Approve
		PC = Prime Contractor					R = Review
		O&M = Gov't Facility O&M					O = Optional
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
	Review Operations & Maintenance Manuals	L	A	R	R	R	
	Training Plan Review	L	A	R	R	R	
	Warranty Review	L	A	R	R	O	
	Review TAB Report	L	A	R	R	O	
Site Observations	Construction Observation Site Visits	L	A	R	R	O	
	Witness Selected Equipment Startup	L	A	R	R	O	
Functional Test Protocols	TAB Verification	L	A	R	R	O	
	Systems Functional Performance Testing	L	A	P	P	P	
	Retesting	L	A	P	P	P	
Technical Activities	Issues Resolution Meetings	P	A	P	L	O	
	Systems Training	L	S	R	P	P	
Reports and Logs	Status Reports	L	A	R	R	O	
	Maintain Commissioning Issues Log	L	A	R	R	O	
	Final Commissioning Report	L	A	R	R	R	
	Prepare Systems Manuals	L	A	R	R	R	

C. The following table outlines the roles and responsibilities for the Commissioning Team members during the Warranty Phase:

Warranty Phase		CxA = Commissioning Agent					L = Lead
Commissioning Roles & Responsibilities		RE = COR					P = Participate
		A/E = Design Arch/Engineer					A = Approve
		PC = Prime Contractor					R = Review
		O&M = Gov't Facility O&M					O = Optional
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Meetings	Post-Occupancy User Review Meeting	L	A	O	P	P	
Site Observations	Periodic Site Visits	L	A	O	O	P	
Functional Test Protocols	Deferred and/or seasonal Testing	L	A	O	P	P	
Technical Activities	Issues Resolution Meetings	L	S	O	O	P	

Warranty Phase		CxA = Commissioning Agent					L = Lead
Commissioning Roles & Responsibilities		RE = COR					P = Participate
		A/E = Design Arch/Engineer					A = Approve
		PC = Prime Contractor					R = Review
		O&M = Gov't Facility O&M					O = Optional
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
	Post-Occupancy Warranty Checkup and review of Significant Outstanding Issues	L	A		R	P	
Reports and Logs	Final Commissioning Report Amendment	L	A		R	R	
	Status Reports	L	A		R	R	

3.2 STARTUP, INITIAL CHECKOUT, AND PRE-FUNCTIONAL CHECKLISTS

A. The following procedures shall apply to all equipment and systems to be commissioned, according to Part 1, Systems to Be Commissioned.

1. Pre-Functional Checklists are important to ensure that the equipment and systems are hooked up and operational. These ensure that Systems Functional Performance Testing may proceed without unnecessary delays. Each system to be commissioned shall have a full Pre-Functional Checklist completed by the Contractor prior to Systems Functional Performance Testing. No sampling strategies are used.
 - a. The Pre-Functional Checklist will identify the trades responsible for completing the checklist. The Contractor shall ensure the appropriate trades complete the checklists.
 - b. The Commissioning Agent will review completed Pre-Functional Checklists and field-verify the accuracy of the completed checklist using sampling techniques.
2. Startup and Initial Checkout Plan: The Contractor shall develop detailed startup plans for all equipment. The primary role of the Contractor in this process is to ensure that there is written documentation that each of the manufacturer recommended procedures have been completed. Parties responsible for startup shall be identified in the Startup Plan and in the checklist forms.
 - a. The Contractor shall develop the full startup plan by combining (or adding to) the checklists with the manufacturer's detailed startup and checkout procedures from the O&M manual data and the field checkout sheets normally used by the Contractor. The plan shall include checklists and procedures with specific boxes or lines for recording and documenting the checking and inspections of each procedure and a summary statement with a signature block at the end of the plan.
 - b. The full startup plan shall at a minimum consist of the following items:
 - 1) The Pre-Functional Checklists.
 - 2) The manufacturer's standard written startup procedures copied from the installation manuals with check boxes by each procedure and a signature block added by hand at the end.
 - 3) The manufacturer's normally used field checkout sheets.
 - c. The Commissioning Agent will submit the full startup plan to the VA and Contractor for review. Final approval will be by the VA.

- d. The Contractor shall review and evaluate the procedures and the format for documenting them, noting any procedures that need to be revised or added.
3. Sensor and Actuator Calibration
- a. All field installed temperature, relative humidity, CO2 and pressure sensors and gages, and all actuators (dampers and valves) on all equipment shall be calibrated using the methods described in Division 21, Division 22, Division 23, Division 26, Division 27, and Division 28 specifications.
 - b. All procedures used shall be fully documented on the Pre-Functional Checklists or other suitable forms, clearly referencing the procedures followed and written documentation of initial, intermediate and final results.
4. Execution of Equipment Startup
- a. Four weeks prior to equipment startup, the Contractor shall schedule startup and checkout with the VA and Commissioning Agent. The performance of the startup and checkout shall be directed and executed by the Contractor.
 - b. The Commissioning Agent will observe the startup procedures for selected pieces of primary equipment.
 - c. The Contractor shall execute startup and provide the VA and Commissioning Agent with a signed and dated copy of the completed startup checklists, and contractor tests.
 - d. Only individuals that have direct knowledge and witnessed that a line-item task on the Startup Checklist was actually performed shall initial or check that item off. It is not acceptable for witnessing supervisors to fill out these forms.

3.3 DEFICIENCIES, NONCONFORMANCE, AND APPROVAL IN CHECKLISTS AND STARTUP

- A. The Contractor shall clearly list any outstanding items of the initial startup and Pre-Functional Checklist procedures that were not completed successfully, at the bottom of the procedures form or on an attached sheet. The procedures form and any outstanding deficiencies shall be provided to the VA and the Commissioning Agent within two days of completion.
- B. The Commissioning Agent will review the report and submit comments to the VA. The Commissioning Agent will work with the Contractor to correct and verify deficiencies or uncompleted items. The Commissioning Agent will involve the VA and others as necessary. The Contractor shall

correct all areas that are noncompliant or incomplete in the checklists in a timely manner, and shall notify the VA and Commissioning Agent as soon as outstanding items have been corrected. The Contractor shall submit an updated startup report and a Statement of Correction on the original noncompliance report. When satisfactorily completed, the Commissioning Agent will recommend approval of the checklists and startup of each system to the VA.

- C. The Contractor shall be responsible for resolution of deficiencies as directed the VA.

3.4 PHASED COMMISSIONING

- A. The project may require startup and initial checkout to be executed in phases. This phasing shall be planned and scheduled in a coordination meeting of the VA, Commissioning Agent, and the Contractor. Results will be added to the master construction schedule and the commissioning schedule.

3.5 DDC SYSTEM TRENDING FOR COMMISSIONING

- A. Trending is a method of testing as a standalone method or to augment manual testing. The Contractor shall trend any and all points of the system or systems at intervals specified below.
- B. Alarms are a means to notify the system operator that abnormal conditions are present in the system. Alarms shall be structured into three tiers - Critical, Priority, and Maintenance.
 - 1. Critical alarms are intended to be alarms that require the immediate attention of and action by the Operator. These alarms shall be displayed on the Operator Workstation in a popup style window that is graphically linked to the associated unit's graphical display. The popup style window shall be displayed on top of any active window within the screen, including non DDC system software.
 - 2. Priority level alarms are to be printed to a printer which is connected to the Operator's Workstation located within the engineer's office. Additionally, Priority level alarms shall be able to be monitored and viewed through an active alarm application. Priority level alarms are alarms which shall require reaction from the operator or maintenance personnel within a normal work shift, and not immediate action.
 - 3. Maintenance alarms are intended to be minor issues which would require examination by maintenance personnel within the following shift. These alarms shall be generated in a scheduled report

automatically by the DDC system at the start of each shift. The generated maintenance report will be printed to a printer located within the engineer's office.

- C. The Contractor shall provide a wireless internet network in the building for use during controls programming, checkout, and commissioning. This network will allow project team members to more effectively program, view, manipulate and test control devices while being in the same room as the controlled device.
- D. The Contractor shall provide graphical trending through the DDC control system of systems being commissioned. Trending requirements are indicated below and included with the Systems Functional Performance Test Procedures. Trending shall occur before, during and after Systems Functional Performance Testing. The Contractor shall be responsible for producing graphical representations of the trended DDC points that show each system operating properly during steady state conditions as well as during the System Functional Testing. These graphical reports shall be submitted to the COR and Commissioning Agent for review and analysis before, during dynamic operation, and after Systems Functional Performance Testing. The Contractor shall provide, but not limited to, the following trend requirements and trend submissions:
 - 1. Pre-testing, Testing, and Post-testing - Trend reports of trend logs and graphical trend plots are required as defined by the Commissioning Agent. The trend log points, sampling rate, graphical plot configuration, and duration will be dictated by the Commissioning Agent. At any time during the Commissioning Process the Commissioning Agent may recommend changes to aspects of trending as deemed necessary for proper system analysis. The Contractor shall implement any changes as directed by the COR. Any pre-test trend analysis comments generated by the Commissioning Team should be addressed and resolved by the Contractor, as directed by the COR, prior to the execution of Systems Functional Performance Testing.
 - 2. Dynamic plotting - The Contractor shall also provide dynamic plotting during Systems Functional Performance testing at frequent intervals for points determined by the Systems Functional Performance Test Procedure. The graphical plots will be formatted and plotted at durations listed in the Systems Functional Performance Test Procedure.

3. Graphical plotting - The graphical plots shall be provided with a dual y-axis allowing 15 or more trend points (series) plotted simultaneously on the graph with each series in distinct color. The plots will further require title, axis naming, legend etc. all described by the Systems Functional Performance Test Procedure. If this cannot be sufficiently accomplished directly in the Direct Digital Control System, then it is the responsibility of the Contractor to plot these trend logs in Microsoft Excel.
4. The following tables indicate the points to be trended and alarmed by system. The Operational Trend Duration column indicates the trend duration for normal operations. The Testing Trend Duration column indicates the trend duration prior to Systems Functional Performance Testing and again after Systems Functional Performance Testing. The Type column indicates point type: AI = Analog Input, AO = Analog Output, DI = Digital Input, DO = Digital Output, Calc = Calculated Point. In the Trend Interval Column, COV = Change of Value. The Alarm Type indicates the alarm priority; C = Critical, P = Priority, and M = Maintenance. The Alarm Range column indicates when the point is considered in the alarm state. The Alarm Delay column indicates the length of time the point must remain in an alarm state before the alarm is recorded in the DDC. The intent is to allow minor, short-duration events to be corrected by the DDC system prior to recording an alarm.

Dual-Path Air Handling Unit Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
OA Temperature	AI	15 Min	24 hours	3 days	N/A		
RA Temperature	AI	15 Min	24 hours	3 days	N/A		
RA Humidity	AI	15 Min	24 hours	3 days	P	>60% RH	10 min
Mixed Air Temp	AI	None	None	None	N/A		
SA Temp	AI	15 Min	24 hours	3 days	C	±5°F from SP	10 min
Supply Fan Speed	AI	15 Min	24 hours	3 days	N/A		
Return Fan Speed	AI	15 Min	24 hours	3 days	N/A		

Dual-Path Air Handling Unit Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
RA Pre-Filter Status	AI	None	None	None	N/A		
OA Pre-Filter Status	AI	None	None	None	N/A		
After Filter Status	AI	None	None	None	N/A		
SA Flow	AI	15 Min	24 hours	3 days	C	±10% from SP	10 min
OA Supply Temp	AI	15 Min	24 hours	3 days	P	±5°F from SP	10 min
RA Supply Temp	AI	15 Min	24 hours	3 days	N/A		
RA CHW Valve Position	AI	15 Min	24 hours	3 days	N/A		
OA CHW Valve Position	AI	15 Min	24 hours	3 days	N/A		
OA HW Valve Position	AI	15 Min	24 hours	3 days	N/A		
OA Flow	AI	15 Min	24 hours	3 days	P	±10% from SP	5 min
RA Flow	AI	15 Min	24 hours	3 days	P	±10% from SP	5 min
Initial UVC Intensity (%)	AI	None	None	None	N/A		
Duct Pressure	AI	15 Min	24 hours	3 days	C	±25% from SP	6 min
CO2 Level	AI	15 Min	24 hours	3 days	P	±10% from SP	10 min
Supply Fan Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Return Fan Status	DI	COV	24 hours	3 days	C	Status <> Command	10 Min
High Static Status	DI	COV	24 hours	3 days	P	True	1 min
Fire Alarm Status	DI	COV	24 hours	3 days	C	True	5 min
Freeze Stat Level 1	DI	COV	24 hours	3 days	C	True	10 min
Freeze Stat Level 2	DI	COV	24 hours	3 days	C	True	5 min
Freeze Stat Level 3	DI	COV	24 hours	3 days	P	True	1 min
Fire/Smoke Damper Status	DI	COV	24 hours	3 days	P	Closed	1 min
Emergency AHU Shutdown	DI	COV	24 hours	3 days	P	True	1 min

Dual-Path Air Handling Unit Trending and Alarms							
Point	Type	Trend Interval	Operationa l Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Exhaust Fan #1 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Exhaust Fan #2 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Exhaust Fan #3 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
OA Alarm	DI	COV	24 hours	3 days	C	True	10 min
High Static Alarm	DI	COV	24 hours	3 days	C	True	10 min
UVC Emitter Alarm	DI	COV	24 hours	3 days	P	True	10 min
CO2 Alarm	DI	COV	24 hours	3 days	P	True	10 min
Power Failure	DI	COV	24 hours	3 days	P	True	1 min
Supply Fan Speed	AO	15 Min	24 hours	3 days	N/A		
Return Fan Speed	AO	15 Min	24 hours	3 days	N/A		
RA CHW Valve Position	AO	15 Min	24 hours	3 days	N/A		
OA CHW Valve Position	AO	15 Min	24 hours	3 days	N/A		
OA HW Valve Position	AO	15 Min	24 hours	3 days	N/A		
Supply Fan S/S	DO	COV	24 hours	3 days	N/A		
Return Fan S/S	DO	COV	24 hours	3 days	N/A		
Fire/Smoke Dampers	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
AHU Energy	Calc	1 Hour	30 day	N/A	N/A		

Terminal Unit (VAV, CAV, etc.) Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Space Temperature	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
Air Flow	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
Local Setpoint	AI	15 Min	12 hours	3 days	M	±10°F from SP	60 min
Space Humidity	AI	15 Min	12 hours	3 days	P	> 60% RH	5 min
Unoccupied Override	DI	COV	12 hours	3 days	M	N/A	12 Hours
Refrigerator Alarm	DI	COV	12 hours	3 days	C	N/A	10 min
Damper Position	AO	15 Minutes	12 hours	3 days	N/A		
Heating coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		

4-Pipe Fan Coil Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
Pre-Filter Status	AI	None	None	None	M	> SP	1 hour
Water Sensor	DI	COV	12 hours	3 days	M	N/A	30 Min
Cooling Coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Heating coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Fan Coil ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

2-Pipe Fan Coil Unit Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
Pre-Filter Status	AI	None	None	None	M	> SP	1 hour
Water Sensor	DI	COV	12 hours	3 days	M	N/A	30 Min
Cooling Coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Fan Coil ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

Steam and Condensate Pumps Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Steam Flow (LB/HR)	AI	15 Minutes	12 hours	3 days	N/A		
Condensate Pump Run Hours	AI	15 Minutes	12 hours	3 days	N/A		
Water Meter (GPM)	AI	15 Minutes	12 hours	3 days	N/A		
Electric Meter (KW/H)	AI	15 Minutes	12 hours	3 days	N/A		
Irrigation Meter (GPM)	AI	15 Minutes	12 hours	3 days	N/A		
Chilled Water Flow (TONS)	AI	15 Minutes	12 hours	3 days	N/A		
Condensate Flow (GPM)	AI	15 Minutes	12 hours	3 days	N/A		

Steam and Condensate Pumps Trending and Alarms							
Point	Type	Trend Interval	Operationa l Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
High Water Level Alarm	DI	COV	12 hours	3 days	C	True	5 Min
Condensate Pump Start/Stop	DO	COV	12 hours	3 days	P	Status <> Command	10 min

Domestic Hot Water Trending and Alarms							
Point	Type	Trend Interval	Operationa l Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Domestic HW Setpoint WH-1	AI	15 Minute	12 Hours	3 days	N/A		
Domestic HW Setpoint WH-2	AI	15 Minute	12 Hours	3 days	N/A		
Domestic HW Temperature	AI	15 Minute	12 Hours	3 days	C	> 135 oF	10 Min
Domestic HW Temperature	AI	15 Minute	12 Hours	3 days	P	±5°F from SP	10 Min
Dom. Circ. Pump #1 Status	DI	COV	12 Hours	3 days	M	Status <> Command	30 min
Dom. Circ. Pump #2 Status	DI	COV	12 Hours	3 days	M	Status <> Command	30 min
Dom. Circ. Pump #1 Start/Stop	DO	COV	12 Hours	3 days	N/A		
Dom. Circ. Pump #2 Start/Stop	DO	COV	12 Hours	3 days	N/A		
Domestic HW Start/Stop	DO	COV	12 Hours	3 days	N/A		

Hydronic Hot Water Trending and Alarms							
Point	Type	Trend Interval	Operationa l Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay

Hydronic Hot Water Trending and Alarms							
Point	Type	Trend Interval	Operationa l Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
System HWS Temperature	AI	15 min	12 hours	3 days	C	±5°F from SP	10 Min
System HWR Temperature	AI	15 min	12 hours	3 days	M	±15°F from SP	300 Min
HX-1 Entering Temperature	AI	15 min	12 hours	3 days	P	±5°F from SP	10 Min
HX-2 Entering Temperature	AI	15 min	12 hours	3 days	P	±5°F from SP	10 Min
HX-2 Leaving Temperature	AI	15 min	12 hours	3 days	P	±5°F from SP	10 Min
System Flow (GPM)	AI	15 min	12 hours	3 days	N/A		
System Differential Pressure	AI	15 min	12 hours	3 days	P	±10% from SP	8 Min
				3 days			
HW Pump 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
HW Pump 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
HW Pump 1 VFD Speed	AO	15 Min	12 Hours	3 days	N/A		
HW Pump 2 VFD Speed	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #1 1/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #1 2/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #2 1/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #2 2/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station Bypass Valve Position	AO	15 Min	12 Hours	3 days	N/A		

Hydronic Hot Water Trending and Alarms							
Point	Type	Trend Interval	Operationa l Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
HW Pump 1 Start/Stop	DO	COV	12 Hours	3 days	N/A		
HW Pump 2 Start/Stop	DO	COV	12 Hours	3 days	N/A		
HWR #1 Valve	DO	COV	12 Hours	3 days	N/A		
HWR #2 Valve	DO	COV	12 Hours	3 days	N/A		

Chilled Water System Trending and Alarms							
Point	Type	Trend Interval	Operationa l Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Chiller 1 Entering Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Leaving Temperature	AI	15 Minutes	12 Hours	3 days	P	±5°F from SP	10 Min
Chiller 1 Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Percent Load	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 KW Consumption	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Tonnage	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Entering Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Leaving Temperature	AI	15 Minutes	12 Hours	3 days	P	±5°F from SP	10 Min
Chiller 2 Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Percent Load	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 KW Consumption	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Tonnage	AI	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Decoupler Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Flow	AI	15 Minutes	12 Hours	3 days	N/A		

Chilled Water System Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Primary Loop Supply Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Differential Pressure	AI	15 Minutes	12 Hours	3 days	P	±5% from SP	10 Min
Secondary Loop Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Supply Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Return Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Tonnage	AI	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Pump 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Primary Loop Pump 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Secondary Loop Pump 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Secondary Loop Pump 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Chiller 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Chiller 1 Evaporator Iso-Valve	DI	COV	12 Hours	3 days	N/A		
Chiller 1 Evaporator Flow Switch	DI	COV	12 Hours	3 days	N/A		
Chiller 1 Unit Alarm	DI	COV	12 Hours	3 days	C	True	10 Min
Chiller 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Chiller 2 Evaporator Iso-Valve	DI	COV	12 Hours	3 days	N/A		

Chilled Water System Trending and Alarms							
Point	Type	Trend Interval	Operationa 1 Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Chiller 2 Evaporator Flow Switch	DI	COV	12 Hours	3 days	N/A		
Chiller 2 Unit Alarm	DI	COV	12 Hours	3 days	C	True	10 Min
Refrigerant Detector	DI	COV	12 Hours	3 days	C	True	10 Min
Refrigerant Exhaust Fan Status	DI	COV	12 Hours	3 days	M	Status <> Command	30 min
Emergency Shutdown	DI	COV	12 Hours	3 days	P	True	1 Min
Primary Loop Pump 1 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Pump 2 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Pump 1 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Pump 2 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Primary Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Primary Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Secondary Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Secondary Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Chiller 1 Enable	DO	COV	12 Hours	3 days	N/A		
Chiller 1 Iso-Valve Command	DO	COV	12 Hours	3 days	N/A		
Chiller 2 Enable	DO	COV	12 Hours	3 days	N/A		
Chiller 2 Iso-Valve Command	DO	COV	12 Hours	3 days	N/A		

Chilled Water System Trending and Alarms							
Point	Type	Trend Interval	Operationa l Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Refrigerant Exhaust Fan Start / Stop	DO	COV	12 Hours	3 days	N/A		

Condenser Water System Trending and Alarms							
Point	Type	Trend Interval	Operationa l Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Chiller 1 Condenser Entering Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Condenser Leaving Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Condenser Entering Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Condenser Leaving Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Supply Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Return Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Basin Temp	AI	15 Minutes	12 Hours	3 days	P	< 45 oF	10 Min
Cooling Tower 2 Supply Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Return Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Basin Temp	AI	15 Minutes	12 Hours	3 days	P	< 45 oF	10 Min
Condenser Water Supply Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Condenser Water Return Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Outdoor Air Wet Bulb	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Fan Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Cooling Tower 1 Basin Heat	DI	COV	12 Hours	3 days	N/A		

Condenser Water System Trending and Alarms							
Point	Type	Trend Interval	Operationa 1 Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Cooling Tower 1 Heat Trace	DI	COV	12 Hours	3 days	N/A		
Cooling Tower 2 Fan Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Cooling Tower 2 Basin Heat	DI	COV	12 Hours	3 days	N/A		
Cooling Tower 2 Heat Trace	DI	COV	12 Hours	3 days	N/A		
Chiller 1 Isolation Valve	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Chiller 2 Isolation Valve	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Condenser Water Pump 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Condenser Water Pump 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Chiller 1 Condenser Bypass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Condenser By-Pass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Bypass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Fan Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Bypass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Fan Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Fan Start / Stop	DO	COV	12 Hours	3 days	N/A		
Cooling Tower 2 Fan Start / Stop	DO	COV	12 Hours	3 days	N/A		
Condenser Water Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		

Condenser Water System Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Condenser Water Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		

E. The Contractor shall provide the following information prior to Systems Functional Performance Testing. Any documentation that is modified after submission shall be recorded and resubmitted to the COR and Commissioning Agent.

1. Point-to-Point checkout documentation;
2. Sensor field calibration documentation including system name, sensor/point name, measured value, DDC value, and Correction Factor.
3. A sensor calibration table listing the referencing the location of procedures to following in the O&M manuals, and the frequency at which calibration should be performed for all sensors, separated by system, subsystem, and type. The calibration requirements shall be submitted both in the O&M manuals and separately in a standalone document containing all sensors for inclusion in the commissioning documentation. The following table is a sample that can be used as a template for submission.

SYSTEM		
Sensor	Calibration Frequency	O&M Calibration Procedure Reference
Discharge air temperature	Once a year	Volume I Section D.3.aa
Discharge static pressure	Every 6 months	Volume II Section A.1.c

4. Loop tuning documentation and constants for each loop of the building systems. The documentation shall be submitted in outline or table separated by system, control type (e.g. heating valve temperature control); proportional, integral and derivative constants, interval (and bias if used) for each loop. The following table is a sample that can be used as a template for submission.

AIR HANDLING UNIT AHU-1				
Control Reference	Proportional Constant	Integral Constant	Derivative Constant	Interval
Heating Valve Output	1000	20	10	2 sec.

3.6 SYSTEMS FUNCTIONAL PERFORMANCE TESTING

- A. This paragraph applies to Systems Functional Performance Testing of systems for all referenced specification Divisions.
- B. Objectives and Scope: The objective of Systems Functional Performance Testing is to demonstrate that each system is operating according to the Contract Documents. Systems Functional Performance Testing facilitates bringing the systems from a state of substantial completion to full dynamic operation. Additionally, during the testing process, areas of noncompliant performance are identified and corrected, thereby improving the operation and functioning of the systems. In general, each system shall be operated through all modes of operation (seasonal, occupied, unoccupied, warm-up, cool-down, part- and full-load, fire alarm and emergency power) where there is a specified system response. The Contractor shall verify each sequence in the sequences of operation. Proper responses to such modes and conditions as power failure, freeze condition, low oil pressure, no flow, equipment failure, etc. shall also be tested.
- C. Development of Systems Functional Performance Test Procedures: Before Systems Functional Performance Test procedures are written, the Contractor shall submit all requested documentation and a current list of change orders affecting equipment or systems, including an updated points list, program code, control sequences and parameters. Using the testing parameters and requirements found in the Contract Documents and approved submittals and shop drawings, the Commissioning Agent will develop specific Systems Functional Test Procedures to verify and document proper operation of each piece of equipment and system to be commissioned. The Contractor shall assist the Commissioning Agent in developing the Systems Functional Performance Test procedures as requested by the Commissioning Agent i.e. by answering questions about equipment, operation, sequences, etc. Prior to execution, the Commissioning Agent will provide a copy of the Systems Functional

Performance Test procedures to the VA, the Architect/Engineer, and the Contractor, who shall review the tests for feasibility, safety, equipment and warranty protection.

- D. Purpose of Test Procedures: The purpose of each specific Systems Functional Performance Test is to verify and document compliance with the stated criteria of acceptance given on the test form. Representative test formats and examples are found in the Commissioning Plan for this project. (The Commissioning Plan is issued as a separate document and is available for review.) The test procedure forms developed by the Commissioning Agent will include, but not be limited to, the following information:
1. System and equipment or component name(s)
 2. Equipment location and ID number
 3. Unique test ID number, and reference to unique Pre-Functional Checklists and startup documentation, and ID numbers for the piece of equipment
 4. Date
 5. Project name
 6. Participating parties
 7. A copy of the specification section describing the test requirements
 8. A copy of the specific sequence of operations or other specified parameters being verified
 9. Formulas used in any calculations
 10. Required pretest field measurements
 11. Instructions for setting up the test.
 12. Special cautions, alarm limits, etc.
 13. Specific step-by-step procedures to execute the test, in a clear, sequential and repeatable format
 14. Acceptance criteria of proper performance with a Yes / No check box to allow for clearly marking whether or not proper performance of each part of the test was achieved.
 15. A section for comments.
 16. Signatures and date block for the Commissioning Agent. A place for the Contractor to initial to signify attendance at the test.
- E. Test Methods: Systems Functional Performance Testing shall be achieved by manual testing (i.e. persons manipulate the equipment and observe performance) and/or by monitoring the performance and analyzing the results using the control system's trend log capabilities or by

standalone data loggers. The Contractor and Commissioning Agent shall determine which method is most appropriate for tests that do not have a method specified.

1. Simulated Conditions: Simulating conditions (not by an overwritten value) shall be allowed, although timing the testing to experience actual conditions is encouraged wherever practical.
 2. Overwritten Values: Overwriting sensor values to simulate a condition, such as overwriting the outside air temperature reading in a control system to be something other than it really is, shall be allowed, but shall be used with caution and avoided when possible. Such testing methods often can only test a part of a system, as the interactions and responses of other systems will be erroneous or not applicable. Simulating a condition is preferable. e.g., for the above case, by heating the outside air sensor with a hair blower rather than overwriting the value or by altering the appropriate setpoint to see the desired response. Before simulating conditions or overwriting values, sensors, transducers and devices shall have been calibrated.
 3. Simulated Signals: Using a signal generator which creates a simulated signal to test and calibrate transducers and DDC constants is generally recommended over using the sensor to act as the signal generator via simulated conditions or overwritten values.
 4. Altering Setpoints: Rather than overwriting sensor values, and when simulating conditions is difficult, altering setpoints to test a sequence is acceptable. For example, to see the Air Conditioning compressor lockout initiate at an outside air temperature below 12 C (54 F), when the outside air temperature is above 12 C (54 F), temporarily change the lockout setpoint to be 2 C (4 F) above the current outside air temperature.
 5. Indirect Indicators: Relying on indirect indicators for responses or performance shall be allowed only after visually and directly verifying and documenting, over the range of the tested parameters, that the indirect readings through the control system represent actual conditions and responses. Much of this verification shall be completed during systems startup and initial checkout.
- F. Setup: Each function and test shall be performed under conditions that simulate actual conditions as closely as is practically possible. The Contractor shall provide all necessary materials, system modifications,

etc. to produce the necessary flows, pressures, temperatures, etc. necessary to execute the test according to the specified conditions. At completion of the test, the Contractor shall return all affected building equipment and systems, due to these temporary modifications, to their pretest condition.

- G. Sampling: No sampling is allowed in completing Pre-Functional Checklists. Sampling is allowed for Systems Functional Performance Test Procedures execution. The Commissioning Agent will determine the sampling rate. If at any point, frequent failures are occurring and testing is becoming more troubleshooting than verification, the Commissioning Agent may stop the testing and require the Contractor to perform and document a checkout of the remaining units, prior to continuing with Systems Functional Performance Testing of the remaining units.
- H. Cost of Retesting: The cost associated with expanded sample System Functional Performance Tests shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a justified reason for a claim of delay or for a time extension by the Contractor.
- I. Coordination and Scheduling: The Contractor shall provide a minimum of 7 days' notice to the Commissioning Agent and the VA regarding the completion schedule for the Pre-Functional Checklists and startup of all equipment and systems. The Commissioning Agent will schedule Systems Functional Performance Tests with the Contractor and VA. The Commissioning Agent will witness and document the Systems Functional Performance Testing of systems. The Contractor shall execute the tests in accordance with the Systems Functional Performance Test Procedure.
- J. Testing Prerequisites: In general, Systems Functional Performance Testing will be conducted only after Pre-Functional Checklists have been satisfactorily completed. The control system shall be sufficiently tested and approved by the Commissioning Agent and the VA before it is used to verify performance of other components or systems. The air balancing and water balancing shall be completed before Systems Functional Performance Testing of air-related or water-related equipment or systems are scheduled. Systems Functional Performance Testing will proceed from components to subsystems to systems. When the proper performance of all interacting, individual systems has been

achieved, the interface or coordinated responses between systems will be checked.

- K. Problem Solving: The Commissioning Agent will recommend solutions to problems found, however the burden of responsibility to solve, correct and retest problems is with the Contractor.

3.7 DOCUMENTATION, NONCONFORMANCE AND APPROVAL OF TESTS

- A. Documentation: The Commissioning Agent will witness and document the results of all Systems Functional Performance Tests using the specific procedural forms developed by the Commissioning Agent for that purpose. Prior to testing, the Commissioning Agent will provide these forms to the VA and the Contractor for review and approval. The Contractor shall include the filled-out forms with the O&M manual data.
- B. Nonconformance: The Commissioning Agent will record the results of the Systems Functional Performance Tests on the procedure or test form. All items of nonconformance issues will be noted and reported to the VA on Commissioning Field Reports and/or the Commissioning Master Issues Log.
1. Corrections of minor items of noncompliance identified may be made during the tests. In such cases, the item of noncompliance and resolution shall be documented on the Systems Functional Test Procedure.
 2. Every effort shall be made to expedite the systems functional Performance Testing process and minimize unnecessary delays, while not compromising the integrity of the procedures. However, the Commissioning Agent shall not be pressured into overlooking noncompliant work or loosening acceptance criteria to satisfy scheduling or cost issues, unless there is an overriding reason to do so by direction from the VA.
 3. As the Systems Functional Performance Tests progresses and an item of noncompliance is identified, the Commissioning Agent shall discuss the issue with the Contractor and the VA.
 4. When there is no dispute on an item of noncompliance, and the Contractor accepts responsibility to correct it:
 - a. The Commissioning Agent will document the item of noncompliance and the Contractor's response and/or intentions. The Systems Functional Performance Test then continues or proceeds to another test or sequence. After the day's work is complete, the Commissioning Agent will submit a Commissioning Field Report to the VA. The Commissioning Agent will also note items of

- noncompliance and the Contractor's response in the Master Commissioning Issues Log. The Contractor shall correct the item of noncompliance and report completion to the VA and the Commissioning Agent.
- b. The need for retesting will be determined by the Commissioning Agent. If retesting is required, the Commissioning Agent and the Contractor shall reschedule the test and the test shall be repeated.
5. If there is a dispute about item of noncompliance, regarding whether it is an item of noncompliance, or who is responsible:
- a. The item of noncompliance shall be documented on the test form with the Contractor's response. The item of noncompliance with the Contractor's response shall also be reported on a Commissioning Field Report and on the Master Commissioning Issues Log.
- b. Resolutions shall be made at the lowest management level possible. Other parties are brought into the discussions as needed. Final interpretive and acceptance authority is with the Department of Veterans Affairs.
- c. The Commissioning Agent will document the resolution process.
- d. Once the interpretation and resolution have been decided, the Contractor shall correct the item of noncompliance, report it to the Commissioning Agent. The requirement for retesting will be determined by the Commissioning Agent. If retesting is required, the Commissioning Agent and the Contractor shall reschedule the test. Retesting shall be repeated until satisfactory performance is achieved.
- C. Cost of Retesting: The cost to retest a System Functional Performance Test shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a justified reason for a claim of delay or for a time extension by the Contractor.
- D. Failure Due to Manufacturer Defect: If 10%, or three, whichever is greater, of identical pieces (size alone does not constitute a difference) of equipment fail to perform in compliance with the Contract Documents (mechanically or substantively) due to manufacturing defect, not allowing it to meet its submitted performance specifications, all identical units may be considered unacceptable by

the VA. In such case, the Contractor shall provide the VA with the following:

1. Within one week of notification from the VA, the Contractor shall examine all other identical units making a record of the findings. The findings shall be provided to the VA within two weeks of the original notice.
 2. Within two weeks of the original notification, the Contractor shall provide a signed and dated, written explanation of the problem, cause of failures, etc. and all proposed solutions which shall include full equipment submittals. The proposed solutions shall not significantly exceed the specification requirements of the original installation.
 3. The VA shall determine whether a replacement of all identical units or a repair is acceptable.
 4. Two examples of the proposed solution shall be installed by the Contractor and the VA shall be allowed to test the installations for up to one week, upon which the VA will decide whether to accept the solution.
 5. Upon acceptance, the Contractor shall replace or repair all identical items, at their expense and extend the warranty accordingly, if the original equipment warranty had begun. The replacement/repair work shall proceed with reasonable speed beginning within one week from when parts can be obtained.
- E. Approval: The Commissioning Agent will note each satisfactorily demonstrated function on the test form. Formal approval of the Systems Functional Performance Test shall be made later after review by the Commissioning Agent and by the VA. The Commissioning Agent will evaluate each test and report to the VA using a standard form. The VA will give final approval on each test using the same form, and provide signed copies to the Commissioning Agent and the Contractor.

3.8 DEFERRED TESTING

- A. Unforeseen Deferred Systems Functional Performance Tests: If any Systems Functional Performance Test cannot be completed due to the building structure, required occupancy condition or other conditions, execution of the Systems Functional Performance Testing may be delayed upon approval of the VA. These Systems Functional Performance Tests shall be conducted in the same manner as the seasonal tests as soon as possible. Services of the Contractor to conduct these unforeseen

Deferred Systems Functional Performance Tests shall be negotiated between the VA and the Contractor.

- B. Deferred Seasonal Testing: Deferred Seasonal Systems Functional Performance Tests are those that must be deferred until weather conditions are closer to the systems design parameters. The Commissioning Agent will review systems parameters and recommend which Systems Functional Performance Tests should be deferred until weather conditions more closely match systems parameters. The Contractor shall review and comment on the proposed schedule for Deferred Seasonal Testing. The VA will review and approve the schedule for Deferred Seasonal Testing. Deferred Seasonal Systems Functional Performances Tests shall be witnessed and documented by the Commissioning Agent. Deferred Seasonal Systems Functional Performance Tests shall be executed by the Contractor in accordance with these specifications.

3.9 OPERATION AND MAINTENANCE TRAINING REQUIREMENTS

- A. Training Preparation Conference: Before operation and maintenance training, the Commissioning Agent will convene a training preparation conference to include VA's COR, VA's Operations and Maintenance personnel, and the Contractor. The purpose of this conference will be to discuss and plan for Training and Demonstration of VA Operations and Maintenance personnel.
- B. The Contractor shall provide training and demonstration as required by other Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 sections. The Training and Demonstration shall include, but is not limited to, the following:
1. Review the Contract Documents.
 2. Review installed systems, subsystems, and equipment.
 3. Review instructor qualifications.
 4. Review instructional methods and procedures.
 5. Review training module outlines and contents.
 6. Review course materials (including operation and maintenance manuals).
 7. Review and discuss locations and other facilities required for instruction.
 8. Review and finalize training schedule and verify availability of educational materials, instructors, audiovisual equipment, and facilities needed to avoid delays.

9. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.

C. Training Module Submittals: The Contractor shall submit the following information to the VA and the Commissioning Agent:

1. Instruction Program: Submit two copies of outline of instructional program for demonstration and training, including a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module. At completion of training, submit two complete training manuals for VA's use.
2. Qualification Data: Submit qualifications for facilitator and/or instructor.
3. Attendance Record: For each training module, submit list of participants and length of instruction time.
4. Evaluations: For each participant and for each training module, submit results and documentation of performance-based test.
5. Demonstration and Training Recording:
 - a. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.
 - b. Video Format: Provide high quality color DVD color on standard size DVD disks.
 - c. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.
 - d. Narration: Describe scenes on video recording by audio narration by microphone while demonstration and training is recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.
 - e. Submit two copies within seven days of end of each training module.
6. Transcript: Prepared on 8-1/2-by-11-inch paper, punched and bound in heavy-duty, 3-ring, vinyl-covered binders. Mark appropriate

identification on front and spine of each binder. Include a cover sheet with same label information as the corresponding videotape. Include name of Project and date of videotape on each page.

D. Quality Assurance:

1. Facilitator Qualifications: A firm or individual experienced in training or educating maintenance personnel in a training program similar in content and extent to that indicated for this Project, and whose work has resulted in training or education with a record of successful learning performance.
2. Instructor Qualifications: A factory authorized service representative, complying with requirements in Division 01 Section "Quality Requirements," experienced in operation and maintenance procedures and training.
3. Photographer Qualifications: A professional photographer who is experienced photographing construction projects.

E. Training Coordination:

1. Coordinate instruction schedule with VA's operations. Adjust schedule as required to minimize disrupting VA's operations.
2. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.
3. Coordinate content of training modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by the VA.

F. Instruction Program:

1. Program Structure: Develop an instruction program that includes individual training modules for each system and equipment not part of a system, as required by individual Specification Sections, and as follows:
 - a. Fire protection systems, including fire alarm, fire pumps, and fire suppression systems.
 - b. Intrusion detection systems.
 - c. Conveying systems, including elevators, wheelchair lifts, escalators, and automated materials handling systems.
 - d. Medical equipment, including medical gas equipment and piping.
 - e. Laboratory equipment, including laboratory air and vacuum equipment and piping.

- f. Heat generation, including boilers, feedwater equipment, pumps, steam distribution piping, condensate return systems, heating hot water heat exchangers, and heating hot water distribution piping.
 - g. Refrigeration systems, including chillers, cooling towers, condensers, pumps, and distribution piping.
 - h. HVAC systems, including air handling equipment, air distribution systems, and terminal equipment and devices.
 - i. HVAC instrumentation and controls.
 - j. Electrical service and distribution, including switchgear, transformers, switchboards, panelboards, uninterruptible power supplies, and motor controls.
 - k. Packaged engine generators, including synchronizing switchgear/switchboards, and transfer switches.
 - l. Lighting equipment and controls.
 - m. Communication systems, including intercommunication, surveillance, nurse call systems, public address, mass evacuation, voice and data, and entertainment television equipment.
 - n. Site utilities including lift stations, condensate pumping and return systems, and storm water pumping systems.
- G. Training Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participants are expected to master. For each module, include instruction for the following:
- 1. Basis of System Design, Operational Requirements, and Criteria: Include the following:
 - a. System, subsystem, and equipment descriptions.
 - b. Performance and design criteria if Contractor is delegated design responsibility.
 - c. Operating standards.
 - d. Regulatory requirements.
 - e. Equipment function.
 - f. Operating characteristics.
 - g. Limiting conditions.
 - H, Performance curves.
 - 2. Documentation: Review the following items in detail:
 - a. Emergency manuals.
 - b. Operations manuals.

- c. Maintenance manuals.
 - d. Project Record Documents.
 - e. Identification systems.
 - f. Warranties and bonds.
 - g. Maintenance service agreements and similar continuing commitments.
3. Emergencies: Include the following, as applicable:
- a. Instructions on meaning of warnings, trouble indications, and error messages.
 - b. Instructions on stopping.
 - c. Shutdown instructions for each type of emergency.
 - d. Operating instructions for conditions outside of normal operating limits.
 - e. Sequences for electric or electronic systems.
 - f. Special operating instructions and procedures.
4. Operations: Include the following, as applicable:
- a. Startup procedures.
 - b. Equipment or system break-in procedures.
 - c. Routine and normal operating instructions.
 - d. Regulation and control procedures.
 - e. Control sequences.
 - f. Safety procedures.
 - g. Instructions on stopping.
 - h. Normal shutdown instructions.
 - i. Operating procedures for emergencies.
 - j. Operating procedures for system, subsystem, or equipment failure.
 - k. Seasonal and weekend operating instructions.
 - l. Required sequences for electric or electronic systems.
 - m. Special operating instructions and procedures.
5. Adjustments: Include the following:
- a. Alignments.
 - b. Checking adjustments.
 - c. Noise and vibration adjustments.
 - d. Economy and efficiency adjustments.
6. Troubleshooting: Include the following:
- a. Diagnostic instructions.
 - b. Test and inspection procedures.
7. Maintenance: Include the following:

- a. Inspection procedures.
 - b. Types of cleaning agents to be used and methods of cleaning.
 - c. List of cleaning agents and methods of cleaning detrimental to product.
 - d. Procedures for routine cleaning
 - e. Procedures for preventive maintenance.
 - f. Procedures for routine maintenance.
 - g. Instruction on use of special tools.
8. Repairs: Include the following:
- a. Diagnosis instructions.
 - b. Repair instructions.
 - c. Disassembly; component removal, repair, and replacement; and reassembly instructions.
 - d. Instructions for identifying parts and components.
 - e. Review of spare parts needed for operation and maintenance.
- H. Training Execution:
- 1. Preparation: Assemble educational materials necessary for instruction, including documentation and training module. Assemble training modules into a combined training manual. Set up instructional equipment at instruction location.
 - 2. Instruction:
 - a. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and Department of Veterans Affairs for number of participants, instruction times, and location.
 - b. Instructor: Engage qualified instructors to instruct VA's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.
 - 1) The Commissioning Agent will furnish an instructor to describe basis of system design, operational requirements, criteria, and regulatory requirements.
 - 2) The VA will furnish an instructor to describe VA's operational philosophy.
 - 3) The VA will furnish the Contractor with names and positions of participants.
 - 3. Scheduling: Provide instruction at mutually agreed times. For equipment that requires seasonal operation, provide similar

instruction at start of each season. Schedule training with the VA and the Commissioning Agent with at least seven days' advance notice.

4. Evaluation: At conclusion of each training module, assess and document each participant's mastery of module by use of an oral, or a written, performance-based test.
5. Cleanup: Collect used and leftover educational materials and remove from Project site. Remove instructional equipment. Restore systems and equipment to condition existing before initial training use.

I. Demonstration and Training Recording:

1. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.
2. Video Format: Provide high quality color DVD color on standard size DVD disks.
3. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.
4. Narration: Describe scenes on videotape by audio narration by microphone while demonstration and training is recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.

- - - E N D - - -

**SECTION 02 41 00
DEMOLITION**

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies demolition and removal of buildings, portions of buildings, utilities, other structures and debris from trash dumps shown.

1.2 RELATED WORK:

- A. Safety Requirements: Section 01 35 26 Safety Requirements Article, ACCIDENT PREVENTION PLAN (APP).
- B. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS.
- C. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS.
- D. Asbestos Removal: Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.
- E. Lead Paint: Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
- F. Environmental Protection: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- G. Construction Waste Management: Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT.
- H. Infectious Control: Section 01 35 26, SAFETY REQUIREMENTS.

1.3 PROTECTION:

- A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures. Comply with requirements of GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations. Comply with requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES AND IMPROVEMENTS.
- C. Maintain fences, barricades, lights, and other similar items around exposed excavations until such excavations have been completely filled.

- D. Provide enclosed dust chutes with control gates from each floor to carry debris to truck beds and govern flow of material into truck. Provide overhead bridges of tight board or prefabricated metal construction at dust chutes to protect persons and property from falling debris.
- E. Prevent spread of flying particles and dust. Sprinkle rubbish and debris with water to keep dust to a minimum. Do not use water if it results in hazardous or objectionable condition such as, but not limited to; ice, flooding, or pollution. Vacuum and dust the work area daily.
- F. In addition to previously listed fire and safety rules to be observed in performance of work, include following:
 - 1. No wall or part of wall shall be permitted to fall outwardly from structures.
 - 2. Maintain at least one stairway in each structure in usable condition to highest remaining floor. Keep stairway free of obstructions and debris until that level of structure has been removed.
 - 3. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for immediate use. Instruct all possible users in use of fire extinguishers.
 - 4. Keep hydrants clear and accessible at all times. Prohibit debris from accumulating within a radius of 4500 mm (15 feet) of fire hydrants.
- G. Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Medical Center; any damaged items shall be repaired or replaced as approved by the COR. The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for

existing construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have COR's approval.

H. The work shall comply with the requirements of Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

I. The work shall comply with the requirements of Section 01 00 00, GENERAL REQUIREMENTS and Section 01 35 26, SAFETY REQUIREMENTS.

1.4 UTILITY SERVICES:

A. Demolish and remove outside utility service lines shown to be removed.

B. Remove abandoned outside utility lines that would interfere with installation of new utility lines and new construction.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 DEMOLITION:

A. Completely demolish and remove buildings and structures, including all appurtenances related or connected thereto, as noted below:

1. As required for installation of new utility service lines.
2. To full depth within an area defined by hypothetical lines located 1500 mm (5 feet) outside building lines of new structures.

B. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the Medical Center to avoid accumulation at the demolition site. Materials that cannot be removed daily shall be stored in areas specified by the COR. Break up concrete slabs below grade that do not require removal from present location into pieces not exceeding 600 mm (24 inches) square to permit drainage. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.

C. In removing buildings and structures of more than two stories, demolish work story by story starting at highest level and progressing down to third floor level. Demolition of first and second stories may proceed simultaneously.

D. Remove and legally dispose of all materials, other than earth to remain as part of project work, from any trash dumps shown. Materials removed shall become property of contractor and shall be disposed of in compliance with applicable federal, state or local permits, rules and/or regulations. All materials in the indicated trash dump areas, including above surrounding grade and extending to a depth of 1500mm (5feet) below surrounding grade, shall be included as part of the lump

sum compensation for the work of this section. Materials that are located beneath the surface of the surrounding ground more than 1500 mm (5 feet), or materials that are discovered to be hazardous, shall be handled as unforeseen. The removal of hazardous material shall be referred to Hazardous Materials specifications.

- E. Remove existing utilities as indicated or uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the COR. When Utility lines are encountered that are not indicated on the drawings, the COR shall be notified prior to further work in that area.

3.2 CLEAN-UP :

On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to the COR. Clean-up shall include off the Medical Center disposal of all items and materials not required to remain property of the Government as well as all debris and rubbish resulting from demolition operations.

- - - E N D - - -

SECTION 02 82 11
TRADITIONAL ASBESTOS ABATEMENT

TABLE OF CONTENTS

PART 1 - GENERAL.....	1
1.1 SUMMARY OF THE WORK.....	1
1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS.....	1
1.1.2 EXTENT OF WORK.....	1
1.1.3 RELATED WORK.....	2
1.1.4 TASKS.....	2
1.1.5 CONTRACTORS USE OF PREMISES.....	2
1.2 VARIATIONS IN QUANTITY.....	3
1.3 STOP ASBESTOS REMOVAL.....	3
1.4 DEFINITIONS.....	4
1.4.1 GENERAL.....	4
1.4.2 GLOSSARY.....	4
1.4.3 REFERENCED STANDARDS ORGANIZATIONS.....	12
1.5 APPLICABLE CODES AND REGULATIONS.....	14
1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS.....	14
1.5.2 Asbestos Abatement CONTRACTOR RESPONSIBILITY.....	14
1.5.3 FEDERAL REQUIREMENTS.....	15
1.5.4 STATE REQUIREMENTS.....	15
1.5.5 STANDARDS.....	15
1.5.7 EPA GUIDANCE DOCUMENTS.....	16
1.5.8 NOTICES.....	16
1.5.9 PERMITS/LICENSES.....	16
1.5.10 POSTING AND FILING OF REGULATIONS.....	16
1.5.11 VA RESPONSIBILITIES.....	17
1.5.12 SITE SECURITY.....	17
1.5.13 EMERGENCY ACTION PLAN AND ARRANGEMENTS.....	18
1.5.14 PRE-CONSTRUCTION MEETING.....	19
1.6 PROJECT COORDINATION.....	20
1.6.1 PERSONNEL.....	20
1.7 RESPIRATORY PROTECTION.....	21
1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM.....	21
1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR.....	22
1.7.3 SELECTION AND USE OF RESPIRATORS.....	22
1.7.4 MINIMUM RESPIRATORY PROTECTION.....	22

1.7.5 MEDICAL WRITTEN OPINION.....	22
1.7.6 RESPIRATOR FIT TEST.....	22
1.7.7 RESPIRATOR FIT CHECK.....	22
1.7.8 MAINTENANCE AND CARE OF RESPIRATORS.....	23
1.7.9 SUPPLIED AIR SYSTEMS.....	23
1.8 WORKER PROTECTION.....	23
1.8.1 TRAINING OF ABATEMENT PERSONNEL.....	23
1.8.2 MEDICAL EXAMINATIONS.....	23
1.8.3 PERSONAL PROTECTIVE EQUIPMENT.....	23
1.8.4 REGULATED AREA ENTRY PROCEDURE.....	24
1.8.5 DECONTAMINATION PROCEDURE - PAPR.....	24
1.8.6 REGULATED AREA REQUIREMENTS.....	25
1.9 DECONTAMINATION FACILITIES.....	25
1.9.1 DESCRIPTION.....	25
1.9.2 GENERAL REQUIREMENTS.....	25
1.9.3 TEMPORARY FACILITIES TO THE PDF and W/EDF.....	26
1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF).....	26
1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF).....	28
1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES.....	29
PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT.....	30
2.1 MATERIALS AND EQUIPMENT.....	30
2.1.1 GENERAL REQUIREMENTS.....	30
2.1.2 NEGATIVE PRESSURE FILTRATION SYSTEM.....	31
2.1.3 DESIGN AND LAYOUT.....	32
2.1.4 NEGATIVE AIR MACHINES (HEPA UNITS).....	32
2.1.5 PRESSURE DIFFERENTIAL.....	33
2.1.6 MONITORING.....	34
2.1.7 AUXILIARY GENERATOR.....	34
2.1.8 SUPPLEMENTAL MAKE-UP AIR INLETS.....	34
2.1.9 TESTING THE SYSTEM.....	34
2.1.10 DEMONSTRATION OF THE NEGATIVE AIR PRESSURE SYSTEM.....	34
2.1.11 USE OF SYSTEM DURING ABATEMENT OPERATIONS.....	35
2.1.12 DISMANTLING THE SYSTEM.....	35
2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA.....	35
2.2.1 GENERAL.....	35
2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA.....	36
2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA.....	36

2.2.4 CRITICAL BARRIERS.....	36
2.2.5 PRIMARY BARRIERS.....	36
2.2.6 SECONDARY BARRIERS.....	37
2.2.7 EXTENSION OF THE REGULATED AREA.....	37
2.2.8 FIRESTOPPING.....	37
2.3 MONITORING, INSPECTION AND TESTING.....	37
2.3.1 GENERAL.....	37
2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT.....	39
2.3.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH.....	40
2.4 STANDARD OPERATING PROCEDURES.....	41
2.5 SUBMITTALS.....	41
2.5.1 PRE-START MEETING SUBMITTALS.....	41
2.5.2 SUBMITTALS DURING ABATEMENT.....	44
2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT.....	44
2.6 ENCAPSULANTS.....	45
2.6.1 TYPES OF ENCAPSULANTS.....	45
2.6.2 PERFORMANCE REQUIREMENTS.....	45
2.6.3 CERTIFICATES OF COMPLIANCE.....	46
PART 3 - EXECUTION.....	46
3.1 PRE-ABATEMENT ACTIVITIES.....	46
3.1.1 PRE-ABATEMENT MEETING.....	46
3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS.....	46
3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS.....	47
3.2 REGULATED AREA PREPARATIONS.....	47
3.3 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA GENERAL:.....	49
3.4 REMOVAL OF ACM.....	49
3.4.1 WETTING acm.....	49
3.4.2 SECONDARY BARRIER AND WALKWAYS.....	49
3.4.3 WET REMOVAL OF ACM.....	50
3.5 LOCKDOWN ENCAPSULATION.....	51
3.5.1 GENERAL.....	51
3.5.2 DELIVERY AND STORAGE.....	51
3.5.3 WORKER PROTECTION.....	51
3.5.4 ENCAPSULATION OF PIPING.....	51
3.5.5 SEALING EXPOSED EDGES.....	52
3.6 DISPOSAL OF ACM WASTE MATERIALS.....	52
3.6.1 GENERAL.....	52

3.6.2 PROCEDURES.....	52
3.7 PROJECT DECONTAMINATION.....	53
3.7.1 GENERAL.....	53
3.7.2 REGULATED AREA CLEARANCE.....	53
3.7.3 WORK DESCRIPTION.....	53
3.7.4 PRE-DECONTAMINATION CONDITIONS.....	53
3.7.5 FIRST CLEANING.....	54
3.7.6 PRE-CLEARANCE INSPECTION AND TESTING.....	54
3.7.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES.....	54
3.8 FINAL VISUAL INSPECTION AND AIR CLEARANCE TESTING.....	54
3.8.1 GENERAL.....	54
3.8.2 FINAL VISUAL INSPECTION.....	54
3.8.3 FINAL AIR CLEARANCE TESTING.....	55
3.8.4 FINAL AIR CLEARANCE PROCEDURES.....	55
3.8.5 CLEARANCE SAMPLING USING PCM:.....	56
3.9 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE.....	56
3.9.1 COMPLETION OF ABATEMENT WORK.....	56
3.9.2 CERTIFICATE OF COMPLETION BY CONTRACTOR.....	56
3.9.3 WORK SHIFTS.....	56
ATTACHMENT #1.....	57
ATTACHMENT #2.....	58
ATTACHMENT #3.....	59
ATTACHMENT #4.....	60

SECTION 02 82 11
CLASS I NEGATIVE PRESSURE ENCLOSURE ASBESTOS ABATEMENT SPECIFICATIONS

PART 1 - GENERAL

1.1 SUMMARY OF THE WORK

1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS

Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict shall be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

1.1.2 EXTENT OF WORK

- A. Below is a brief description of the estimated quantities of asbestos containing materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section shall be interpreted as limiting the extent of work otherwise required by this contract and related documents.

- B. Removal, clean-up and disposal of asbestos containing materials (ACM) in an appropriate regulated area for the following approximate quantities;

Demo. Plan Note Number	Asbestos Containing Materials Locations for Abatement	Locations	Quantity
1	12" white/black and 12" tan floor tile (negative mastic)	Basement hallway, lobby, entry, storage rooms, restrooms, large storage area, and offices	4,464 sf
2	Tan linoleum sheet flooring (negative mastic)	Basement hall/lobby and restrooms over 12" floor tile	374 sf

1.1.3 RELATED WORK

- A. Not applicable.

1.1.4 TASKS

The work tasks are summarized briefly as follows:

- A. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, regulated area preparations, emergency procedures arrangements, and standard operating procedures for asbestos abatement work.
- B. Abatement activities including removal, clean-up, decontamination of ACM debris in pipe chases, disposal of ACM waste, recordkeeping, security, monitoring, and inspections.
- C. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

1.1.5 CONTRACTORS USE OF PREMISES

- A. The Contractor and Contractor's personnel shall cooperate fully with the COR/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.
- B. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved pre-abatement work plan. Asbestos abatement drawings of partially occupied buildings shall show the limits of regulated areas; the placement of decontamination facilities; the temporary location of

bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the COR through the pre-abatement plan of action. The following limitations of use shall apply to existing facilities shown on drawings:

1.2 VARIATIONS IN QUANTITY

The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated which are limited by the physical constraints imposed by occupancy of the buildings. Accordingly, minor variations (+/- 5%) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the contractor shall provide unit prices for newly discovered materials and those prices shall be used for additional work required under the contractor.

1.3 STOP ASBESTOS REMOVAL

If the Contracting Officer; their field representative; or the VPIH/CIH presents a written **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered air flow and adequately wet any exposed ACM. The Contractor shall not resume any asbestos removal activity until authorized to do so by the VA. A stop asbestos removal order shall be issued at any time the VA determines abatement conditions/activities are not within specification requirements. Work stoppage shall continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions shall be borne by the Contractor, including the industrial hygienist's time. The occurrence of any of the following events shall be reported immediately by the Contractor's competent person in writing to the COR and shall require the Contractor to immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities:

- A. $\geq$ 0.01 f/cc outside a regulated area or >0.05 f/cc inside a regulated area;
- B. breach/break in regulated area barrier(s);
- C. less than -0.02" WCG pressure in the regulated area;
- D. serious injury/death at the site;
- E. fire/safety emergency at the site;

- F. respiratory protection system failure;
- G. power failure or loss of wetting agent; or
- H. any visible emissions observed outside the regulated area.

1.4 DEFINITIONS

1.4.1 GENERAL

Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings shall be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

1.4.2 GLOSSARY

Abatement - Procedures to control fiber release from asbestos-containing materials, typically during removal. Includes removal, encapsulation, enclosure, demolition and renovation activities related to asbestos.

ACE - Asbestos contaminated elements.

ACM - Asbestos containing material.

Aerosol - Solid or liquid particulate suspended in air.

Adequately wet - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

Aggressive method - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

Aggressive sampling - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

AHERA - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

Aircell - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

Air monitoring - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air.

Air sample filter - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM

(Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

Amended water - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

Asbestos - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

Asbestos-containing material (ACM) - Any material containing more than one percent of asbestos.

Asbestos contaminated elements (ACE) - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

Asbestos-containing waste material - Asbestos-containing material or asbestos contaminated objects requiring disposal.

Asbestos waste decontamination facility - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it shall be used to evacuate personnel.

Authorized person - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

Authorized visitor - Any person approved by the VA; the contractor; or any government agency having jurisdiction over the regulated area.

Barrier - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

Containment Barrier - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

Critical Barrier - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

Primary Barrier - Barriers placed over critical barriers and exposed directly to abatement work.

Secondary Barrier - Any additional sheeting used to isolate and provide protection from debris during abatement work.

Breathing zone - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

Bridging encapsulant - An encapsulant that forms a layer on the surface of the ACM.

Building/facility owner - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

Bulk testing - The collection and analysis of suspect asbestos containing materials.

Certified Industrial Hygienist (CIH) - One certified in practice of industrial hygiene by the American Board of Industrial Hygiene. An industrial hygienist Certified in Comprehensive Practice by the American Board of Industrial Hygiene.

Class I asbestos work - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

Class II asbestos work - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

Clean room/Changing room - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

Clearance sample - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's industrial hygiene consultant (VPIH/CIH).

Closely resemble - The major workplace conditions which have contributed to the levels of historic asbestos exposure are no more protective than conditions of the current workplace.

Competent person - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

Contracting Officer's Representative (COR) - COR responsible for the on-going project work, typically the COR.

Contractor's Professional Industrial Hygienist (CPIH) - The asbestos abatement contractor's industrial hygienist. The industrial hygienist shall meet the qualification requirements of the PIH.

Count - Refers to the fiber count or the average number of fibers greater than five microns in length per cubic centimeter of air.

Decontamination area/unit - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

Demolition - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

Disposal bag - Typically 6 mil thick siftproof, dustproof, leaktight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container shall be labeled/marked in accordance with EPA, OSHA and DOT requirements.

Disturbance - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag which shall not exceed 60 inches in length or width.

Drum - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be siftproof, dustproof, and leaktight.

Employee exposure - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

Encapsulant - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

Encapsulation - Treating ACM with an encapsulant.

Enclosure - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

Equipment room - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

Fiber - A particulate form of asbestos, 5 microns or longer, with a length to width ratio of at least 3 to 1.

Fibers per cubic centimeter (f/cc) - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

Filter - Media used in respirators, vacuums, or other machines to remove particulate from air.

Firestopping - Material used to close the open parts of a structure in order to prevent a fire from spreading.

Friable asbestos containing material - Any material containing more than 1 percent asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

Glovebag - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools shall be handled.

High efficiency particulate air (HEPA) filter - A filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 microns or greater in diameter.

HEPA vacuum - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

Homogeneous area - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

HVAC - Heating, Ventilation and Air Conditioning

Industrial hygienist - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

Industrial hygienist technician - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned.

Intact - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

Lockdown - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

National Emission Standards for Hazardous Air Pollutants (NESHAP's) - EPA's rule to control emissions of asbestos to the environment.

Negative initial exposure assessment - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL's.

Negative pressure - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water column gauge inside the negative pressure enclosure.

Negative pressure respirator - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air outside the respirator.

Non-friable ACM - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

Organic vapor cartridge - The type of cartridge used on air purifying respirators for organic vapor exposures.

Outside air - The air outside buildings and structures, including the air under a bridge or in an open ferry dock.

Owner/operator - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

Penetrating encapsulant - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

Personal sampling/monitoring - Representative air samples obtained in the breathing zone of the person using a cassette and battery operated pump to determine asbestos exposure.

Permissible exposure limit (PEL) - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the PEL is 0.1 fibers per cc.

Polarized light microscopy (PLM) - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

Polyethylene sheeting - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, sometimes flame retardant in compliance with NFPA 241.

Positive/negative fit check - A method of verifying the fit of a respirator by closing off the filters and breathing in or closing off the exhalation valve and breathing out while detecting leakage of the respirator.

Presumed ACM (PACM) - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or shall have known through the exercise of due diligence that other materials are ACM, they too shall be treated as PACM. The designation of PACM shall be rebutted pursuant to 29 CFR 1926.1101 (k) (5).

Professional IH - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH.

Project designer - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B) (5).

Protection factor - A value assigned by OSHA/NIOSH to indicate the assigned protection a respirator shall provide if worn properly. The number indicates the reduction of exposure level from outside to inside the respirator.

Qualitative fit test (QLFT) - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

Quantitative fit test (QNFT) - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

Regulated area - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work shall accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they shall exceed the PEL.

Regulated ACM (RACM) - Friable ACM; Category I nonfriable ACM that has become friable; Category I nonfriable ACM that shall be or has been subjected to sanding, grinding, cutting, or abrading or; Category II nonfriable ACM that has a high probability of becoming or has become

crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

Removal - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

Renovation - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

Repair - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

Shower room - The portion of the PDF where personnel shower before leaving the regulated area. Also used for bag/drum decontamination in the EDF.

Standard operating procedures (SOP's) - Asbestos work procedures required to be submitted by the contractor before work begins.

Supplied air respirator (SAR) - A respirator that utilizes an air supply separate from the air in the regulated area.

Surfacing ACM - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

Surfactant - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

Thermal system ACM - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

Transmission electron microscopy (TEM) - A microscopy method that can identify and count asbestos fibers.

VA Industrial Hygienist (VPIH) - Department of Veterans Affairs Professional Industrial Hygienist.

VA Certified Industrial Hygienist (VPCIH) - Department of Veteran's Affairs Professional Certified Industrial Hygienist.

COR - The VA official responsible for on-going project work = COR.

Visible emissions - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM or ACM waste material.

Waste/Equipment decontamination facility (W/EDF) - The area in which equipment is decontaminated before removal from the regulated area.

Waste generator - Any owner or operator whose act or process produces asbestos-containing waste material.

Waste shipment record - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

Wet cleaning - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

1.4.3 REFERENCED STANDARDS ORGANIZATIONS

The following acronyms or abbreviations as referenced in contract/specification documents are defined to mean the associated names. Names and addresses shall be subject to change.

- A. VA Department of Veterans Affairs
810 Vermont Avenue, NW
Washington, DC 20420
- B. AIHA American Industrial Hygiene Association
2700 Prosperity Avenue, Suite 250
Fairfax, VA 22031
703-849-8888
- C. ANSI American National Standards Institute
1430 Broadway
New York, NY 10018
212-354-3300
- D. ASTM American Society for Testing and Materials
1916 Race St.
Philadelphia, PA 19103
215-299-5400
- E. CFR Code of Federal Regulations
Government Printing Office
Washington, DC 20420
- F. CGA Compressed Gas Association
1235 Jefferson Davis Highway
Arlington, VA 22202
703-979-0900
- G. CS Commercial Standard of the National Institute of Standards and Technology (NIST)
U. S. Department of Commerce

- Government Printing Office
Washington, DC 20420
- H. EPA Environmental Protection Agency
401 M St., SW
Washington, DC 20460
202-382-3949
- I. MIL-STD Military Standards/Standardization Division
Office of the Assistant Secretary of Defense
Washington, DC 20420
- J. MSHA Mine Safety and Health Administration
Respiratory Protection Division
Ballston Tower #3
Department of Labor
Arlington, VA 22203
703-235-1452
- K. NIST National Institute for Standards and Technology
U. S. Department of Commerce
Gaithersburg, MD 20234
301-921-1000
- L. NEC National Electrical Code (by NFPA)
- M. NEMA National Electrical Manufacturer's Association
2101 L Street, N.W.
Washington, DC 20037
- N. NFPA National Fire Protection Association
1 Batterymarch Park
P.O. Box 9101
Quincy, MA 02269-9101
800-344-3555
- O. NIOSH National Institutes for Occupational Safety and Health
4676 Columbia Parkway
Cincinnati, OH 45226
513-533-8236
- P. OSHA Occupational Safety and Health Administration
U.S. Department of Labor
Government Printing Office
Washington, DC 20402
- Q. UL Underwriters Laboratory
333 Pfingsten Rd.

Northbrook, IL 60062

312-272-8800

R. USA United States Army

Army Chemical Corps

Department of Defense

Washington, DC 20420

1.5 APPLICABLE CODES AND REGULATIONS

1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS

- A. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and shall have the same force and effect as this specification.
- B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specifications exists, the most stringent requirement(s) shall be utilized.
- C. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

1.5.2 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITY

The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment as required by applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor shall incur all costs of the CPIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work.

1.5.3 FEDERAL REQUIREMENTS

Federal requirements which govern of asbestos abatement include the following regulations.

- A. Occupational Safety and Health Administration **(OSHA)**
 - 1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
 - 2. Title 29 CFR 1910.132 - Personal Protective Equipment
 - 3. Title 29 CFR 1910.134 - Respiratory Protection
 - 4. Title 29 CFR 1926 - Construction Industry Standards
 - 5. Title 29 CFR 1910.20 - Access to Employee Exposure and Medical Records
 - 6. Title 29 CFR 1910.1200 - Hazard Communication
 - 7. Title 29 CFR 1910.151 - Medical and First Aid
- B. Environmental Protection Agency **(EPA)** :
 - 1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
 - 2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)
- C. Department of Transportation **(DOT)**
 - Title 49 CFR 100 - 185 - Transportation

1.5.4 STATE REQUIREMENTS

- A. State requirements that apply to the abatement work include the following:
 - 1. Administrative Rules of South Dakota (ARSD) 74:36:08:02 and training requirements found in ARSD 74:31 and SDCL 34-44. Administrative code adopted by the South Dakota Health Commission to implement the statutes may be found under 10A NCAC 41C .0601 - Asbestos Hazard Management Program.
 - 2. The South Dakota Asbestos Rules adopt the National Emission Standards for Hazardous Air Pollutants (NESHAP) relating to asbestos demolition and renovation by reference. These regulations may be found at 40 CFR Part 61, Subpart M - National Emission Standard for Asbestos (40 CFR 61-141-157).

1.5.5 STANDARDS

- A. Standards which govern asbestos abatement activities include the following:
 - 1. American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems Z88.2 - Practices for Respiratory Protection.

2. Underwriters Laboratories (UL) 586-90 - UL Standard for Safety of HEPA Filter Units, 7th Edition.

B. Standards which govern encapsulation work include the following:

1. American Society for Testing and Materials (ASTM)

C. Standards which govern the fire and safety concerns in abatement work include the following:

1. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.

2. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.

3. NFPA 101 - Life Safety Code

1.5.7 EPA GUIDANCE DOCUMENTS

A. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.

B. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024

C. Asbestos Waste Management Guidance EPA 530-SW-85-007

D. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001

E. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

1.5.8 NOTICES

A. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:

1. SD DHHS Notification

B. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification is given to EPA, State, and Local authorities.

1.5.9 PERMITS/LICENSES

A. The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

1.5.10 POSTING AND FILING OF REGULATIONS

A. Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each in the clean room at the regulated area where workers shall have daily access to the regulations and keep another copy in the Contractor's office.

1.5.11 VA RESPONSIBILITIES

Prior to commencement of work:

- A. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements shall be made prior to starting work for relocation of desks, files, equipment and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**
- B. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

1.5.12 SITE SECURITY

- A. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These shall include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.
- B. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent Person shall immediately notify the VA.
- C. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area shall record their name, affiliation, time in, and time out for each entry.
- D. Access to the regulated area shall be through a single decontamination unit. All other access (doors, windows, and hallways) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside, however, they shall be sealed with poly sheeting and taped until needed.

- E. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.
- F. The Contractor shall have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
- G. The regulated area shall be locked during non-working hours and secured by VA security/police guards.

1.5.13 EMERGENCY ACTION PLAN AND ARRANGEMENTS

- A. An Emergency Action Plan shall be developed by prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a); (b).
- B. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, shall read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.
- C. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that shall affect response capabilities.
- D. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.
- E. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
 - 1. For non-life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
 - 2. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker,

remove them from the regulated area, and secure proper medical treatment.

- F. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
- G. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.
- H. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that shall require the modification of the standard operating procedures during abatement. Such incidents include: fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

1.5.14 PRE-CONSTRUCTION MEETING

Prior to commencing the work, the Contractor shall meet with the VA Certified Industrial Hygienist (VPCIH) to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who shall be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

- A. Proof of Contractor licensing.
- B. Proof the Competent Person(s) is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person(s) shall also be presented.
- C. A list of all workers who shall participate in the project, including experience and verification of training and accreditation.
- D. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift shall have adequate training.
- E. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).

- F. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.
- G. A copy of the Contractor's Standard Operating Procedures for Asbestos Abatement. In these procedures, the following information shall be detailed, specific for this project.
 - 1. Regulated area preparation procedures;
 - 2. Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
 - 3. Decontamination area set-up/layout and decontamination procedures for employees;
 - 4. Abatement methods/procedures and equipment to be used;
 - 5. Personal protective equipment to be used;
- H. At this meeting the Contractor shall provide all submittals as required.
- I. Procedures for handling, packaging and disposal of asbestos waste.
- J. Emergency Action Plan and Contingency Plan Procedures.

1.6 PROJECT COORDINATION

The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

1.6.1 PERSONNEL

- A. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.
- B. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the COR. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with color picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.
- C. Minimum qualifications for Contractor and assigned personnel are:

1. The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive standard operating procedures for asbestos work; has adequate materials, equipment and supplies to perform the work.
2. The Competent Person has three (3) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
3. The Contractor Professional Industrial Hygienist (CPIH) shall have three (3) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete standard operating procedure for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.
4. The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the standard operating procedures of the Contractor; has one year of asbestos abatement experience; has applicable medical and respiratory protection documentation; has certificate of training/current refresher and State accreditation/license.

1.7 RESPIRATORY PROTECTION

1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM

The Contractor shall develop and implement a Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.132;134. ANSI

Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program. All respirators used shall be NIOSH approved for asbestos abatement activities. The written respiratory protection shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c) (1) (i - ix) - Respiratory Protection Program.

1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR

The Respiratory Protection Program Coordinator (RPPC) shall be identified and shall have two (2) years' experience coordinating the program. The RPPC shall submit a signed statement attesting to the fact that the program meets the above requirements.

1.7.3 SELECTION AND USE OF RESPIRATORS

The procedure for the selection and use of respirators shall be submitted to the VA as part of the Contractor's qualification. The procedure shall be written clearly enough for workers to understand. A copy of the Respiratory Protection Program shall be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

1.7.4 MINIMUM RESPIRATORY PROTECTION

Minimum respiratory protection shall be a full face powered air purifying respirator when fiber levels are maintained consistently at or below 0.5 f/cc. A higher level of respiratory protection shall be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel shall have a respirator for their exclusive use.

1.7.5 MEDICAL WRITTEN OPINION

No employee shall be allowed to wear a respirator unless a physician has determined they are capable of doing so and has issued a current written opinion for that person.

1.7.6 RESPIRATOR FIT TEST

All personnel wearing respirators shall have a current qualitative/quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Quantitative fit tests shall be done for PAPR's which have been put into a failure mode.

1.7.7 RESPIRATOR FIT CHECK

The Competent Person shall assure that the positive/negative fit check is done each time the respirator is donned by an employee. Headcoverings shall cover respirator headstraps. Any situation that

prevents an effective facepiece to face seal as evidenced by failure of a fit check shall preclude that person from wearing a respirator until resolution of the problem.

1.7.8 MAINTENANCE AND CARE OF RESPIRATORS

The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and care of respirators.

1.7.9 SUPPLIED AIR SYSTEMS

If a supplied air system is used, the system shall meet all requirements of 29 CFR 1910.134 and the ANSI/Compressed Gas Association (CGA) Commodity Specification for Air current requirements for Type 1 - Grade D breathing air. Low pressure systems are not allowed to be used on asbestos abatement projects. Supplied Air respirator use shall be in accordance with EPA/NIOSH publication EPA-560-OPTS-86-001 "A Guide to Respiratory Protection for the Asbestos Abatement Industry".

1.8 WORKER PROTECTION

1.8.1 TRAINING OF ABATEMENT PERSONNEL

Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k) (9) and any additional State/Local requirements. Training shall include, at a minimum, the elements listed at 29 CFR 1926.1101 (k) (9) (viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof shall be submitted for each person working at the site.

1.8.2 MEDICAL EXAMINATIONS

Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m) (4) shall be provided for each person and shall include in the opinion the person has been evaluated for working in a heat stress environment while wearing personal protective equipment and is able to perform the work.

1.8.3 PERSONAL PROTECTIVE EQUIPMENT

Provide whole body clothing, head coverings, gloves and foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective

equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

1.8.4 REGULATED AREA ENTRY PROCEDURE

The Competent Person shall ensure that each time workers enter the regulated area, they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

1.8.5 DECONTAMINATION PROCEDURE – PAPR

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

- A. When exiting the regulated area, remove disposable coveralls, and ALL other clothes, disposable head coverings, and foot coverings or boots in the equipment room.
- B. Still wearing the respirator and completely naked, proceed to the shower. Showering is MANDATORY. Care shall be taken to follow reasonable procedures in removing the respirator to avoid asbestos fibers while showering. The following procedure is required as a minimum:
 1. Thoroughly wet body including hair and face. If using a PAPR hold blower above head to keep filters dry.
 2. With respirator still in place, thoroughly decontaminate body, hair, respirator face piece, and all other parts of the respirator except the blower and battery pack on a PAPR. Pay particular attention to cleaning the seal between the face and respirator facepiece and under the respirator straps.
 3. Take a deep breath, hold it and/or exhale slowly, completely wetting hair, face, and respirator. While still holding breath, remove the respirator and hold it away from the face before starting to breathe.
- C. Carefully decontaminate the facepiece of the respirator inside and out. If using a PAPR, shut down using the following sequence: a) first cap inlets to filters; b) turn blower off to keep debris collected on the inlet side of the filter from dislodging and contaminating the outside of the unit; c) thoroughly decontaminate blower and hoses; d) carefully decontaminate battery pack with a wet rag being cautious of getting

water in the battery pack thus preventing destruction. **(THIS PROCEDURE IS NOT A SUBSTITUTE FOR RESPIRATOR CLEANING!)** .

- D. Shower and wash body completely with soap and water. Rinse thoroughly.
- E. Rinse shower room walls and floor to drain prior to exiting.
- F. Proceed from shower to clean room; dry off and change into street clothes or into new disposable work clothing.

1.8.6 REGULATED AREA REQUIREMENTS

The Competent Person shall meet all requirements of 29 CFR 1926.1101

(o) and assure that all requirements for regulated areas at 29 CFR 1926.1101 (e) are met. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

1.9 DECONTAMINATION FACILITIES

1.9.1 DESCRIPTION

Provide each regulated area with separate personnel (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

1.9.2 GENERAL REQUIREMENTS

All personnel entering or exiting a regulated area shall go through the PDF and shall follow the requirements at 29 CFR 1926.1101 (j) (1) and these specifications. All waste, equipment and contaminated materials shall exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF shall be constructed of a minimum of 3 layers of 6 mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6 mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.

1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF

The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention shall be provided at the point of connection to the VA system. Water supply shall be of adequate pressure and meet requirements of 29 CFR 1910.141(d)(3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70°F throughout the PDF and W/EDF.

1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)

The Competent Person shall provide a PDF consisting of shower room which is contiguous to a clean room and equipment room which is connected to the regulated area. The PDF shall be sized to accommodate the number of personnel scheduled for the project. The shower room, located in the center of the PDF, shall be fitted with as many portable showers as necessary to insure all employees can complete the entire decontamination procedure within 15 minutes. The PDF shall be constructed of opaque poly for privacy. The PDF shall be constructed to eliminate any parallel routes of egress without showering.


1. Clean Room: The clean room shall be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 3 layers of 6 mil opaque fire retardant poly to provide an airtight room. Provide a minimum of 2 - 900 mm (3 foot) wide 6 mil poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by

posting guards at both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.

2. Shower Room: The Competent Person shall assure that the shower room is a completely watertight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the equipment room to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using airtight walls made from at least 3 layers of 6 mil opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Wastewater shall be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters shall be changed a minimum of daily or more often as needed. Filter changes shall be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.
3. Equipment Room: The Competent Person shall provide an equipment room which shall be an airtight compartment for the storage of work equipment/tools, reusable personal protective equipment, except for a respirator and for use as a gross decontamination area for personnel exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made with 2 layers of 6 mil opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and the rest of the building by airtight walls and ceiling constructed of a minimum of 3 layers of 6 mil opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6 mil fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the

equipment room to accommodate any equipment required in the regulated area.

4. The PDF shall look like as follows: Clean room at the entrance followed by a shower room followed by an equipment room leading to the regulated area. Each doorway in the PDF is minimum of 2 layers of 6 mil opaque fire retardant poly.

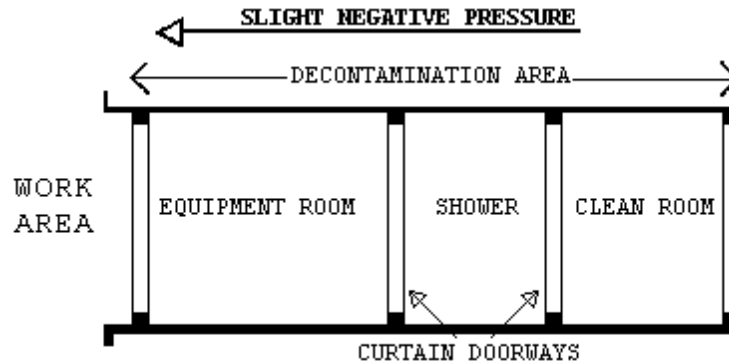


1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF)

The Competent Person shall provide an W/EDF consisting of a wash room, holding room, and clean room for removal of waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:

1. Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment bag and container cleaning station.
2. Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 6 mil fire retardant poly.
3. Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. The holding room shall be located so that bagged

- material cannot be passed from the wash room to the clean room unless it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6 mil fire retardant poly.
4. Clean Room: Provide a clean room to isolate the holding room from the exterior of the regulated area. Construct the clean room using 2 x 4 wood framing and 2 layers of 6 mil fire retardant poly. The clean room shall be located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be constructed of 2 layers of 6 mil fire retardant poly. When a negative pressure differential system is used, a rigid enclosure separation between the W/EDF clean room and the adjacent areas shall be provided.
 5. The W/EDF shall be provided as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

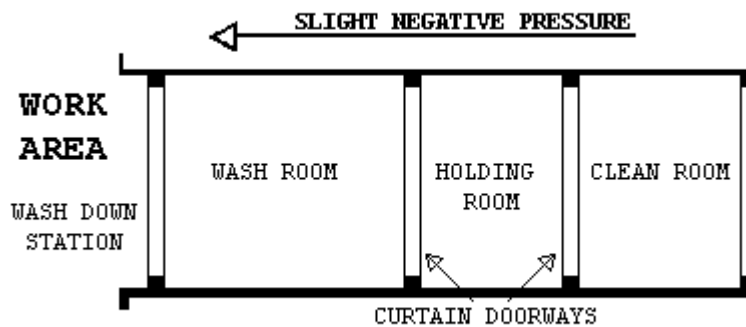

1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES

At washdown station in the regulated area, thoroughly wet clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and disposal. These personnel shall not be required to wear

PPE. At no time shall personnel from the clean side be allowed to enter the Wash Room.

PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT

2.1 MATERIALS AND EQUIPMENT

2.1.1 GENERAL REQUIREMENTS

Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH has submitted verification to the VA's representative.

- A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
- B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.
- C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized place.
- D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
- E. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least 6-mils shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.
- F. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment shall include any combination of moisture resistant duct tape furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other effective procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.
- G. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6 mil fire retardant poly.

- H. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
- I. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.
- J. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).
- K. Disposal bags - 2 layers of 6 mil, for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
- L. The VA shall be provided a copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication. Chlorinated compounds shall not be used with any spray adhesive or other product. Appropriate encapsulant(s) shall be provided.
- M. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k) (7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
- N. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued shall be based on a hazard assessment conducted under 29 CFR 1910.132(d).

2.1.2 NEGATIVE PRESSURE FILTRATION SYSTEM

The Contractor shall provide enough HEPA negative air machines to completely exchange the regulated area air volume 4 times per hour. The Competent Person shall determine the number of units needed for the regulated area by dividing the cubic feet in the regulated area by 15 and then dividing that result by the cubic feet per minute (CFM) for each unit to determine the number of units needed to effect 4 air changes per hour. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area.

2.1.3 DESIGN AND LAYOUT

- A. Before start of work submit the design and layout of the regulated area and the negative air machines. The submittal shall indicate the number of, location of and size of negative air machines. The point(s) of exhaust, air flow within the regulated area, anticipated negative pressure differential, and supporting calculations for sizing shall be provided. In addition, submit the following:
1. Method of supplying power to the units and designation/location of the panels.
 2. Description of testing method(s) for correct air volume and pressure differential.
 3. If auxiliary power supply is to be provided for the negative air machines, provide a schematic diagram of the power supply and manufacturer's data on the generator and switch.

2.1.4 NEGATIVE AIR MACHINES (HEPA UNITS)

- A. Negative Air Machine Cabinet: The cabinet shall be constructed of steel or other durable material capable of withstanding potential damage from rough handling and transportation. The width of the cabinet shall be less than 30" in order to fit in standard doorways. The cabinet shall be factory sealed to prevent asbestos fibers from being released during use, transport, or maintenance. Any access to and replacement of filters shall be from the inlet end. The unit shall be on casters or wheels.
- B. Negative Air Machine Fan: The rating capacity of the fan shall indicate the CFM under actual operating conditions. Manufacturer's typically use "free-air" (no resistance) conditions when rating fans. The fan shall be a centrifugal type fan.
- C. Negative Air Machine Final Filter: The final filter shall be a HEPA filter. The filter media shall be completely sealed on all edges within a structurally rigid frame. The filter shall align with a continuous flexible gasket material in the negative air machine housing to form an air tight seal. Each HEPA filter shall be certified by the manufacturer to have an efficiency of not less than 99.97% when challenged with 0.3 μm dioctylphthalate (DOP) particles. Testing shall have been done in accordance with Military Standard MIL-STD-282 and Army Instruction Manual 136-300-175A. Each filter shall bear a UL586 label to indicate ability to perform under specified conditions. Each filter shall be

marked with the name of the manufacturer, serial number, air flow rating, efficiency and resistance, and the direction of test air flow.

- D. Negative Air Machine Pre-filters: The pre-filters, which protect the final HEPA filter by removing larger particles, are required to prolong the operating life of the HEPA filter. Two stages of pre-filtration are required. A first stage pre-filter shall be a low efficiency type for particles 10 µm or larger. A second stage pre-filter shall have a medium efficiency effective for particles down to 5 µm or larger. Pre-filters shall be installed either on or in the intake opening of the NAM and the second stage filter shall be held in place with a special housing or clamps.
- E. Negative Air Machine Instrumentation: Each unit shall be equipped with a gauge to measure the pressure drop across the filters and to indicate when filters have become loaded and need to be changed. A table indicating the cfm for various pressure readings on the gauge shall be affixed near the gauge for reference or the reading shall indicate at what point the filters shall be changed, noting cfm delivery. The unit shall have an elapsed time meter to show total hours of operation.
- F. Negative Air Machine Safety and Warning Devices: An electrical/mechanical lockout shall be provided to prevent the fan from being operated without a HEPA filter. Units shall be equipped with an automatic shutdown device to stop the fan in the event of a rupture in the HEPA filter or blockage in the discharge of the fan. Warning lights are required to indicate normal operation; too high a pressure drop across filters; or too low of a pressure drop across filters.
- G. Negative Air Machine Electrical: All electrical components shall be approved by the National Electrical Manufacturer's Association (NEMA) and Underwriter's Laboratories (UL). Each unit shall be provided with overload protection and the motor, fan, fan housing, and cabinet shall be grounded.

2.1.5 PRESSURE DIFFERENTIAL

The fully operational negative air system within the regulated area shall continuously maintain a pressure differential of -0.02" water column gauge. Before any disturbance of any asbestos material, this shall be demonstrated to the VA by use of a pressure differential meter/manometer as required by OSHA 29 CFR 1926.1101(e)(5)(i). The Competent Person shall be responsible for providing, maintaining, and

documenting the negative pressure and air changes as required by OSHA and this specification.

2.1.6 MONITORING

The pressure differential shall be continuously monitored and recorded between the regulated area and the area outside the regulated area with a monitoring device that incorporates a strip chart recorder. The strip chart recorder shall become part of the project log and shall indicate at least -0.02" water column gauge for the duration of the project.

2.1.7 AUXILIARY GENERATOR

Not applicable.

2.1.8 SUPPLEMENTAL MAKE-UP AIR INLETS

Provide, as needed for proper air flow in the regulated area, in a location approved by the VA, openings in the plastic sheeting to allow outside air to flow into the regulated area. Auxiliary makeup air inlets shall be located as far from the negative air machines as possible, off the floor near the ceiling, and away from the barriers that separate the regulated area from the occupied clean areas. Cover the inlets with weighted flaps which shall seal in the event of failure of the negative pressure system.

2.1.9 TESTING THE SYSTEM

The negative pressure system shall be tested before any ACM is disturbed in any way. After the regulated area has been completely prepared, the decontamination units set up, and the negative air machines installed, start the units up one at a time. Demonstrate and document the operation and testing of the negative pressure system to the VA using smoke tubes and a negative pressure gauge. Testing shall also be done at the start of each work shift.

2.1.10 DEMONSTRATION OF THE NEGATIVE AIR PRESSURE SYSTEM

The demonstration of the operation of the negative pressure system to the VA shall include the following:

- A. Plastic barriers and sheeting move lightly in toward the regulated area.
- B. Curtains of the decontamination units move in toward regulated area.
- C. There is a noticeable movement of air through the decontamination units. Use the smoke tube to demonstrate air movement from the clean room to the shower room to the equipment room to the regulated area.
- D. Use smoke tubes to demonstrate air is moving across all areas in which work is to be done. Use a differential pressure gauge to indicate a

negative pressure of at least -0.02" across every barrier separating the regulated area from the rest of the building. Modify the system as necessary to meet the above requirements.

2.1.11 USE OF SYSTEM DURING ABATEMENT OPERATIONS

- A. Start units before beginning any disturbance of ACM occurs. After work begins, the units shall run continuously, maintaining 4 actual air changes per hour at a negative pressure differential of -0.02" water column gauge, for the duration of the work until a final visual clearance and final air clearance has been completed. The negative air machines shall not be shut down for the duration of the project unless authorized by the VA, in writing.
- B. Abatement work shall begin at a location farthest from the units and proceed towards them. If an electric failure occurs, the Competent Person shall stop all abatement work and immediately begin wetting all exposed asbestos materials for the duration of the power outage. Abatement work shall not resume until power is restored and all units are operating properly again.
- C. The negative air machines shall continue to run after all work is completed and until a final visual clearance and a final air clearance has been completed for that regulated area.

2.1.12 DISMANTLING THE SYSTEM

After completion of the final visual and final air clearance has been obtained by the VPIH/CIH, the units shall be shut down. The units shall have been **completely decontaminated**, all pre-filters removed and disposed of as asbestos waste, asbestos labels attached and the units inlet/outlet sealed with 2 layers of 6 mil poly.

2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA

2.2.1 GENERAL

Seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All surfaces in the regulated area shall be covered to prevent contamination and to facilitate clean-up. Shall adjacent areas become contaminated as a result of the work, shall immediately stop work and clean up the contamination at no additional cost to the VA. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Section 2.2.8; FIRESTOPPING.

2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA

Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. All uncontaminated removable furniture, equipment and/or supplies shall be removed by the VA from the regulated area before commencing work. Any objects remaining in the regulated area shall be completely covered with 2 layers of 6-mil fire retardant poly sheeting and secured with duct tape. Lock out and tag out any HVAC/electrical systems in the regulated area.

2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA

Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier shall be solid and capable of withstanding the negative pressure.

2.2.4 CRITICAL BARRIERS

Completely separate any operations in the regulated area from adjacent areas using 2 layers of 6 mil fire retardant poly and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects/openings in the regulated area. Heat shall be shut off any objects covered with poly.

2.2.5 PRIMARY BARRIERS

- A. Cover the regulated area with two layers of 6 mil fire retardant poly on the floors and two layers of 4 mil fire retardant poly on the walls, unless otherwise directed in writing by the COR. Floor layers shall form a right angle with the wall and turn up the wall at least 300 mm (12"). Seams shall overlap at least 1800 mm (6') and shall be spray glued and taped. Install sheeting so that layers can be removed independently from each other. Carpeting shall be covered with three layers of 6 mil poly. Corrugated cardboard sheets shall be placed between the bottom and middle layers of poly. Mechanically support and seal with duct tape and glue all wall layers.

- B. If stairs and ramps are covered with 6 mil plastic, two layers shall be used. Provide 19 mm (3/4") exterior grade plywood treads held in place with duct tape/glue on the plastic. Do not cover rungs or rails with any isolation materials.

2.2.6 SECONDARY BARRIERS

A loose layer of 6 mil shall be used as a drop cloth to protect the primary layers from debris generated during the abatement. This layer shall be replaced as needed during the work minimally once per work day.

2.2.7 EXTENSION OF THE REGULATED AREA

If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section.

Decontamination measures shall be started immediately and continue until air monitoring indicates background levels are met.

2.2.8 FIRESTOPPING

- A. Through penetrations caused by cables, cable trays, pipes, sleeves shall be firestopped with a fire-rated firestop system providing an air tight seal.
- B. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the COR. The contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the COR immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the COR or Fire Marshall.
- C. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the COR for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

2.3 MONITORING, INSPECTION AND TESTING

2.3.1 GENERAL

- A. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. The CPIH shall be responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these

specifications. In addition, the CPIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.

- B. The VA shall employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH shall perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors shall not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services shall be borne by the VA except for any repeat of final inspection and testing that shall be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, shall be paid for by the Contractor.
- C. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor shall request confirmation of the results by analysis of the samples by TEM. Request shall be in writing and submitted to the VA's representative. Cost for the confirmation of results shall be borne by the Contractor for both the collection and analysis of samples and for the time delay that shall/does result for this confirmation. Confirmation sampling and analysis shall be the responsibility of the CPIH with review and approval of the VPIH/CIH. An agreement between the CPIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT

- A. The purpose of the work of the VPIH/CIH is to: assure quality; adherence to the specification; resolve problems; prevent the spread of contamination beyond the regulated area; and assure clearance at the end of the project. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH shall perform the following tasks:
1. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
 2. Task 2: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
 3. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits shall include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
 4. Task 4: Provide support to the COR such as evaluation of submittals from the Contractor, resolution of conflicts, and interpret data.
 5. Task 5: Perform, in the presence of the COR, final inspection and testing of a decontaminated regulated area at the conclusion of the abatement to certify compliance with all regulations and VA requirements/specifications.
 6. Task 6: Issue certificate of decontamination for each regulated area and project report.
- B. All documentation, inspection results and testing results generated by the VPIH/CIH shall be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
- C. The monitoring and inspection results of the VPIH/CIH shall be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

2.3.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH

The Contractor's CPIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in air sampling and analysis. The IH Technician shall have a NIOSH 582 Course or equivalent and show proof. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA/State Contractor/Supervisor and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation. The analytic laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT. A daily log documenting all OSHA requirements for air monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the COR and the VPIH/CIH. The log shall contain, at a minimum, information on personnel or area sampled, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH shall perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH responsibilities.

2.4 STANDARD OPERATING PROCEDURES

The Contractor shall have established Standard Operating Procedures (SOP's) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the procedures to be followed during all phases of the work by the Contractor's personnel. The SOP's shall be modified as needed to address specific requirements of this project and the specifications. The SOP's shall be submitted for review and approval prior to the start of any abatement work. The minimum topics and areas to be covered by the SOP's are:

- A. Minimum Personnel Qualifications
- B. Emergency Action Plan/Contingency Plans and Arrangements
- C. Security and Safety Procedures
- D. Respiratory Protection/Personal Protective Equipment Program and Training
- E. Medical Surveillance Program and Recordkeeping
- F. Regulated Area Requirements - Containment Barriers/Isolation of Regulated Area
- G. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
- H. Negative Pressure Systems Requirements
- I. Monitoring, Inspections, and Testing
- J. Removal Procedures for ACM
- K. Removal of Contaminated Soil
- L. Encapsulation Procedures for ACM
- M. Disposal of ACM waste/equipment
- N. Regulated Area Decontamination/Clean-up
- O. Regulated Area Visual and Air Clearance
- P. Project Completion/Closeout

2.5 SUBMITTALS

2.5.1 PRE-START MEETING SUBMITTALS

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:

- A. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
- B. Submit a staff organization chart showing all personnel who shall be working on the project and their capacity/function. Provide their

qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.

- C. Submit Standard Operating Procedures developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH.
- D. Submit the specifics of the materials and equipment to be used for this project with brand names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
 - 1. Supplied air system, if used, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
 - 2. Waste water filtration system, shower system, containment barriers.
 - 3. Encapsulants, surfactants, hand held sprayers, airless sprayers, glovebags, fire extinguishers.
 - 4. Respirators, protective clothing, personal protective equipment.
 - 5. Fire safety equipment to be used in the regulated area.
- E. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
- F. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.
- G. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Air monitoring shall be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A.
- H. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
 - 1. Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project

- Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; Completion Date
2. List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; Resolution
 3. List asbestos regulatory citations, penalties, damages paid and legal actions taken against the company in the last 3 years. Provide copies and all information needed for verification.
- I. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.
1. CPIH: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of SOP's developed; medical opinion; current respirator fit test.
 2. Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion; current respirator fit test.
 3. Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion; current respirator fit test.
- J. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain english the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of SOP's incorporating the requirements of this specification; information on who provides your training, how often; who provides medical

surveillance, how often; who does and how is air monitoring conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and standard operating procedures; copies of monitoring results of the five referenced projects listed and analytical method(s) used.

- K. Rented equipment shall be decontaminated prior to returning to the rental agency.
- L. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants and the MSDS. Provide application instructions also.

2.5.2 SUBMITTALS DURING ABATEMENT

- A. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breeching, equipment failures, emergencies, and any cause for stopping work; representative air monitoring and results/TWA's/EL's. Submit this information daily to the VPIH/CIH.
- B. The CPIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.
 - 1. Removal of any poly barriers.
 - 2. Visual inspection/testing by the CPIH prior to application of lockdown.
 - 3. Packaging and removal of ACM waste from regulated area.
 - 4. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT

The CPIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. The report shall include a certificate of completion, signed and dated by the CPIH, in accordance with Attachment #1. All clearance and perimeter samples shall be submitted. The COR shall retain the abatement report after completion of the project.

2.6 ENCAPSULANTS

2.6.1 TYPES OF ENCAPSULANTS

- A. The following four types of encapsulants, if used, shall comply with performance requirements as stated in paragraph 2.6.2:
1. Removal encapsulant - used as a wetting agent to remove ACM.
 2. Bridging encapsulant - provides a tough, durable coating on ACM.
 3. Penetrating encapsulant - penetrates/encapsulates ACM at least 13 mm (1/2").
 4. Lockdown encapsulant - seals microscopic fibers on surfaces after ACM removal.

2.6.2 PERFORMANCE REQUIREMENTS

Encapsulants shall meet the latest requirements of EPA; shall not contain toxic or hazardous substances; or solvents; and shall comply with the following performance requirements:

- A. General Requirements for all Encapsulants:
1. ASTM E84: Flame spread of 25; smoke emission of 50.
 2. University of Pittsburgh Protocol: Combustion Toxicity; zero mortality.
 3. ASTM C732: Accelerated Aging Test; Life Expectancy - 20 years.
 4. ASTM E96: Permeability - minimum of 0.4 perms.
- B. Bridging/Penetrating Encapsulants:
1. ASTM E736: Cohesion/Adhesion Test - 24 kPa (50 lbs/ft²).
 2. ASTM E119: Fire Resistance - 3 hours (Classified by UL for use on fibrous/cementitious fireproofing).
 3. ASTM D2794: Gardner Impact Test; Impact Resistance - minimum 11.5 kg-mm (43 in/lb).
 4. ASTM D522: Mandrel Bend Test; Flexibility - no rupture or cracking.
- C. Lockdown Encapsulants:
1. ASTM E119: Fire resistance - 3 hours (tested with fireproofing over encapsulant applied directly to steel member).
 2. ASTM E736: Bond Strength - 48 kPa (100 lbs/ft²) (test compatibility with cementitious and fibrous fireproofing).
 3. In certain situations, encapsulants shall have to be applied to hot pipes/equipment. The encapsulant shall be able to withstand high temperatures without cracking or off-gassing any noxious vapors during application.

2.6.3 CERTIFICATES OF COMPLIANCE

The Contractor shall submit to the COR certification from the manufacturer indicating compliance with performance requirements for encapsulants when applied according to manufacturer recommendations.

PART 3 - EXECUTION

3.1 PRE-ABATEMENT ACTIVITIES

3.1.1 PRE-ABATEMENT MEETING

The COR, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH that all materials and equipment required for the project are on the site, shall arrange for a pre-abatement meeting between the Contractor, the CPIH, Competent Person(s), the COR(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative shall issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS

Before any work begins on the construction of the regulated area, the Contractor shall:

- A. Conduct a space-by-space inspection with an authorized COR and prepare a written inventory of all existing damage in those spaces where asbestos abatement shall occur. Still or video photography shall be used to supplement the written damage inventory. Document shall be signed and certified as accurate by both parties.
- B. The COR, the Contractor, and the VPIH/CIH shall be aware of 10/95 A/E Quality Alert indicating the failure to identify asbestos in the areas listed. Make sure these areas are looked at/reviewed on the project: Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside chases/walls; transite piping/ductwork/sheets; behind radiators; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawl spaces(previous abatement contamination); flooring/mastic covered by carpeting/new flooring;

exterior insulated wall panels; on underground fuel tanks; steam line trench coverings.

- C. Ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area have been cleaned, HEPA vacuumed, wet wiped, and removed from the work area.
- D. HEPA vacuum all of carpeting and floors in the regulated area.
- E. Inspect existing firestopping in the regulated area. Correct as needed.

3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS

- A. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
- B. Upon completion of all preparatory work, the CPIH shall inspect the work and systems and shall notify the VA's representative when the work is completed in accordance with this specification. The VA's representative shall inspect the regulated area and the systems with the VPIH/CIH and shall require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved SOP's, especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation. The operational systems for respiratory protection and the negative pressure system shall be demonstrated for proper performance.
- C. The CPIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.
- D. Upon satisfactory inspection of the installation of and operation of systems the VA's representative shall notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification and all applicable regulations.

3.2 REGULATED AREA PREPARATIONS

- A. Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos shall exceed ambient background levels. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs shall be posted following construction of the regulated area enclosure.
- B. Shut down and lock out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all

- applicable electrical code requirements and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.
- C. Shut down and lock out heating, cooling, and air conditioning system (HVAC) components that are in, supply or pass through the regulated area. Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil polyethylene disposal bags for staging and eventual disposal as asbestos waste.
- D. The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.
- E. The VA shall provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.
- F. Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location. Drapes, clothing, upholstered furniture and other fabric items shall be disposed of as asbestos contaminated waste. Cleaning these asbestos contaminated items utilizing HEPA vacuum techniques and off-premises steam cleaning is very difficult and cannot guarantee decontamination. Since adequate cleaning of contaminated fabrics is difficult, the VA shall determine whether this option is an appropriate one.
- G. Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention shall be paid to machinery behind grills or gratings where access shall be difficult but contamination shall be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After precleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which shall remain in the regulated area and that require special ventilation or enclosure requirements shall be designated here

along with specified means of protection. Contact the manufacturer for special protection requirements.

- H. Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

3.3 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA GENERAL:

Follow requirements of Section 2.2 - Containment Barriers and Coverings.

3.4 REMOVAL OF ACM

3.4.1 WETTING ACM

- A. Use amended water for the wetting of ACM prior to removal. The Competent Person shall assure the wetting of ACM meets the definition of "adequately wet" in the EPA NESHAP's regulation and OSHA's "wet methods" for the duration of the project. A removal encapsulant shall be used instead of amended water with written approval of the VA's representative.
- B. Amended Water: Provide water to which a surfactant has been added shall be used to wet the ACM and reduce the potential for fiber release during disturbance of ACM. The mixture shall be equal to or greater than the wetting provided by water amended by a surfactant consisting one ounce of 50% polyoxyethylene ester and 50% polyoxyethylene ether mixed with 5 gallons (19L) of water.
- C. Removal Encapsulant: Provide a penetrating encapsulant designed specifically for the removal of ACM. The material shall, when used, result in adequate wetting of the ACM and retard fiber release during removal.

3.4.2 SECONDARY BARRIER AND WALKWAYS

- A. Install as a drop cloth a 6 mil poly sheet at the beginning of each work shift where removal is to be done during that shift. Completely cover floors and any walls within 10 feet (3M) of the area where work is to done. Secure the secondary barrier with duct tape to prevent debris from getting behind it. Remove the secondary barrier at the end of the shift or as work in the area is completed. Keep residue on the secondary barrier wetted. When removing, fold inward to prevent spillage and place in a disposal bag.

- B. Install walkways using 6 mil black poly between the regulated area and the decontamination facilities (PDF and W/EDF) to protect the primary layers from contamination and damage. Install the walkways at the beginning of each shift and remove at the end of each shift.

3.4.3 WET REMOVAL OF ACM

- A. Adequately and thoroughly wet the ACM to be removed prior to removal to reduce/prevent fiber release to the air. Adequate time shall be allowed for the amended water to saturate the ACM. Abatement personnel shall not disturb dry ACM. Use a fine spray of amended water or removal encapsulant. Saturate the material sufficiently to wet to the substrate without causing excessive dripping. The material shall be sprayed repeatedly/continuously during the removal process in order to maintain adequately wet conditions. Removal encapsulants shall be applied in accordance with the manufacturer's written instructions. Perforate or carefully separate, using wet methods, an outer covering that is painted or jacketed in order to allow penetration and wetting of the material. Where necessary, carefully remove covering while wetting to minimize fiber release. **In no event shall dry removal occur except in the case of electrical hazards or a greater safety issue is possible!**
- B. If ACM does not wet well with amended water due to coating or jacketing, remove as follows:
 - 1. Mist work area continuously with amended water whenever necessary to reduce airborne fiber levels.
 - 2. Remove saturated ACM in small sections. Do not allow material to dry out. As material is removed, bag material while still wet into disposal bags. Twist tightly the bag neck, bend over (gooseneck) and seal with a minimum of three tight wraps of duct tape. Clean /decontaminate the outside of any residue and move to washdown station adjacent to W/EDF.
 - 3. Pipe/Tank/Vessel/Boiler Insulation: Remove the outer layer of wrap while spraying with amended water in order to saturate the ACM. Spray ACM with a fine mist of amended water or removal encapsulant. Allow time to saturate the material to the substrate. Cut bands holding pre-formed pipe insulation sections. Slit jacketing at the seams, remove and hand place in a disposal bag. Do not allow dropping to the floor. Remove molded fitting insulation/mud in large pieces and hand place in a disposal bag. Remove any residue on pipe or fitting with a stiff bristle nylon brush. In locations where pipe

fitting insulation is removed from fibrous glass or other non-asbestos insulated straight runs of pipe, remove fibrous material at least 6" from the point it contacts the ACM.

3.5 LOCKDOWN ENCAPSULATION

3.5.1 GENERAL

Lockdown encapsulation is an integral part of the ACM removal. At the conclusion of ACM removal and before removal of the primary barriers, all surfaces shall be encapsulated with a bridging encapsulant.

3.5.2 DELIVERY AND STORAGE

Deliver materials to the job site in original, new and unopened containers bearing the manufacturer's name and label as well as the following information: name of material, manufacturer's stock number, date of manufacture, thinning instructions, application instructions and the MSDS for the material.

3.5.3 WORKER PROTECTION

Before beginning work with any material for which an MSDS has been submitted, provide workers with any required personal protective equipment. The required personal protective equipment shall be used whenever exposure to the material might occur. In addition to OSHA/specification requirements for respiratory protection, a paint pre-filter and an organic vapor cartridge, at a minimum, shall be used in addition to the HEPA filter when a solvent based encapsulant is used. The CPIH shall be responsible for provision of adequate respiratory protection.

3.5.4 ENCAPSULATION OF PIPING

- A. Apply two coats of encapsulant to the piping after all ACM has been removed. Apply in strict accordance with the manufacturer's instructions. Any deviation from the instructions shall be approved by the VA's representative in writing prior to commencing the work.
- B. Apply the encapsulant with an airless sprayer at a pressure and using a nozzle orifice as recommended by the manufacturer. Apply the first coat while the scratch coat is still damp from the asbestos removal process, after passing the visual inspection. If the surface has been allowed to dry, wet wipe or HEPA vacuum prior to spraying with encapsulant. Apply a second coat over the first coat in strict conformance with the manufacturer's instructions. Color the encapsulant and contrast the color in the second coat so that visual confirmation of completeness and uniform coverage of each coat is possible. Adhere

to the manufacturer's instructions for coloring. At the completion of the encapsulation, the surface shall be a uniform third color produced by the mixture.

3.5.5 SEALING EXPOSED EDGES

Seal edges of ACM exposed by removal work which is inaccessible, such as a sleeve, wall penetration, and floor penetration, with two coats of encapsulant. Prior to sealing, permit the exposed edges to dry completely to permit penetration of the encapsulant. Apply in accordance with 3.5.4 (B).

3.6 DISPOSAL OF ACM WASTE MATERIALS

3.6.1 GENERAL

Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging shall also be met. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

3.6.2 PROCEDURES

- A. Asbestos waste shall be packaged and moved through the W/EDF into a covered transport container in accordance with procedures in this specification. Waste shall be double-bagged prior to disposal. Wetted waste can be very heavy. Bags shall not be overfilled. Bags shall securely sealed to prevent accidental opening and/or leakage. The top shall be tightly twisted and goosenecked prior to tightly sealing with at least three wraps of duct tape. Ensure that unauthorized persons do not have access to the waste material once it is outside the regulated area. All transport containers shall be covered at all times when not in use. NESHAP's signs shall be on containers during loading and unloading. Material shall not be transported in open vehicles. If drums are used for packaging, the drums shall be labeled properly and shall not be re-used.
- B. Waste Load Out: Waste load out shall be done in accordance with the procedures in W/EDF Decontamination Procedures. Bags shall be decontaminated on exterior surfaces by wet cleaning and/or HEPA vacuuming before being placed in the second bag.
- C. Asbestos waste with sharp edged components, i.e., nails, screws, lath, strapping, tin sheeting, jacketing, and metal mesh, which might tear poly bags shall be wrapped securely in burlap before packaging and, if

needed, use a poly lined fiber drum as the second container, prior to disposal.

3.7 PROJECT DECONTAMINATION

3.7.1 GENERAL

- A. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH.
- B. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination shall be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.
- C. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination shall be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

3.7.2 REGULATED AREA CLEARANCE

Air testing and other requirements which shall be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

3.7.3 WORK DESCRIPTION

Decontamination includes the clearance of the air in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.

3.7.4 PRE-DECONTAMINATION CONDITIONS

- A. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the loose 6 mil layer of poly removed and disposed of along with any gross debris generated by the work.
- B. At the start of decontamination, the following shall be in place:
 - 1. Primary barriers consisting of 2 layers of 6 mil poly on the floor and 4 mil poly on the walls.
 - 2. Critical barriers consisting of 2 layers of 6 mil poly which is the sole barrier between the regulated area and openings to the rest of the building or outside.
 - 4. Decontamination facilities for personnel and equipment in operating condition and the negative pressure system in operation.

3.7.5 FIRST CLEANING

Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping methods. Use each surface of a cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. If determined by the CPIH/VPIH/CIH additional cleaning(s) shall be needed.

3.7.6 PRE-CLEARANCE INSPECTION AND TESTING

The CPIH and VPIH/CIH shall perform a thorough and detailed visual inspection at the end of the cleaning to determine whether there is any visible residue in the regulated area. If the visual inspection is acceptable, the CPIH shall perform pre-clearance sampling using aggressive clearance as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III) (B) (7) (d). If the sampling results show values below 0.01 f/cc, then the Contractor shall notify the VA's representative of the results with a brief report from the CPIH documenting the inspection and sampling results and a statement verifying that the regulated area is ready for lockdown encapsulation. The VA reserves the right to utilize their own VPIH/CIH to perform a pre-clearance inspection and testing for verification.

3.7.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES

With the express written permission of the VA's representative, perform lockdown encapsulation of all surfaces from which asbestos was abated in accordance with the procedures in this specification. Negative pressure shall be maintained in the regulated area during the lockdown application.

3.8 FINAL VISUAL INSPECTION AND AIR CLEARANCE TESTING

3.8.1 GENERAL

Notify the COR 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing shall be performed by the VPIH/CIH starting after the final cleaning.

3.8.2 FINAL VISUAL INSPECTION

Final visual inspection shall include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows,

and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. When the regulated area is visually clean the final testing can be done.

3.8.3 FINAL AIR CLEARANCE TESTING

- A. After an acceptable final visual inspection by the VPIH/CIH and COR AE Project Engineer, the VPIH/CIH shall perform the final testing. Air samples shall be collected and analyzed in accordance with procedures for AHERA in this specification. 5 PCM samples shall be collected for clearance. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures until clearance is achieved. **All additional inspection and testing costs shall be borne by the Contractor.**
- B. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

3.8.4 FINAL AIR CLEARANCE PROCEDURES

- A. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured with PCM methods
- B. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH shall secure samples and analyze them according to the following procedures:
 - 1. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method.
 - 2. Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques except where soil is not encapsulated or enclosed. Samples shall be collected on 0.8μ MCE filters for PCM analysis. A minimum of 1200 Liters of air shall be collected for clearance samples. Before pumps are started, initiate aggressive sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III) (B) (7) (d). Air samples shall be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off. The negative pressure system shall continue to operate.

3.8.5 CLEARANCE SAMPLING USING PCM:

- A. The VPIH/CIH shall perform clearance samples as indicated by the specification.
- B. The NIOSH 7400 PCM method shall be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 5 PCM clearance samples shall be collected. All samples shall be equal to or less than 0.01 f/cc to clear the regulated area.

3.8.6 CLEARANCE SAMPLING USING TEM

Not applicable.

3.8.7 LABORATORY TESTING OF PCM CLEARANCE SAMPLES

The services of an AIHA accredited laboratory shall be employed by the VA to perform analysis for the air samples. Samples shall be sent daily by the VPIH/CIH so that verbal/faxed reports can be received within 24 hours. A complete record, certified by the laboratory, of all air monitoring tests and results shall be furnished to the VA's representative and the Contractor.

3.9 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE

3.9.1 COMPLETION OF ABATEMENT WORK

After thorough decontamination, seal negative air machines with 2 layers of 6 mil poly and duct tape to form a tight seal at the intake/outlet ends before removal from the regulated area. Complete asbestos abatement work upon meeting the regulated area visual and air clearance criteria and fulfilling the following:

- A. Remove all equipment and materials from the project area.
- B. Dispose of all packaged ACM waste as required.
- C. Repair or replace all interior finishes damaged during the abatement work, as required.
- D. Fulfill other project closeout requirements as required in this specification.

3.9.2 CERTIFICATE OF COMPLETION BY CONTRACTOR

The CPIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

3.9.3 WORK SHIFTS

All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday -Friday excluding Federal Holidays. Any change in the work schedule shall be approved in writing by the COR.

ATTACHMENT #1

CERTIFICATE OF COMPLETION

DATE:

PROJECT NAME:

VAMC/ADDRESS:

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):
which took place from / / to / /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That the negative pressure system was installed, operated and maintained in order to provide a minimum of 4 actual air changes per hour with a continuous -0.02" of water column pressure.

Signature/Date:

Signature/Date:

ATTACHMENT #2

CERTIFICATE OF WORKER'S ACKNOWLEDGMENT

PROJECT NAME:

DATE:

PROJECT ADDRESS:

ABATEMENT CONTRACTOR'S NAME:

WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.

Your employer's contract with the owner for the above project requires that: You shall be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You shall be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You shall receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards
- Medical Monitoring
- Air Monitoring
- Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
- Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and shall have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature:

Printed Name:

Social Security Number:

Witness:

ATTACHMENT #3

**AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND
TRAINING/ACCREDITATION**

VA PROJECT NAME AND NUMBER:

VA MEDICAL FACILITY:

ABATEMENT CONTRACTOR'S NAME AND ADDRESS:

1. I verify that the following individual

Name:

Social Security Number:

who is proposed to be employed in asbestos abatement work associated with the above project by the named. Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m) (n) and 29 CFR 1910.20 are kept at the offices of the Contractor at the following address.

Address:

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.
3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation shall be kept on-site.
4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH:

Date:

Printed Name of CPIH:

Signature of Contractor:

Date:

Printed Name of Contractor:

ATTACHMENT #4

**ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S
ASBESTOS SPECIFICATIONS**

VA Project Location:

VA Project #:

VA Project Description:

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I shall certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature

Date

Abatement Contractor Competent Person(s)

Date

- - - E N D - - -

SECTION 02 83 33.13
LEAD-BASED PAINT REMOVAL AND DISPOSAL

PART 1 - GENERAL**1.1 SUMMARY**

A. Section Includes:

1. Removing and disposal of lead-based paint (LBP) and lead painted building components as follows:

Lead painted components	Locations	Abatement Method	Quantity
Exterior paint on wood window sashes and trim	Basement, 1 st , and 2 nd floor windows	Infrared or Chemical Removal	94 windows (3'x 5')
Interior paint on wood window sashes, sills, frames, and trim	Basement windows; 1 st and 2 nd hallway windows	Infrared or Chemical Removal	94 windows (3'x 5')
Interior wood doors and door trim	Basement lobby, 1 st and 2 nd floor custodial closets	Component removal & disposal	5 doors
Wood porch columns, beams, railings, trim, and ceilings (black paint only)	1 st and 2 nd floor exterior balconies	Infrared or Chemical Removal	6,020 sf

1.2 RELATED WORK

- A. Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT: Hazardous Material Abatement.
- B. Section 02 41 00, DEMOLITION: Demolition Disturbing Lead-Based Paint.
- C. Section 09 91 00, PAINTING: Surface Preparation Disturbing Lead-Based Paint.

1.3 DEFINITIONS

- A. Action Level: Employee exposure, without regard to use of respirator, to an airborne lead concentration of 30 micrograms(μ) per cubic meter (m^3) of air determined as an 8-hour Time-Weighted Average (TWA). As used in this section, "30 micrograms per cubic meter of air" refers to OSHA 29 CFR 1926.62 Lead in Construction Action Level (AL).
- B. Area Monitoring: Sampling of lead concentrations within lead control area and inside physical boundaries which are representative of airborne lead concentrations which may reach breathing zone of personnel potentially exposed to lead.

- C. Breathing Zone: Area within hemisphere, forward of shoulders, with 150 mm to 225 mm (6 to 9 inches) radius and center at nose or mouth of employee.
- D. Certified Industrial Hygienist (CIH): As used in this section, refers to an Industrial Hygienist Certified in the Comprehensive Practice of Industrial Hygiene by the American Board of Industrial Hygiene and Board for Global EHS Credentialing, employed by Contractor.
- E. Change Rooms and Shower Facilities: Rooms within designated physical boundary around lead control area equipped with separate storage facilities for clean protective work clothing and equipment and for street clothes which prevents cross contamination.
- F. Competent Person: Person capable of identifying lead hazards in work area and authorized by contractor to take corrective action. Meets the OSHA definition of Competent Person.
- G. Decontamination Room: Room for removal of contaminated personal protective equipment (PPE).
- H. Eight-Hour Time Weighted Average (TWA): Airborne concentration of lead averaged over 8-hour workday to which an employee is exposed.
- I. High Efficiency Particulate Air (HEPA) Filter Equipment:
HEPA filtered vacuuming equipment with UL 586 filter system capable of collecting and retaining lead-contaminated paint dust. HEPA filter means 99.97 percent efficient against 0.3 micron (0.012 mil) size particles.
- J. Lead: Metallic lead, inorganic lead compounds, and organic lead soaps. Excluded from this definition are other organic lead compounds.
- K. Lead Control Area: Enclosed area or structure with full containment to prevent spreading lead dust, paint chips, and debris from lead-based paint removal operations. Lead control area is isolated by physical boundaries to prevent unauthorized entry of personnel.
- L. Lead Permissible Exposure Limit (PEL): Fifty micrograms per cubic meter of air ($50 \mu\text{g}/\text{m}^3$) determined as an 8-hour TWA as determined by 29 CFR Part 1926.62. When employee is exposed for more than 8-hours per work day, determine PEL by the following formula. PEL micrograms/cubic meter (parts per million) of air = $400/\text{No. of hrs. worked per day}$.
- M. Personnel Monitoring: Sampling of lead concentrations within employee breathing zone to determine 8-hour time weighted average concentration according to 29 CFR Part 1926.62. Take samples that are representative of the various employee's work tasks.

N. Physical Boundary: Area physically roped or partitioned off around enclosed lead control area to limit unauthorized entry of personnel. As used in this section, "inside boundary" shall mean same as "outside lead control area."

1.4 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American National Standards Institute (ANSI):
 - Z9.2-2018.....Fundamentals Governing the Design & Operation of Local Exhaust Ventilation Systems.
- C. Code of Federal Regulations (CFR):
 - 29 CFR Part 1910.....Occupational Safety and Health Standards.
 - 29 CFR Part 1926.....Safety and Health Regulations for Construction.
 - 40 CFR Part 260.....Hazardous Waste Management System: General.
 - 40 CFR Part 261.....Identification and Listing of Hazardous Waste.
 - 40 CFR Part 262.....Standards Applicable to Generators of Hazardous Waste.
 - 40 CFR Part 263.....Standards Applicable to Transporters of Hazardous Waste.
 - 40 CFR Part 264.....Standards for Owners and Operations of Hazardous Waste Treatment, Storage, and Disposal Facilities.
 - 40 CFR Part 265.....Interim Status Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities.
 - 40 CFR Part 268.....Land Disposal Restrictions.
 - 49 CFR Part 172.....Hazardous Material Table, Special Provisions, Hazardous Material Communications, Emergency Response Information, and Training Requirements, and Security Plans.
 - 49 CFR Part 178.....Specifications for Packaging.
- D. Underwriters Laboratories (UL):
 - 586-09.....High-Efficiency, Particulate, Air Filter Units.

1.5 PRE-REMOVAL MEETINGS

- A. Conduct pre-removal meeting at the project site at least 30 days before beginning Work of this section.
 - 1. Required Participants:
 - a. Contracting Officer's Representative.
 - b. Certified Industrial Hygienist.
 - c. Architect/Engineer.
 - d. General Contractor.
 - e. Paint removal contractor.
 - 2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
 - a. Respiratory protection program.
 - b. Hazard communication program.
 - c. Hazardous waste management plan.
 - d. Safety and health regulation compliance.
 - e. Employee training.
 - f. Removal schedule.
 - g. Removal sequence.
 - h. Preparatory work.
 - i. Protection before, during, and after removal.
 - j. Removal.
 - k. Inspecting and testing.
 - l. Other items affecting successful completion.
 - 3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.6 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - a. Paint removal products/equipment.
 - b. Vacuum filters.
 - c. Respirators.
 - 2. Safety Data Sheet for each paint removal product.
 - 3. Installation instructions.
 - a. Paint removal products.
- C. Test Reports: Submit testing laboratory reports.

1. Submit air monitoring results within three working days, signed by testing laboratory employee performing air monitoring, employee analyzing sample, and CIH.
- D. Certificates: Certify completed lead training.
 1. Submit certificate for each employee signed and dated by CIH and employee stating employee was trained.
- E. Qualifications: Substantiate qualifications comply with specifications.
 1. Paint removal contractor.
 2. Testing laboratory.
 - a. Name, address, and telephone number.
 - b. Current evidence of participation in American Industrial Hygiene Association (AIHA) Laboratory Accreditation Program (LAP), LLC, Environmental Lead Laboratory Accreditation Program (ELLAP).
 - c. Copy of current AIHA accreditation certificate.
 3. Industrial hygienist.
 - a. Name, address, and telephone number.
 - b. Resume showing previous experience.
 - c. Copy of current ABIH CIH certification.
 4. Paint disposal facility.
 - a. Name, address, and telephone number.
 - b. Current license or authorization to receive and dispose lead contaminated waste.
- F. Record Documents:
 1. Completed and signed hazardous waste manifest from waste transporter.
 2. Toxicity Characteristic Leaching Procedure (TCLP) test results to determine if waste is hazardous.
 3. Paint disposal facility receipts and disposition reports.
 4. Certification of medical examinations.
 5. Medical Opinion that employee is qualified to wear a respirator, that employees has been trained and fit tested for the respirator.
 6. Employee training certification.

1.7 QUALITY ASSURANCE

A. Safety and Health Regulation Compliance:

1. Comply with laws, ordinances, rules, and regulations of Federal, State, and Local authorities having jurisdiction regarding removing, handling, storing, transporting, and disposing lead waste materials.
 - a. Comply with applicable requirements of 29 CFR Part 1926.62.
 - b. Notify Contracting Officer's Representative and request resolution of conflicts between regulations and specified requirements before starting work.

B. Paint Removal Contractor: Experienced contractor, registered or licensed by applicable state agency regulating lead-based paint removal.

C. Testing Laboratory: State certified independent testing laboratory experienced in airborne lead monitoring, testing, and reporting.

1. Successful participant in American Industrial Hygiene Association (AIHA) Laboratory Accreditation Program (LAP), LLC, Environmental Lead Laboratory Accreditation Program (ELLAP).

D. Certified Industrial Hygienist: Certified as CIH by American Board of Industrial Hygiene in comprehensive practice and responsible for:

1. Certify Training.
2. Review and approve lead-based paint removal plan for conformance to applicable referenced standards.
3. Inspect lead-based paint removal work for conformance with approved plan.
4. Direct monitoring.
5. Ensure work is performed according to specifications.
6. Ensure personnel and environment hazardous exposures are adequately controlled.

E. Paint Disposal Facility: State certified disposal facility qualified to receive and dispose lead-based paint.

F. Lead-based Paint Removal Plan:

1. Submit detailed, site-specific plan describing lead-based paint removal procedures.
2. Include sketch showing location, size, and details of lead control areas, decontamination rooms, change rooms, shower facilities, and mechanical ventilation system.
3. Include eating, drinking, and restroom procedures, interface of trades, work sequencing, collected wastewater and paint debris

- disposal plan, air sampling plan, respirators, protective equipment, and detailed description of containment methods ensuring airborne lead concentrations do not exceed action level outside lead control area.
- a. Eating, drinking, and smoking are not acceptable within lead control area.
4. Include air sampling, training and strategy, sampling methodology, frequency, duration, and qualifications of air monitoring personnel.
- G. Respiratory Protection Program: Establish and implement program required by 29 CFR Part 1910.134 and 29 CFR Part 1926.62.
- 1. Provide each employee negative pressure or other appropriate respirator.
 - a. Respirator fit each employee's respirator at initial fitting and at least annually thereafter, as required by 29 CFR Part 1910.134 Respiratory Protection.
- H. Hazard Communication Program: Establish and implement program required by 29 CFR Part 1910.1200 which is the same as 29 CFR 1926.59.
- I. Hazardous Waste Management Plan: Establish and implement plan according to applicable requirements of Federal, State, and Local hazardous waste regulations including the following:
- 1. Identification of hazardous wastes associated with work.
 - 2. Estimated quantities of generated and disposed waste.
 - 3. Names and qualifications of each contractor transporting, storing, treating, and disposing wastes. Include facility location and 24-hour point of contact. Provide two copies of EPA hazardous waste permits and EPA Identification numbers.
 - 4. Names and qualifications (experience and training) of personnel working on-site with hazardous wastes.
 - 5. List of required waste handling equipment including cleaning, volume reduction, and transport equipment.
 - 6. Spill prevention, containment, and cleanup contingency implementation measures.
 - 7. Work plan and schedule for waste containment, removal, and disposal with daily waste cleaned up and containerization.
 - 8. Hazardous waste disposal cost.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 PAINT REMOVAL PRODUCTS

- A. Chemical Stripper: Biodegradable, non-toxic, capable of removing existing paint layers in one application, and acceptable to CIH.
- B. Infrared paint removal machines: Handheld equipment to remove paint/coatings using heat and hand scrapers.

2.2 ACCESSORIES

- A. Waste Collection Drums: 49 CFR Part 178; Type 1A2, steel, removable head, 200 L (55 gal.) capacity, capable of containing waste without loss.
- B. Vacuum Cleaner: HEPA filtered type.
- C. Scrapers:
 - 1. Metal type for use on metal, concrete, and masonry surfaces.
 - 2. Plastic type for use on wood, plaster, gypsum board, and other surfaces.
- D. Rinse Water: Potable.
- E. Cleaning Cloths: Cotton.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Before exposure to lead-contaminated dust, provide workers with comprehensive medical examination required by 29 CFR Part 1926.62 (j) Medical Surveillance.
- B. Maintain complete and accurate employee medical records according to 29 CFR Part 1910.1020.
- C. Train each employee performing paint removal, disposal, and air sampling operations according to 29 CFR Part 1926.62.
 - 1. Certify training is completed before employee is permitted to work on project and enter lead control area.

3.2 PREPARATION

- A. Protect existing work indicated to remain.
 - 1. Perform paint removal work without damaging and contaminating adjacent work.
 - 2. Restore damage and contamination to original condition.
- B. Notify Contracting Officer 20 days before starting paint removal work.
- C. Lead Control Area Requirements:

1. Establish lead control area by establishing a regulated area in compliance with OSHA regulations.
 2. Contain removal operations using negative pressure full containment system with minimum one change room and HEPA filtered exhaust.
- D. Boundary Requirements: Provide physical boundaries around lead control area by demarcating work area using barrier tape or portable partitions or other enclosures to ensure that airborne lead concentrations do not meet or exceed action level outside of lead control area.
- E. Heating, Ventilating and Air Conditioning (HVAC) Systems: Shut down, lock out, and isolate HVAC systems supplying exhausting, and passing through lead control areas. Seal HVAC inlets and outlet within lead control area with 6-mil plastic sheet and tape. Tape seal seams in HVAC components passing through lead control area.
- F. Change Room and Shower Facilities: Provide clean change rooms and shower facilities within physical boundary around lead control area according to 29 CFR Part 1926.62.
- G. Mechanical Ventilation System:
1. Provide ventilation system to control personnel exposure to lead using HEPA equipped negative air machines.
 2. Design, construct, install, and maintain HEPA filtered fixed local exhaust ventilation system according to ANSI Z9.2 and approved by CIH.
 3. Exhaust ventilation air to exterior wherever possible.
 4. When exhaust ventilation air must be recirculated into work area, provide HEPA filter with reliable back-up filter and controls to monitor lead concentration in return air and to bypass recirculation system automatically when system fails.
- H. Personnel Protection: Provide and use required protective clothing and equipment within lead control area.
- I. Warning Signs: Provide warning signs complying with 29 CFR Part 1926.62 at lead control area approaches. Locate signs so personnel read signs and take necessary precautions before entering lead control area.

3.3 WORK PROCEDURES

- A. Remove lead-based paint according to approved lead-based paint removal plan.
1. Perform work only in presence of CIH or Industrial Hygienist (IH) Technician under direction of CIH ensuring continuous inspection of work in progress and direction of air monitoring activities.

2. Handle, store, transport, and dispose lead or and lead contaminated waste according to 40 CFR Part 260, 40 CFR Part 261, 40 CFR Part 262, 40 CFR Part 263, 40 CFR Part 264, and 40 CFR Part 265. Comply with land disposal restriction notification requirements as required by 40 CFR Part 268.
- B. Use procedures and equipment required to limit occupational and environmental lead exposure when lead-based paint is removed according to 29 CFR Part 1926.62.
- C. Dispose removed paint and waste according to Environmental Protection Agency (EPA), federal, state, and local requirements.
- D. Personnel Exiting Procedures:
 1. When personnel exit lead control area, comply with the following procedures:
 - a. Vacuum exposed clothing surfaces.
 - b. Remove protective clothing and equipment in decontamination room. Place clothing in approved impermeable disposal bag.
 - c. Shower.
 - d. Dress in clean clothes before leaving lead control area.
- E. Monitoring - General:
 1. Monitor airborne lead concentrations according to 29 CFR Part 1910.1025 by testing laboratory as directed by CIH.
 2. Take personal air monitoring samples on employees anticipated to have greatest exposure risk as determined by CIH. Additionally, take air monitoring samples on minimum 25 percent of work crew or minimum of two employees, whichever is greater, during each work shift.
 3. Submit results of air monitoring samples, signed by CIH, within 24 hours after taking air samples. Notify Contracting Officer's Representative immediately of lead exposure at or exceeding action level outside of lead control area.
- F. Monitoring During Paint Removal:
 1. Perform personal and area monitoring during entire paint removal operation.
 2. Conduct area monitoring at physical boundary daily for each work shift to ensure unprotected personnel are not exposed above action level anytime.
 3. For outdoor operations, take at least one sample on each shift leeward of lead control area. When adjacent areas are contaminated,

clean area of contamination and have CIH visually inspect and certify lead contamination is cleaned.

4. Stop work when outside boundary lead levels meet or exceed action level. Notify Contracting Officer's Representative, immediately.
5. Correct conditions causing increased lead concentration as directed by CIH.
6. Review sampling data collected during work stoppage to determine if conditions require additional work method modifications as determined by CIH.
7. Resume paint removal when approved by CIH.

3.4 LEAD-BASED PAINT REMOVAL

- A. Remove paint within areas indicated on drawings completely exposing substrate. Minimize damage to substrate.
- B. Comply with paint removal processes described lead paint removal plan.
- C. Lead-Based Paint Removal: Select processes for each application to minimize work area lead contamination and waste.

3.5 SUBSTRATE SURFACE PREPARATION

- A. Protect substrates from deterioration and contamination until refinished.
 1. Protect metal substrates from flash rusting.
- B. Prepare and paint substrates according to Section 09 91 00, PAINTING.

3.6 FIELD QUALITY CONTROL

- A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Perform sampling and testing for:
 1. Air monitoring.
 2. Lead-Based Paint.

3.7 CLEANING AND DISPOSAL

- A. Cleaning:
 1. Maintain lead control area surfaces free of accumulating paint chips and dust. Confine dust, debris, and waste to work area.
 2. HEPA vacuum clean and wet wipe with detergent solution work area daily, at end of each shift, and when paint removal operation is complete.
- B. CIH Certification: Certify in writing that inside and outside lead control area air monitoring samples are less than action level, employee respiratory protection was adequate, the work was performed

according to 29 CFR Part 1926.62, and no visible accumulations of lead-based paint and dust remain on worksite.

1. Do not remove lead control area or roped-off boundary and warning signs before Contracting Officer's Representative's receipt of CIH's certification.

C. Testing: Where indicated and when directed by Contracting Officer's Representative, test lead-based paint residue and used abrasive according to 40 CFR Part 261 for hazardous waste.

D. Waste Collection:

1. Collect lead-contaminated materials including waste, scrap, debris, bags, containers, equipment, and clothing, which may produce airborne lead contamination.
2. Place lead contaminated materials in waste disposal drums. Label each drum identifying waste type according to 49 CFR Part 172 and date waste materials were first put into drum. Obtain and complete the Uniform Hazardous Waste Manifest forms. Comply with land disposal restriction notification requirements required by 40 CFR Part 268:
3. Coordinate temporary storage location on project site with Contracting Officer's Representative.

E. Waste Disposal:

1. Minimum 14 days before delivery, notify Contracting Officer's Representative who will arrange for job site inspection of drums and manifests by paint disposal facility personnel.
2. Contracting Officer's Representative will arrange hazardous wastes removal, transport and delivery to disposal facility to ensure drums do not remain on project site longer than 90 calendar days from drum label date.

F. Waste Disposal:

1. Do not store hazardous waste drums in temporary storage location longer than 90 calendar days from drum label date.
2. Remove, transport, and deliver drums to paint disposal facility.
 - a. Obtain signed receipt including date, time, quantity, and description of materials received according to 40 CFR Part 262.
 - b. Obtain final report of materials disposition after disposal completion.

- - - E N D - - -

SECTION 02 84 16
HANDLING OF FLUORESCENT TUBES, BALLASTS, THERMOSTATS, AND BATTERIES

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

40 CFR 1910.1000	Air Contaminants
40 CFR 260	Hazardous Waste Management System: General
40 CFR 261	Identification and Listing of Hazardous Waste
40 CFR 262	Standards Applicable to Generators of Hazardous Waste
40 CFR 263	Standards Applicable to Transporters of Hazardous Waste
40 CFR 264	Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities
40 CFR 265	Interim Status Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities
40 CFR 268	Land Disposal Restrictions
40 CFR 270	EPA Administered Permit Programs: The Hazardous Waste Permit Program
40 CFR 273	Standards For Universal Waste Management
40 CFR 761	Polychlorinated Biphenyls (PCBs) Manufacturing, Processing, Distribution in Commerce, and Use Prohibitions
49 CFR 178	Specifications for Packagings

1.2 PROJECT REQUIREMENTS

Removal and disposal of the mercury containing fluorescent light tubes, thermostats, ballasts, and batteries in the backup/emergency/exit light fixtures on the Basement, 1st floor, and 2nd floor of Building 8.

1.3 DEFINITIONS

1.3.1 UNIVERSAL WASTE

Universal Waste means any of the following hazardous wastes that are

managed under the universal waste requirements 40 CFR 273:

- (1) Batteries as described in Sec. 273.2 of this chapter;
- (2) Lamps as described in Sec. 273.5 of this chapter;
- (3) Thermostats as described in Sec. 273.5 of this chapter;
- (4) Ballasts as described in Sec. 273.5 of this chapter.

1.4 QUALITY ASSURANCE

1.4.1 REGULATORY REQUIREMENTS

Perform work in accordance with 40 CFR 761 and perform mercury-containing lamps storage and transport in accordance with 40 CFR 261, 40 CFR 264, 40 CFR 265, and 40 CFR 273.

1.4.2 TRAINING

Certified industrial hygienist (CIH) shall instruct and certify the training of all persons involved in the removal of batteries, ballasts, mercury-containing lamps, and thermostats. The instruction shall include: The dangers of mercury exposure, decontamination, safe work practices, and applicable OSHA and EPA regulations. The CIH shall review and approve the Removal Work Plans.

1.4.3 REGULATION DOCUMENTS

Maintain at all times one copy each at the office and one copy each in view at the job site of 29 CFR 1910.1000, 40 CFR 260, 40 CFR 261, 40 CFR 262, 40 CFR 263, 40 CFR 265, 40 CFR 268, 40 CFR 270, and 40 CFR 273, and of the Contractor removal work plan and disposal plan for PCB and for associated mercury-containing lamps.

1.5 SUBMITTALS

Certificates

Training Certification

Removal Work Plan

Disposal Plan

Closeout Submittals

Certificate of Disposal and/or recycling. Submit to the Government before application for payment within 30 days of the date that the disposal of the batteries and mercury-containing lamp waste identified on the manifest was completed.

1.6 ENVIRONMENTAL REQUIREMENTS

Use special clothing:

- a. Disposable gloves (polyethylene)
- b. Eye protection
- c. PPE as required

1.7 SCHEDULING

Notify the Contracting Officer 20 days prior to the start of removal work.

1.8 QUALITY ASSURANCE

1.8.1 WORK PLAN

Submit a job-specific plan within 20 calendar days after award of contract of the work procedures to be used in the removal, packaging, and storage of batteries and mercury-containing lamps. Include in the plan: Requirements for Personal Protective Equipment (PPE), spill cleanup procedures and equipment, eating, smoking and restroom procedures. The plan shall be approved and signed by the Certified Industrial Hygienist. Obtain approval of the plan by the Contracting Officer prior to the start of removal work.

1.8.2 DISPOSAL/RECYCLING PLAN

Submit a Disposal or Recycling Plan with 45 calendar days after award of contract. The Plan shall comply with applicable requirements of federal, state, and local regulations and address:

- a. Estimated quantities of wastes to be generated, disposed of, and/or recycled.
- b. Names and qualifications of each Contractor that will be transporting, storing, treating, and disposing of the wastes. Include the facility location. Furnish two copies of EPA and state waste permit applications and EPA identification numbers, as required.
- c. Names and qualifications (experience and training) of personnel who will be working on-site with wastes.
- d. Spill prevention, containment, and cleanup contingency measures to be implemented.
- e. Work plan and schedule for waste removal, containment, storage, transportation, disposal and or recycling. Wastes shall be cleaned up and containerize daily.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

3.1 WORK PROCEDURE

Furnish labor, materials, services, and equipment necessary for the removal of thermostats, batteries, ballasts, and mercury-containing fluorescent lamps, in accordance with local, state, or federal regulations. Do not expose lamps or batteries to open flames or other high temperature sources since toxic decomposition by-products may be produced. Do not break mercury containing fluorescent lamps, thermostat switches, or battery casings.

3.1.1 WORK OPERATIONS

Ensure that work operations or processes involving Universal Waste materials are conducted in accordance with 40 CFR 761, 40 CFR 262 40 CFR 263, and the applicable requirements of this section, including but not limited to:

- a. Obtaining suitable storage sites.
- b. Notifying Contracting Officer prior to commencing the operation.
- c. Reporting leaks and spills to the Contracting Officer.
- d. Cleaning up spills.
- e. Inspecting Universal Waste items and waste containers for leaks and forwarding copies of inspection reports to the Contracting Officer.
- f. Maintaining inspection, inventory and spill records.

3.3 REMOVAL

3.3.1 LIGHTING LAMPS

Remove lighting tubes/lamps from the lighting fixture and carefully place (unbroken) into appropriate containers (original transport boxes or equivalent). In the event of a lighting tube/lamp breaking, sweep and place waste in double plastic taped bags and dispose of as universal waste as specified herein.

3.3.2 BATTERIES

Remove batteries from the fixtures and carefully place into appropriate containers for transportation to an EPA licensed recycling facility.

3.3.3 BALLASTS

Field check ballast labels and remove all ballasts that are not marked "No PCB's" from the fixtures and carefully place into metal drums for transportation to an EPA licensed recycling/disposal facility.

3.3.4 THERMOSTAT SWITCHES

Remove mercury containing switches from thermostats and carefully place into appropriate containers for transportation to a State or EPA licensed recycling facility.

3.4 STORAGE FOR DISPOSAL

3.4.1 STORAGE CONTAINERS FOR BATTERIES

Store batteries in containers approved by DOT in accordance with 40 CFR 761.

3.4.2 STORAGE CONTAINERS FOR LAMPS

Store mercury containing lamps in appropriate DOT containers. The boxes shall be stored and labeled for transport in accordance with 40 CFR 273.

3.4.3 STORAGE CONTAINERS FOR MERCURY SWITCHES

Store mercury containing switches in appropriate DOT containers. The containers shall be stored and labeled for transport in accordance with 40 CFR 273.

3.4.4 STORAGE CONTAINERS FOR BALLASTS

Store PCB ballasts in appropriate DOT containers. The drums shall be stored and labeled for transport in accordance with 40 CFR 273.

3.4.5 LABELING OF WASTE CONTAINERS

Label with the following:

- a. Date the item was placed in storage and the name of the cognizant activity/building.
- b. Label waste in accordance with 40 CFR 273. Affix labels to all waste containers.

3.5 DISPOSAL

Dispose of off Government property in accordance with EPA, DOT, and local regulations at a permitted site.

3.5.1 IDENTIFICATION NUMBER

For mercury containing lamp removal, Federal regulations 40 CFR 273 require that large quantity handlers of Universal waste (LQHUW) must provide notification of universal waste management to the appropriate EPA Region (or state director in authorized states), obtain an EPA identification number, and retain for three years records of off-site shipments of universal waste. The contractor shall verify that the activity has a U.S. EPA generator identification number for use on the Universal Waste manifest. If not, the contractor shall advise the activity that it must file and obtain an I.D. number with EPA prior to commencement of removal work.

- - - E N D - - -

**SECTION 03 30 00
CAST-IN-PLACE CONCRETE**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies cast-in-place structural concrete and materials and mixes for other concrete.

1.2 RELATED WORK

- A. Section 01 45 29, TESTING LABORATORY SERVICES: Materials testing and inspection during construction.
- B. Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS: Concrete roads, walks, and similar exterior site work.

1.3 TESTING AGENCY FOR CONCRETE MIX DESIGN

- A. Testing agency for the trial concrete mix design retained and reimbursed by the Contractor and approved by COR. For all other testing, refer to Section 01 45 29 Testing Laboratory Services.
- B. Testing agency maintaining active participation in Program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology.
- C. Testing agency shall furnish equipment and qualified technicians to establish proportions of ingredients for concrete mixes.

1.4 TOLERANCES

- A. Formwork: ACI 117, except the elevation tolerance of formed surfaces before removal of shores is +0 mm (+0 inch) and -20 mm (-3/4 inch).
- B. Reinforcement Fabricating and Placing: ACI 117, except that fabrication tolerance for bar sizes Nos. 10, 13, and 16 (Nos. 3, 4, and 5) (Tolerance Symbol 1 in Fig. 2.1(a), ACI, 117) used as column ties or stirrups is +0 mm (+0 inch) and -13 mm (-1/2 inch) where gross bar length is less than 3600 mm (12 feet), or +0 mm (+0 inch) and -20 mm (-3/4 inch) where gross bar length is 3600 mm (12 feet) or more.
- C. Cross-Sectional Dimension: ACI 117, except tolerance for thickness of slabs 12 inches or less is +20 mm (+3/4 inch) and - 6 mm (-1/4 inch). Tolerance of thickness of beams more than 300 mm (12 inch) but less than 900 mm (3 feet) is +20 mm (+3/4 inch) and -10 mm (-3/8 inch).
- D. Slab Finishes: See structural drawings.

1.5 REGULATORY REQUIREMENTS

- A. ACI SP-66 - ACI Detailing Manual.
- B. ACI 318 - Building Code Requirements for Reinforced Concrete.
- C. ACI 301 - Standard Specifications for Structural Concrete.

1.6 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES. All items indicated below are required submittals requiring Contracting Officer's Representative (COR) review and approval.
- B. Shop Drawings: Reinforcing steel: Complete shop drawings
- C. Mill Test Reports:
 - 1. Reinforcing Steel.
 - 2. Cement.
- D. Manufacturer's Certificates:
 - 1. Air-entraining admixture.
 - 2. Chemical admixtures, including chloride ion content.
 - 3. Waterproof paper for curing concrete.
 - 4. Liquid membrane-forming compounds for curing concrete.
 - 5. Non-shrinking grout.
 - 6. Waterstops.
 - 7. Expansion joint filler.
- E. Testing Agency for Concrete Mix Design: Approval request including qualifications of principals and technicians and evidence of active participation in program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology.
- F. Test Report for Concrete Mix Designs: Trial mixes including concrete mix ingredients, and admixtures.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Conform to ACI 304. Store aggregate separately for each kind or grade, to prevent segregation of sizes and avoid inclusion of dirt and other materials.
- B. Deliver cement in original sealed containers bearing name of brand and manufacturer, and marked with net weight of contents. Store in suitable watertight building in which floor is raised at least 300 mm (1 foot) above ground. Store bulk cement in separate suitable bins.
- C. Deliver other packaged materials for use in concrete in original sealed containers, plainly marked with manufacturer's name and brand, and protect from damage until used.

1.8 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Concrete Institute (ACI):
- 117-10.....Specifications for Tolerances for Concrete Construction and Materials and Commentary
 - 211.1-91 (R2009).....Standard Practice for Selecting Proportions for Normal, Heavyweight, and Mass Concrete
 - 214R-11 (R2019).....Guide to Evaluation of Strength Test Results of Concrete
 - 301-16.....Specifications for Structural Concrete
 - 304R-00 (R2009).....Guide for Measuring, Mixing, Transporting, and Placing Concrete
 - 305.1-14.....Specification for Hot Weather Concreting
 - 306.1-90 (R2002).....Standard Specification for Cold Weather Concreting
 - 308.1-11.....Specification for Curing Concrete
 - 309R-05.....Guide for Consolidation of Concrete
 - 318/318-19.....Building Code Requirements for Structural Concrete and Commentary
 - 347R-14.....Guide to Formwork for Concrete
 - SP-66-04.....ACI Detailing Manual
- C. American National Standards Institute and American Hardboard Association (ANSI/AHA):
- A135.4-2012.....Basic Hardboard
- D. ASTM International (ASTM):
- A615/A615M-20.....Standard Specification for Deformed and Plain Carbon Steel Bars for Concrete Reinforcement
 - A653/A653M-20.....Standard Specification for Steel Sheet, Zinc Coated (Galvanized) or Zinc Iron Alloy Coated (Galvannealed) by the Hot Dip Process
 - A706/A706M-16.....Standard Specification for Deformed and Plain Low-Alloy Steel Bars for Concrete Reinforcement
 - A775/A775M-19.....Standard Specification for Epoxy Coated Steel Reinforcing Bars

A996/A996M-16.....Standard Specification for Rail Steel and Axle
Steel Deformed Bars for Concrete Reinforcement

A1064/A1064M-18a.....Standard Specification for Carbon-Steel Wire
and Welded Wire Reinforcement, Plain and
Deformed, for Concrete

C31/C31M-19a.....Standard Practice for Making and Curing
Concrete Test Specimens in the field

C33/C33M-18.....Standard Specification for Concrete Aggregates

C39/C39M-20.....Standard Test Method for Compressive Strength
of Cylindrical Concrete Specimens

C94/C94M-19a.....Standard Specification for Ready Mixed Concrete

C143/C143M-20.....Standard Test Method for Slump of Hydraulic
Cement Concrete

C150C150M-20.....Standard Specification for Portland Cement

C171-16.....Standard Specification for Sheet Materials for
Curing Concrete

C172C172M-17.....Standard Practice for Sampling Freshly Mixed
Concrete

C173/C173M-16.....Standard Test Method for Air Content of Freshly
Mixed Concrete by the Volumetric Method

C192/C192M-19.....Standard Practice for Making and Curing
Concrete Test Specimens in the Laboratory

C231/C231M-17a.....Standard Test Method for Air Content of Freshly
Mixed Concrete by the Pressure Method

C260/C260M-10a(2016)....Standard Specification for Air Entraining
Admixtures for Concrete

C309-19.....Standard Specification for Liquid Membrane
Forming Compounds for Curing Concrete

C494/C494M-19.....Standard Specification for Chemical Admixtures
for Concrete

C618-19.....Standard Specification for Coal Fly Ash and Raw
or Calcined Natural Pozzolan for Use in
Concrete

C666/C666M-15.....Standard Test Method for Resistance of Concrete
to Rapid Freezing and Thawing

C881/C881M-20.....Standard Specification for Epoxy Resin Base
Bonding Systems for Concrete

C1107/1107M-20.....Standard Specification for Packaged Dry,
Hydraulic-Cement Grout (Non-shrink)

C1315-19.....Standard Specification for Liquid Membrane
Forming Compounds Having Special Properties for
Curing and Sealing Concrete

D297-15(2019).....Standard Test Methods for Rubber Products
Chemical Analysis

D412-16.....Standard Test Methods for Vulcanized Rubber and
Thermoplastic Elastomers - Tension

D1751-18.....Standard Specification for Preformed Expansion
Joint Filler for Concrete Paving and Structural
Construction (Non-extruding and Resilient
Bituminous Types)

D4263-83(2018).....Standard Test Method for Indicating Moisture in
Concrete by the Plastic Sheet Method.

F1249-20.....Standard Test Method for Water Vapor
Transmission Rate Through Plastic Film and
Sheeting Using a Modulated Infrared Sensor

F1869-16a.....Standard Test Method for Measuring Moisture
Vapor Emission Rate of Concrete Subfloor Using
Anhydrous Calcium Chloride.

E. American Welding Society (AWS):

D1.4/D1.4M-18.....Structural Welding Code - Steel Reinforcing
Bars

F. Concrete Reinforcing Steel Institute (CRSI):

Handbook 2008

G. U. S. Department of Commerce Product Standard (PS):

PS 1-07.....Structural Plywood

PS 20-20.....American Softwood Lumber Standard

H. U. S. Army Corps of Engineers Handbook for Concrete and Cement:

CRD C513.....Rubber Waterstops

CRD C572.....Polyvinyl Chloride Waterstops

PART 2 - PRODUCTS

2.1 FORMS

A. Wood: PS 20 free from loose knots and suitable to facilitate finishing
concrete surface specified; tongue and grooved.

- B. Plywood: PS-1 Exterior Grade B-B (concrete-form) 16 mm (5/8 inch), or 20 mm (3/4 inch) thick for unlined contact form. B-B High Density Concrete Form Overlay optional.

The minimum-content standards are based on the weight (not the volume) of the material.

- C. Form Ties: Develop a minimum working strength of 13.35 kN (3000 pounds) when fully assembled. Ties shall be adjustable in length to permit tightening of forms and not have any lugs, cones, washers to act as spreader within form, nor leave a hole larger than 20 mm (3/4 inch) diameter, or a depression in exposed concrete surface, or leave metal closer than 40 mm (1 1/2 inches) to concrete surface. Wire ties not permitted. Cutting ties back from concrete face not permitted.

2.2 MATERIALS

- A. Portland Cement: ASTM C150 Type I, II, I/II, IL, IIL, or I/II, L.
- B. Fly Ash: ASTM C618, Class F including supplementary optional requirements relating to reactive aggregates and alkalies, and loss on ignition (LOI) not to exceed 5 percent. Do not exceed more than 25 percent total cementitious content by weight.
- C. Coarse Aggregate: ASTM C33.
1. Size 67 or Size 467 may be used for footings and walls over 300 mm (12 inches) thick.
 2. Coarse aggregate for interior slabs on grade shall conform to the following:
 - a. Dense or well graded aggregate.
 - 1) Percent retained on each sieve below the top size and above the No. 100 sieve:
 - a) 8 to 18 percent for 1-1/2 inches (38 mm) top size.
 - b) 8 to 22 percent for 3/4 or 1 inch (19 or 25 mm) top size.
 - 2) The above requirements may be deviated from based on locally available material.
 - a) One or two non-adjacent sieves sizes may fall outside of the limits set above.
 - b) Percent retained on two adjacent sieves sizes shall not be less than 5 percent of the above required.
 - c) Percent retained on three adjacent sieve sizes shall not be less than 8 percent of the above required.
 - d) When the percent retained on each of two adjacent sieve sizes is less than 8 percent the total percent retained on

either of these sieves and the adjacent outside sieve should be at least 13 percent (for example, if both the No. 4 and No. 8 (4.75 and 2.36 mm) sieves have 6 percent retained on each item then: 1. the total retained on the 3/8 inch and No. 4 (9.5 and 4.75 mm) sieves should be at least 13 percent, and 2. the total retained on the No. 8 and No. 16 (2.36 and 1.18 mm) sieves should be at least 13 percent.

3. Coarse aggregate for applied topping, encasement of steel columns, and metal pan stair fill shall be Size 7.
 4. Maximum size of coarse aggregates not more than one-fifth of narrowest dimension between sides of forms, one-third of depth of slabs, nor three-fourth of minimum clear spacing between reinforcing bars.
- D. Fine Aggregate: ASTM C33. Fine aggregate for applied concrete floor topping shall pass a 4.75 mm (No. 4) sieve, 10 percent maximum shall pass a 150 μ m (No. 100) sieve.
- E. Mixing Water: Fresh, clean, and potable.
- F. Admixtures:
1. Water Reducing Admixture: ASTM C494, Type A and not contain more chloride ions than are present in municipal drinking water.
 2. Water Reducing, Retarding Admixture: ASTM C494, Type D and not contain more chloride ions than are present in municipal drinking water.
 3. High-Range Water-Reducing Admixture (Superplasticizer): ASTM C494, Type F or G, and not contain more chloride ions than are present in municipal drinking water. Use of superplasticizer requires COR approval.
 4. Non-Corrosive, Non-Chloride Accelerator: ASTM C494, Type C or E, and not contain more chloride ions than are present in municipal drinking water. Admixture manufacturer must have long-term non-corrosive test data from an independent testing laboratory of at least one year duration using an acceptable accelerated corrosion test method such as that using electrical potential measures.
 5. Air Entraining Admixture: ASTM C260.
- G. Vapor Barrier: As indicated in structural drawings.
- H. Reinforcing Steel: ASTM A615, or ASTM A996, deformed, grade as shown.

- I. Supports, Spacers, and Chairs: Types which will hold reinforcement in position shown in accordance with requirements of ACI 318 except as specified.
- J. Expansion Joint Filler: ASTM D1751.
- K. Sheet Materials for Curing Concrete: ASTM C171.
- L. Liquid Membrane-forming Compounds for Curing Concrete: ASTM C309, Type I, with fugitive dye, and shall meet the requirements of ASTM C1315. Compound shall be compatible with scheduled surface treatment, such as paint and resilient tile, and shall not discolor concrete surface.
- M. Non-Shrink Grout:
 - 1. ASTM C1107, pre-mixed, produce a compressive strength of at least 18 MPa at three days and 35 MPa (5000 psi) at 28 days.
- N. Waterstops:
 - 1. Non-Metallic Hydrophilic: Swellable strip type compound of polymer modified chloroprene rubber that swells upon contact with water shall conform to ASTM D412 as follows: Tensile strength 420 psi minimum; ultimate elongation 600 percent minimum. Hardness shall be 50 minimum on the type A durometer and the volumetric expansion ratio in in 70 deg water shall be 3 to 1 minimum.

2.3 CONCRETE MIXES

- A. Mix Designs: Proportioned in accordance with Section 5.3, "Proportioning on the Basis of Field Experience and/or Trial Mixtures" of ACI 318.
 - 1. If trial mixes are used, make a set of at least 6 cylinders in accordance with ASTM C192 for test purposes from each trial mix; test three for compressive strength at 7 days and three at 28 days.
 - 2. Submit a report of results of each test series, include a detailed listing of the proportions of trial mix or mixes, including cement, fly ash, admixtures, weight of fine and coarse aggregate per m³ (cubic yard) measured dry rodded and damp loose, specific gravity, fineness modulus, percentage of moisture, air content, water-cement -fly ash ratio, and consistency of each cylinder in terms of slump.
- B. Fly Ash Testing: Submit certificate verifying conformance with ASTM 618 initially with mix design and for each truck load of fly ash delivered from source. Submit test results performed within 6 months of submittal date. Notify the COR immediately when change in source is anticipated.

1. Testing Laboratory used for fly ash certification/testing shall participate in the Cement and Concrete Reference Laboratory (CCRL) program. Submit most recent CCRL inspection report.
- C. After approval of mixes no substitution in material or change in proportions of approval mixes may be made without additional tests and approval of the COR or as specified. Making and testing of preliminary test cylinders may be carried on pending approval of cement and fly ash, providing Contractor and manufacturer certify that ingredients used in making test cylinders are the same. The COR may allow Contractor to proceed with depositing concrete for certain portions of work, pending final approval of cement and fly ash and approval of design mix.
- D. Cement Factor: Maintain minimum cement factors in Table I regardless of compressive strength developed above minimums. Use Fly Ash as an admixture with maximum of 20 percent replacement by weight in all structural work.

TABLE I - CEMENT AND WATER FACTORS FOR CONCRETE

Concrete Strength		Non-Air- Entrained	Air-Entrained	
Min. 28 Day Comp. Str. MPa (psi)	Min. Cement kg/m ³ (lbs/c. yd)	Max. Water Cement Ratio	Min. Cement kg/m ³ (lbs/c. yd)	Max. Water Cement Ratio
35 (5000)1,3	375 (630)	0.45	385 (650)	0.40
30 (4000)1,3	325 (550)	0.55	340 (570)	0.50
25 (3000)1,3	280 (470)	0.65	290 (490)	0.55
25 (3000)1,2	300 (500)	See 4 below	310 (520)	See 4 below

1. If trial mixes are used, the proposed mix design shall achieve a compressive strength 8.3 MPa (1200 psi) in excess of f'c. For concrete strengths above 35 Mpa (5000 psi), the proposed mix design shall achieve a compressive strength 9.7 MPa (1400 psi) in excess of f'c.
2. For concrete exposed to high sulfate content soils maximum water cement ratio is 0.44.
3. Determined by Laboratory in accordance with ACI 211.1 for normal concrete.

- E. Maximum Slump: Maximum slump, as determined by ASTM C143 with tolerances as established by ASTM C94, for concrete to be vibrated shall be as shown in Table II.

TABLE II - MAXIMUM SLUMP, MM (INCHES)

Type of Construction	Normal Weight Concrete	Lightweight Structural Concrete
Reinforced Footings and Substructure Walls	75mm (3 inches)	75 mm (3 inches)
Slabs, Beams, Reinforced Walls, and Building Columns	100 mm (4 inches)	100 mm (4 inches)

- F. Slump may be increased by the use of the approved high-range water-reducing admixture (superplasticizer). Tolerances as established by ASTM C94. Concrete containing the high-range-water-reducing admixture may have a maximum slump of 225 mm (9 inches). The concrete shall arrive at the job site at a slump of 50 mm to 75 mm (2 inches to 3 inches). This should be verified, and then the high-range-water-reducing admixture added to increase the slump to the approved level.
- G. Air-Entrainment: Air-entrainment of normal weight concrete shall conform with Table III. Determine air content by either ASTM C173 or ASTM C231.

**TABLE III - TOTAL AIR CONTENT
FOR VARIOUS SIZES OF COARSE AGGREGATES (NORMAL CONCRETE)**

Nominal Maximum Size of Total Air Content	Coarse Aggregate, mm (Inches) Percentage by Volume
10 mm (3/8 in) 6 to 10	13 mm (1/2 in) 5 to 9
20 mm (3/4 in) 4 to 8	25 mm (1 in) 3-1/2 to 6-1/2
40 mm (1 1/2 in) 3 to 6	

- H. Durability: Use air entrainment for exterior exposed concrete subjected to freezing and thawing and other concrete shown or specified. For air content requirements see Table III or Table IV.
- I. Enforcing Strength Requirements: Test as specified in Section 01 45 29, TESTING LABORATORY SERVICES, during the progress of the work. Seven-day tests may be used as indicators of 28-day strength. Average of any three 28-day consecutive strength tests of laboratory-cured specimens representing each type of concrete shall be equal to or greater than specified strength. No single test shall be more than 3.5 MPa (500 psi)

below specified strength. Interpret field test results in accordance with ACI 214. Should strengths shown by test specimens fall below required values, the COR may require any one or any combination of the following corrective actions, at no additional cost to the Government:

1. Require changes in mix proportions by selecting one of the other appropriate trial mixes or changing proportions, including cement content, of approved trial mix.
2. Require additional curing and protection.
3. If five consecutive tests fall below 95 percent of minimum values given in Table I or if test results are so low as to raise a question as to the safety of the structure, the COR may direct Contractor to take cores from portions of the structure. Use results from cores tested by the Contractor retained testing agency to analyze structure.
4. If strength of core drilled specimens falls below 85 percent of minimum value given in Table I, the COR may order load tests, made by Contractor retained testing agency, on portions of building so affected. Load tests in accordance with ACI 318 and criteria of acceptability of concrete under test as given therein.
5. Concrete work, judged inadequate by structural analysis, by results of load test, or for any reason, shall be reinforced with additional construction or replaced, if directed by the COR.

2.4 BATCHING AND MIXING

- A. General: Concrete shall be "Ready-Mixed" and comply with ACI 318 and ASTM C94, except as specified. Batch mixing at the site is permitted. Mixing process and equipment must be approved by the COR. With each batch of concrete, furnish certified delivery tickets listing information in Paragraph 16.1 and 16.2 of ASTM C94. Maximum delivery temperature of concrete is 38 degrees C (100 degrees Fahrenheit). Minimum delivery temperature as follows:

Atmospheric Temperature	Minimum Concrete Temperature
-1. degrees to 4.4 degrees C (30 degrees to 40 degrees F)	15.6 degrees C (60 degrees F.)
-17 degrees C to -1.1 degrees C (0 degrees to 30 degrees F.)	21 degrees C (70 degrees F.)

PART 3 - EXECUTION**3.1 FORMWORK**

- A. General: Design in accordance with ACI 347 is the responsibility of the Contractor.
 - 1. Form boards and plywood forms may be reused for contact surfaces of exposed concrete only if thoroughly cleaned, patched, and repaired and the COR approves their reuse.
 - 2. Provide forms for concrete footings unless the COR determines forms are not necessary.
- B. Treating and Wetting: Treat or wet contact forms as follows:
 - 1. Coat plywood and board forms with non-staining form sealer. In hot weather, cool forms by wetting with cool water just before concrete is placed.
 - 2. Clean and coat removable metal forms with light form oil before reinforcement is placed. In hot weather, cool metal forms by thoroughly wetting with water just before placing concrete.
 - 3. Use sealer on reused plywood forms as specified for new material.
- C. Size and Spacing of Studs: Size and space studs, wales and other framing members for wall forms so as not to exceed safe working stress of kind of lumber used nor to develop deflection greater than $1/270$ of free span of member.
- D. Unlined Forms: Use plywood forms to obtain a smooth finish for concrete surfaces. Tightly butt edges of sheets to prevent leakage. Back up all vertical joints solidly and nail edges of adjacent sheets to same stud with 6d box nails spaced not over 150 mm (6 inches) apart.
- E. Lined Forms: May be used in lieu of unlined plywood forms. Back up form lining solidly with square edge board lumber securely nailed to studs with all edges in closecontact to prevent bulging of lining. No joints in lining and backing may coincide. Nail abutted edges of sheets to same backing board. Nail lining at not over 200 mm (8 inches) on center along edges and with at least one nail to each square foot of surface area; nails to be 3d blued shingle or similar nails with thin flatheads.
- F. Wall Form Ties: Locate wall form ties in symmetrically level horizontal rows at each line of wales and in plumb vertical tiers. Space ties to maintain true, plumb surfaces. Provide one row of ties within 150 mm (6 inches) above each construction joint. Space through-ties adjacent to

horizontal and vertical construction joints not over 450 mm (18 inches) on center.

1. Tighten row of ties at bottom of form just before placing concrete and, if necessary, during placing of concrete to prevent seepage of concrete and to obtain a clean line. Ties to be entirely removed shall be loosened 24 hours after concrete is placed and shall be pulled from least important face when removed.
2. Coat surfaces of all metal that is to be removed with paraffin, cup grease or a suitable compound to facilitate removal.

G. Inserts, Sleeves, and Similar Items: Flashing reglets, steel strips, masonry ties, anchors, wood blocks, nailing strips, grounds, inserts, wire hangers, sleeves, drains, guard angles, forms for floor hinge boxes, inserts or bond blocks for elevator guide rails and supports, and other items specified as furnished under this and other sections of specifications and required to be in their final position at time concrete is placed shall be properly located, accurately positioned, and built into construction, and maintained securely in place.

1. Locate inserts or hanger wires for furred and suspended ceilings only in bottom of concrete joists, or similar concrete member of overhead concrete joist construction.
2. Install sleeves, inserts and similar items for mechanical services in accordance with drawings prepared specially for mechanical services. Contractor is responsible for accuracy and completeness of drawings and shall coordinate requirements for mechanical services and equipment.
3. Minimum clear distance of embedded items such as conduit and pipe is at least three times diameter of conduit or pipe, except at stub-ups and other similar locations.
4. Provide recesses and blockouts in floor slabs for door closers and other hardware as necessary in accordance with manufacturer's instructions.

H. Construction Tolerances:

1. Set and maintain concrete formwork to assure erection of completed work within tolerances specified and to accommodate installation of other rough and finish materials. Accomplish remedial work necessary for correcting excessive tolerances. Erected work that exceeds specified tolerance limits shall be remedied or removed and replaced, at no additional cost to the Government.

2. Permissible surface irregularities - see structural drawings.

3.2 PLACING REINFORCEMENT

- A. General: Details of concrete reinforcement in accordance with ACI 318 unless otherwise shown.
- B. Placing: Place reinforcement conforming to CRSI DA4, unless otherwise shown.
 - 1. Place reinforcing bars accurately and tie securely at intersections and splices with 1.6 mm (16 gauge) black annealed wire. Secure reinforcing bars against displacement during the placing of concrete by spacers, chairs, or other similar supports. Portions of supports, spacers, and chairs in contact with formwork shall be made of plastic in areas that will be exposed when building is occupied. Type, number, and spacing of supports conform to ACI 318. Where concrete slabs are placed on ground, use concrete blocks or other non-corrodible material of proper height, for support of reinforcement. Use of brick or stone supports will not be permitted.
- C. Spacing: Minimum clear distances between parallel bars, except in columns and multiple layers of bars in beams shall be equal to nominal diameter of bars. Minimum clear spacing is 25 mm (1 inch) or 1-1/3 times maximum size of coarse aggregate.
- D. Splicing: Splices of reinforcement made only as required or shown or specified. Accomplish splicing as follows:
 - 1. Lap splices: Do not use lap splices for bars larger than Number 36 (Number 11). Minimum lengths of lap as shown.
- E. Bending: Bend bars cold, unless otherwise approved. Do not field bend bars partially embedded in concrete, except when approved by the COR.
- F. Cleaning: Metal reinforcement, at time concrete is placed, shall be free from loose flaky rust, mud, oil, or similar coatings that will reduce bond.

3.3 VAPOR BARRIER

- A. Except where membrane waterproofing is required, interior concrete slab on grade shall be placed on a continuous vapor barrier.
 - 1. Vapor barrier joints lapped 150 mm (6 inches) and sealed with compatible waterproof pressure-sensitive tape.
 - 2. Patch punctures and tears.

3.4 SLABS RECEIVING RESILIENT COVERING

- A. Slab shall be allowed to cure for 6 weeks minimum prior to placing resilient covering. After curing, slab shall be tested by the

Contractor for moisture in accordance with ASTM D4263 or ASTM F1869. Moisture content shall be less than 3 pounds per 1000 sf prior to placing covering.

3.5 CONSTRUCTION JOINTS

- A. Unless otherwise shown, location of construction joints to limit individual placement shall not exceed 24,000 mm (80 feet) in any horizontal direction, except slabs on grade which shall have construction joints shown. Allow 48 hours to elapse between pouring adjacent sections unless this requirement is waived by the COR.
- B. Locate construction joints in suspended floors near the quarter-point of spans for slabs, beams or girders, unless a beam intersects a girder at center, in which case joint in girder shall be offset a distance equal to twice width of beam. Provide keys and inclined dowels as shown. Provide longitudinal keys as shown.

3.6 EXPANSION JOINTS AND CONTRACTION JOINTS

- A. Clean expansion joint surfaces before installing premolded filler and placing adjacent concrete.
- B. Provide contraction (control) joints in floor slabs as indicated on the contract drawings. Joints shall be either formed or saw cut, to the indicated depth after the surface has been finished. Protect joints from intrusion of foreign matter.

3.7 PLACING CONCRETE

- C. Preparation:
 - 1. Remove hardened concrete, wood chips, shavings and other debris from forms.
 - 2. Remove hardened concrete and foreign materials from interior surfaces of mixing and conveying equipment.
 - 3. Have forms and reinforcement inspected and approved by the COR before depositing concrete.
 - 4. Provide runways for wheeling equipment to convey concrete to point of deposit. Keep equipment on runways which are not supported by or bear on reinforcement. Provide similar runways for protection of vapor barrier on coarse fill.
- D. Bonding: Before depositing new concrete on or against concrete which has been set, thoroughly roughen and clean existing surfaces of laitance, foreign matter, and loose particles.
 - a.

- E. Conveying Concrete: Convey concrete from mixer to final place of deposit by a method which will prevent segregation. Method of conveying concrete is subject to approval of the COR.
- F. Placing: For special requirements see Paragraphs, HOT WEATHER and COLD WEATHER.
1. Do not place concrete when weather conditions prevent proper placement and consolidation, or when concrete has attained its initial set, or has contained its water or cement content more than 1 1/2 hours.
 2. Deposit concrete in forms as near as practicable in its final position. Prevent splashing of forms or reinforcement with concrete in advance of placing concrete.
 3. Do not drop concrete freely more than 3000 mm (10 feet) for concrete containing the high-range water-reducing admixture (superplasticizer) or 1500 mm (5 feet) for conventional concrete. Where greater drops are required, use a tremie or flexible spout (canvas elephant trunk), attached to a suitable hopper.
 4. Discharge contents of tremies or flexible spouts in horizontal layers not exceeding 500 mm (20 inches) in thickness, and space tremies such as to provide a minimum of lateral movement of concrete.
 5. Continuously place concrete until an entire unit between construction joints is placed. Rate and method of placing concrete shall be such that no concrete between construction joints will be deposited upon or against partly set concrete, after its initial set has taken place, or after 45 minutes of elapsed time during concrete placement.
- G. Consolidation: Conform to ACI 309. Immediately after depositing, spade concrete next to forms, work around reinforcement and into angles of forms, tamp lightly by hand, and compact with mechanical vibrator applied directly into concrete at approximately 450 mm (18 inch) intervals. Mechanical vibrator shall be power driven, hand operated type with minimum frequency of 5000 cycles per minute having an intensity sufficient to cause flow or settlement of concrete into place. Vibrate concrete to produce thorough compaction, complete embedment of reinforcement and concrete of uniform and maximum density without segregation of mix. Do not transport concrete in forms by vibration.

1. Use of form vibration shall be approved only when concrete sections are too thin or too inaccessible for use of internal vibration.
2. Carry on vibration continuously with placing of concrete. Do not insert vibrator into concrete that has begun to set.

3.8 HOT WEATHER

- A. Follow the recommendations of ACI 305 or as specified to prevent problems in the manufacturing, placing, and curing of concrete that can adversely affect the properties and serviceability of the hardened concrete. Methods proposed for cooling materials and arrangements for protecting concrete shall be made in advance of concrete placement and approved by the COR.

3.9 COLD WEATHER

- A. Follow the recommendations of ACI 306 or as specified to prevent freezing of concrete and to permit concrete to gain strength properly. Use only the specified non-corrosive, non-chloride accelerator. Do not use calcium chloride, thiocyanates or admixtures containing more than 0.05 percent chloride ions. Methods proposed for heating materials and arrangements for protecting concrete shall be made in advance of concrete placement and approved by the COR.

3.10 PROTECTION AND CURING

- A. Conform to ACI 308: Initial curing shall immediately follow the finishing operation. Protect exposed surfaces of concrete from premature drying, wash by rain and running water, wind, mechanical injury, and excessively hot or cold temperatures. Keep concrete not covered with membrane or other curing material continuously wet for at least 7 days after placing. Keep wood forms continuously wet to prevent moisture loss until forms are removed. Cure exposed concrete surfaces as described below. Other curing methods may be used if approved by the COR.
 1. Liquid curing and sealing compounds: Apply by power-driven spray or roller in accordance with the manufacturer's instructions. Apply immediately after finishing. Maximum coverage 10m²/L (400 square feet per gallon) on steel troweled surfaces and 7.5m²/L (300 square feet per gallon) on floated or broomed surfaces for the curing/sealing compound.
 2. Plastic sheets: Apply as soon as concrete has hardened sufficiently to prevent surface damage. Utilize widest practical width sheet and

overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with tape.

3. Paper: Utilize widest practical width paper and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with sand, wood planks, pressure-sensitive tape, mastic or glue.

3.12 CONCRETE SURFACE PREPARATION

- A. Metal Removal: Unnecessary metal items cut back flush with face of concrete members.
- B. Patching: Maintain curing and start patching as soon as forms are removed. Do not apply curing compounds to concrete surfaces requiring patching until patching is completed. Use cement mortar for patching of same composition as that used in concrete. Use white or gray Portland cement as necessary to obtain finish color matching surrounding concrete. Thoroughly clean areas to be patched. Cut out honeycombed or otherwise defective areas to solid concrete to a depth of not less than 25 mm (1 inch). Cut edge perpendicular to surface of concrete. Saturate with water area to be patched, and at least 150 mm (6 inches) surrounding before placing patching mortar. Give area to be patched a brush coat of cement grout followed immediately by patching mortar. Cement grout composed of one part Portland cement, 1.5 parts fine sand, bonding admixture, and water at a 50:50 ratio, mix to achieve consistency of thick paint. Mix patching mortar approximately 1 hour before placing and remix occasionally during this period without addition of water. Compact mortar into place and screed slightly higher than surrounding surface. After initial shrinkage has occurred, finish to match color and texture of adjoining surfaces. Cure patches as specified for other concrete. Fill form tie holes which extend entirely through walls from unexposed face by means of a pressure gun or other suitable device to force mortar through wall. Wipe excess mortar off exposed face with a cloth.
- C. Upon removal of forms, clean vertical concrete surface that is to receive bonded applied cementitious application with wire brushes or by sand blasting to remove unset material, laitance, and loose particles to expose aggregates to provide a clean, firm, granular surface for bond of applied finish.

3.13 CONCRETE FINISHES

- A. Vertical and Overhead Surface Finishes:

1. Unfinished areas: Vertical and overhead concrete surfaces exposed in pipe basements, elevator and dumbwaiter shafts, pipe spaces, pipe trenches, above suspended ceilings, manholes, and other unfinished areas will not require additional finishing.
2. Interior and exterior exposed areas to be painted: Remove fins, burrs and similar projections on surfaces flush, and smooth by mechanical means approved by the COR, and by rubbing lightly with a fine abrasive stone or hone. Use ample water during rubbing without working up a lather of mortar or changing texture of concrete.
3. Interior and exterior exposed areas finished: Give a grout finish of uniform color and smooth finish treated as follows:
 - a. After concrete has hardened and laitance, fins and burrs removed, scrub concrete with wire brushes. Clean stained concrete surfaces by use of a hone stone.
 - b. Apply grout composed of one part of Portland cement, one part fine sand, smaller than a 600 μm (No. 30) sieve. Work grout into surface of concrete with cork floats or fiber brushes until all pits, and honeycombs are filled.
 - c. After grout has hardened slightly, but while still plastic, scrape grout off with a sponge rubber float and, about 1 hour later, rub concrete vigorously with burlap to remove any excess grout remaining on surfaces.
 - d. In hot, dry weather use a fog spray to keep grout wet during setting period. Complete finish of area in same day. Make limits of finished areas at natural breaks in wall surface. Leave no grout on concrete surface overnight.

B. Slab Finishes:

1. Set perimeter forms to serve as screed using either optical or laser instruments. For slabs on grade, wet screeds may be used to establish initial grade during strike-off, unless the COR determines that the method is proving insufficient to meet required finish tolerances and directs use of rigid screed guides. Where wet screeds are allowed, they shall be placed using grade stakes set by optical or laser instruments. Use rigid screed guides, as opposed to wet screeds, to control strike-off elevation for all types of elevated (non slab-on-grade) slabs. Divide bays into halves or thirds by hard screeds. Adjust as necessary where monitoring of previous placements

indicates unshored structural steel deflections to other than a level profile.

2. Place slabs monolithically. Once slab placement commences, complete finishing operations within same day. Slope finished slab to floor drains where they occur, whether shown or not.
3. Use straightedges specifically made for screeding, such as hollow magnesium straightedges or power strike-offs. Do not use pieces of dimensioned lumber. Strike off and screed slab to a true surface at required elevations. Use optical or laser instruments to check concrete finished surface grade after strike-off. Repeat strike-off as necessary. Complete screeding before any excess moisture or bleeding water is present on surface. Do not sprinkle dry cement on the surface.
4. Immediately following screeding, and before any bleed water appears, use a 3000 mm (10 foot) wide highway straightedge in a cutting and filling operation to achieve surface flatness. Do not use bull floats or darbys, except that darbying may be allowed for narrow slabs and restricted spaces.
5. Wait until water sheen disappears and surface stiffens before proceeding further. Do not perform subsequent operations until concrete will sustain foot pressure with maximum of 6 mm (1/4 inch) indentation.
6. Float Finish: Slabs to receive unbonded toppings, steel trowel finish, fill, mortar setting beds, or a built-up roof, and ramps, stair treads, platforms (interior and exterior), and equipment pads shall be floated to a smooth, dense uniform, sandy textured finish. During floating, while surface is still soft, check surface for flatness using a 3000 mm (10 foot) highway straightedge. Correct high spots by cutting down and correct low spots by filling in with material of same composition as floor finish. Remove any surface projections and re-float to a uniform texture.
7. Steel Trowel Finish: Concrete surfaces to receive resilient floor covering or carpet, monolithic floor slabs to be exposed to view in finished work, future floor roof slabs, applied toppings, and other interior surfaces for which no other finish is indicated. Steel trowel immediately following floating. During final troweling, tilt steel trowel at a slight angle and exert heavy pressure to compact cement paste and form a dense, smooth surface. Finished surface

shall be smooth, free of trowel marks, and uniform in texture and appearance.

8. Broom Finish: Finish exterior slabs, ramps, and stair treads with a bristle brush moistened with clear water after surfaces have been floated. Brush in a direction transverse to main traffic. Match texture approved by the COR from sample panel.
9. Finished slab flatness (FF) and levelness (FL) values comply with the following minimum requirements:
 - a. Areas covered with carpeting, or not specified otherwise in b. below:
 - 1) Slab on Grade:
 - a) Specified overall value F_F 25/ F_L 20
 - b) Minimum local value F_F 17/ F_L 15
 - 2) Level tolerance such that 80 percent of all points fall within a 20 mm (3/4 inch) envelope +10 mm, -10 mm (+3/8 inch, -3/8 inch) from the design elevation.
 - b. Areas that will be exposed, receive thin-set tile or resilient flooring, or roof areas designed as future floors:
 - 1) Slab on grade:
 - a) Specified overall value FF 36/ FL 20
 - b) Minimum local value FF 24/ FL 15
 - 2) Level tolerance such that 80 percent of all points fall within a 20 mm (3/4 inch) envelope +10 mm, -10 mm (+3/8 inch, -3/8 inch) from the design elevation.
 - c. "Specified overall value" is based on the composite of all measured values in a placement derived in accordance with ASTM E1155.
 - d. "Minimum local value" (MLV) describes the flatness or levelness below which repair or replacement is required. MLV is based on the results of an individual placement and applies to a minimum local area. Minimum local area boundaries may not cross a construction joint or expansion joint. A minimum local area will be bounded by construction and/or control joints, or by column lines and/or half-column lines, whichever is smaller.
10. Measurements
 - a. Department of Veterans Affairs retained testing laboratory will take measurements as directed by the COR, to verify compliance with FF, FL, and other finish requirements. Measurements will

occur within 72 hours after completion of concrete placement (weekends and holidays excluded). Make measurements before shores or forms are removed to insure the "as-built" levelness is accurately assessed. Profile data for above characteristics may be collected using a laser level or any Type II apparatus (ASTM E1155, "profileograph" or "dipstick"). Contractor's surveyor shall establish reference elevations to be used by Department of Veterans Affairs retained testing laboratory.

- b. Contractor not experienced in using FF and FL criteria is encouraged to retain the services of a floor consultant to assist with recommendations concerning adjustments to slab thicknesses, finishing techniques, and procedures on measurements of the finish as it progresses in order to achieve the specific flatness and levelness numbers.
11. Acceptance/ Rejection:
- a. If individual slab section measures less than either of specified minimum local F_F/F_L numbers, that section shall be rejected and remedial measures shall be required. Sectional boundaries may be set at construction and contraction (control) joints, and not smaller than one-half bay.
 - b. If composite value of entire slab installation, combination of all local results, measures less than either of specified overall F_F/F_L numbers, then whole slab shall be rejected and remedial measures shall be required.
12. Remedial Measures for Rejected Slabs: Correct rejected slab areas by grinding, planing, surface repair with underlayment compound or repair topping, retopping, or removal and replacement of entire rejected slab areas, as directed by the COR, until a slab finish constructed within specified tolerances is accepted.

**SECTION 04 01 00
MAINTENANCE OF MASONRY**

PART 1 - GENERAL**1.1 SUMMARY**

- A. Section Includes:
 - 1. Repointing existing and damaged masonry joints.
 - 2. Replacing existing and damaged masonry units.

1.2 RELATED WORK

- A. Section 04 05 13, MASONRY MORTARING: Mortars for new masonry.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
 - C67/C67M-20.....Sampling and Testing Brick and Structural Clay
Tile.
 - C144-18.....Aggregate for Masonry Mortar.
 - C150/C150M-20.....Specification for Portland Cement.
 - C207-18 - Hydrated Lime for Masonry Purposes
 - C216-19 - Facing Brick (Solid Masonry Units Made from
Clay or Shale)
 - C270-19ae1.....Mortar for Unit Masonry
 - C295/C295M-19.....Petrographic Examination of Aggregates for
Concrete

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA,
AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Replacement units indicating manufacturer recommendation for each
application.
- C. Samples:
 - 1. Pointing Mortar: Molded, 150 mm (6 inches) long for each type,
texture, and color.
- D. Test reports:
 - 1. Preconstruction test results of existing masonry mortar and units.
 - 2. Recommended mortar mix and mortar materials sources.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications:

1. Documented experience in completion of work, similar in design, material, and extent specified.

B. Preconstruction Testing:

1. Existing Brick: according to ASTM C67.
2. Existing Mortar: according to ASTM C295/C295M.
 - a. Recommend mortar mix compatible with existing and mortar material sources required to match existing color and texture.

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Store materials covered, protected from weather, and elevated above grade.
 1. Prevent contamination of aggregates.
- B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

- A. Environment:
 1. Cold Weather Requirements: Maintain mortar ingredients and substrate within temperature range between 4 degrees C (40 degrees F) and 49 degrees C (120 degrees F) when outside temperature is less than 4 degrees C (40 degrees F).
 2. Hot Weather Requirements: Protect mortar-joint from evaporation of moisture from mortar material. When required, provide adequately shaded work area.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Mortar Components:
 1. Hydrated Lime: ASTM C207, Type S.
 2. Aggregate: ASTM C144.
 3. Portland Cement: ASTM C150/C150M, Type I.

4. Water: Potable, free of substances that are detrimental to grout, masonry, and metal.

2.2 PRODUCTS - GENERAL

- A. Basis of Design: See drawings.
- B. Provide each product from one manufacturer and from one production run.

2.3 REPLACEMENT MASONRY UNITS

- A. Masonry Units: Match existing.

2.4 MIXES

- A. Tuck Pointing Mortar: ASTM C270; Appendix X3.
 1. Type N.

2.5 ACCESSORIES

- A. Cleaning Agent: Soapless, non-acidic, detergent, specially prepared for cleaning stone masonry.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
 1. Protect from mortar droppings and cleaning operations.
- C. Remove existing fixtures and fittings concealing masonry joints to permit repointing and repair.

3.2 EXISTING MORTAR JOINTS

- A. Cut out existing bed and head mortar joints, to uniform depth of 19 mm (3/4 inches), or to sound mortar without damaging edges and faces of existing masonry units to remain.
- B. Remove dust and debris from joints.
 1. Do not rinse when temperature is below freezing.

3.3 TUCK POINTING

- A. Dampen joints immediately before tuck pointing. Allow masonry units to absorb surface water.
- B. Tightly pack tuck pointing mortar into joints in thin layers, 6 mm (1/4 inch) thick, maximum.
- C. Allow layer to become slightly hardened before applying next layer.
- D. Pack final layer flush with surfaces of masonry units.

3.4 MASONRY UNIT REPLACEMENT

- A. Cut out mortar joints surrounding masonry units requiring replacement.
 1. Remove existing masonry units creating opening for replacement masonry unit installation.
 2. Remove mortar, dust, and debris from opening perimeter surfaces.

3. Prevent debris from falling into cavity.
- B. Dampen surfaces of surrounding existing masonry before installing replacement masonry units.
 1. Allow existing masonry to absorb surface moisture before installing replacement units.
 2. Butter contact surfaces of existing masonry and replacement masonry units with mortar.
 3. Center replacement masonry units in opening and press into position.
 4. Remove excess mortar.
 5. Tuck point replacement masonry units to ensure full head and bed joints.

3.5 JOINT TOOLING

- A. Tool repointed and replaced masonry joints when mortar becomes slightly hardened.
- B. Produce smooth, compacted, joint matching existing.

3.6 CLEANING

- A. Remove mortar splatter from exposed surfaces immediately.
- B. Clean exposed masonry surfaces on completion.
- C. Remove mortar droppings and other foreign substances from wall surfaces.
- D. Wet surfaces with clean water.
- E. Wash with cleaning agent.
- F. Brush masonry surfaces with stiff fiber brushes while washing.
- G. Immediately after washing, rinse with clean water.
 1. Remove traces of detergent, foreign streaks or stains.

- - E N D - -

**SECTION 04 05 13
MASONRY MORTARING**

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Masonry mortar installed by other concrete and masonry sections.

1.2 RELATED REQUIREMENTS

- A. Mortar used in Section:
 - 1. Section 04 01 00, MAINTENANCE OF MASONRY.
 - 2. Section 04 05 16, MASONRY GROUTING.
 - 3. Section 04 20 00, UNIT MASONRY.
 - 4. Section 04 72 00, CAST STONE MASONRY.
- B. Mortar Color: Match existing.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
 - 1. C40/C40M-11 - Organic Impurities in Fine Aggregates for Concrete.
 - 2. C91/C91M-12 - Masonry Cement.
 - 3. C144-11 -Aggregate for Masonry Mortar.
 - 4. C150/C150M-15 - Portland Cement.
 - 5. C207-06(2011) - Hydrated Lime for Masonry Purposes.
 - 6. C270-14a - Mortar of Unit Masonry.
 - 7. C595/C595M-15e1 - Blended Hydraulic Cements.
 - 8. C780-15 - Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry.
 - 9. C979/C979M-10 - Pigments for Integrally Colored Concrete.
 - 10. C1329/C1329M-15 - Mortar Cement.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Description of each product.
- C. Test Reports: Certify each product complies with specifications.
 - 1. Mortar.
 - 2. Admixtures.
- D. Certificates: Certify each product complies with specifications.
 - 1. Portland cement.

2. Masonry cement.
3. Mortar cement.
4. Hydrated lime.
5. Fine aggregate.
6. Color admixture.

E. Qualifications: Substantiate qualifications comply with specifications.

1. Testing laboratory.

1.5 QUALITY ASSURANCE

A. Preconstruction Testing:

1. Engage independent testing laboratory to tests and submit reports.
 - a. Deliver samples to laboratory in number and quantity required for testing.
2. Test mortar and materials specified.
3. Mortar:
 - a. Test for compressive strength and water retention according to ASTM C270.
 - b. Minimum Mortar compressive strengths 28 days:
 - 1) Type M: 17.2 MPa (2,500 psi).
 - 2) Type S: 12.4 MPa (1,800 psi).
 - 3) Type N: 5.1 MPa (750 psi).
4. Non Staining Cement: Test for water soluble alkali.
 - a. Water Soluble Alkali: Maximum 0.03 percent.
5. Sand: Test for deleterious substances, organic impurities, soundness and grading.

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Store masonry materials under waterproof covers on planking clear of ground.
 1. Protect loose, bulk materials from contamination.
- B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS**2.1 MATERIALS**

- A. Hydrated Lime: ASTM C207, Type S.
- B. Aggregate for Masonry Mortar: ASTM C144 and as follows:
 - 1. Light colored sand for mortar for lying face brick.
 - 2. White plastering sand meeting sieve analysis for mortar joints for pointing and laying of structural facing tile units except that 100 percent passes No. 8 sieve, and maximum 5 percent retained on No. 16 sieve.
 - 3. Test sand for color value according to ASTM C40/C40M. Sand producing color darker than specified standard is unacceptable.
- C. Blended Hydraulic Cement: ASTM C595/C595M, Type IS, IP.
- D. Masonry Cement: ASTM C91/C91M. Type N, S, Or M.
 - 1. Use white masonry cement whenever white mortar is specified.
- E. Mortar Cement: ASTM C1329/C1329M, Type N, S or M.
- F. Portland Cement: ASTM C150/C150M, Type I.
 - 1. Use white Portland cement wherever white mortar is specified.
- G. Pigments: ASTM C979/C979M; inorganic, inert, mineral pigments only, unaffected by atmospheric conditions, nonfading, alkali resistant, and water insoluble.
- H. Water: Potable, free of substances that are detrimental to mortar, masonry, and metal.

2.2 PRODUCTS - GENERAL

- A. Provide each product from one manufacturer and from one production run.

2.3 MIXES

- A. Pointing Mortar for New Work:
 - 1. For Cast Stone or Precast Concrete: Proportion by volume; one part white Portland cement, two parts white sand, and 1/5 part hydrated lime.
 - 2. Pointing Mortar for Glazed Structural Facing Tile:
 - a. Proportion by volume: One part white Portland cement, two parts of graded white sand passing Number 50 sieve, and 1/8 part hydrated lime.
- B. Tuck Pointing Mortar for Repair Work: Tuck pointing mortar specified in Section 04 01 00, MAINTENANCE OF MASONRY.

C. Masonry Mortar: ASTM C270.

1. Admixtures:

- a. Do not use mortar admixtures, and color admixtures unless approved by Contracting Officer's Representative.
- b. Do not use antifreeze compounds.

D. Colored Mortar:

1. Maintain uniform mortar color for exposed work, throughout.
2. Match mortar color in approved sample or sample panel specified in Section 04 20 00, UNIT MASONRY.
3. Alteration Work Mortar Color: Match existing mortar unless specified otherwise in drawings.

E. Color Admixtures:

1. Proportion as specified by manufacturer.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.

3.2 MIXING

- A. Measure ingredients by volume using known capacity container.
- B. Mix for 3 to 5 minutes in a mechanically operated mortar mixer.
- C. Mix water with dry ingredients in sufficient amount to provide a workable mixture which will adhere to vertical surfaces of masonry units.
- D. Mortar Stiffened Because of Water Loss Through Evaporation:
 1. Re-temper by adding water to restore to proper consistency and workability.
 2. Discard mortar reaching initial set or unused within two hours of mixing.
- E. Pointing Mortar:
 1. Mix dry ingredients with enough water to produce damp mixture of workable consistency retaining shape when formed into ball.
 2. Allow mortar to stand in dampened condition for 60 to 90 minutes.
 3. Add water to bring mortar to a workable consistency before use.

3.3 MORTARING

- A. Type M Mortar: Use for precast concrete panels and parging below grade.
- B. Type S Mortar: Use for masonry containing vertical reinforcing bars (non-engineered), masonry below grade and, setting cast stone and engineered reinforced unit masonry work.

C. Type N Mortar: Use for other masonry work.

D. Type N Mortar: Use for pointing items and tuck pointing specified.

3.4 FIELD QUALITY CONTROL

A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.

1. Take and test samples during progress of work according to ASTM C780.

- - - E N D - - -

**SECTION 04 05 16
MASONRY GROUTING**

PART 1 - GENERAL**1.1 SUMMARY**

- A. Section Includes: Grout for filling hollow concrete masonry cores.

1.2 RELATED WORK

- A. Section 04 20 00, UNIT MASONRY: Grout
- B. Section 04 72 00, CAST STONE MASONRY: Grout
- C. Section 09 30 13, CERAMIC/PORCELAIN TILING: Ready-Mixed Grout.
- D. Section 09 91 00, PAINTING

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section
American National Standards Institute (ANSI):
A118.6-19 - Standard Cement Grouts for Tile Installation.
- B. ASTM International (ASTM):
C40/C40M-20 - Organic Impurities in Fine Aggregates for
Concrete.
C150/C150M-20 - Portland Cement.
C207-18 - Hydrated Lime for Masonry Purposes.
C404-18 - Aggregates for Masonry Grout.
C476-20 - Grout for Masonry.
C595/C595M-20 - Blended Hydraulic Cement.
C979/C979M-16 - Pigments for Integrally Colored Concrete.
C1019-19 - Sampling and Testing Grout.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA,
AND SAMPLES. All items indicated below are required submittals
requiring Contracting Officer's Representative (COR) review and
approval.
- B. Manufacturer's Literature and Data:
1. Description of each product.
- C. Sustainable Construction Submittals:
1. Recycled Content: Identify pre-consumer recycled content percentage
by weight.
- D. Test Reports: Certify each product complies with specifications.
1. Grout, each type.
2. Cement.
3. Aggregate.

E. Certificates: Certify each product complies with specifications.

1. Blended hydraulic cement.
2. Portland cement.
3. Grout.
4. Hydrated lime.
5. Aggregate.
6. Color admixture.

1.5 QUALITY ASSURANCE

A. Preconstruction Testing:

1. Engage independent testing laboratory to perform tests and submit reports.
 - a. Deliver samples to laboratory in number and quantity required for testing.
2. Grout:
 - a. Test compressive strength according to ASTM C1019 standard.
3. Cement:
 - a. Test for water soluble alkali (nonstaining) when nonstaining cement is specified.
 - b. Nonstaining cement containing more than 0.03 percent water soluble alkali.
4. Aggregate:
 - a. Test for deleterious substances, organic impurities, soundness and grading.

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

1.7 STORAGE AND HANDLING

- A. Store masonry materials under waterproof covers on planking clear of ground, and protect damage from handling, dirt, stain, water and wind.
- B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Grout Components:

1. Hydrated Lime: ASTM C207, Type S.
2. Aggregate For Masonry Grout: ASTM C404, Size 8.
3. Blended Hydraulic Cement: ASTM C595, Type IS, IP.
4. Portland Cement: ASTM C150, Type I.
5. Liquid Acrylic Resin:
 - a. A formulation of acrylic polymers and modifiers in liquid form designed for use as an additive for mortar to improve physical properties.
6. Water: Potable, free of substances that are detrimental to grout, masonry, and metal.

2.2 PRODUCTS - GENERAL

- A. Provide each product from one manufacturer and from one production run.
- B. Sustainable Construction Requirements:
 1. Blended Hydraulic Cement Recycled Content: 30 percent total recycled content, minimum.
 - a. Fly Ash: 25 percent total recycled content, minimum.
 - b. Combined Fly Ash and Pozzolan: 25 percent total recycled content, minimum.
 - c. Ground Granulated Blast-Furnace Slag: 50 percent total recycled content, minimum.
 - d. Combined Fly Ash or Pozzolan and Ground Granulated Blast-Furnace Slag: 50 percent Portland cement minimum, with fly ash or pozzolan not exceeding 25 percent total recycled content, minimum.

2.3 MIXES

- A. Grout: ASTM C476; fine grout and coarse grout.
 1. Color Admixture:
 - a. Pigments: ASTM C979, inert, stable to atmospheric conditions, nonfading, alkali resistant, and water insoluble.
 - b. Use mineral pigments only. Organic pigments are not acceptable.
- B. Ready-Mixed Grout: ANSI A118.8.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Clean mortar from masonry cells protruding more than 13 mm (1/2 inch) to permit grout flow.
- D. Remove debris from grout spaces.

E. Verify reinforcement is correctly placed before placing grout.

3.2 MIXING

A. Mix grout in mechanically operated mixer.

1. Mix grout for five minutes, minimum.

B. Measure ingredients by volume using container of known capacity.

C. Mix water with grout dry ingredients.

1. Slump Range: 200 to 275 mm (8 to 11 inches).

3.3 GROUTING

A. Install grout according to Section 04 20 00, UNIT MASONRY.

B. Use fine grout for filling wall cavities and hollow concrete masonry units where smallest cell dimension is 50 mm (2 inches) or less.

C. Use either fine grout or coarse grout for filling wall cavities and hollow concrete masonry units where smallest cell dimension is greater than 50 mm (2 inches).

D. Use grout for filling bond beam or lintel units.

- - - E N D - - -

**SECTION 04 20 00
UNIT MASONRY**

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes: Concrete masonry unit (CMU) assemblies for:
 - 1. Interior walls.

1.2 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American Concrete Institute (ACI):
 - 1. 315-99 - Details and Detailing of Concrete Reinforcement.
 - 2. 530.1/ASCE 6/TMS 602-13 - Specification for Masonry Structures.
- C. ASTM International (ASTM):
 - 1. A615/A615M-15a1 - Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement.
 - 2. A951/A951M-14 - Steel Wire for Masonry Joint Reinforcement.
 - 3. A1064/A1064M-15 - Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete.
 - 4. C90-14 - Load-Bearing Concrete Masonry Units.
- D. Federal Specifications (Fed. Spec.):
 - 1. FF-S-107C(2) - Screws, Tapping and Drive.

1.3 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Fabrication, bending, and placement of reinforcing bars. Comply with ACI 315. Show bar schedules, diagrams of bent bars, stirrup spacing, lateral ties and other arrangements and assemblies.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
- D. Test reports: Certify products comply with specifications.
 - 1. Ceramic glazed facing brick.
- E. Certificates: Certify products comply with specifications.
 - 1. Solid and load-bearing concrete masonry units, including fire-resistant rated units.

1.4 STORAGE AND HANDLING

- A. Store products above grade, protected from contamination.

- B. Protect products from damage during handling and construction operations.

1.5 FIELD CONDITIONS

- A. Hot and Cold Weather Requirements: Comply with ACI 530.1/ASCE 6/TMS 602.

1.6 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 UNIT MASONRY PRODUCTS

- A. Concrete Masonry Units (CMU):
 - 1. Hollow and Solid Load-Bearing Concrete Masonry Units: ASTM C90.
 - a. Unit Weight: Normal.
 - 2. Sizes: Modular, 200 mm by 400 mm (8 inches by 16 inches) nominal face dimension; thickness as indicated on drawings.
 - 3. For molded faces used as a finished surface, use concrete masonry units with uniform fine to medium surface texture unless specified otherwise.

2.2 ANCHORS, TIES, AND REINFORCEMENT

- A. Steel Reinforcing Bars: ASTM A615/A615M; Grade 60, deformed bars.
- B. Joint Reinforcement:
 - 1. Form from wire complying with ASTM A951/A951M.
 - 2. Hot dipped galvanized after fabrication.
 - 3. Width of joint reinforcement 40 mm (1.6 inches) less than nominal thickness of masonry wall or partition.
 - 4. Cross wires welded to longitudinal wires.
 - 5. Joint reinforcement minimum 3000 mm (10 feet) long, factory cut.
 - 6. Joint reinforcement with crimp formed drip is not acceptable.
 - 7. Maximum spacing of cross wires 400 mm (16 inch) to longitudinal wires.
 - 8. Ladder Design:
 - a. Longitudinal wires deformed // 4 mm (0.16 inch) // 5 mm (0.20 inch) diameter wire //.
 - b. Cross wires // 2.6 mm (0.10 inch) // 4 mm (0.16 inch) diameter //.

2.3 ACCESSORIES

A. Masonry Cleaner:

1. Detergent type cleaner selected for each type masonry.
2. Acid cleaners are not acceptable.
3. Use soapless type specially prepared for cleaning brick or concrete masonry as appropriate.

PART 3 - EXECUTION

3.1 INSTALLATION - GENERAL

A. Keep finish work free from mortar smears or spatters, and leave neat and clean.

B. Wall Openings:

1. Fill hollow metal frames built into masonry walls solid with mortar as laying of masonry progresses.
2. When items are not available when walls are built, prepare openings for subsequent installation.

C. Tooling Joints:

1. Do not tool until mortar has stiffened enough to retain thumb print when thumb is pressed against mortar.
2. Tool while mortar is soft enough to be compressed into joints and not raked out.
3. Finish joints in exterior face masonry work with jointing tool, and provide smooth, water-tight concave joint unless specified otherwise.
4. Tool Exposed interior joints in finish work concave unless specified otherwise.

D. Wall, Furring, and Partition Units:

1. Lay out field units to provide one-half running bond, unless indicated otherwise.
2. Align head joints of alternate vertical courses.
3. At sides of openings, balance head joints in each course on vertical center lines of openings.
4. Minimum Masonry Unit Length: 100 mm (4 inches).

3.2 INSTALLATION - REINFORCEMENT

A. Joint Reinforcement:

1. Install joint reinforcement single wythe concrete masonry unit walls.

2. Locate joint reinforcement in mortar joints at 400 mm (16 inch) maximum vertical intervals.
3. Additional joint reinforcement is required in mortar joints at both 200 mm (8 inches) and 400 (16 inches) above and below windows, doors, louvers and similar openings in masonry.

B. Steel Reinforcing Bars:

1. Install reinforcing bars in cells of hollow masonry units where required for vertical reinforcement and in bond beam units for horizontal reinforcement. Install in wall cavities of reinforced masonry walls where indicated on drawings.
2. Bond Beams:
 - a. Form Bond beams of load-bearing concrete masonry units filled with grout and reinforced with two No. 15m (No. 5) reinforcing bars unless shown otherwise. Do not cut reinforcement.
 - b. Brake bond beams only at expansion joints and at control joints, if shown.

3.3 INSTALLATION - CONCRETE MASONRY // AND STRUCTURAL CLAY TILE // UNITS

A. Types and Uses:

1. Provide special concrete masonry shapes as required.
2. Grout cell of hollow units at jambs of openings in walls, where structural members impose loads directly on concrete masonry, and where shown.
3. Provide rounded corner (bullnose) shapes at opening jambs in exposed work and at exterior corners.
4. Install concrete building brick only as filler in backup material where not exposed.

B. Laying:

1. Lay concrete masonry units with 9 mm (3/8 inch) joints, with a bond overlap of minimum 1/4 of unit length.
2. Do not wet concrete masonry units before laying.
3. Lay first course in a full mortar bed.
4. Set anchorage items as work progress.
5. Where ends of anchors, bolts, and other embedded items, project into voids of units, completely fill voids with mortar or grout.
6. Lay concrete masonry units with full face shell mortar beds and fill head joint beds for depth equivalent to face shell thickness.
7. Lay concrete masonry units so cores of units, that are to be filled with grout, are vertically continuous with joints of cross webs of

such cores completely filled with mortar. Unobstructed core openings minimum 50 mm (2 inches) by 75 mm (3 inches).

8. Do not wedge masonry against steel reinforcing. Minimum 13 mm (1/2 inch) clear distance between reinforcing and masonry units.
9. Install deformed reinforcing bars of sizes indicated on drawings.
10. At time of placement, ensure steel reinforcement is free of loose rust, mud, oil, and other contamination capable of affecting bond.
11. Place steel reinforcement at spacing indicated on drawings before grouting.
12. Minimum clear distance between parallel bars: One bar diameter.
13. Hold vertical steel reinforcement in place vertically by centering clips, caging devices, tie wire, or other approved methods.
14. Support vertical bars near each end and at maximum 192 bar diameter on center.
15. Splice reinforcement or attach reinforcement to dowels by placing in contact and securing with wire ties.
16. Stagger splices in adjacent horizontal reinforcing bars. Lap reinforcing bars at splices a minimum of 40 bar diameters.
17. Grout cells of concrete masonry units, containing reinforcing bars, solid as specified.
18. Install cavity and joint reinforcement as masonry work progresses.

3.4 GROUTING

A. Preparation:

1. Clean grout space of mortar droppings before placing grout.
2. Close cleanouts.
3. Verify reinforcing bars are installed as indicated on drawings.

B. Placing:

1. Place grout in grout space in lifts as specified.
2. Consolidate each grout lift after free water has disappeared but before plasticity is lost.
3. Do not slush with mortar or use mortar with grout.
4. Interruptions:
 - a. When grouting must be stopped for more than an hour, top off grout 40 mm (1-1/2 inches) below top of last masonry course.
 - b. Grout from dam to dam on high lift method.
 - c. Longitudinal run of masonry may be stopped off only by raking back one-half masonry unit length in each course and stopping grout 100 mm (4 inches) back of rake on low lift method.

C. Puddling Method:

1. Consolidate by puddling with grout stick during and immediately after placing.
2. Grout cores of concrete masonry units containing reinforcing bars solid as masonry work progresses.

D. Low Lift Method:

1. Construct masonry to 1.5 m (5 feet) maximum height before grouting.
2. Grout in one continuous operation and consolidate grout by mechanical vibration and reconsolidate after initial water loss and settlement has occurred.

E. High Lift Method:

1. Do not pour grout until masonry wall has cured minimum of 4 hours.
2. Place grout in 1.5 m (5 feet) maximum lifts.
3. Exception:
 - a. Where following conditions are met, place grout in 3.86 m (12.67 feet) maximum lifts.
 - b. Masonry has cured minimum of 4 hours.
 - c. Grout slump is maintained between 250 and 275 mm (10 and 11 inches).
 - d. No intermediate reinforced bond beams are placed between top and bottom of grout lift.
4. When vibrating succeeding lifts, extend vibrator 300 to 450 mm (12 to 18 inches) into preceding lift.

3.5 PLACING REINFORCEMENT

- A. General: Clean reinforcement of loose rust, mill scale, earth, ice or other materials which will reduce bond to mortar or grout. Do not use reinforcement bars with kinks or bends not shown on drawings or approved submittal drawings, or bars with reduced cross-section due to excessive rusting or other causes.
- B. Position reinforcement accurately at spacing indicated on drawings. Support and secure vertical bars against displacement. Install horizontal reinforcement as masonry work progresses. Where vertical bars are shown in close proximity, provide clear distance between bars of minimum one bar diameter or 25 mm (1 inch), whichever is greater.
- C. Splice reinforcement bars only where indicated on drawings, unless approved by Contracting Officer's Representative. Provide lapped splices. In splicing vertical bars or attaching to dowels, lap ends, place in contact and wire tie.

- D. Provide minimum lap as indicated on approved submittal drawings, or if not indicated, minimum 48 bar diameters.
- E. Embed metal ties in mortar joints as work progresses, with minimum mortar cover of 15 mm (5/8 inch) on exterior face of walls and 13 mm (1/2 inch) at other locations.
- F. Embed prefabricated horizontal joint reinforcement as work progresses, with minimum cover of 15 mm (5/8 inch) on exterior face of walls and 13 mm (1/2 inch) at other locations. Lap joint reinforcement minimum 150 mm (6 inches) at ends. Use prefabricated "L" and "T" sections to provide continuity at corners and intersections. Cut and bend joint reinforcement for continuity at returns, offsets, column fireproofing, pipe enclosures and other special conditions.

3.6 INSTALLATION OF REINFORCED CONCRETE UNIT MASONRY

- A. Do not wet concrete masonry units (CMU).
- B. Lay CMU units with full-face shell mortar beds. Fill vertical head joints (end joints between units) solidly with mortar from face of unit to distance behind face equal to thickness of longitudinal face shells. Solidly bed cross-webs of starting courses in mortar. Maintain head and bed 9 mm (3/8 inch) joint widths.
- C. Where solid CMU units are shown, lay with full mortar head and bed joints.
- D. Walls:
 - 1. Pattern Bond: Lay CMU wall units in 1/2-running bond with vertical joints in each course centered on units in courses above and below, unless otherwise indicated. Bond and interlock each course at corners and intersections. Use special-shaped units where shown, and as required for corners, jambs, sash, control joints, lintels, bond beams and other special conditions.
 - 2. Maintain vertical continuity of core or cell cavities, which are to be reinforced and grouted, to provide minimum clear dimension indicated and to provide minimum clearance and grout coverage for vertical reinforcement bars. Keep cavities free of mortar. Solidly bed webs in mortar where adjacent to reinforced cores or cells.
 - 3. Where horizontally reinforced beams (bond beams) are indicated on drawings, use special units or modify regular units to allow for placement of continuous horizontal reinforcement bars. Place small mesh expanded metal lath or wire screening in mortar joints under

bond beam courses over cores or cells of non-reinforced vertical cells, or provide units with solid bottoms.

E. Grouting:

1. Use fine grout for filling spaces less than 100 mm (4 inches) in one or both horizontal directions.
2. Use coarse grout for filling 100 mm (4 inch) spaces or larger in both horizontal directions.
3. Grouting Technique: At Contractor's option, use either low-lift or high-lift grouting techniques.

F. Low-Lift Grouting:

1. Provide minimum clear dimension of 50 mm (2 inches) and clear area of 5160 sq. mm (8 sq. inches) in vertical cores to be grouted.
2. Place vertical reinforcement before grouting of CMU. Extend above elevation of maximum pour height as required for splicing. Support in position at vertical intervals not exceeding 192 bar diameters nor 3 m (10 feet).
3. Lay CMU to maximum pour height. Do not exceed 1.5 m (5 feet) height, or if bond beam occurs below 1.5 m (5 feet) height, stop pour 38 mm (1-1/2 inches) below top of bond beam.
4. Rod or vibrate grout during placing. Place grout continuously; do not interrupt pouring of grout for more than one hour. Terminate grout pours 38 mm (1-1/2 inches) below top course of pour.
5. Bond Beams: Stop grout in vertical cells 38 mm (1-1/2 inches) below bond beam course. Place horizontal reinforcement in bond beams; lap at corners and intersections as indicated on drawings. Place grout in bond beam course before filling vertical cores above bond beam.

G. High-Lift Grouting:

1. Do not use high-lift grouting technique for grouting of CMU unless minimum cavity dimension and area is 75 mm (3 inches) and 6450 sq. mm (10 sq. inches), respectively.
2. Provide cleanout holes in first course at vertical cells which are to be filled with grout.
3. Use units with one face shell removed and provide temporary supports for units above, or use header units with concrete brick supports, or cut openings in one face shell.
4. Construct masonry to full height of maximum grout pour before placing grout.

5. Limit grout lifts to maximum height of 1.5 m (5 feet) and grout pour to maximum height of 7.3 m (24 feet), for single wythe hollow concrete masonry walls, unless otherwise indicated.
6. Place vertical reinforcement before grouting. Place before or after laying masonry units, to suit application. Tie vertical reinforcement to dowels at base of masonry where shown and thread CMU over or around reinforcement. Support vertical reinforcement at intervals not exceeding 192 bar diameters nor 3 m (10 feet).
7. Where individual bars are placed after laying masonry, place wire loops extending into cells as masonry is laid and loosen before mortar sets. After insertion of reinforcement bar, pull loops and bar to proper position and tie free ends.
8. Place horizontal beam reinforcement as masonry units are laid.
9. Embed lateral tie reinforcement in mortar joints where indicated. Place as masonry units are laid, at vertical spacing shown.
10. Preparation of Grout Spaces: Before grouting, inspect and clean grout spaces. Remove dust, dirt, mortar droppings, loose pieces of masonry and other foreign materials from grout spaces. Clean reinforcement and adjust to proper position. Clean top surface of structural members supporting masonry to ensure bond. After final cleaning and inspection, close cleanout holes and brace closures to resist grout pressures.
11. Do not place grout until entire height of masonry to be grouted has attained sufficient strength to resist displacement of masonry units and breaking of mortar bond. Install shores and bracing, if required, before starting grouting operations.
12. Limit grout pours to sections which can be completed in one working day with maximum one hour interruption of pouring operation. Place grout in lifts which do not exceed 1.5 m (5 feet). Allow minimum 30 minutes and maximum one hour between lifts. Mechanically consolidate each lift.
13. Place grout in lintels or beams over openings in one continuous pour.
14. Where bond beam occurs more than one course below top of pour, fill bond beam course to within 25 mm (1 inch) of vertically reinforced cavities, during construction of masonry.
15. When more than one pour is required to complete a given section of masonry, extend reinforcement beyond masonry as required for

splicing. Pour grout to within 38 mm (1-1/2 inches) of top course of first pour. After grouted masonry is cured, lay masonry units and place reinforcement for second pour section before grouting. Repeat sequence if more pours are required.

3.7 CONSTRUCTION TOLERANCES

- A. Lay masonry units plumb, level and true to line within tolerances according to ACI 530.1/ASCE 6/TMS 602 and as follows:
- B. Maximum variation from plumb:
 - 1. In 3000 mm (10 feet) - 6 mm (1/4 inch).
 - 2. In 6000 mm (20 feet) - 9 mm (3/8 inch).
 - 3. In 12,000 mm (40 feet) or more - 13 mm (1/2 inch).
- C. Maximum variation from level:
 - 1. In any bay or up to 6000 mm (20 feet) - 6 mm (1/4 inch).
 - 2. In 12,000 mm (40 feet) or more - 13 mm (1/2 inch).
- D. Maximum variation from linear building lines:
 - 1. In any bay or up to 6000 mm (20 feet) - 13 mm (1/2 inch).
 - 2. In 12,000 mm (40 feet) or more - 19 mm (3/4 inch).
- E. Maximum variation in cross-sectional dimensions of columns and thickness of walls from dimensions shown:
 - 1. Minus 6 mm (1/4 inch).
 - 2. Plus 13 mm (1/2 inch).
- F. Maximum variation in prepared opening dimensions:
 - 1. Accurate to minus 0 mm (0 inch).
 - 2. Plus 6 mm (1/4 inch).

3.8 CLEANING AND REPAIR

A. General:

1. Clean exposed masonry surfaces on completion.
2. Protect adjoining construction materials and landscaping during cleaning operations.
3. Cut out defective exposed new joints to depth of approximately 19 mm (3/4 inch) and repoint.
4. Remove mortar droppings and other foreign substances from wall surfaces.

B. Concrete Masonry Units:

1. Immediately following setting, brush exposed surfaces free of mortar or other foreign matter.
2. Allow mud to dry before brushing.

- - E N D - -

**SECTION 04 72 00
CAST STONE MASONRY**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies manufactured concrete units to simulate a natural stone.
- B. Installation of cast stone units.

1.2 RELATED WORK

- A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS
- B. Section 04 05 13, MASONRY MORTARING, Setting and pointing mortar.
- C. Section 04 05 16, MASONRY GROUTING, Setting and pointing mortar.
- D. Section 07 92 00, JOINT SEALANTS, Joint sealant and application.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. All items indicated below are required submittals requiring Contracting Officer's Representative (COR) review and approval.
- B. Samples:
 - 1. Cast stone, sample panel, size 100 by 300 by 300 mm (4 by 12 by 12 inches) each color and finish.
 - 2. Show finish on two 100 mm (4-inch) edges and 300 by 300 mm (12 by 12 inch) surface.
- C. Shop Drawings:
 - 1. Cast stone showing exposed faces, profiles, cross sections, anchorage, reinforcing, jointing and sizes.
 - 2. Setting drawings with setting mark.
- D. Certificates: Test results indicating that the cast stone meets specification requirements and proof of plant certification.
- E. Submit manufacturers test results of cast stone previously made by manufacturer.
- F. Laboratory Data: Description of testing laboratories facilities and qualifications of its principals and key personnel.
- G. List of jobs furnished by the manufacturer, which were similar in scope and at least three (3) years of age.

1.4 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. Store cast stone under waterproof covers on planking clear of ground.
- B. Protect from handling, dirt, stain, and water damage.

- C. Mark production units with the identification marks as shown on the shop drawings.
- D. Package units and protect them from staining or damage during shipping and storage.
- E. Provide an itemized list of product to support the bill of lading.

1.5 WARRANTY

- A. Warranty exterior masonry walls against moisture leaks, any defects and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be two years.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by the basic designation only. Comply with applicable provisions and recommendations of the following, except as otherwise shown or specified.
- B. Cast Stone Institute Technical Manual and Cast Stone Institute standard specifications.
- C. ASTM International (ASTM):
 - A167-99(R2009).....Stainless and Heat Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
 - A615/A615M-20.....Standard Specification for Deformed and Plain Carbon Steel Bars for Concrete Reinforcement
 - A1064/A1064M-18a.....Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete
 - C33/C33M-18.....Standard Specification for Concrete Aggregates
 - C150/C150M-20.....Standard Specification for Portland Cement
 - C503/C503M-15.....Standard Specification for Marble Dimension Stone (Exterior)
 - C568/C568M-15.....Standard Specification for Limestone Dimension Stone
 - C615/C615M-18e1.....Standard Specification for Granite Dimension Stone
 - C616/C616M-15.....Standard Specification for Quartz-Based Dimension Stone
 - C979/C979M-16.....Standard Specification for Pigments for Integrally Colored Concrete
 - C1194-19.....Standard Test Method for Compressive Strength of Architectural Cast Stone

- C1195-19a.....Standard Test Method for Absorption of
Architectural Cast Stone
- C1364-19.....Standard Specification for Architectural Cast
Stone.
- D2244-16.....Standard Practice for Calculation of Color
Differences from Instrumentally Measured Color
Coordinates.

1.7 QUALITY ASSURANCE

A. The Manufacturer:

1. Must have 5 years minimum continuous operating experience and have facilities for manufacturing cast stone as described herein. Manufacturer shall have sufficient plant facilities to produce the shapes, quantities and size of cast stone required in accordance with the project schedule.
2. Must be a member of the Cast Stone Institute.
3. Must have a certified plant (certification by the Cast Stone Institute).

B. Stone setter: Must have 5 years' experience setting cast or natural building stone.

C. Testing: One (1) sample from production units may be selected at random from the field for each 500 cubic feet (14 meters squared) delivered to the job:

1. Three (3) field cut cube specimens from each of these sample shall have an average minimum compressive strength of not less than 85 percent with no single specimen testing less than 75 percent of design strength as specified.
2. Three (3) field cut cube specimens from each of these samples shall have an average maximum cold-water absorption of 6 percent.
3. Field specimens shall be tested in accordance with ASTM C 1194 and C 1195.
4. Manufacturer shall submit a written list of projects similar and at least three (3) years of age, along with owner, architect and contractor references.

1.8 MANUFACTURING TOLERANCES

- A. Cross section dimensions shall not deviate by more than + 1/8 inch (3 mm) from approved dimension.**
- B. Length of units shall not deviate by more than length /360 or + 1/8 inch (3mm), whichever is greater, not to exceed + 1/4 inch (6 mm).**

Maximum length of any unit shall not exceed 15 times the average thickness of such unit unless otherwise agreed by the manufacturer.

- C. Warp bow or twist of units shall not exceed length/360 or + 1/8 inch (3 mm), whichever is greater.
- D. Location of dowel holes, anchor slots, flashing grooves, false joints and similar features - On formed sides of unit, 1/8 inch (3 mm), on unformed sides of unit, 3/8 inch (9 mm) maximum deviation.

1.9 MOCK-UP

- A. Provide full size unit(s) for use in construction of sample wall. The mock-up becomes the standard of workmanship for the project.

PART 2 - PRODUCTS

2.1 ARCHITECTURAL CAST STONE

- A. Comply with ASTM C 1364
- B. Physical properties: Provide the following:
 - 1. Compressive Strength - ASTM C 1194: 6,500 psi (45 Mpa) minimum for products at 28 days.
 - 2. Absorption - ASTM C 1195: 6 percent maximum by the cold water method, or 10 percent maximum by the boiling method for products as 28 days.
 - 3. Air Content - ASTM C173 or C231, for wet cast product shall be 4-8 percent for units exposed to freeze-thaw environments. Air entrainment is not required for vibrant dry tamp (VDT) products.
 - 4. Freeze thaw - ASTM C 1364L The cumulative percent weight loss (CPWL) shall be less than 5 percent after 300 cycles of freezing and thawing.
 - 5. Linear Shrinkage - ASTM C 426L Shrinkage shall not exceed 0.065 percent.
- C. Job site testing - One (1) sample from production units may be selected at random from the field for each 500 cubic feet (14 cubic meters) delivered to the job site:
 - 1. Three (3) field cut cube specimens from each of these samples shall have an average minimum compressive strength of not less than 85 percent with no single specimen testing less than 75 percent of design strength as allowed by ACI 318.
 - 2. Three (3) field cut cube specimens from each of these samples shall have an average maximum cold-water absorption of 6 percent.
 - 3. Field specimens shall be tested in accordance with ASTM C 1194 and C 1195.

2.2 RAW MATERIALS

- A. Portland cement - Type I or Type III, white and/or grey, ASTM C 150.
- B. Coarse aggregates - Granite, quartz or limestone, ASTM C 33, except for gradation, and are optional for the vibrant dry tamp (VDT) casting method.
- C. Fine aggregates - Manufactured or natural sands, ASTM C 33, except for gradation.
- D. Colors - Inorganic iron oxide pigments, ASTM C 979 except that carbon black pigments shall not be used.
- E. Admixtures- Comply with the following:
 - 1. ASTM C 260 for air-entraining admixtures.
 - 2. ASTM C 494/C 495 M Types A-G for water reducing, retarding, accelerating and high range admixtures.
 - 3. Other admixtures: integral water repellents and other chemicals, for which no ASTM Standard exists, shall be previously established as suitable for use in concrete by proven field performance or through laboratory testing.
 - 4. ASTM C 618 mineral admixtures of dark and variable colors shall not be used in surfaces intended to be exposed to view.
 - 5. ASTM C 989 granulated blast furnace slag may be used to improve physical properties. Tests are required to verify these features.
- F. Water - Potable
- G. Reinforcing bars:
 - 1. ASTM A 615/A 615M. Grade 40 or 60 steel galvanized or epoxy coated when cover is less than 1.5 inch (37 mm).
 - 2. Welded Wire Fabric: ASTM A 1064 where applicable for wet cast units.
- H. All anchors, dowels and other anchoring devices and shims shall be standard building stone anchors commercially available in a non-corrosive material such as zinc plated, galvanized steel, brass, or stainless steel Type 302 or 304.

2.3 COLOR AND FINISH

- A. Match sample on file.
- B. All surfaces intended to be exposed to view shall have a fine-grained texture similar to natural stone, with no air voids in excess of 1/32 inch (0.8 mm) and the density of such voids shall be less than 3 occurrences per any 1 inch (25 mm) and not obvious under direct daylight illumination at a 5 feet (1.5 meters) distance.

- C. Units shall exhibit a texture approximately equal to the approved sample when viewed under direct daylight illumination at a 10 feet (3 meters) distance.
- D. ASTM D 2244 permissible variation in color between units of comparable age subjected to similar weathering exposure.
 - 1. Total color difference - not greater than 6 units.
 - 2. Total hue difference-not greater than 2 units.

2.4 REINFORCING

- A. Reinforce the units as required by the drawings and for safe handling and structural stress.
 - 1. Minimum reinforcing shall be 0.25 percent of the cross section area.
- B. Reinforcement shall be non-corrosive where faces exposed to weather are covered with less than 1.5 inch (38 mm) of concrete material. All reinforcement shall have minimum coverage of twice the diameter of the bars.
- C. Minor chipping resulting from shipment and delivery shall not be grounds for rejection. Minor chips shall not be obvious under direct daylight illumination from a 20 foot (6 meter) distance.
- D. The occurrence of crazing or efflorescence shall not constitute a cause for rejection.
- E. Remove cement film, if required, from exposed surface prior to packaging for shipment.

2.5 CURING

- A. Cure units in a warm curing chamber 100 degrees F (37.8 degrees C) at 95 percent relative humidity for approximately 12 hours, or cure in a 95 percent moist environment at a minimum 70 degrees F (21.1 degrees C) for 16 hours after casting. Additional yard curing at 95 percent relative humidity shall be 350-degree-days (i.e. 7 days @ 50 degrees F (10.0 degrees C) or 5 days @ 70 degrees F (21.0 degrees C) prior to shipping. Form cured units shall be protected from moisture evaporation with curing blankets or curing compounds after casting.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Installing contractor shall check cast stone materials for fit and finish prior to installation. Do not set unacceptable units.

3.2 SETTING TOLERANCES

- A. Comply with Cast Stone Institute Technical Manual.
- B. Set stones 1/8 inch (3 mm) or less, within the plane of adjacent units.
- C. Joints, plus - 1/6 inch (1.5 mm), minus - 1/8 inch (3 mm).

3.3 JOINTING

A. Joint size:

1. At stone/brick joints 3/8 inch (9.5 cm).
2. At stone/stone joints in vertical position 1/4 inch (6 mm) (3/8 inch (9.5 mm) optional).
3. Stone/stone joint exposed on top 3/8 inch (.5 mm).

B. Joint Materials:

1. Mortar, Type N, ASTM C 270.
2. Use a full bed of mortar at all bed joints.
3. Flush vertical joints full with mortar.
4. Leave all joints with exposed tops or under relieving angles open for sealant.
5. Leave head joints in coping and projecting components open for sealant.

C. Location of joints:

1. As shown on shop drawings.
2. At control and expansion joints unless otherwise shown.

3.4 SETTING

- A. Drench units with clean water prior to setting.
- B. Fill dowel holes and anchor slots completely with mortar or non-shrink grout.
- C. Set units in full bed of mortar, unless otherwise detailed.
- D. Rake mortar joints 3/4 inch (18 mm) for pointing.
- E. Remove excess mortar from unit faces immediately after setting.
- F. Tuck point unit joints to a slight concave profile.

3.5 JOINT PROTECTION

- A. Comply with requirements of Section 07 92 00, JOINT SEALANTS.
- B. Prime ends of units, insert properly sized backing rod and install required sealant.

3.6 REPAIR AND CLEANING

- A. Repair chips with touchup materials furnished by manufacturer.
- B. Saturate units to be cleaned prior to applying an approved masonry cleaner.
- C. Consult with manufacturer for appropriate cleaners.

3.7 INSPECTION AND ACCEPTANCE

- A. Inspect finished installation according to Bulletin #36 published by the Cast Stone Institute.

- - - E N D - - -

SECTION 05 12 00
STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Structural steel shapes, plates, and bars.
2. Structural pipe.
3. Bolts, nuts, and washers.

1.2 RELATED REQUIREMENTS

- A. Materials Testing And Inspection During Construction: Section 01 45 29, TESTING LABORATORY SERVICES.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American Institute of Steel Construction (AISC):
1. AISC Manual - Steel Construction Manual, 14th Ed.
 2. 303-10 - Code of Structural Steel Buildings and Bridges.
 3. 360-10: Specification for Structural Steel Buildings.
- C. The American Society of Mechanical Engineers (ASME):
1. B18.22.1-09 - Washers: Helical Spring-Lock, Tooth Lock, and Plain Washers.
- D. American Welding Society (AWS):
1. D1.1/D1.1M-15 - Structural Welding Code - Steel.
- E. ASTM International (ASTM):
1. A6/A6M-14 - General Requirements for Rolled Structural Steel Bars, Plates, Shapes, and Sheet Piling.
 2. A36/A36M-14 - Carbon Structural Steel.
 3. A53/A53M-12 - Pipe, Steel, Black and Hot-Dip, Zinc-Coated, Welded and Seamless.
 4. A123/A123M-15 - Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
 5. A283/A283M-13 - Low and Intermediate Tensile Strength Carbon Steel Plates.
 6. A500/A500M-13 - Cold-Formed Welded and Seamless Carbon Steel Structural Tubing and Rounds and Shapes.
 7. A501/A501M-14 - Hot-Formed Welded and Seamless Carbon Steel Structural Tubing and Rounds and Shapes.
 8. A992/A992M-15 - Structural Shapes.

9. F2329/F2329M-15 - Zinc Coating, Hot-Dip, Requirements for Application to Carbon and Alloy steel Bolts, Screws, washers, Nuts, and Special Threaded Fasteners.
 10. F3125/F3125M-15 - Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040 MPa) Minimum Tensile Strength, Inch and Metric Dimensions
- F. Master Painters Institute (MPI):
1. No. 18 - Primer, Zinc Rich, Organic.
- G. Occupational Safety and Health Administration (OSHA):
1. 29 CFR 1926.752(e) - Guidelines For Establishing The Components Of A Site-Specific Erection Plan.
 2. 29 CFR 1926-2001 - Safety Standards for Steel Erection.
- H. Research Council on Structural Connections (RCSC) of The Engineering Foundation:
1. Specification for Structural Joints Using ASTM F3125 Bolts.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
1. Show size, configuration, and fabrication and installation details.
- C. Test Reports: Certify products comply with specifications.
1. Welders' qualifying tests.
- D. Certificates: Certify each product complies with specifications.
1. Structural steel.
 2. Welding materials.
 3. Shop coat primer paint.
- E. Qualifications: Substantiate qualifications comply with specifications.
1. Fabricator with project experience list.
 2. Installer with project experience list.
 3. Welders and welding procedures.

1.5 QUALITY ASSURANCE

- A. Fabricator Qualifications:
1. Regularly fabricates specified products.
 2. Fabricated specified products with satisfactory service on five similar installations for minimum five years.

- a. Project Experience List: Provide contact names and addresses for completed projects.
- B. Installer Qualifications: AISC Quality Certification Program participant designated as AISC-Certified Erector, Category ACSE.
 - 1. Regularly installs specified products.
 - 2. Installed specified products with satisfactory service on five similar installations for minimum five years.
- a. Project Experience List: Provide contact names and addresses for completed projects.
- C. Before commencement of Work, ensure steel erector provides written notification required by OSHA 29 CFR 1926.752(e). Submit a copy of the notification to Contracting Officer's Representative.
- D. Welders and Welding Procedures Qualifications: AWS D1.1/D1.1M.

1.6 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

- A. W-Shapes:
 - 1. ASTM A992/A992M.
- B. Channel and Angles:
 - 1. ASTM A36/A36M.
- C. Plates and Bars:
 - 1. ASTM A36/A36M.
- D. Hollow Structural Sections:
 - 1. ASTM A500/A500M.
- E. Structural Pipe: ASTM A53/A53M, Grade B.
- F. Bolts, Nuts and Washers: Galvanized for galvanized framing and plain finish for other framing.
 - 1. High-strength bolts, including nuts and washers: ASTM F3125.
 - 2. Bolts and nuts, other than high-strength: ASTM A307, Grade A.
 - 3. Plain washers, other than those in contact with high-strength bolt heads and nuts: ASME B18.22.1.
- G. Welding Materials: AWS D1.1, type to suit application.

2.2 PRODUCTS - GENERAL**2.3 FABRICATION**

- A. Fabricate structural steel according to Chapter M, AISC 360.
- B. Shop and Field Connections:
 - 1. Weld connections according to AWS D1.1/D1.1M. Welds shall be made only by welders and welding operators who have been previously qualified by tests as prescribed in AWS D1.1 to perform type of work required.
 - 2. High-Strength Bolts: High-strength bolts tightened to a bolt tension minimum 70 percent of their minimum tensile strength. Tightening done with properly calibrated wrenches, by turn-of-nut method or by use of direct tension indicators (bolts or washers). Tighten bolts in connections identified as slip-critical using Direct Tension Indicators.

2.4 FINISHES

- A. Shop Priming:
 - 1. Prime paint structural steel according to AISC 303, Section 6.
 - a. Interstitial Space Structural Steel: Prime paint
- B. Do not paint:
 - 1. Surfaces within 50 mm (2 inches) of field welded joints.
 - 2. Surfaces indicated to be encased in concrete.
 - 3. Surfaces receiving sprayed on fireproofing.
 - 4. Beam top flanges receiving shear connector studs applied.
- C. Structural Steel Galvanizing: ASTM A123/A123M, hot dipped, after fabrication. Touch-up after erection: Clean and wire brush any abraded and other spots worn through zinc coating, including threaded portions of bolts and welds and touch-up with galvanizing repair paint.
 - 1. Galvanize structural steel framing installed at exterior locations.
- D. Bolts, Nuts, and Washers Galvanizing: ASTM F2329, hot-dipped.

2.5 ACCESSORIES

- A. General: Shop paint steel according to AISC 303, Section 6.
- B. Galvanizing Repair Paint: MPI No. 18.

PART 3 - EXECUTION**3.1 ERECTION**

- A. Erect structural steel according to AISC 303 and AISC 360.

- B. Set structural steel accurately at locations and elevations indicated on drawings.
- C. Maintain erection tolerances of structural steel within AISC 303 requirements.
 - 1. Pour Stop Elevation Tolerance: 6 mm (1/4 inch), maximum, before concrete placement.
- D. Weld and bolt connections as specified for shop connections.

3.2 FIELD PAINTING

- A. After welding, clean and prime weld areas to match adjacent finish.
- B. Touch-up primer damaged by construction operations.
- C. Apply galvanizing repair paint to galvanized coatings damaged by construction operations.

- - E N D - -

**SECTION 05 36 00
COMPOSITE METAL DECKING**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies material and services required for installation of composite steel decking including shear connector studs and miscellaneous closures required to prepare deck for concrete placement as shown and specified.

1.2 RELATED WORK

- A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Sustainable Design Requirements.
- B. Section 01 45 29, TESTING LABORATORY SERVICES: Materials testing and inspection during construction.

1.3 DESIGN REQUIREMENTS

- A. Design steel decking in accordance with AISI S-100, except as otherwise shown or specified.
- B. Design steel decking to comply with all applicable South Dakota Building codes.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. All items indicated below are required submittals requiring Contracting Officer's Representative (COR) review and approval.
- B. Sustainable Design Submittals, as described below:
 - 1. Combined recycled content as specified in PART 2 - PRODUCTS.
- C. Shop Drawings: Shop and erection drawings showing decking unit layout, connections to supporting members, and information necessary to complete the installation as shown and specified, including supplementary framing, cant strips, cut openings, special jointing or other accessories.
 - 1. Show welding, side lap, closure, deck reinforcing and closure reinforcing details.
 - 2. Show openings required for work of other trades, including openings not shown on structural drawings.
 - 3. Indicate where temporary shoring is required to satisfy design criteria.
- D. Manufacturer's Literature and Data: Showing steel decking section properties and specifying required structural characteristics.

- E. Manufacturer's written recommendations for:
 - 1. Shape of decking section.
 - 2. Cleaning of steel decking prior to concrete placement.
- F. Test Report - Establishing structural characteristics of composite concrete and steel decking system.
- G. Test Report - Stud base qualification.
- H. Welding power setting recommendation by shear stud manufacturer.
- I. Shear Stud Layouts: Submit drawings showing the quantity, pattern, spacing and configuration of shear studs for each beam and girder.
- J. Certification: For each type and gauge of metal deck supporting concrete slab or fill, submit certification of specified fire ratings. Certify that units supplied are UL listed as a "Steel Floor and Form Unit".
- K. Manufacturers Certificates for deck units attesting compliance with specified requirements.
- L. Submit manufacturer's catalog data for Welding Equipment and Welding Rods and Accessories intended use.
- M. Power Actuated Tool Operator Certificates.
- N. Welders qualifications.

1.5 QUALITY ASSURANCE

- A. Fire Safety
 - 1. Underwriters' Label: Provide composite metal floor deck units listed in Underwriters' Laboratories "Building Materials Directory", with each deck unit bearing the UL label and marking for specific system detailed.
- B. Deck Units: Provide deck units and accessory products from a manufacturer engaged in the manufacture of steel decking for more than three (3) years. Submit manufacturer's certificates attesting that the decking material complies with the specified requirements.
- C. Certification of Powder-Actuated Tool Operator: Manufacturer's certificate attesting that the operators are authorized to use the low velocity powder-actuated tool.
- D. Qualifications for Welding Work: Submit qualified welder qualifications in accordance with AWS D1.1/D1.1M or under an approved qualification test.

1.6 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only. Refer to the latest edition of referenced Standards and codes.

- B. American Iron and Steel Institute (AISI):
 - S-100-16.....North American Specification for the Design of Cold-Formed Steel Structural Members
- C. ASTM International (ASTM):
 - A36/A36M-19.....Standard Specification for Carbon Structural Steel
 - A108-18.....Standard Specification for Steel Bar, Carbon and Alloy, Cold-Finished
 - A653/A653M-20.....Standard Specification for Steel Sheet, Zinc Coated (Galvanized) or Zinc Iron Alloy Coated (Galvannealed) by the Hot Dip Process
- D. American Institute of Steel Construction (AISC):
 - 1. Specification for Structural Steel Buildings - Allowable Stress Design and Plastic Design (Latest Edition)
 - 2. Load and Resistance Factor Design Specification for Structural Steel Buildings (Latest Edition)
- E. American Welding Society (AWS):
 - D1.1/D1.1M-20.....Structural Welding Code - Steel
 - D1.3/D1.3M-18.....Structural Welding Code - Sheet Steel
- F. FM Global (FM):
 - APP Guide.....Approval Guide
 - DS 1-28-15.....Design Wind Loads
- G. Military Specifications (Mil. Spec.):
 - MIL-P-21035B.....Paint, High Zinc Dust Content, Galvanizing Repair
- H. Underwriters Laboratories (UL):
 - Bld Mat Dir (Annually)...Building Materials Directory

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Steel Decking and Flashings: ASTM A653/A653M, Structural Quality suitable for shear stud weld-through techniques.
- B. Recycled Content of Steel Products: Combined recycled content not less than 75 percent.
- C. Galvanizing: ASTM A653/A653M, G60. Thickness not less than indicated on drawings or 0.75 mm (0.029 inch).
- D. Shear connector studs: ASTM A108, Grades 1015-1020, yield 350 Mpa (50,000 pound/square inch) minimum, tensile strength - 400 Mpa (60,000 pounds/square inch) minimum, reduction of area 50 percent minimum.

1. Provide studs of uniform diameter, with heads concentric and on same axis to shaft.
2. Provide studs, after welding, free from substance or defect which would interfere with its function as a shear connector.
3. Do not paint or galvanize studs.
4. Provide size of studs as shown on drawings.
5. Provide studs manufactured by a company normally engaged in the manufacturer of shear studs and can furnish equipment suitable for weld-through installation of shear studs.

E. Galvanizing Repair Paint: Mil. Spec. MIL-P-21035B.

F. Miscellaneous Steel Shapes: ASTM A36/A36M.

G. Welding Electrode: E60XX minimum.

H. Sheet Metal Accessories: ASTM A653/A653M, galvanized, unless noted otherwise. Provide accessories of every kind required to complete the installation of metal decking in the system shown. Finish sheet metal items to match deck including, but not limited to, the following items:

1. Metal Cover Plates: For end-abutting deck units, to close gaps at changes in deck direction, columns, walls and openings. Same quality as deck units but not less than 1.3 mm (18 gauge) sheet steel.
2. Continuous sheet metal edging: at openings and concrete slab edges. Same quality as deck units but not less than 1.3 mm (18 gauge) steel. Side and end closures supporting concrete and their attachment to supporting steel to be designed by the manufacturer to safely support the wet weight of concrete and construction loads. The deflection of cantilever closures to be limited to a total of 3 mm (1/8 inch) maximum.
3. Metal Closure Strips: For openings between decking and other construction, of not less than 1.3 mm (18 gauge) sheet steel of the same quality as the deck units. Form to the configuration required to provide tight-fitting closures at open ends of flutes and sides of decking.
4. Seat angles for deck: Where a beam does not frame into a column.

2.2 REQUIREMENTS

- A. Steel decking depth, gauge, and section properties to be as shown on contract documents. Provide edges of deck with vertical interlocking male and female lip providing for a positive mechanical connection.
- B. Fabricate deck units with integral embossments to provide mechanical bond with concrete slab. Deck units combined with concrete slab to be capable of supporting total design loads.

C. Provide integral system with single point of attachment for light duty hanger devices for flexibility for attaching hangers for support of acoustical, lathing, plumbing, heating, air conditioning electrical and similar items.

1. Provide a minimum spacing pattern of 305 mm (12 inches) on centers longitudinally and 610 mm or 914 mm (24 or 36 inches) on centers transversely.
2. Provide suspension system capable of safely supporting a maximum allowable load of 45 kg (100 pounds) concentrated at one hanger attachment point.
3. System may consist of fold-down type hanger tabs or a lip hanger.

PART 3 - EXECUTION

3.1 ERECTION:

- A. Do not start installation of metal decking until corresponding steel framework has been plumbed, aligned and completed, and until temporary shoring, where required, has been installed.
1. Remove oil, dirt, paint, ice, water and rust from steel surfaces to which metal decking will be welded.
- B. Coordinate and cooperate with structural steel erector in locating decking bundles to prevent overloading of structural members.
- C. Do not use floor deck units for storage or working platforms until permanently secured.
1. Do not overload deck units once placed.
 2. Replace deck units that become damaged after erection and prior to casting concrete at no additional cost to the Government.
- D. Erect steel deck in accordance with manufacturer's printed instructions.
- E. Ship steel deck units in standard widths and fabricated to proper length.
- F. Provide steel decking in sufficient lengths to extend over 3 or more spans, except where structural steel layout does not permit.
- G. Place steel decking units on supporting steel framework and adjust to final position before being permanently fastened.
1. Bring each unit to proper bearing on supporting beams.
 2. Place deck units in straight alignment for entire length of run of flutes and with close registration of flutes of one unit with those of abutting unit.
 3. Maximum space between ends of abutting units is 13 mm (1/2 inch). If space exceeds 13 mm (1/2 inch), install closure plates.

H. Ceiling hanger loops, if provided, must be flattened or removed to obtain bearing of units on structural steel.

I. Fastening Deck Units:

1. Fasten floor deck units to steel supporting members by not less than 16 mm (5/8 inch) diameter puddle welds or elongated welds of equal strength, spaced not more than 305 mm (12 inches) on center with a minimum of two welds per unit at each support. Where two units abut, fasten each unit individually to the supporting steel framework.
2. Tack weld or use self-tapping No. 8 or larger machine screws at 914 mm (3 feet) on center for fastening end closures. Only use welds to attach longitudinal end closures.
3. Weld side laps of adjacent floor deck units that span more than 1524 mm (5 feet). Fasten at midspan or 914 mm (3 feet) on center, whichever is smaller.

J. Weld in conformance to AWS D1.3/D1.3M and done by qualified experienced welding mechanics.

K. Clean and touch-up area and welds scarred during erection, and repair with zinc rich galvanizing repair paint.

1. Paint touch-up is not required for welds or scars that are to be in direct contact with concrete.

L. Provide metal concrete stops at edges of deck.

M. Cutting and Fitting:

1. Fabricate metal deck units to proper length prior to shipping.
2. Field cutting by the metal deck erector is restricted to bevel cuts, notching to fit around columns and similar items, and cutting openings that are located and dimensioned on the structural drawings.
3. Other penetrations shown on the approved metal deck shop drawings but not shown on the structural drawings are to be located, cut and reinforced.
4. Make cuts and penetrations neat and trim using a metal saw, drill or punchout device; cutting with torches is prohibited.
5. Do not make cuts in the metal deck that are not shown on the approved metal deck drawings.
6. If an additional opening not shown on the approved shop drawings is required, submit a sketch, to scale, locating the required new opening and other openings and supports in the immediate area. Do not cut the opening until the sketch has been reviewed and accepted by the Contracting Officer Representative (COR). Provide additional

reinforcing or framing required for the opening at no additional cost to the Government.

7. Reinforcement at Openings: Provide additional metal reinforcement and closure pieces as required for strength, continuity of decking and support of other work shown.

- N. Install shear connector studs through previously installed metal deck in conformance to AWS D1.1/D1.1M, Section 7.

Exception: Install studs with automatically timed welding equipment and as specified below:

1. Do not place welded wire reinforcing or other materials and equipment which will interfere with stud installation on steel deck until shear connector studs are installed.
2. Clean steel deck sheets free of oil, rust, dirt, and paint. Release water in deck's valley so that it does not become entrapped between deck and beam. Clean and dry surface to which stud is to be welded.
3. Rest metal deck tightly upon top flange of structural member with bottom of deck rib in full contact with top of beam flange.
4. Weld studs only through a single thickness of deck. Place decking so that a butt joint is obtained. Place studs directly over beam web, where one row of studs are required.
5. Provide ferrules specially developed for the weld-through technique, and appropriate for size of studs installed. Remove ferrules after welding.
6. Submit report of successful test program for stud base qualification as required by AWS D1.1/D1.1M, Appendix K.

3.2 CLEANING

- A. Clean deck in accordance with manufacturer's recommendation before concrete placement.

- - - E N D - - -

**SECTION 05 40 00
COLD-FORMED METAL FRAMING**

PART 1 - GENERAL**1.1 DESCRIPTION**

A. This section specifies materials and services required for installation of cold-formed steel, including tracks and required accessories as shown and specified. This Section includes the following:

1. Exterior load-bearing steel stud walls.
2. Interior load-bearing steel stud walls.
3. Exterior non-load-bearing steel stud curtain wall.
4. Steel joists.
5. Steel trusses.

1.2 RELATED WORK

- A. Section 01 81 13 SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Section 05 12 00, STRUCTURAL STEEL FRAMING: Structural steel framing.
- C. Section 05 21 00, STEEL JOIST FRAMING: Open web steel joists.
- D. Section 09 22 16, NON-STRUCTURAL METAL FRAMING: Non-load-bearing metal stud framing assemblies.
- E. Section 09 29 00, GYPSUM BOARD: Gypsum board assemblies.

1.3 DESIGN REQUIREMENTS

- A. Design steel in accordance with American Iron and Steel Institute Publication "Specification for the Design of Cold-Formed Steel Structural Members", except as otherwise shown or specified.
- B. Structural Performance: Engineer, fabricate and erect cold-formed metal framing with the minimum physical and structural properties indicated.
- C. Structural Performance: Engineer, fabricate, and erect cold-formed metal framing to withstand design loads within limits and under conditions required.
1. Design Loads:
- a. Gravity, wind and seismic loading as indicated on the drawings or in this specification.
 - b. Blast Loads:
 - 1) Light gauge framing in exterior walls shall be blast resistant and meet the following criteria per the VA Physical Security and Resiliency Design Manual.
 - 2) Standoff Distance: 50 feet (Mission Critical Protected)
 - 3) Design Threat in accordance with Table 6-1 of the referenced Physical Security and Resiliency Design Manual.

- 4) Deformation not to exceed deformation limits shown in Table 6-2 of the referenced Physical Security and Resiliency Design Manual.
2. Design framing systems to withstand design loads without deflections greater than the following:
 - a. Exterior Load-Bearing Walls: Lateral deflection of 1/40 of the wall height.
 - b. Interior Load-Bearing Walls: Lateral deflection of 1/240 of the wall height.
 - c. Exterior Non-load-Bearing Curtain wall: Lateral deflection of 1/240 of the wall height.
 - d. Floor Joists: Vertical deflection of 1/240 of the span.
 - e. Roof Trusses: Vertical deflection of 1/240 of the span.
3. Design framing systems to provide for movement of framing members without damage or overstressing, sheathing failure, connection failure, undue strain on fasteners and anchors, or other detrimental effects when subject to a maximum ambient temperature change (range) of 67 degrees C (120 degrees F).
4. Design framing system to accommodate deflection of primary building structure and construction tolerances, and to maintain clearances at openings.
5. Design exterior non-load-bearing curtain wall framing to accommodate lateral deflection without regard to contribution of sheathing materials.
6. Engineering Responsibility: Engage a fabricator who assumes undivided responsibility for engineering cold-formed metal framing by employing a qualified professional engineer to prepare design calculations, shop drawings, and other structural data.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. All items indicated below are required submittals requiring Contracting Officer's Representative (COR) review and approval
- B. Shop Drawings: Shop and erection drawings showing steel unit layout, connections to supporting members, and information necessary to complete installation as shown and specified.
- C. Manufacturer's Literature and Data: Showing steel component sections and specifying structural characteristics.

- D. Design of the light gauge for this project shall be provided by the contractor's structural engineer for the loads shown on the construction documents. Submit signed and sealed calculations performed by a structural engineer with at least 5 years' experience in the design of light gauge metal and registered in the state of the project. Calculations shall be submitted with plans elevations and details for review and approval.
- E. Blast Design Calculations: Light Gauge Members and Connections
1. Submit calculations for review and approval prepared by qualified blast consultant, with a minimum of 5 years' experience in design of blast resistant window systems when delegated designer of the light gauge responsible for design of light gauge members for gravity, wind and seismic loadings varies from minimum sizes required for blast loading shown on the drawings. The magnitudes of the design threats W1, and GP2 are defined in the Physical Security and Resiliency Design Standards Data Definitions which is a document separate from the referenced VA Security and Resiliency Design Manual. The Physical Security and Resiliency Design Standards Data Definitions are provided on a need to know basis by the structural blast specialist performing the blast design on VA projects. It is the responsibility of the delegated engineer responsible for the design of blast resistant cold formed framing to request and obtain the Physical Security Design and Resiliency Data Standard Data Definitions from the VA Office of Construction and Facilities Management (CFM). Any associated delays or increased costs due to failure to obtain this information will be borne by the contractor.
- F. Sustainable Construction Submittals:
1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Iron and Steel Institute (AISI): Specification and Commentary for the Design of Cold-Formed Steel Structural Members (2016)
- C. ASTM International (ASTM):
A36/A36M-19.....Standard Specification for Carbon Structural Steel

- A123/A123M-17.....Standard Specifications for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
- A153/A153M-16a.....Standard Specifications for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
- A307-14e1.....Standard Specifications for Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength
- A653/A653M-20.....Standard Specification for Steel Sheet, Zinc Coated (Galvanized) or Zinc Iron Alloy Coated (Galvannealed) by the Hot Dip Process
- C955-18e1.....Standard Specification for Cold Formed Steel Structural Framing Members
- C1107/1107M-20.....Standard Specification for Packaged Dry, Hydraulic-Cement Grout (Non-shrink)
- E488/E488M-18.....Standard Test Methods for Strength of Anchors in Concrete Elements
- E1190-11(2018).....Standard Test Methods for Strength of Power-Actuated Fasteners Installed in Structural Members
- D. American Welding Society (AWS):
- D1.3/D1.3M-18.....Structural Welding Code-Sheet Steel
- E. Military Specifications (Mil. Spec.):
- MIL-P-21035B.....Paint, High Zinc Dust Content, Galvanizing Repair
- F. VA Physical Security and Resiliency Design Manual October 1, 2020.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Sheet Steel for joists, studs and accessories 16 gauge and heavier: ASTM A653, structural steel, zinc coated G90, with a yield of 340 MPa (50 ksi) minimum.
- B. Sheet Steel for joists, studs and accessories 18 gauge and lighter: ASTM A653, structural steel, zinc coated G90, with a yield of 230 MPa (33 ksi) minimum.
- C. Galvanizing Repair Paint: MIL-P-21035B.
- D. Nonmetallic, Non-shrink Grout: Premixed, nonmetallic, noncorrosive, nonstaining grout containing selected silica sands, Portland cement, shrinkage-compensating agents, plasticizing and water-reducing agents,

complying with ASTM C1107, with fluid consistency and a 30 minute working time.

2.2 WALL FRAMING

- A. Steel Studs: Complying with ASTM C 955. Manufacturer's standard C-shaped steel studs of web depth indicated, with lipped flanges, and complying with the following:
 - 1. Minimum Base-Steel Thickness (uncoated): 1.09 mm (0.0428 inch)
 - 2. Flange Width: 1-5/8 inches)
 - 3. Web: Punched.
- B. Steel Track: Manufacturer's standard U-shaped steel track, unpunched, of web depths indicated, with straight flanges, and complying with the following:
 - 1. Design Uncoated-Steel Thickness: Matching steel studs.
 - 2. Flange Width: Manufacturer's standard deep flange where indicated, standard flange elsewhere.

2.3 JOIST FRAMING

- A. Steel Joists: Manufacturer's standard C-shaped steel joists, unpunched, of web depths indicated, with lipped flanges, and complying with the following:
 - 1. Minimum Base-Steel
 - 2. 1.45 mm (0.0566 inch).
 - 3. Flange Width: 41 mm (1 5/8 inches) minimum.
- B. Steel Joist Track: Manufacturer's standard U-shaped steel joist track, unpunched, of web depths indicated, with straight flanges, and complying with the following:
 - 1. Design Thickness: Matching steel joists.
 - 2. Flange Width: 41 mm (1 5/8-inches) minimum.

2.4 FRAMING ACCESSORIES

- A. Fabricate steel framing accessories of the same material and finish used for framing members, with a minimum yield strength of 230 MPa (33 ksi).
- B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:
 - 1. Supplementary framing.
 - a. Including CH framing at rated ceiling assembly.
 - 2. Bracing, bridging, and solid blocking.
 - 3. Web stiffeners.
 - 4. Gusset plates.

5. Deflection track and vertical slide clips.
6. Stud kickers and girts.
7. Joist hangers and end closures.
8. Reinforcement plates.

2.5 ANCHORS, CLIPS, AND FASTENERS

- A. Steel Shapes and Clips: ASTM A36, zinc coated by the hot-dip process according to ASTM A123.
- B. Cast-in-Place Anchor Bolts and Studs: ASTM A307, Grade A, zinc coated by the hot-dip process according to ASTM A153.
- C. Expansion Anchors: Fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 5 times the design load, as determined by testing per ASTM E488 conducted by a qualified independent testing agency.
- D. Power-Actuated Anchors: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 10 times the design load, as determined by testing per ASTM E1190 conducted by a qualified independent testing agency.
- E. Mechanical Fasteners: Corrosion-resistant coated, self-drilling, self-threading steel drill screws. Low-profile head beneath sheathing, manufacturer's standard elsewhere.

2.6 REQUIREMENTS

- A. Welding in accordance with AWS D1.3
- B. Furnish members and accessories by one manufacturer only.

PART 3 - EXECUTION

3.1 FABRICATION

- A. Framing components may be preassembled into panels. Panels shall be square with components attached.
- B. Cut framing components squarely or as required for attachment. Cut framing members by sawing or shearing; do not torch cut.
- C. Hold members in place until fastened.
- D. Fasten cold-formed metal framing members by welding or screw fastening, as standard with fabricator. Wire tying of framing members is not permitted.
 1. Comply with AWS requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.

2. Locate mechanical fasteners and install according to cold-formed metal framing manufacturer's instructions with screw penetrating joined members by not less than 3 exposed screw threads.

E. Where required, provide specified insulation in double header members and double jamb studs which will not be accessible after erection.

3.2 ERECTION

A. Handle and lift prefabricated panels in a manner as to not distort any member.

B. Securely anchor tracks to supports as shown.

C. At butt joints, securely anchor two pieces of track to same supporting member or butt-weld or splice together.

D. Plumb, align, and securely attach studs to flanges or webs of both upper and lower tracks.

E. All axially loaded members shall be aligned vertically to allow for full transfer of the loads down to the foundation. Vertical alignment shall be maintained at floor/wall intersections.

F. Install jack studs above and below openings and as required to furnish support. Securely attach jack studs to supporting members.

G. Install headers in all openings that are larger than the stud spacing in that wall.

H. Attach bridging for studs in a manner to prevent stud rotation. Space bridging rows as shown.

I. Studs in one piece for their entire length, splices will not be permitted.

J. Provide a load distribution member at top track where joist is not located directly overbearing stud.

K. Provide joist bridging and web stiffeners at reaction points where shown.

L. Provide end blocking where joist ends are not restrained from rotation.

M. Provide an additional joist under parallel partitions, unless otherwise shown, when partition length exceeds one-half joist span and when floor and roof openings interrupt one or more spanning members.

N. Provide temporary bracing and leave in place until framing is permanently stabilized.

O. Do not bridge building expansion joints with cold-formed metal framing. Independently frame both sides of joints.

P. Fasten reinforcement plate over web penetrations that exceed size of manufacturer's standard punched openings.

3.3 TOLERANCES

- A. Vertical alignment (plumbness) of studs shall be within 1/960th of the span.
- B. Horizontal alignment (levelness) of walls shall be within 1/960th of their respective lengths.
- C. Spacing of studs shall not be more than 3 mm (1/8 inch) +/- from the designed spacing providing that the cumulative error does not exceed the requirements of the finishing materials.
- D. Prefabricated panels shall be not more than 3 mm (1/8 inch) +/- out of square within the length of that panel.

3.4 FIELD REPAIR

- A. Touch-up damaged galvanizing with galvanizing repair paint.

- - - E N D - - -

**SECTION 05 50 00
METAL FABRICATIONS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies items and assemblies fabricated from structural steel shapes and other materials as shown and specified.
- B. Items specified.
 - 1. Support for Wall and Ceiling Mounted Items: (SD055000-01, SD055000-02, SD102113-01, SD102600-01, SD123100-01 & SD123100-02)
 - 2. Frames:
 - 3. Guards
 - 5. Gratings
 - 6. Loose Lintels
 - 7. Shelf Angles
 - 10. Safety Nosings
 - 11. Ladders
 - 12. Railings:
 - 14. Trap Doors with Ceiling Hatch
 - 16. Screened Access Doors
 - 17. Steel Counter or Bench Top Frame and Leg
 - 18. Steel Pipe Bollards
 - 19. Metal Mesh Screens

1.2 RELATED WORK

- A. Railings attached to steel stairs: Section 05 51 00, METAL STAIRS.
- B. Prime and finish painting: Section 09 91 00, PAINTING.
- C. Stainless steel corner guards: Section 10 26 00, WALL AND DOOR PROTECTION.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:

Ceiling hatch	Floor plate
Manhole Covers	Wheel guards
	Safety nosing

C. Shop Drawings:

1. Each item specified, showing complete detail, location in the project, material and size of components, method of joining various components and assemblies, finish, and location, size and type of anchors.
2. Mark items requiring field assembly for erection identification and furnish erection drawings and instructions.
3. Provide templates and rough-in measurements as required.

D. Manufacturer's Certificates:

1. Anodized finish as specified.
2. Live load designs as specified.

E. Design Calculations for specified live loads including dead loads.**F. Furnish setting drawings and instructions for installation of anchors to be preset into concrete and masonry work, and for the positioning of items having anchors to be built into concrete or masonry construction.****1.4 QUALITY ASSURANCE**

- A. Each manufactured product shall meet, as a minimum, the requirements specified, and shall be a standard commercial product of a manufacturer regularly presently manufacturing items of type specified.
- B. Each product type shall be the same and be made by the same manufacturer.
- C. Assembled product to the greatest extent possible before delivery to the site.
- D. Include additional features, which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):
B18.6.1-97.....Wood Screws
B18.2.2-87(R2010).....Square and Hex Nuts
- C. American Society for Testing and Materials (ASTM):
A36/A36M-14.....Structural Steel
A47-99(R2014).....Malleable Iron Castings
A48-03(R2012).....Gray Iron Castings

- A53-12.....Pipe, Steel, Black and Hot-Dipped, Zinc-Coated
Welded and Seamless
- A123-15.....Zinc (Hot-Dip Galvanized) Coatings on Iron and
Steel Products
- A240/A240M-15.....Standard Specification for Chromium and
Chromium-Nickel Stainless Steel Plate, Sheet
and Strip for Pressure Vessels and for General
Applications.
- A269-15.....Seamless and Welded Austenitic Stainless Steel
Tubing for General Service
- A307-14.....Carbon Steel Bolts and Studs, 60,000 PSI
Tensile Strength
- A391/A391M-07 (R2015) Grade 80 Alloy Steel Chain
- A786/A786M-15.....Rolled Steel Floor Plate
- B221-14.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Shapes, and Tubes
- B456-11.....Electrodeposited Coatings of Copper Plus Nickel
Plus Chromium and Nickel Plus Chromium
- B632-08.....Aluminum-Alloy Rolled Tread Plate
- C1107-13.....Packaged Dry, Hydraulic-Cement Grout
(Nonshrink)
- D3656-13.....Insect Screening and Louver Cloth Woven from
Vinyl-Coated Glass Yarns
- F436-16.....Hardened Steel Washers
- F468-06 (R2015) Nonferrous Bolts, Hex Cap Screws, Socket Head
Cap Screws and Studs for General Use
- F593-13.....Stainless Steel Bolts, Hex Cap Screws, and
Studs
- F1667-15.....Driven Fasteners: Nails, Spikes and Staples
- D. American Welding Society (AWS):
- D1.1-15.....Structural Welding Code Steel
- D1.2-14.....Structural Welding Code Aluminum
- D1.3-18.....Structural Welding Code Sheet Steel
- E. National Association of Architectural Metal Manufacturers (NAAMM)
- AMP 521-01 (R2012) Pipe Railing Manual
- AMP 500-06.....Metal Finishes Manual
- MBG 531-09 (R2017) Metal Bar Grating Manual
- MBG 532-09.....Heavy Duty Metal Bar Grating Manual

F. Structural Steel Painting Council (SSPC)/Society of Protective Coatings:

SP 1-15.....No. 1, Solvent Cleaning

SP 2-04.....No. 2, Hand Tool Cleaning

SP 3-04.....No. 3, Power Tool Cleaning

G. Federal Specifications (Fed. Spec):

RR-T-650E.....Treads, Metallic and Nonmetallic, Nonskid

PART 2 - PRODUCTS

2.1 DESIGN CRITERIA

- A. In addition to the dead loads, design fabrications to support the following live loads unless otherwise specified.
- B. Ladders and Rungs: 120 kg (250 pounds) at any point.
- C. Railings and Handrails: 900 N (200 pounds) in any direction at any point.

2.2 MATERIALS

- A. Structural Steel: ASTM A36.
- B. Stainless Steel: ASTM A240, Type 302 or 304.
- C. Aluminum, Extruded: ASTM B221, Alloy 6063-T5 unless otherwise specified. For structural shapes use alloy 6061-T6 and alloy 6061-T4511.
- D. Floor Plate:
 - 1. Steel ASTM A786.
 - 2. Aluminum: ASTM B632.
- E. Steel Pipe (Bollard): ASTM A53.
 - 1. Galvanized for exterior locations.
 - 2. Type S, Grade A unless specified otherwise.
 - 3. NPS (inside diameter) as shown.
- F. Cast-Iron: ASTM A48, Class 30, commercial pattern.
- G. Malleable Iron Castings: A47.
- H. Primer Paint: As specified in Section 09 91 00, PAINTING.
- I. Stainless Steel Tubing: ASTM A269, type 302 or 304.
- J. Modular Channel Units:
 - 1. Factory fabricated, channel shaped, cold formed sheet steel shapes, complete with fittings bolts and nuts required for assembly.
 - 2. Form channel within turned pyramid shaped clamping ridges on each side.
 - 3. Provide case hardened steel nuts with serrated grooves in the top edges designed to be inserted in the channel at any point and be

- given a quarter turn so as to engage the channel clamping ridges. Provide each nut with a spring designed to hold the nut in place.
4. Factory finish channels and parts with oven baked primer when exposed to view. Channels fabricated of ASTM A525, G90 galvanized steel may have primer omitted in concealed locations. Finish screws and nuts with zinc coating.
 5. Fabricate snap-in closure plates to fit and close exposed channel openings of not more than 0.3 mm (0.0125 inch) thick stainless steel.

K. Grout: ASTM C1107, pourable type.

L. Insect Screening: ASTM D3656.

2.3 HARDWARE

A. Rough Hardware:

1. Furnish rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electro-galvanizing process. Galvanized G-90 where specified.
2. Use G90 galvanized coating on ferrous metal for exterior work unless non-ferrous metal or stainless is used.

B. Fasteners:

1. Bolts with Nuts:
 - a. ASME B18.2.2.
 - b. ASTM A307 for 415 MPa (60,000 psi) tensile strength bolts.
 - c. ASTM F468 for nonferrous bolts.
 - d. ASTM F593 for stainless steel.
2. Screws: ASME B18.6.1.
3. Washers: ASTM F436, type to suit material and anchorage.
4. Nails: ASTM F1667, Type I, style 6 or 14 for finish work.

2.4 FABRICATION GENERAL

A. Material

1. Use material as specified. Use material of commercial quality and suitable for intended purpose for material that is not named or its standard of quality not specified.
2. Use material free of defects which could affect the appearance or service ability of the finished product.

B. Size:

1. Size and thickness of members as shown.

2. When size and thickness is not specified or shown for an individual part, use size and thickness not less than that used for the same component on similar standard commercial items or in accordance with established shop methods.

C. Connections

1. Except as otherwise specified, connections may be made by welding, riveting or bolting.
2. Field riveting will not be approved.
3. Design size, number and placement of fasteners, to develop a joint strength of not less than the design value.
4. Holes, for rivets and bolts: Accurately punched or drilled and burrs removed.
5. Size and shape welds to develop the full design strength of the parts connected by welds and to transmit imposed stresses without permanent deformation or failure when subject to service loadings.
6. Use Rivets and bolts of material selected to prevent corrosion (electrolysis) at bimetallic contacts. Plated or coated material will not be approved.
7. Use stainless steel connectors for removable members machine screws or bolts.

D. Fasteners and Anchors

1. Use methods for fastening or anchoring metal fabrications to building construction as shown or specified.
2. Where fasteners and anchors are not shown, design the type, size, location and spacing to resist the loads imposed without deformation of the members or causing failure of the anchor or fastener, and suit the sequence of installation.
3. Use material and finish of the fasteners compatible with the kinds of materials which are fastened together and their location in the finished work.
4. Fasteners for securing metal fabrications to new construction only, may be by use of threaded or wedge type inserts or by anchors for welding to the metal fabrication for installation before the concrete is placed or as masonry is laid.
5. Fasteners for securing metal fabrication to existing construction or new construction may be expansion bolts, toggle bolts, power actuated drive pins, welding, self-drilling and tapping screws or bolts.

E. Workmanship

1. General:

- a. Fabricate items to design shown.
- b. Furnish members in longest lengths commercially available within the limits shown and specified.
- c. Fabricate straight, true, free from warp and twist, and where applicable square and in same plane.
- d. Provide holes, sinkages and reinforcement shown and required for fasteners and anchorage items.
- e. Provide openings, cut-outs, and tapped holes for attachment and clearances required for work of other trades.
- f. Prepare members for the installation and fitting of hardware.
- g. Cut openings in gratings and floor plates for the passage of ducts, sumps, pipes, conduits and similar items. Provide reinforcement to support cut edges.
- h. Fabricate surfaces and edges free from sharp edges, burrs and projections which may cause injury.

2. Welding:

- a. Weld in accordance with AWS.
- b. Welds shall show good fusion, be free from cracks and porosity and accomplish secure and rigid joints in proper alignment.
- c. Where exposed in the finished work, continuous weld for the full length of the members joined and have depressed areas filled and protruding welds finished smooth and flush with adjacent surfaces.
- d. Finish welded joints to match finish of adjacent surface.

3. Joining:

- a. Miter or butt members at corners.
- b. Where frames members are butted at corners, cut leg of frame member perpendicular to surface, as required for clearance.

4. Anchors:

- a. Where metal fabrications are shown to be preset in concrete, weld 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 150 mm (6 inches) long with 25 mm (one inch) hooked end, to back of member at 600 mm (2 feet) on center, unless otherwise shown.
- b. Where metal fabrications are shown to be built into masonry use 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 250 mm (10

inches) long with 50 mm (2 inch) hooked end, welded to back of member at 600 mm (2 feet) on center, unless otherwise shown.

5. Cutting and Fitting:

- a. Accurately cut, machine and fit joints, corners, copes, and miters.
- b. Fit removable members to be easily removed.
- c. Design and construct field connections in the most practical place for appearance and ease of installation.
- d. Fit pieces together as required.
- e. Fabricate connections for ease of assembly and disassembly without use of special tools.
- f. Joints firm when assembled.
- g. Conceal joining, fitting and welding on exposed work as far as practical.
- h. Do not show rivets and screws prominently on the exposed face.
- i. The fit of components and the alignment of holes shall eliminate the need to modify component or to use exceptional force in the assembly of item and eliminate the need to use other than common tools.

F. Finish:

1. Finish exposed surfaces in accordance with NAAMM AMP 500 Metal Finishes Manual.
2. Aluminum: NAAMM AMP 501.
 - a. Mill finish, AA-M10, as fabricated, use unless specified otherwise.
 - b. Clear anodic coating, AA-C22A41, chemically etched medium matte, with Architectural Class 1, 0.7 mils or thicker.
 - c. Colored anodic coating, AA-C22A42, chemically etched medium matte with Architectural Class 1, 0.7 mils or thicker.
 - d. Painted: AA-C22R10.
3. Steel and Iron: NAAMM AMP 504.
 - a. Zinc coated (Galvanized): ASTM A123, G90 unless noted otherwise.
 - b. Surfaces exposed in the finished work:
 - 1) Finish smooth rough surfaces and remove projections.
 - 2) Fill holes, dents and similar voids and depressions with epoxy type patching compound.
 - c. Shop Prime Painting:
 - 1) Surfaces of Ferrous metal:

- a) Items not specified to have other coatings.
 - b) Galvanized surfaces specified to have prime paint.
 - c) Remove all loose mill scale, rust, and paint, by hand or power tool cleaning as defined in SSPC-SP2 and SP3.
 - d) Clean of oil, grease, soil and other detrimental matter by use of solvents or cleaning compounds as defined in SSPC-SP1.
 - e) After cleaning and finishing apply one coat of primer as specified in Section 09 91 00, PAINTING.
- 2) Nonferrous metals: Comply with MAAMM-500 series.
4. Stainless Steel: NAAMM AMP-504 Finish No. 4.
5. Chromium Plating: ASTM B456, satin or bright as specified, Service Condition No. SC2.
- G. Protection:
- 1. Insulate aluminum surfaces that will come in contact with concrete, masonry, plaster, or metals other than stainless steel, zinc or white bronze by giving a coat of heavy-bodied alkali resisting bituminous paint or other approved paint in shop.
 - 2. Spot prime all abraded and damaged areas of zinc coating which expose the bare metal, using zinc rich paint on hot-dip zinc coat items and zinc dust primer on all other zinc coated items.

2.5 SUPPORTS

- A. General:
- 1. Fabricate ASTM A36 structural steel shapes as shown.
 - 2. Use clip angles or make provisions for welding hangers and braces to overhead construction.
 - 3. Field connections may be welded or bolted.
- B. For Ceiling Hung Toilet Stall:
- 1. Use a continuous steel channel above pilasters with hangers centered over pilasters.
 - 2. Make provision for installation of stud bolts in lower flange of channel.
 - 3. Provide a continuous steel angle at wall and channel braces spaced as shown.
 - 4. Use threaded rod hangers.
 - 5. Provide diagonal angle brace where the suspended ceiling over toilet stalls does not extend to side wall of room.
- C. For Wall Mounted Items:

1. For items supported by metal stud partitions.
2. Steel strip or hat channel minimum of 1.5 mm (0.0598 inch) thick.
3. Steel strip minimum of 150 mm (6 inches) wide, length extending one stud space beyond end of item supported.
4. Steel hat channels where shown. Flange cut and flattened for anchorage to stud.
5. Structural steel tube or channel for grab bar at water closets floor to structure above with clip angles or end plates formed for anchors.
6. Use steel angles for thru wall counters. Drill angle for fasteners at ends and not over 100 mm (4 inches) on center between ends.

2.6 FRAMES

A. Elevator Entrance Wall Opening.

1. Fabricate of channel shapes, plates, and angles as shown.
2. Weld or bolt head to jamb as shown.
3. Weld clip angles to bottom of frame and top of jamb members extended to structure above for framed construction.
 - a. Provide holes for anchors.
 - b. Weld head to jamb members.

B. Channel Door Frames:

1. Fabricate of structural steel channels of size shown.
2. Miter and weld frames at corners.
3. Where anchored to masonry or embedded in concrete, weld to back of frame at each jamb, 5 mm (3/16 inch) thick by 44 mm (1-3/4 inch) wide steel strap anchors with ends turned 50 mm (2 inches), and of sufficient length to extend at least 300 mm (12 inches) into wall. Space anchors 600 mm (24 inches) above bottom of frame and 600 mm (24 inches) o.c. to top of jamb. Weld clip angles to bottom of jambs and provide holes for expansion bolts.
4. Where anchored to concrete or masonry in prepared openings, drill holes at jambs for anchoring with expansion bolts. Weld clip angles to bottom of frame and provide holes for expansion bolt anchors as shown. Drill holes starting 600 mm (24 inches) above bottom of frame and 600 mm (24 inches) o.c. to top of jamb and at top of jamb. Provide pipe spacers at holes welded to channel.
5. Where closure plates are shown, continuously weld them to the channel flanges.

6. Weld continuous 19 x 19 x 3 mm (3/4 x 3/4 x 1/8 inch) thick steel angles to the interior side of each channel leg at the head and jambs to form a caulking groove.
7. Prepare frame for installation of hardware specified in Section 08 71 00, DOOR HARDWARE.
 - a. Cut a slot in the lock jamb to receive the lock bolt.
 - b. Where shown use continuous solid steel bar stops at perimeter of frame, weld or secure with countersunk machine screws at not more than 450 mm (18 inches) on center.

C. Frames for Breech Opening:

1. Fabricate from steel channels, or combination of steel plates and angles to size and contour shown.
2. Weld strap anchors on back of frame at not over 600 mm (2 feet) on centers for concrete or masonry openings.

D. Frames for Window Security Screen:

1. Fabricate frame from 1-1/2 x 1-1/4 inch x 13GA steel roll formed angle.
2. Miter and weld corners of frame. Mesh screen to be welded to frame.
3. Screens mechanically fastened to window jambs/sill with minimum 3 clips as indicated on drawings.

2.7 GUARDS

A. Wall Corner Guards:

1. Fabricate from steel angles and furnish with anchors as shown.
2. Continuously weld anchor to angle.

B. Guard Angles for Overhead Doors:

1. Cut away top portion of outstanding leg of angle and extend remaining portion of angle up wall.
2. Weld filler piece across head of opening to jamb angles.
3. Make provisions for fasteners and anchorage.

C. Channel Guard at Loading Platform:

1. Fabricate from steel channel of size shown.
2. Weld anchors to channels as shown.
3. Drill channel for bumper anchor bolts.

D. Edge Guard Angles for Openings in slabs.

1. Fabricate from steel angles of sizes and with anchorage shown.
2. Where size of angle is not shown, provide 50 x 50 x 6 mm (2 x 2 x 1/4 inch) steel angle with 32 x 5 mm (1-1/4 x 3/16 inch) strap anchors, welded to back.

3. Miter or butt angles at corners and weld.
4. Use one anchor near end and three feet on centers between end anchors.

E. Wheel Guards:

1. Construct wheel guards of not less than 16 mm (5/8 inch) thick cast iron.
2. Provide corner type, with flanges for bolting to walls.

2.10 LOOSE LINTELS

- A. Furnish lintels of sizes shown. Where size of lintels is not shown, provide the sizes specified.
- B. Fabricate lintels with not less than 150 mm (6 inch) bearing at each end for nonbearing masonry walls, and 200 mm (8 inch) bearing at each end for bearing walls.
- C. Provide one angle lintel for each 100 mm (4 inches) of masonry thickness as follows except as otherwise specified or shown.
 1. Openings 750 mm to 1800 mm (2-1/2 feet to 6 feet) - 100 x 90 x 8 mm (4 x 3-1/2 x 5/16 inch).
 2. Openings 1800 mm to 3000 mm (6 feet to 10 feet) - 150 x 90 x 9 mm (6 x 3-1/2 x 3/8 inch).
- D. For 150 mm (6 inch) thick masonry openings 750 mm to 3000 mm (2-1/2 feet to 10 feet) use one angle 150 x 90 x 9 mm (6 x 3-1/2 x 3/8 inch).
- E. Provide bearing plates for lintels where shown.
- F. Weld or bolt upstanding legs of double angle lintels together with 19 mm (3/4 inch bolts) spaced at 300 mm (12 inches) on centers.
- G. Insert spreaders at bolt points to separate the angles for insertion of metal windows, louver, and other anchorage.
- H. Where shown or specified, punch upstanding legs of single lintels to suit size and spacing of anchor bolts.
- I. Elevator Entrance:
 1. Fabricate lintel from plate bent to channel shape, and provide a minimum of 100 mm (4 inch) bearing each end.
 2. Cut away the front leg of the channel at each end to allow for concealment behind elevator hoistway entrance frame.

2.11 SHELF ANGLES

- A. Fabricate from steel angles of size shown.

- B. Fabricate angles with horizontal slotted holes for 19 mm (3/4 inch) bolts spaced at not over 900 mm (3 feet) on centers and within 300 mm (12 inches) of ends.
- C. Provide adjustable malleable iron inserts for embedded in concrete framing.

2.13 SAFETY NOSINGS

- A. Fed. Spec. RR-T-650, Type C.
 - 1. Aluminum: Class 2, Style 2.
 - 2. Cast iron: Class 4.
- B. Fabricate nosings for exterior use from cast aluminum, and nosings for interior use from either cast aluminum or cast iron. Use one Class throughout.
- C. Fabricate nosings approximately 100 mm (4 inches) wide with not more than 9 mm (3/8 inch) nose.
- D. Provide nosings with integral type anchors spaced not more than 100 mm (4 inches) from each end and intermediate anchors spaced approximately 375 mm (15 inches) on center.
- E. Fabricate nosings to extend within 100 mm (4 inches) of ends of concrete stair treads except where shown to extend full width.
- F. Fabricate nosings to extend full width between stringers of metal stairs and full width of door openings.
- G. On curved steps fabricate to terminate at point of curvature of steps having short radius curved ends.

2.14 LADDERS

- A. Steel Ladders:
 - 1. Fixed-rail type with steel rungs shouldered and headed into and welded to rails.
 - 2. Fabricate angle brackets of 50 mm (2 inch) wide by 13 mm (1/2 inch) thick steel; brackets spaced maximum of 1200 mm (4 feet) apart and of length to hold ladder 175 mm (7 inches) from wall to center of rungs. Provide turned ends or clips for anchoring.
 - 3. Provide holes for anchoring with expansion bolts through turned ends and brackets.
 - 4. Where shown, fabricate side rails curved, twisted and formed into a gooseneck.
 - 5. Galvanize exterior ladders after fabrication, ASTM A123, G-90.
- C. Ladder Rungs:
 - 1. Fabricate from 25 mm (one inch) diameter steel bars.

2. Fabricate so that rungs will extend at least 100 mm (4 inches) into wall with ends turned 50 mm (2 inches), project out from wall 175 mm (7 inches), be 400 mm (16 inches) wide and be designed so that foot cannot slide off end.
3. Galvanized after fabrication, ASTM A123, G-90 rungs for exterior use and for access to pits.

2.15 RAILINGS

- A. In addition to the dead load design railing assembly to support live load specified.
- B. Fabrication General:
 1. Provide continuous welded joints, dressed smooth and flush.
 2. Standard flush fittings, designed to be welded, may be used.
 3. Exposed threads will not be approved.
 4. Form handrail brackets to size and design shown.
 5. Exterior Post Anchors.
 - a. Fabricate tube or pipe sleeves with closed ends or plates as shown.
 - b. Where inserts interfere with reinforcing bars, provide flanged fittings welded or threaded to posts for securing to concrete with expansion bolts.
 - c. Provide heavy pattern sliding flange base plate with set screws at base of pipe or tube posts. Base plates are not required on pipe sleeves where ornamental railings occur.
 6. Interior Post Anchors:
 - a. Provide flanged fittings for securing fixed posts to floor with expansion bolts, unless shown otherwise.
 - b. Weld or thread flanged fitting to posts at base.
 - c. For securing removable posts to floor, provide close fitting sleeve insert or inverted flange base plate with stud bolts or rivets concrete anchor welded to the base plate.
 - d. Provide sliding flange base plate on posts secured with set screws.
 - e. Weld flange base plate to removable posts set in sleeves.
- C. Handrails:
 1. Close free ends of rail with flush metal caps welded in place except where flanges for securing to walls with bolts are shown.
 2. Make provisions for attaching handrail brackets to wall, posts, and handrail as shown.

D. Steel Pipe Railings:

1. Fabricate of steel pipe with welded joints.
2. Number and space of rails as shown.
3. Space posts for railings not over 1800 mm (6 feet) on centers between end posts.
4. Form handrail brackets from malleable iron.
5. Fabricate removable sections with posts at end of section.
6. Removable Rails:
 - a. Provide "U" shape brackets at each end to hold removable rail as shown. Use for top and bottom horizontal rail when rails are joined together with vertical members.
 - b. Secure rail to brackets with 9 mm (3/8 inch) stainless steel through bolts and nuts at top rail only when rails joined with vertical members.
 - c. Continuously weld brackets to post.
 - d. Provide slotted bolt holes in rail bracket.
 - e. Weld bolt heads flush with top of rail.
 - f. Weld flanged fitting to post where posts are installed in sleeves.
7. Opening Guard Rails:
 - a. Fabricate rails with flanged fitting at each end to fit between wall opening jambs.
 - b. Design flange fittings for fastening with machine screws to steel plate anchored to jambs.
 - c. Fabricate rails for floor openings for anchorage in sleeves.
8. Gates:
 - a. Fabricate from steel pipe as specified for railings.
 - b. Fabricate gate fittings from either malleable iron or wrought steel.
 - c. Hang each gate on suitable spring hinges of clamp on or through bolted type. Use bronze hinges for exterior gates.
 - d. Provide suitable stops, so that gate will swing as shown.
 - e. Provide padlock eyes where shown.
9. Chains:
 - a. Chains: ASTM A391, Grade 63, straight link style, normal size chain bar 8 mm (5/16 inch) diameter, eight links per 25 mm (foot) and with boat type snap hook on one end, and through type eye bolt on other end.

- b. Fabricate eye bolt for attaching chain to pipe posts, size not less than 9 mm (3/8 inch) diameter.
 - c. Fabricate anchor at walls, for engagement of snap hook of either a 9 mm (3/8 inch) diameter eye bolt or punched angle.
 - d. Galvanize chain and bolts after fabrication.
- E. Aluminum Railings:
- 1. Fabricate from extruded aluminum.
 - 2. Use tubular posts not less than 3 mm (0.125 inch) wall thickness for exterior railings.
 - 3. Punch intermediate rails and bottom of top rails for passage of posts and machine to a close fit.
 - 4. Where shown use extruded channel sections for top rail with 13 mm (1/2 inch) thick top cover plates and closed ends.
 - 5. Fabricate brackets of extruded or wrought aluminum as shown.
 - 6. Fabricate stainless pipe sleeves with closed bottom at least six inches deep having internal dimensions at least 13 mm (1/2 inch) greater than external dimensions of posts where set in concrete.
- F. Stainless Steel Railings:
- 1. Fabricate from 38 mm (1-1/2 inches) outside diameter stainless steel tubing, ASTM A269, having a wall thickness of 1.6 mm (0.065 inch).
 - 2. Join sections by an internal connector to form hairline joints where field assembled.
 - 3. Fabricate with continuous welded connections.
 - 4. Fabricate brackets of stainless steel to design shown.
 - 5. Fabricate stainless steel sleeves at least 150 mm (6 inches) deep having internal dimensions at least 13 mm (1/2 inch) greater than external dimensions of post.

2.17 TRAP DOOR AND FRAMES WITH CEILING HATCH

- A. Design to support a live load as specified.
- B. Frames:
- 1. Fabricate steel angle frame to set in concrete slabs and design to set flush with finished concrete slab or curb. If not shown use 63 x 63 x 6 mm (2-1/2 x 2-1/2 x 1/4 inch) angles.
 - 2. Miter steel angles at corners and weld together.
 - 3. Weld steel bar stops to vertical leg of frame, to support doors flush with the top of the frame.

4. Weld steel strap anchors on each side not over 600 mm (24 inches) on center to the backs of the frames. If not shown use 6 x 50 x 200 mm (1/4 x 2 x 8 inch) long straps with 50 mm (2 inch bent) ends.
5. Form frames from steel angles with welded corners for reinforcing and bracing of well lining and support of ceiling hatch.

C. Covers:

1. Use 6 mm (1/4 inch) thick steel floor plate.
2. Where double leaf covers are shown, reinforce at meeting edges.
3. Use wrought steel hinges with fixed brass pins.
 - a. Weld to cover.
 - b. Secure to frame with machine screws.
4. Where ladders occur, install hinges on the side opposite the ladder.
5. Provide two bar type drop handles, flush with cover when closed for each leaf.

D. Well Lining:

1. Fabricate well linings, for access through concrete floor slabs and suspended ceilings, from hatch to ceiling hatch or ceiling openings.
2. Use steel sheet and shapes of size and thickness as shown. If not shown use 1.5 mm (0.0598 inch) thick steel sheet.
3. If not shown use 50 x 50 x 6 mm (2 x 2 x 1/4 inch) angle braces from ceiling level on each side angled at 45 degrees to structure above.
4. Use 25 x 25 x 3 mm (1 x 1 x 1/8 inch) angle bottom flange trim welded to well lining where no ceiling hatch occurs.

E. Ceiling Hatch:

1. Construct hatch with "T" or angle frame designed to support edge of ceiling and hatch, weld to well lining.
2. Form hatch panels of 3 mm (1/8 inch) steel, 5 mm (3/16 inch) aluminum or 1 mm (0.0359 inch) thick steel of pan type construction with 25 mm (one inch) of mineral fiber insulation between.
3. Use counter balance device, hinges, latch, hangers and other accessories required for installation and operation of hatch with not over 90 N (20 pounds) of force.
4. Fabricate panels flush and reinforced to remain flat.
5. Locate hatch panel flush with frame.

F. Finish with baked on prime coat.

2.19 SCREENED ACCESS DOORS AND FRAMES

- A. Galvanized ASTM A123, G-90 after fabrication.
- B. Wall frame:

1. Fabricate frame from steel angles or channels as shown.
2. Continuously weld 38 x 13 mm (1-1/2 x 1/2 inch) steel channel door stop to angle frame. Cut out lock strike opening in channel.
3. Miter and weld channel frame at corners. Reinforce corner with 3 mm (1/8 inch) plate angle.
4. Reinforce channel frame with 3 x 150 mm (1/8 x 6 inch) long steel plate at channel back to cutout for latch. Cutout lock strike opening in channel face. Drill and tap for hinge anchorage.
5. Drill jambs for 6 mm (1/4 inch) bolt anchors at top and bottom and not over 450 mm (18 inches) between top and bottom.
6. Fabricate frame for door to sit flush with face of frame.

C. Doors

1. Fabricate door using steel channel frame with 3 mm (1/8 inch) angle plate reinforcing at corners.
2. Miter and weld corners.
3. Fabricate lock box of 1.6 mm (1/16 inch) plate and weld to channel surround.
4. Provide wire mesh constructed of 3.5 mm (0.135 inch) diameter galvanized steel wire crimped and woven into 38 mm (1-1/2 inch) diamond mesh pattern. Fasten the wire mesh to door frames by bending the ends of each strand of wire over through channel clinched and welded to channel door frame.
5. Weld steel plate back-bands to channel door frame at hinge stiles only.
6. Screen on doors in exterior walls.
 - a. Fabricate rewirable frame for screen from either extruded or tubular aluminum.
 - b. Design to allow for removing or replacement frame and screening or adjoining items without damage.
 - c. Use aluminum insect screening specified.
 - d. Use stainless steel fasteners for securing screen to door.

D. Hardware:

1. Install hinged door to fixed frame with two 63 mm (2-1/2 inch) brass or bronze hinges.
2. Install lock or latch specified in Section 08 71 00, DOOR HARDWARE in lockbox.

2.20 STEEL COUNTER OR BENCH TOP FRAME AND LEGS

- A. Fabricate channel or angle frame with mitered and welded corners as shown.
- B. Drill top of frame with 6 mm (1/4inch) holes spaced 200 mm (8 inches) on center for securing countertop.
- C. Fabricate legs of angle or pipe shapes and continuously weld to frame.
- D. Finish frame with backed on enamel prime coat.

2.21 STEEL PIPE BOLLARD

Provide bollard in accordance with ASTM A53 with dimensions as shown in standard detail SD320523-04. Anchor posts in concrete and fill solidly with concrete with a minimum compressive strength of 17 MPa 2500psi.

2.22 METAL MESH SCREENS

- A. Expanded Metal Mesh Screens (Porches)
 - 1. Material: Carbon steel.
 - 2. Finish: Powder-coated black.
 - 3. Pattern: Diamond.
 - 4. Design Direction: Long way of opening parallel to length of sheet.
 - 5. Style and Type: 1-1/2" #9 Standard (Raised).
 - 6. Open Area: 70%-80%.
 - 7. Connection: Staple screens to inside face of 2x wood framing at 12 inches maximum spacing.
- B. Wire Metal Mesh Screens (Window Security Screens)
 - 1. Material: Carbon Steel.
 - 2. Finish: Mill Finish.
 - 3. Pattern: Square.
 - 4. Construction Type: Welded - Trimmed on all sides.
 - 5. Mesh Size: 2" x 2".
 - 6. Wire Gauge: 10 or 11 Gauge.
 - 7. Connection: Weld to 1-1/2" x 1-1/4" x 13GA roll formed angle frame.

PART 3 - EXECUTION**3.1 INSTALLATION, GENERAL**

- A. Set work accurately, in alignment and where shown, plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Items set into concrete or masonry.
 - 1. Provide temporary bracing for such items until concrete or masonry is set.
 - 2. Place in accordance with setting drawings and instructions.

3. Build strap anchors, into masonry as work progresses.
- C. Set frames of gratings, covers, corner guards, trap doors and similar items flush with finish floor or wall surface and, where applicable, flush with side of opening.
- D. Field weld in accordance with AWS.
 1. Design and finish as specified for shop welding.
 2. Use continuous weld unless specified otherwise.
- E. Install anchoring devices and fasteners as shown and as necessary for securing metal fabrications to building construction as specified.
Power actuated drive pins may be used except for removable items and where members would be deformed or substrate damaged by their use.
- F. Spot prime all abraded and damaged areas of zinc coating as specified and all abraded and damaged areas of shop prime coat with same kind of paint used for shop priming.
- G. Isolate aluminum from dissimilar metals and from contact with concrete and masonry materials as required to prevent electrolysis and corrosion.
- H. Secure escutcheon plate with set screw.

3.2 INSTALLATION OF SUPPORTS

- A. Anchorage to structure.
 1. Secure angles or channels and clips to overhead structural steel by continuous welding unless bolting is shown.
 2. Secure supports to concrete inserts by bolting or continuous welding as shown.
 3. Secure supports to mid height of concrete beams when inserts do not exist with expansion bolts and to slabs, with expansion bolts. unless shown otherwise.
 4. Secure steel plate or hat channels to studs as detailed.
- B. Ceiling Hung Toilet Stalls:
 1. Securely anchor hangers of continuous steel channel above pilasters to structure above.
 2. Bolt continuous steel angle at wall to masonry or weld to face of each metal stud.
 3. Secure brace for steel channels over toilet stall pilasters to wall angle supports with bolts at each end spaced as shown.
 4. Install diagonal angle brace where the suspended ceiling over toilet stalls does not extend to side wall of room.

5. Install stud bolts in lower flange of channel before installing furred down ceiling over toilet stalls.
6. Install support for ceiling hung pilasters at entrance screen to toilet room similar to toilet stall pilasters.

C. Supports for Wall Mounted items:

1. Locate center of support at anchorage point of supported item.
2. Locate support at top and bottom of wall hung cabinets.
3. Locate support at top of floor cabinets and shelving installed against walls.
4. Locate supports where required for items shown.

G. Support for cantilever grab bars:

1. Locate channels or tube in partition for support as shown, and extend full height from floor to underside of structural slab above.
2. Anchor at top and bottom with angle clips bolted to channels or tube with two, 9 mm (3/8 inch) diameter bolts.
3. Anchor to floors and overhead construction with two 9 mm (3/8 inch) diameter bolts.
4. Fasten clips to concrete with expansion bolts, and to steel with machine bolts or welds.

3.5 DOOR FRAMES

- A. Secure clip angles at bottom of frames to concrete slab with expansion bolts as shown.
- B. Level and plumb frame; brace in position required.
- C. At masonry, set frames in walls so anchors are built-in as the work progresses unless shown otherwise.
- D. Set frames in formwork for frames cast into concrete.
- E. Where frames are set in prepared openings, bolt to wall with spacers and expansion bolts.

3.6 OTHER FRAMES

- A. Set frame flush with surface unless shown otherwise.
- B. Anchor frames at ends and not over 450 mm (18 inches) on centers unless shown otherwise.
- C. Set in formwork before concrete is placed.

3.7 GUARDS

- A. Steel Angle Corner Guards:
 1. Build into masonry as the work progress.
 2. Set into formwork before concrete is placed.

3. Set angles flush with edge of opening and finish floor or wall or as shown.
 4. At existing construction fasten angle and filler piece to adjoining construction with 16 mm (5/8 inch) diameter by 75 mm (3 inch) long expansion bolts 450 mm (18 inches) on center.
 5. Install Guard Angles at Edges of Stairwell where shown.
- B. Channel Guard at Top Edge of Concrete Platforms:
1. Install in formwork before concrete is placed.
 2. Set channel flush with top of the platform.
- C. Wheel Guards:
1. Set flanges of wheel guard at least 50 mm (2 inches) into pavement.
 2. Anchor to walls as shown, expansion bolt if not shown.

3.9 STEEL LINTELS

- A. Use lintel sizes and combinations shown or specified.
- B. Install lintels with longest leg upstanding, except for openings in 150 mm (6 inch) masonry walls install lintels with longest leg horizontal.
- C. Install lintels to have not less than 150 mm (6 inch) bearing at each end for nonbearing walls, and 200 mm (8 inch) bearing at each end for bearing walls.

3.10 SHELF ANGLES

- A. Anchor shelf angles with 19 mm (3/4 inch) bolts unless shown otherwise in adjustable malleable iron inserts, set level at elevation shown.
- B. Provide expansion space at end of members.

3.12 SAFETY NOSINGS

- A. Except as specified and where preformed rubber treads are shown or specified install safety nosings at the following:
 1. Exterior concrete steps.
 2. Door sills of areaway entrances curbs.
 3. Exposed edges of curbs of door sills at transformer and service rooms.
 4. Interior concrete steps, including concrete filled treads of metal stairs of service stairs.
- B. Install flush with horizontal and vertical surfaces.
- C. Install nosing to within 100 mm (4 inches) of ends of concrete stair treads, except where shown to extend full width.
- D. Extend nosings full width of door openings.

- E. Extend nosings, full width between stringers of metal stairs, and terminate at point of curvature of steps having short radius curved ends.

3.13 LADDERS

- A. Anchor ladders to walls and floors with expansion bolts through turned lugs or angle clips or brackets.
- B. In elevator pits, set ladders to clear all elevator equipment where shown on the drawings.
 - 1. Where ladders are interrupted by division beams, anchor ladders to beams by welding, and to floors with expansion bolts.
 - 2. Where ladders are adjacent to division beams, anchor ladders to beams with bent steel plates, and to floor with expansion bolts.
- C. Ladder Rungs:
 - 1. Set ladder rungs into formwork before concrete is placed. Build ladder rungs into masonry as the work progresses.
 - 2. Set step portion of rung 150 mm (6 inches) from wall.
 - 3. Space rungs approximately 300 mm (12 inches) on centers.
 - 4. Where only one rung is required, locate it 400 mm (16 inches) above the floor.

3.14 RAILINGS

- A. Steel Posts:
 - 1. Secure fixed posts to concrete with expansion bolts through flanged fittings except where sleeves are shown with pourable grout.
 - 2. Install sleeves in concrete formwork.
 - 3. Set post in sleeve and pour grout to surface. Apply beveled bead of urethane sealant at perimeter of post or under flange fitting as specified in Section 07 92 00, JOINT SEALANTS—on exterior posts.
 - 4. Secure removable posts to concrete with either machine screws through flanged fittings which are secured to inverted flanges embedded in and set flush with finished floor or set posts in close fitting pipe sleeves without grout.
 - 5. Secure sliding flanged fittings to posts at base with set screws.
 - 6. Secure fixed flanged fittings to concrete with expansion bolts.
 - 7. Secure posts to steel with welds.
- B. Aluminum Railing, Stainless Steel Railing, and Ornamental Railing Posts:
 - 1. Install pipe sleeves in concrete formwork.

2. Set posts in sleeve and pour grout to surface on exterior locations and to within 6 mm (1/4 inch) of surface for interior locations except to where posts are required to be removable.
3. Apply beveled bead of urethane sealant over sleeve at post perimeter for exterior posts and flush with surface for interior posts as specified in Section 07 92 00, JOINT SEALANTS.

C. Anchor to Walls:

1. Anchor rails to concrete or solid masonry with machine screws through flanged fitting to steel plate.
 - a. Anchor steel plate to concrete or solid masonry with expansion bolts.
 - b. Anchor steel plate to hollow masonry with toggle bolts.
2. Anchor flanged fitting with toggle bolt to steel support in frame walls.

D. Removable Rails:

1. Rest rails in brackets at each end and secure to bracket with stainless steel bolts and nuts where part of a continuous railing.
2. Rest rail posts in sleeves where not part of a continuous railing. Do not grout posts.

E. Gates:

1. Hang gate to swing as shown.
2. Bolt gate hinges to jamb post with clamp on or through bolts.

F. Chains:

1. Eye bolt chains to pipe posts.
2. Eye bolt anchoring at walls.
 - a. Expansion bolt to concrete or solid masonry.
 - b. Toggle bolt to hollow masonry of frame wall installed support.

G. Handrails:

1. Anchor brackets for metal handrails as detailed.
2. Install brackets within 300 mm (12 inches) of return of walls, and at evenly spaced intermediate points not exceeding 1200 mm (4 feet) on centers unless shown otherwise.
3. Expansion bolt to concrete or solid masonry.
4. Toggle bolt to installed supporting frame wall and to hollow masonry unless shown otherwise.

3.17 SCREENED ACCESS DOOR

- A. Set frame in opening so that clearance at jambs is equal and secure with expansion bolts.

- B. Use shims at bolts to prevent deformation of frame members in prepared openings.
- C. Set frame in mortar bed and build in anchors as the masonry work progresses.
- D. Grout jambs solid with mortar.
- E. Secure insect screen to inside of door with stainless steel fasteners on doors in exterior walls.

3.18 STEEL COMPONENTS FOR MILLWORK ITEMS

- A. Coordinate and deliver to Millwork fabricator for assembly where millwork items are secured to metal fabrications.

3.19 INSTALLATION OF STEEL PIPE BOLLARD

- A. Set bollards vertically in concrete piers. Compressive strength of concrete piers shall be 21MPa 3000psi. For dimensions of concrete piers See standard detail SD320523-04.

3.20 INSTALLATION OF METAL MESH SCREENS

- A. Expanded Metal Mesh Screens (Porches)
 - 1. New screen assembly to match existing.
 - 2. Connection: Mechanically fasten screens to inside face of 2x wood framing at 12 inches maximum spacing. Mesh screen is sandwiched between two 2x framing members.
- B. Wire Metal Mesh Screens (Window Security Screens)
 - 1. Connection: Weld mesh screen to 1-1/2" x 1-1/4" x 13GA roll formed angle frame.
 - 2. Provide minimum 3 clips at each window for connection of framed screen to window jambs/sill.

3.21 CLEAN AND ADJUSTING

- A. Adjust movable parts including hardware to operate as designed without binding or deformation of the members centered in the opening or frame and, where applicable, contact surfaces fit tight and even without forcing or warping the components.
- B. Clean after installation exposed prefinished and plated items and items fabricated from stainless steel, aluminum and copper alloys, as recommended by the metal manufacture and protected from damage until completion of the project.

- - - E N D - - -

**SECTION 05 51 00
METAL STAIRS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies steel stairs with railings.
- B. Types:
 - 1. Closed riser stairs with concrete filled treads and platforms.

1.2 RELATED WORK

- A. Section 03 30 00, CAST-IN-PLACE CONCRETE: Concrete fill for treads and platforms.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Show design, fabrication details, installation, connections, material, and size of members.
- C. Welding qualifications.

1.4 QUALITY ASSURANCE

- A. Fabricator: A firm with a minimum of three (3) years' experience in type of work required by this section. Submit fabricator qualifications.
- B. Installer: A firm with a minimum of three (3) years' experience in type of work required by this section. Submit installer qualifications.
- C. Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M and AWS D1.3/D1.3M.

1.5 APPLICATION PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation.
- B. American Society of Mechanical Engineers (ASME):
 - B18.2.1-12.....Square, Hex, Heavy Hex, and Askew Head Bolts
and Hex, Heavy Hex, Hex Flange, Lobed Head, and
Lag Screws (Inch Series)
 - B18.2.3.8M-81(R2005)....Metric Heavy Lag Screws
 - B18.6.1-81(R2008).....Wood Screws (Inch Series)
 - B18.6.3-13.....Machine Screws, Tapping Screws, and Metallic
Drive Screws (Inch Series)

B18.6.5M-10.....Metric Thread Forming and Thread Cutting
Tapping Screws

B18.6.7M-10.....Metric Machine Screws

B18.22M-81 (R2010).....Metric Plain Washers

B18.21.1-09.....Washers: Helical Spring-Lock, Tooth Lock, and
Plain Washer (Inch Series)

C. ASTM International (ASTM):

A36/A36M-19.....Structural Steel

A47/A47M-99e1R2018).....Ferritic Malleable Iron Castings

A48/A48M-03 (R2016).....Gray Iron Castings

A53/A53M-20.....Pipe, Steel, Black and Hot-Dipped Zinc-Coated
Welded and Seamless

A123/A123M-17.....Zinc (Hot-Dip Galvanized) Coatings on Iron and
Steel Products

A153/A153M-16a.....Zinc Coating (Hot-Dip) on Iron and Steel
Hardware

A307-14e1.....Carbon Steel Bolts, Studs and Threaded Rod
60,000 PSI Tensile Strength

A653/A653M-20.....Steel Sheet, Zinc Coated (Galvanized) or Zinc
Alloy Coated (Galvannealed) by the Hot-Dip
Process

A786/A786M-15.....Rolled Steel Floor Plates

A1008/A1008M-20.....Steel, Sheet, Cold-Rolled, Carbon, Structural,
High-Strength, Low-Alloy

A1011/A1011M-18.....Steel, Sheet and Strip, Strip, Hot-Rolled
Carbon, Structural, High-Strength, Low-Alloy

D. American Welding Society (AWS):

D1.1/D1.1M-15.....Structural Welding Code-Steel

D1.3/D1.3M-18.....Structural Welding Code-Sheet Steel

E. The National Association of Architectural Metal Manufacturers (NAAMM)
Manuals:

MBG 531-17.....Metal Bar Gratings

AMP521-01 (R2012).....Pipe Railing Manual, Including Round Tube

F. American Iron and Steel Institute (AISI):

S100-12.....Design of Cold-Formed Steel Structural Members

G. National Fire Protection Association (NFPA):

101-18.....Life Safety Code

H. Society for Protective Coatings (SSPC):

Paint 25(1997; E 2004)..Zinc Oxide, Alkyd, Linseed Oil Primer for Use
Over Hand Cleaned Steel, Type I and Type II

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Steel Pipe: ASTM A53/A53M, Standard Weight, zinc coated.
- B. Steel Grating: Metal bar type grating NAAMM BG.
- C. Sheet Steel: ASTM A1008/A1008M.
- D. Structural Steel: ASTM A36/A36M.
- E. Steel Floor Plate: ASTM A786/A786M.
- F. Steel Decking: Form from zinc coated steel conforming to ASTM A653/A653M, with properties conforming to AISI S100 Specification for the Design of Cold-Formed Steel Structural Members.
- G. Steel Plate: ASTM A1011/A1011M.
- H. Iron Castings: ASTM A48/A48M, Class 30.
- I. Malleable Iron Castings: ASTM A47/A47M.

2.2 FABRICATION GENERAL

- A. Fasteners:
 - 1. Conceal bolts and screws wherever possible.
 - 2. Galvanized zinc-coated fasteners in accordance with ASTM A153/A153M.
 - 3. Standard/regular hexagon-head bolts and nuts be conforming to ASTM A325.
 - 4. Plain washers, round, general-assembly-grade, carbon steel conforming to ASME B18.22M, ASME B18.21.1.
- B. Welding:
 - 1. Structural steel, AWS D1.1/D1.1M, and sheet steel, AWS D1.3/D1.3M.
 - 2. Where possible, locate welds on unexposed side.
 - 3. Grind exposed welds smooth and true to contour of welded member.
 - 4. Remove welding splatter.
- C. Remove sharp edges and burrs.
- D. Fit stringers to head channel and close ends with steel plates welded in place where shown.
 - 1. Hot dip galvanize steelwork in accordance with ASTM A123/A123M. Touch up abraded surfaces and cut ends of galvanized members with zinc-dust, zinc-oxide primer, or an approved galvanizing repair compound.
- E. Form exposed work true to line and level with accurate angles and surfaces and straight sharp edges.

- F. Continuously weld corners and seams in accordance with the recommendations of AWS D1.1/D1.1M. Grind smooth exposed welds and flush to match and blend with adjoining surfaces.
- G. Form exposed connections with hairline joints that are flush and smooth.
- H. Provide and coordinate anchorage of the type indicated with the supporting structure. Fabricate anchoring devices, space as indicated and required to provide adequate support for the intended use of the work.
- I. Use hot-rolled steel bars for work fabricated for bar stock unless work is indicated or specified as fabricated from cold-finished or cold-rolled stock.

2.3 RAILINGS

- A. Fabricate railings, including handrails, from steel pipe.
 - 1. Connections may be standard fittings designed for welding, or coped or mitered pipe with full welds.
 - 2. Wall handrails are provided under Section 05 50 00, METAL FABRICATIONS.
- B. Return ends of handrail to wall and close free end.
- C. Provide standard terminal castings where fastened to newel.
- D. Space intermediate posts not over 1828 mm (6 feet) on center between end post // or newel post //.
- E. Fabricate handrail brackets from cast malleable iron.
- F. Provide standard terminal fittings at ends of post and rails.

2.4 CLOSED RISER STAIRS

- A. Provide treads, risers, platforms, railings, stringers, headers and other supporting members.
- B. Fabricate pans for treads and platforms, and risers from sheet steel.
// Fabricate pans for platforms from steel decking where shown. //
- C. Form risers with sanitary cove.
- D. Fabricate stringers, headers, and other supporting members from structural steel.
- E. Construct newel posts of steel tubing having wall thickness not less than 5 mm (3/16-inch), with forged steel caps and drops.

PART 3 - EXECUTION**3.1 STAIR INSTALLATION**

- A. Provide columns, hangers, and struts required to support the loads imposed.
- B. Perform job site welding and bolting as specified for shop fabrication.
- C. Set stairs and other members in position and secure to structure as shown.
- D. Install stairs plumb, level and true to line.
- E. Provide steel closure plate to fill gap between the stringer and surrounding wall. Weld and apply primer, ready to accept paint finish.

3.2 RAILING INSTALLATION

- A. Install standard terminal fittings at ends of posts and rails.
- B. Secure brackets, posts and rails to steel by welds, and to masonry or concrete with expansion sleeves and bolts, except secure posts at concrete by setting in sleeves filled with commercial non-shrink grout.
- C. Set rails horizontal or parallel to rake of stairs to within 3 mm in 3658 mm (1/8-inch in 12 feet).
- D. Set posts plumb and aligned to within 3 mm in 3658 mm (1/8-inch in 12 feet).

3.3 FIELD PRIME PAINTING

- A. Touch up abraded galvanized areas.

- - - E N D - - -

**SECTION 05 51 33.23
ALTERNATING TREAD STEEL STAIRS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies steel alternating tread stair assemblies with railings.
1. Note: Terminology used for the component covered by this specification varies among the codes or standards that address the component. This specification uses the term alternating tread stair. The International Building Code and NFPA-101, Life Safety Code use the term alternating tread device.

1.2 ADDITIONAL WORK INCLUDED IN THIS SECTION

- A. Field Measurements of alternating tread stair installation sites and verification of vertical distance between floors.

1.3 WORK SPECIFICALLY EXCLUDED IN THIS SECTION

- A. The items in this section are not to be included in the metal stair contractor's work:
1. Temporary shoring or bracing.
 2. Demolition and removal of existing work.
 3. Clean up of site prior to installation.
 4. Concrete supports or other concrete work
 5. Cutting; preparation of pockets; setting of plates, inserts, adapters, or other hardware of built in items.
 6. Placement of wire mesh or re-bar for concrete fill.
 7. Temporary lights or electricity.
 8. Temporary safety rails.
 9. Protection after erection.
 10. Wood trim or moldings, for treads or stringers.
 11. Rubber treads or carpets.
 12. Slip resistant concrete treatments.
 13. Field painting other than touch up of damaged surfaces.
 14. Final surface cleaning, passivation, or application of surface protectant after installation.

1.4 RELATED DOCUMENTS

- A. Project drawings and specifications and general provisions of Contract; including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

1.5 SUMMARY

- A. Provide all material, labor, equipment and services and perform all operations required for the work of this section in accordance with the Drawings and Specifications, including fabrication and installation of alternating tread steel stairs.

1.6 REFERENCES

- A. American Institute of Steel Construction (AISC)
 - 1. Manual of Steel Construction (AISC-360)
 - 2. Code of Standard Practice (AISC-303)
- B. American Iron and Steel Institute
 - 1. Type 304 Stainless Steel (UNS S30400)
 - 2. Type 1010 Stainless Steel (UNS G10100)
- C. American Society for Testing and Materials (ASTM)
 - 1. ASTM A108 Standard Specification for Steel Bars, Carbon, Cold-Finished
 - 2. ASTM A123 - Standard Specification for Zinc (Hot Dip Galvanized) Coatings on Iron and Steel Products
 - 3. ASTM A193/A193M - Standard Specification for Alloy-Steel and Stainless Steel Bolting Materials for High-Temperature or High Pressure Service and Other Special Purpose Applications
 - 4. ASTM A240/A240M - Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
 - 5. ASTM A307 - Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength
 - 6. ASTM A500 - Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes
 - 7. ASTM A513 - Standard Specification for Electric-Resistance-Welded Carbon and Alloy Steel Mechanical Tubing
 - 8. ASTM A563 - Standard Specification for Carbon and Alloy Steel Nuts.
 - 9. ASTM A568/568M - Specification for Steel Sheet, Carbon, Structural, and High Strength, Low Alloy, Hot Rolled and Cold Rolled General Requirements
 - 10. ASTM A780 - Standard Practice for Repair of Damaged and Uncoated Areas of Hot-Dip Galvanized Coatings
 - 11. ASTM A786/A786M Standard Specification for Hot-Rolled Carbon, Low-Alloy, High-Strength Low-Alloy, and Alloy Steel Floor Plate

12. ASTM A1011/A1011M Standard Specification for Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability and Ultra High Strength
13. ASTM F844 Standard Specification for Washers, Steel, Plain (Flat), Unhardened for General Use
14. Note: Editions specified in the applicable building code apply. If the editions is not specified in the applicable building code, then the latest edition of the References shall apply.

D. National Association of Architectural Metal Manufacturers (NAAMM)

1. NAAMM STANDARD AMP 510-92 Metal Stairs Manual 5th Edition

1.7 PERFORMANCE REQUIREMENTS

- A. Alternating Tread Stair Treads: shall be capable of withstanding a single concentrated 1000 pound load without permanent deformation; or 100 pounds per square foot or 300 pounds on an area of 4 square inches without exceeding the allowable working stress of the material.
- B. Alternating Tread Stair Guard/Handrail: shall be capable of withstanding a single concentrated load of 200 pounds or a uniform load of 50 pounds per linear foot applied in any direction at any point on the rail without exceeding the allowable working stress of the material.
- C. Alternating Tread Stair Stringers: shall be capable of withstanding a single concentrated load of 1000 pounds at any point on the stair without permanent deformation; or a uniform live loading of 100 pounds per square foot applied in a downward direction to all tread surfaces or a 300 pound load on an area of 4 square inches without exceeding the allowable working stress of the material.

1.8 CONSTRUCTION REQUIREMENTS

- A. Landings, Treads, and Mounting Base: shall be stamped and formed from single piece material. Stock shapes, hand forming, or welded remnants shall not be permitted. All stamped parts shall have integrally formed rigidizing bends and shall be spot welded to stringers of like material.
- B. Welds: shall be a minimum of 6 welds per tread, and 12 welds each on the landing and mounting base. Each weld shall be quality controlled and be capable of withstanding a minimum of 2800 lbs. in shear.
- C. Landing and Tread Surfaces: shall be punched through with upset non-skid openings.

- D. Riser Spacing: shall be equally spaced to within 3/16" for adjacent risers and to within 3/8" for any two non-adjacent risers on a stair.
- E. Guards and Handrails: shall be contoured for body guidance and underarm support and shall be attached to the outside stringers and landings by bolting.
- F. Landing Reinforcement: shall be with 1/4" steel angle notched and punched and factory welded to the landing at the points of a guard or handrail attachment.
- G. Rubber Bumper: shall be affixed to the central portion of the landing. A rubber bumper strip shall be attached or will be provided for field attaching to the central stringer.

1.9 DIMENSIONS

- A. Alternating Tread Stair Angle: 68 degrees from horizontal as specified in the drawings.
- B. Vertical Drop: the change in elevation, as shown on the drawings, between the upper finished floor surface where the top landing will be attached and the lower finished floor surface where the base of the alternating tread stair will be secured.

1.10 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals, as described below:
 - 1. Postconsumer and preconsumer recycled content as specified in PART 2 - PRODUCTS.
- C. Shop Drawings: Show design, fabrication details, installation, connections, material, and size of members.
- D. Fabrication qualifications.
 - 1. Installer qualifications.
 - 2. Calculations.
- E. Welding qualifications.

1.11 QUALITY ASSURANCE

- A. Fabricator: A firm with a minimum of three (3) years' experience in type of work required by this section. Submit fabricator qualifications.
- B. Installer: A firm with a minimum of three (3) years' experience in type of work required by this section. Submit installer qualifications.
- C. Calculations: Provide professionally prepared calculations and certification of performance of this work, signed and sealed by a

Professional Engineer registered in the state where the work is located. Perform structural design of the stair including supports for the metal stair frame. Indicate how Design Criteria as specified have been incorporated into the design.

Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M and AWS D1.3/D1.3M.

1.12 DELIVERY STORAGE AND HANDLING

- A. Reference: AISC Code of Standard Practice, sections 6 & 7.
- B. Deliver materials to the job-site in good condition and properly protected against damage to finished surfaces.
- C. Store material in a location and manner to avoid damage. Do not stack components. Lay out components on firm foundation material such that bending cannot occur.
- D. Store metal components in a clean dry location, away from uncured concrete, cement, or masonry products, acids, oxidizers, rainwater, or any other chemical or substance that might damage the material or finish.
- E. Plan work and storage locations to keep on-site handling to a minimum.
- F. Exercise particular care to avoid damage to material finishes or unprotected surfaces when handling.

PART 2 - PRODUCTS

2.1 DESIGN CRITERIA

- A. Basis of Design: Lapeyre Stair - alternating tread steel stairs.

2.2 MATERIALS

- A. Carbon Steel:
 - 1. Treads: 13 Gauge; Minimum 36 ksi yield stress; AISI 1010/15 HRPO or ASTM A1011 structural steel (SS) type grade 36 (or higher).
 - 2. Landing & Foot Stampings: 11 Gauge; Minimum 36 ksi yield stress; AISI 1010/15 or ASTM A1011 structural steel (SS) type grade 36 (or higher).
 - 3. Top Landing Support Clips: Formed L2 x 2 x ¼" x 4" lg. with 5/8" Φ round holes and 5/8" x 1" slot holes, ASTM A1011 structural steel (SS) Type, grade 36 (or higher).
 - 4. Stringers: 2" x 1 3/4" x 11 Gauge U section; minimum 36 ksi yield stress; AISI 1010/15 or ASTM A1011 structural steel (SS) Type, grade 36 (or higher) for 68 degree stairs 12 vertical feet or less.

5. Handrails: 1 1/2" OD x 0.095"; Minimum 42 ksi yield stress; AISI 1010/15 CS or ASTM A1011 cold drawn, fully annealed tube per ASTM A513 grade 1026 or higher As-welded tubing or ASTM A500 Grade B.

B. Fasteners

1. Bolts: handrail to stringer; Hex Head A307 or SAE J429 Grade 5, 1/2" Φ x 13 TPI Landing to structure; Carriage Head A307 or Hex Head SAE J429 Grade 5, 1/2" Φ x 13 TPI; dimensions per ANSI/ASME B18.2.1
2. Nuts: ASTM A563 Grade A, B, C, D or O; dimensions per ANSI/ASME B18.2.2.
3. Washers ASTM F436 or F844, dimensions per ANSI/ASME B18.22.1.

C. Miscellaneous Material:

1. Rubber Spine: Hollow neoprene.
2. Rubber Foot Divider: Solid Santoprene.

2.3 FINISHES

A. Carbon Steel:

1. Gray Primer: Epoxy Powder Coat or
2. Safety Yellow Paint: Polyester TGIC* Powder Coat or
3. Iron Gray: TGIC*.
4. Typical RAL selections: Polyester Powder Coat.
5. Hot-Dip Galvanized: per ASTM A123.

*Triglycidyl Isocyanate

2.4 FABRICATION

- A. Fabricate alternating tread steel stairs to conform to performance and construction requirements, in accordance with approved shop drawings or dimensional prints. Fabricate and shop-assemble to greatest extent possible.
1. Carbon Steel: gas metal arc welded (GMAW/MIG) with E70 electrodes (or other approved welding wire) with treads spot welded to stringers and bolt-on handrails (with bolts included).

PART 3 - EXECUTION

3.1 PREPARATIONS

- A. Coordination: Coordinate start and installation of steel alternating tread stair with all other related and adjacent work. Installation shall not start until the construction has progressed to the point that weather conditions and remaining construction operations will not damage alternating tread stair installation.
- B. Verification: Verify that dimensions and angle are correct and that substrate is in proper condition for alternating tread stair

installation. Do not proceed with installation until all necessary corrections have been made.

3.2 INSTALLATION

- A. If bumper has not been installed at the factory, install the bumper in accordance with the manufacturer's instructions (peel and stick).
- B. Prepare mounting holes.
- C. Position alternating tread stair with top tread at same elevation as upper finished floor or roof surface.
- D. Secure alternating tread stair with not less than 2 bolts or studs at top and with not less than 2 at bottom of stair.
- E. Touch up with matching paint any chipped or abraded damage to factory finish or
- F. Touch up any damage to galvanized surfaces using galvanized repair paint in accordance with ASTM A780

3.3 CLEAN UP

- A. Leave work area clean and free of debris.

- - - E N D - - -

**SECTION 06 10 00
ROUGH CARPENTRY**

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies wood blocking, framing, sheathing, furring, nailers, sub-flooring, rough hardware, and light wood construction.

1.2 RELATED WORK:

- B. Milled woodwork: Section 06 20 00, FINISH CARPENTRY.
C. Gypsum sheathing: Section 09 29 00, GYPSUM BOARD.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1.4 PRODUCT DELIVERY, STORAGE AND HANDLING:

- A. Protect lumber and other products from dampness both during and after delivery at site.
B. Pile lumber in stacks in such manner as to provide air circulation around surfaces of each piece.
C. Stack plywood and other board products so as to prevent warping.
D. Locate stacks on well drained areas, supported at least 152 mm (6 inches) above grade and cover with well-ventilated sheds having firmly constructed over hanging roof with sufficient end wall to protect lumber from driving rain.

1.5 QUALITY ASSURANCE:

- A. Installer: A firm with a minimum of three (3) years' experience in the type of work required by this section.

1.6 GRADING AND MARKINGS:

- A. Any unmarked lumber or plywood panel for its grade and species will not be allowed on VA Construction sites for lumber and material not normally grade marked, provide manufacturer's certificates (approved by an American Lumber Standards approved agency) attesting that lumber and material meet the specified the specified requirements.

1.7 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.

- B. American Forest and Paper Association (AFPA):

NDS-15.....National Design Specification for Wood
Construction

WCD1-01.....Details for Conventional Wood Frame
Construction

C. American Institute of Timber Construction (AITC):

A190.1-07.....Structural Glued Laminated Timber

D. American Society of Mechanical Engineers (ASME):

B18.2.1-12 (R2013).....Square and Hex Bolts and Screws

B18.2.2-10.....Square and Hex Nuts

B18.6.1-81 (R2008).....Wood Screws

E. American Plywood Association (APA):

E30-11.....Engineered Wood Construction Guide

F. ASTM International (ASTM):

A653/A653M-13.....Steel Sheet Zinc-Coated (Galvanized) or Zinc-
Iron Alloy Coated (Galvannealed) by the Hot Dip
Process

C954-11.....Steel Drill Screws for the Application of
Gypsum Board or Metal Plaster Bases to Steel
Studs from 0.033 inch (2.24 mm) to 0.112-inch
(2.84 mm) in thickness

C1002-14.....Steel Self-Piercing Tapping Screws for the
Application of Gypsum Panel Products or Metal
Plaster Bases to Wood Studs or Metal Studs

D198-14.....Test Methods of Static Tests of Lumber in
Structural Sizes

D2344/D2344M-13.....Test Method for Short-Beam Strength of Polymer
Matrix Composite Materials and Their Laminates

D2559-12a.....Adhesives for Structural Laminated Wood
Products for Use Under Exterior (Wet Use)
Exposure Conditions

D3498-03 (R2011).....Adhesives for Field-Gluing Plywood to Lumber
Framing for Floor Systems

D6108-13.....Test Method for Compressive Properties of
Plastic Lumber and Shapes

D6109-13.....Test Methods for Flexural Properties of
Unreinforced and Reinforced Plastic Lumber and
Related Products

D6111-13a.....Test Method for Bulk Density and Specific
Gravity of Plastic Lumber and Shapes by
Displacement

- D6112-13.....Test Methods for Compressive and Flexural Creep
and Creep-Rupture of Plastic Lumber and Shapes
- F844-07a(R2013).....Washers, Steel, Plan (Flat) Unhardened for
General Use
- F1667-13.....Nails, Spikes, and Staples
- G. American Wood Protection Association (AWPA):
AWPA Book of Standards
- H. Commercial Item Description (CID):
A-A-55615.....Shield, Expansion (Wood Screw and Lag Bolt Self
Threading Anchors)
- I. Environmental Protection Agency (EPA):
40 CFR 59(2014).....National Volatile Organic Compound Emission
Standards for Consumer and Commercial Products
- J. Truss Plate Institute (TPI):
TPI-85.....Metal Plate Connected Wood Trusses
- K. U.S. Department of Commerce Product Standard (PS)
PS 1-95.....Construction and Industrial Plywood
PS 20-10.....American Softwood Lumber Standard

PART 2 - PRODUCTS

2.1 LUMBER:

- A. Unless otherwise specified, each piece of lumber must bear grade mark, stamp, or other identifying marks indicating grades of material, and rules or standards under which produced.
1. Identifying marks are to be in accordance with rule or standard under which material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.
 2. Inspection agency for lumber approved by the Board of Review, American Lumber Standards Committee, to grade species used.
- B. Structural Members: Species and grade as listed in the AFPA NDS having design stresses as shown.
- C. Lumber Other Than Structural:
1. Unless otherwise specified, species graded under the grading rules of an inspection agency approved by Board of Review, American Lumber Standards Committee.
 2. Framing lumber: Minimum extreme fiber stress in bending of 7584 kPa (1100 PSI).

3. Furring, blocking, nailers and similar items 101 mm (4 inches) and narrower Standard Grade; and, members 152 mm (6 inches) and wider, Number 2 Grade.
4. Board Sub-flooring: Shiplap edge, 25 mm (1 inch) thick, not less than 203 mm (8 inches) wide.

D. Sizes:

1. Conforming to PS 20.
2. Size references are nominal sizes, unless otherwise specified, actual sizes within manufacturing tolerances allowed by standard under which produced.

E. Moisture Content:

1. Maximum moisture content of wood products is to be as follows at the time of delivery to site.
 - a. Boards and lumber 50 mm (2 inches) and less in thickness: 19 percent or less.
 - b. Lumber over 50 mm (2 inches) thick: 25 percent or less.

F. Fire Retardant Treatment:

1. Treatment and performance inspection, by an independent and qualified testing agency that establishes performance ratings.

G. Preservative Treatment:

1. Do not treat Heart Redwood and Western Red Cedar.
2. Treat wood members and plywood exposed to weather or in contact with plaster, masonry or concrete, including framing of open roofed structures; sills, sole plates, furring, and sleepers that are less than 610 mm (24 inches) from ground; nailers, edge strips, blocking, crickets, curbs, cant, vent strips and other members provided in connection with roofing and flashing materials.
3. Treat other members specified as preservative treated (PT).
4. Preservative treat by the pressure method complying with AWPA Book use category system standards U1 and T1, except any process involving the use of Chromated Copper Arsenate (CCA) or other agents classified as carcinogenic for pressure treating wood is not permitted.

2.3 PLYWOOD:

- A. Comply with PS 1.
- B. Bear the mark of a recognized association or independent inspection agency that maintains continuing control over quality of plywood which

identifies compliance by veneer grade, group number, span rating where applicable, and glue type.

C. Sheathing:

1. APA rated Exposure 1 or Exterior; panel grade CD or better.

D. Subflooring:

1. Combination subflooring-underlayment under resilient flooring or carpet:
 - a. APA Rated Stud-I-Floor Exterior or Exposure 1, T and G.
 - b. Minimum 15 mm (19/32 inch) thick or greater, span rating 24.

2.4 STRUCTURAL-USE PANELS:

- A. Comply with APA E30.
- B. Bearing the mark of a recognized association or independent agency that maintains continuing control over quality of panel which identifies compliance by end use, Span Rating, and exposure durability classification.
- G. Laminated Veneer Lumber (LVL):
 1. Bonded jointed wood veneers with ASTM D2559 adhesive.
 2. Scarf jointed wood veneers with grain of wood parallel.
 3. Size as indicated on contract documents.

2.5 ROUGH HARDWARE AND ADHESIVES:

- A. Anchor Bolts:
 1. ASME B18.2.1 and ASME B18.2.2 galvanized, 13 mm (1/2 inch) unless shown otherwise.
- B. Miscellaneous Bolts: Expansion Bolts: C1D A-A-55615; lag bolt, long enough to extend at least 65 mm (2-1/2 inches) into masonry or concrete. Provide 13 mm (1/2 inch) bolt unless shown otherwise.
- C. Washers
 1. ASTM F844.
 2. Provide zinc or cadmium coated steel or cast iron for washers exposed to weather.
- D. Screws:
 1. Wood to Wood: ASME B18.6.1 or ASTM C1002.
 2. Wood to Steel: ASTM C954, or ASTM C1002.
- E. Nails:
 1. Size and type best suited for purpose unless noted otherwise. Provide aluminum-alloy nails, plated nails, or zinc-coated nails, for nailing wood work exposed to weather and on roof blocking.
 2. ASTM F1667:

- a. Common: Type I, Style 10.
- b. Concrete: Type I, Style 11.
- c. Barbed: Type I, Style 26.
- d. Underlayment: Type I, Style 25.
- e. Masonry: Type I, Style 27.
- f. Provide special nails designed for use with ties, strap anchors, framing connectors, joists hangers, and similar items. Nails not less than 32 mm (1-1/4 inches) long, 8d and deformed or annular ring shank.

G. Adhesives:

- 1. For field-gluing plywood to lumber framing floor or roof systems: ASTM D3498.
- 2. For structural laminated Wood: ASTM D2559.

PART 3 - EXECUTION

3.1 INSTALLATION OF FRAMING AND MISCELLANEOUS WOOD MEMBERS:

A. Conform to applicable requirements of the following:

- 1. AFPA NDS for timber connectors.
- 2. AITC A190.1 Timber Construction Manual for heavy timber construction.
- 3. AFPA WCD1 for nailing and framing unless specified otherwise.
- 4. APA for installation of plywood or structural use panels.
- 5. TPI for metal plate connected wood trusses.

B. Fasteners:

- 1. Nails.
 - a. Nail in accordance with the Recommended Nailing Schedule as specified in AFPA WCD1 where detailed nailing requirements are not specified in nailing schedule or otherwise specified. Select nail size and nail spacing sufficient to develop adequate strength for the connection without splitting the members.
 - b. Use special nails with framing connectors.
 - c. For sheathing and subflooring, select length of nails sufficient to extend 25 mm (1 inch) into supports.
 - d. Use 8d or larger nails for nailing through 25 mm (1 inch) thick lumber and for toe nailing 50 mm (2 inch) thick lumber.
 - e. Use 16d or larger nails for nailing through 50 mm (2 inch) thick lumber.
 - f. Select the size and number of nails in accordance with the Nailing Schedule except for special nails with framing anchors.

g. Nailing Schedule; Using Common Nails:

- 1) Joist bearing on sill or girder, toe nail three (3) 8d nails or framing anchor.
- 2) Bridging to joist, toe nail each end two (2) 8d nails.
- 3) Ledger strip to beam or girder three (3) 16d nails under each joint.
- 4) Subflooring or Sheathing:
 - a) Plywood or structural use panel to each stud or joist face nail 8d, at supported edges 152 mm (6 inches) on center and at intermediate supports 254 mm (10 inches) on center. When gluing plywood to joint framing increase nail spacing to 305 mm (12 inches) at supported edges and 508 mm (20 inches) o.c. at intermediate supports.
- 5) Sole plate to joist or blocking, through sub floor face nail 20d nails, 406 mm (16 inches) on center.
- 6) Top plate to stud, end nail two (2) 16d nails.
- 7) Stud to sole plate, toe nail or framing anchor. Four (4) 8d nails.
- 8) Doubled studs, face nail 16d at 610 mm (24 inches) on center.
- 9) Built-up corner studs 16d at 610 mm (24 inches) (24 inches) on center.
- 10) Doubled top plates, face nails 16d at 406 mm (16 inches) on center.
- 11) Top plates, laps, and intersections, face nail two (2) 16d.
- 12) Continuous header, two pieces 16d at 406 mm (16 inches) on center along each edge.
- 13) Ceiling joists to plate, toenail three (3) 8d or framing anchor.
- 14) Continuous header to stud, four (4) 16d.
- 15) Ceiling joists, laps over partitions, face nail three (3) 16d or framing anchor.
- 16) Ceiling joists, to parallel rafters, face nail three (3) 16d.

C. Cut notch, or bore in accordance with AFPA WCD1 passage of ducts wires, bolts, pipes, conduits and to accommodate other work. Repair or replace miscut, misfit or damaged work.

D. Blocking Nailers, and Furring:

1. Install furring, blocking, nailers, and grounds where shown.

2. Provide longest lengths practicable.
3. Provide fire retardant treated wood blocking where shown at openings and where shown or specified.
4. Layers of Blocking or Plates:
 - a. Stagger end joints between upper and lower pieces.
 - b. Nail at ends and not over 610 mm (24 inches) between ends.
 - c. Stagger nails from side to side of wood member over 127 mm (5 inches) in width.

F. Floor Framing:

1. Set with crown edge up.
2. Keep framing at least 50 mm (2 inches) away from chimneys.
3. Bear on not less than 101 mm (4 inches) on concrete and masonry, and 38 mm (1-1/2 inches) on wood and metal unless shown otherwise.

L. Subflooring:

1. Subflooring to be plywood.
2. Provide a clearance of approximately 13 mm (1/2 inch) at masonry or concrete at walls.
3. Combination subfloor-underlayment:
 - a. Space edges 3 mm (1/8 inch) apart.
 - b. Provide a clearance of 6 mm (1/4 inch) at masonry on concrete at walls.
4. Stagger panel end joints and make over support.

- - - E N D - - -

**SECTION 06 20 00
FINISH CARPENTRY**

PART 1 - GENERAL**1.1 SUMMARY**

- A. Section Includes:
 - 1. Interior millwork.
- B. Items specified:
 - 1. Custom Plastic Laminate Cabinetry
 - 2. Counter, Wall Caps, and Work Tops.

1.2 RELATED REQUIREMENTS

- A. Adhesive, Paint, and Finish VOC Limits: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Woodwork Finish and Color: See Drawings.
- C. Framing, furring and blocking: Section 06 10 00, ROUGH CARPENTRY.
- D. Wood doors: Section 08 14 00, WOOD DOORS.
- E. Color and texture of finish: See Drawings.
- F. Electrical light fixtures and duplex outlets: Division 26, ELECTRICAL.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International:
 - A36/A36M-19.....Carbon Structural Steel.
 - A53/A53M-20.....Pipe, Steel, Black and Hot-Dipped Zinc Coated, Welded and Seamless.
 - A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications.
 - B26/B26M-18e1.....Aluminum-Alloy Sand Castings.
 - B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
 - E84-20.....Surface Burning Characteristics of Building Materials.
- C. American Hardboard Association (AHA):
 - A135.4-12.....Basic Hardboard.
- D. Architectural Woodwork Institute (AWI):
 - AWI-14.....Architectural Woodwork Standards, 2nd ed.
- E. Builders Hardware Manufacturers Association (BHMA):
 - A156.9-15.....Cabinet Hardware.

- A156.11-14.....Cabinet Locks.
- A156.16-18.....Auxiliary Hardware.
- F. Federal Specifications (Fed. Spec.):
 - A-A-1922A.....Shield Expansion (Calking Anchors, Single Lead).
 - A-A-1936A.....Adhesive, Contact, Neoprene Rubber.
 - FF-N-836E.....Nut: Square, Hexagon, Cap, Slotted, Castle, Knurled, Welding.
 - FF-S-111D(1).....Screw, Wood (Notice 1 inactive for new design).
 - MM-L-736C(1).....Lumber, Hardwood.
- G. Hardwood Plywood and Veneer Association (HPVA):
 - HP1-16.....Hardwood and Decorative Plywood.
- H. Military Specification (Mil. Spec):
 - MIL-L-19140E.....Lumber and Plywood, Fire-Retardant Treated.
- I. National Particleboard Association (NPA):
 - A208.1-09.....Wood Particleboard.
- J. National Electrical Manufacturers Association (NEMA):
 - LD 3-05.....High-Pressure Decorative Laminates.
- K. U.S. Department of Commerce, Product Standard (PS):
 - PS1-07.....Construction and Industrial Plywood.
 - PS20-10.....American Softwood Lumber Standard.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 1. Show size, configuration, and fabrication and installation details.
 2. Millwork items - Half full-size scale for sections and details 1: 50 (1/4 inch) for elevations and plans.
- C. Manufacturer's Literature and Data:
 1. Description of each product.
 - a. Finish hardware.
- D. Samples:
 1. Plastic Laminate Finished Plywood and Particleboard: 150 mm by 300 mm (6 by 12 inches) long, each type and color.
 - a. Submit quantity required to show full color and texture range.
 2. Acrylic Solid Surface: 100 mm by 100 mm (4 inches by 4 inches), each type and color.
- E. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
2. Low Pollutant-Emitting Materials:
 - a. Show volatile organic compound types and quantities.
 - b. Certify each composite wood and agrifiber product contains no added urea formaldehyde.
- F. Certificates: Certify each product complies with specifications.
 1. Fire retardant treatment of materials.
 2. Moisture content of materials.

1.5 QUALITY ASSURANCE

- A. Fabricator Qualifications:
 1. Regularly fabricates specified products.
 2. Fabricated specified products with satisfactory service on five similar installations for minimum five years.
- B. Installer Qualifications:
 1. Regularly installs specified products.
 2. Installed specified products with satisfactory service on five similar installations for minimum five years.

1.6 DELIVERY, STORAGE AND HANDLING

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.
- D. Store products indoors in dry, weathertight, conditioned facility.
- E. Protect products from damage during handling and construction operations.

1.7 FIELD CONDITIONS

- A. Environment:
 1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
 2. Work Area Ambient Conditions: HVAC systems are complete, operational, and maintaining facility design operating conditions continuously, beginning 48 hours before installation until Government occupancy.
 3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.

4. Do not install finish lumber or millwork in any room or space where wet process systems such as concrete, masonry, or plaster work is not complete and dry.

B. Field Measurements: Verify field conditions affecting fabrication and installation. Show field measurements on Submittal Drawings.

1. Coordinate field measurement and fabrication schedule to avoid delay.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Grading and Marking: Factory mark with grade stamp lumber and plywood of inspection agency approved by the Board of Review, American Lumber Standard Committee.

B. Lumber:

1. Sizes:

- a. Lumber Size references, unless otherwise specified, are nominal sizes, and actual sizes within manufacturing tolerances allowed by the standard under which product is produced.

2. Moisture Content:

- a. 32 mm (1-1/4 inches) or less nominal thickness: 12 percent on 85 percent of the pieces and 15 percent on the remainder.

- b. Other materials: According to standards under which the products are produced.

3. Fire Retardant Treatment: Mil. Spec. MIL-L-19140E.

- a. Treatment and performance inspection by an independent and qualified testing agency that establishes performance ratings.

- b. Each piece of treated material bear identification of the testing agency and indicate performance according to such rating of flame spread and smoke developed.

- c. Treat wood for maximum flame spread of 25 and smoke developed of 25.

- d. Fire Resistant Softwood Plywood:

- 1) Grade A, Exterior, plywood for treatment.

- 2) Surface Burning Characteristics: When tested according to ASTM E84.

- a) Flame spread: 0 to 25.

b) Smoke developed: 100 maximum.

C. Plywood:

1. Softwood Plywood: DOC PS1.

a. Plywood, 13 mm (1/2 inch) and thicker; minimum five ply construction, except 32 mm (1-1/4 inch) thick plywood minimum seven ply.

b. Plastic Laminate and Acrylic Solid Surface Plywood Cores:

1) Exterior Type, and species group.

2) Veneer Grade: A-C.

D. Particleboard: NPA A208.1, Type 1, Grade 1-M-3.

1. Plastic Laminate Particleboard Cores:

a. Type 1, Grade 1-M-3, Type 2, Grade 2-M-2, unless otherwise specified.

E. Plastic Laminate: NEMA LD-3.

1. Exposed Laminate Surfaces including Sides of Cabinets: Grade HGL.

2. Enclosed Cabinet Interiors including Drawers and Shelving: NEMA, CLS as a minimum, with the following:

a. Resin impregnated decorative paper thermally fused to particle board.

F. Acrylic Solid Surface: NEMA-LD-3.

G. Stainless Steel: ASTM A240, Type 302 or 304.

H. Cast Aluminum: ASTM B26.

I. Extruded Aluminum: ASTM B221.

2.2 PRODUCTS - GENERAL

A. Basis of Design: See Drawings. Architect approval required.

B. Provide each product from one manufacturer and from one production run.

C. Sustainable Construction Requirements:

1. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for the following products:

a. Non-flooring adhesives and sealants.

b. Aerosol adhesives.

c. Paints and coatings.

d. Composite wood and agrifiber.

2.3 FABRICATION

A. General:

1. AWI Custom Grade for interior millwork.

2. Plywood, minimum 13 mm (1/2 inch), unless otherwise shown on Drawings or specified.
3. Edges of members in contact with concrete or masonry having a square corner caulking rebate.
4. Custom Plastic Laminate Work:
 - a. Factory glued to either a plywood or a particle board core, thickness as shown on Drawings or specified.
 - b. Cover exposed edges with plastic laminate, except where plastic molded edge strips are shown on drawings or specified. Use plastic molded edge strips on 19 mm (3/4 inch) thick or thinner core material.
 - c. Use backing sheet on concealed large panel surface when decorative face does not occur.
- B. Acrylic Solid Surface Countertops and Wall Caps:
 1. Thickness: 13 mm (1/2 inch) solid surface applied with waterproof adhesive to two (2) layers 19 mm (3/4 inch) exterior-grade plywood ladder system with 4-inch wide webs. Walls Caps: 13 mm (1/2 inch) solid surface applied with waterproof adhesive to top of half walls.
 2. Fabricate components in shop to greatest extent practical to sizes and shapes indicated, in accordance with approved Shop Drawings and solid surface manufacturer requirements. Form joints between components to create inconspicuous seams, using manufacturer's standard joint adhesive. Provide factory cutouts for plumbing fittings and bath accessories as indicated on Drawings.
 3. Thermoform corners and edges to shapes and sizes indicated on Drawings, prior to seaming and joining. Cut components larger than finished dimensions and sand edges to remove nicks and scratches. Heat entire component uniformly prior to forming.
 4. Ensure no blistering, whitening and cracking of components during forming.
 5. Form backsplashes from solid surfacing material with radius cove where counter and backsplashes meet as indicated on Drawings. Refer to Technical Bulletin K28235 Thermoformed Backsplash.
 6. Fabricate joints between components using manufacturer's standard joint adhesive. Ensure joints are inconspicuous in appearance and without voids. Attach 50 mm (2") wide reinforcing strip of solid surface material under each joint.

7. Rout and finish component edges to a smooth, uniform finish. Rout cutouts, then sand edges smooth. Repair or reject defective or inaccurate work.
8. Finish: Ensure surfaces have uniform finish.
9. Fabrication Tolerances:
 - a. Variation in Component Size: ± 3 mm ($\pm 1/8$ ").
 - b. Location of Openings: ± 3 mm ($\pm 1/8$ ") from indicated location.

2.4 ACCESSORIES

A. Casework Hardware:

1. Rough Hardware:

- a. Provide rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electric-galvanizing process.

b. Fasteners:

- 1) Bolts with Nuts: FF-N-836.
- 2) Expansion Bolts: A-A-1922A.
- 3) Screws: Fed. Spec. FF-S-111.

2. Finish Hardware:

a. Cabinet Hardware: ANSI A156.9.

- 1) Door/Drawer Pulls: B02011. Door in seismic zones: B03182.
- 2) Drawer Slides: B05051 for drawers over 150 mm (6 inches) deep, B05052 for drawers 75 mm to 150 mm (3 to 6 inches) deep, and B05053 for drawers less than 75 mm (3 inches) deep.
- 3) Adjustable Shelf Standards: B4061 with shelf rest B04083.
- 4) Concealed Hinges: B1601, minimum 110 degree opening.

b. Cabinet Locks: ANSI A156.11.

- 1) Basis of Design: Combi-Cam, 3-dial, combined cabinet cam lock with changeable combination.

c. Auxiliary Hardware: ANSI A156.16.

- 1) Combination Garment rod and Shelf Support: B04051 japanned or enamel finish.
- 2) Closet Bar: L03131 chrome finish of required length.

d. Counter Brackets:

- 1) Steel angles drilled for fasteners on 100 mm (4 inches) centers.
- 2) Baked enamel finish.

e. Edge Strips Moldings:

- 1) Vinyl plastic to match plastic laminate color.

f. Countertop Grommets: Circular, 3-inch OD, plastic grommet for cable passage with flexible top; color: black.

g. Primers: Manufacturer's standard primer for steel providing baked enamel finish.

B. Adhesive:

1. Plastic Laminate: Fed. Spec. A-A-1936.

2. Interior Millwork: Unextended urea resin, unextended melamine resin, phenol resin, or resorcinol resin.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

C. Remove existing construction as shown on drawings to permit new installation.

1. Dispose of removed materials.

D. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.

3.2 INSTALLATION

A. Installation:

1. Seal cut edges of fire retardant treated wood materials with a certified acceptable sealer.

2. Coordinate with plumbing and electrical work for installation of fixtures and service connections in millwork items.

3. Plumb and level items unless shown otherwise.

4. Nail finish at each blocking, lookout, or other nailer and intermediate points; toggle or expansion bolt in place where nails are not suitable.

5. Apply adhesive uniformly for full contact between finish and substrate.

B. Acrylic Solid Surface Countertops and Wall Caps:

1. Install components plumb, level, rigid, scribed to adjacent finishes in accordance with reviewed Shop Drawings and Product installation details.

2. Form field joints using manufacturer's recommended adhesive, with joints being inconspicuous in finished work. Exposed joints/seams are not permitted. Keep components and hands clean when making joints. Reinforce field joints as specified herein. Cut and finish component edges with clean, sharp returns.

3. Route radii and contours to template. Anchor securely to base component or other supports. Align adjacent components and form seams to comply with manufacturer's written recommendations using adhesive in color to match work. Carefully dress joints smooth, remove surface scratches and clean entire surface.
4. Install countertops with no more than 3 mm (1/8") sag over a 3 m (10') span, bow or other variation from a straight line.
5. Adhere undermount/submount/bevel mount sinks/bowls to countertops using manufacturer's recommended adhesive and mounting hardware.
6. Adhere topmount sinks/bowls to countertops using manufacturer recommended adhesives and color-matched silicone sealant.
7. Lavatory Tops with Integral Bowls: Secure seam mount bowls to counter tops using manufacturer's recommended color-matched joint adhesive.
8. Seal between wall and components with joint sealant as specified herein and in Section 07 92 00, as applicable.
9. Provide backsplashes and endsplashes as indicated on Drawings. Adhere to countertops using a standard color-matched silicone sealant. Adhere applied sidesplashes to countertops using a standard color-matched silicone sealant. Provide coved backsplashes and sidesplashes at walls and adjacent millwork. Fabricate radius cove at intersection of counters with backsplashes to dimensions shown on reviewed Shop Drawings. Adhere to countertops using manufacturer's standard color-matched joint adhesive.

3.3 CLEANING

- A. Remove excess adhesive before adhesive sets.
- B. Clean exposed surfaces. Remove contaminants and stains.
- C. Touch up damaged factory finishes.
 1. Repair painted surfaces with touch up primer.

3.4 PROTECTION

- A. Protect finish carpentry from traffic and construction operations.
- B. Cover finish carpentry with reinforced kraft paper, and plywood or hardboard.
- C. Remove protective materials immediately before acceptance.
- D. Repair damage.

- - - E N D - - -

**SECTION 07 01 50.19
PREPARATION FOR RE-ROOFING**

PART 1 - GENERAL**1.1 SUMMARY**

- A. Section Includes:
 - 1. Complete roof removal for new roof system installation.
 - 2. Partial roof removal for new roof system installation.
 - 3. Roofing membrane and selective roofing system component removal for new roof membrane installation.
- B. Existing Roofing System: System components include:
 - 1. Clay tile.
 - 2. Roofing membrane.
 - 3. Cover board.
 - 4. Roof insulation.
 - 5. Vapor retarder.
 - 6. Substrate board.

1.2 RELATED WORK

- A. Section 06 10 00, ROUGH CARPENTRY: Replacement Roof Deck and Parapet Sheathing.
- B. Section 07 60 00, FLASHING AND SHEET METAL: Sheet Metal Counterflashing.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):
 - FX-1 (R2016).....Standard Field Test Procedure for Determining the Withdrawal Resistance of Roofing Fasteners.
- C. American Society for Nondestructive Testing (ASNT):
 - SNT-TC-1A (2019).....Personnel Qualification and Certification for Nondestructive Testing.
- D. ASTM International (ASTM):
 - C208-12(2017)e2.....Cellulosic Fiber Insulating Board.
 - C578-19.....Rigid, Cellular Polystyrene Thermal Insulation.
 - C728-17a.....Perlite Thermal Insulation Board.
 - C1177/C1177M-17.....Glass Mat Gypsum Substrate for Use as Sheathing.
 - C1153-10(2015).....Location of Wet Insulation in Roofing Systems Using Infrared Imaging.

C1278/C1278M-17.....Standard Specification Fiber-Reinforced Gypsum
Panel.

D4263-83(2018).....Indicating Moisture in Concrete by the Plastic
Sheet Method.

E. U.S. Department of Commerce National Institute of Standards and
Technology (NIST):

DOC PS 1-19.....Structural Plywood.

DOC PS 2-18.....Performance Standard for Wood-Based
Structural-Use Panels.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting minimum 30 days before beginning Work
of this section.

1. Required Participants:

- a. Contracting Officer's Representative.
- b. Contractor.
- c. Installer.
- d. Other installers responsible for adjacent and intersecting work,
including mechanical and electrical equipment installers.

2. Meeting Agenda: Distribute agenda to participants minimum 3 days
before meeting.

- a. Removal and installation schedule.
- b. Removal and installation sequence.
- c. Preparatory work.
- d. Protection before, during, and after installation.
- e. Removal and installation.
- f. Temporary roofing including daily terminations.
- g. Transitions and connections to other work.
- h. Inspecting and testing.
- i. Other items affecting successful completion.

3. Document and distribute meeting minutes to participants to record
decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA,
AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and installation details.

C. Manufacturer's Literature and Data:

1. Description of each product.

2. Description of temporary roof system and components.
 3. List of patching materials.
 4. Recover board fastening requirements.
 5. Temporary roofing installation instructions and removal instructions.
 6. Existing roofing warrantor's instructions.
- D. Photographs: Document existing conditions potentially affected by roofing operations before work begins.
- E. Field Inspection Reports:
1. Certify warrantor inspected completed roofing and existing warranty remains in effect.
- F. Infrared Roof Moisture Survey Report.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications:
1. Licensed to perform asbestos abatement in Project jurisdiction when removal of asbestos-containing material is required.
 2. Approved by existing roofing system warrantor when work affects existing roofing system under warranty.

1.7 FIELD CONDITIONS

- A. Existing Roofing Available Information:
1. The following are available for Contractor reference:
 - a. Roof moisture survey.
 - b. Test cores analysis.
 - c. Construction drawings and project manual.
 2. Examine available information before beginning work of this section.
- B. Weather Limitations: Proceed with reroofing preparation only during dry weather conditions as specified for new roofing installation.
1. Remove only as much roofing in one day as can be made watertight in same day.
- C. Hazardous materials are not expected in existing roofing system.
1. Known hazardous materials were removed before start of work.
 2. Do not disturb suspected hazardous materials. When discovered, notify Contracting Officer's Representative.
 3. Hazardous materials discovered during execution of the work will be removed by Government as work of a separate contract.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Existing Warranties: Perform work to maintain existing roofing warranty in effect.

1. Notify warrantor before beginning, and upon completion of reroofing.
2. Obtain warrantor's instructions for maintaining existing warranty.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Patching Materials: Match existing roofing system materials.

B. Plywood Sheathing: See Section 06 10 00, ROUGH CARPENTRY.

C. Metal Flashing: See Section 07 60 00, FLASHING AND SHEET METAL.

D. Temporary Protection Materials:

1. Expanded Polystyrene (EPS) Insulation: ASTM C578-19.
2. Plywood: NIST DOC PS 1-19, Grade CD Exposure 1-18.
3. Oriented Strand Board (OSB): NIST DOC PS 2-18, Exposure 1.

E. Temporary Roofing System Materials: Contractor's option.

F. Recover Board: One of the following:

1. Insulation: See Section 07 22 00, ROOF AND DECK INSULATION.
2. Fiber Board: ASTM C208-12(2017)e2, Type II, fiber board; 13 mm (1/2 inch) thick.
3. Glass Mat Gypsum Board: ASTM C1177/C1177M-17, water-resistant; 13 mm (1/2 inch) thick.
4. Fiber Reinforced Gypsum Board: ASTM C1278/C1278M-17, water-resistant; 13 mm (1/2 inch) thick.

G. Fasteners: Type and size required by roof membrane manufacturer to resist wind uplift.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Infrared Roof Moisture Survey: Ground-based, walk-over type performed according to ASTM C1153-10(2015).

1. Record the entire survey on DVD and provide one copy to Contracting Officer's Representative with report.
2. Include in report thermograms of suspect areas and corresponding daytime photos of same locations.
3. Conduct inspection by NDT test technician certified to at least Level 2 in Thermal/Infrared test method according to ASNT SNT-TC-1A.
4. Mark out roof areas determined to be wet to indicate areas to be removed.

3.2 PREPARATION

A. Examine and verify substrate suitability for product installation.

- B. Protect existing roofing system indicated to remain.
 - 1. Cover roof membrane with temporary protection materials without impeding drainage.
 - 2. Limit traffic and material storage to protected areas.
 - 3. Maintain temporary protection until replacement roofing is completed.
- C. Protect existing construction and completed work from damage.
- D. Protect landscaping from damage.
- E. Maintain access to existing walkways and adjacent occupied facilities.
- F. Coordinate use of rooftop fresh air intakes with Contracting Officer's Representative to minimize effect on indoor air quality.
- G. Ensure temporary protection materials are available for immediate use in case of unexpected rain.
- H. Ensure roof drainage remains functional.
 - 1. Keep drainage systems clear of debris.
 - 2. Prevent water from entering building and existing roofing system.
- I. Coordinate rooftop utilities remaining active during roofing work with Contracting Officer's Representative.

3.3 RE-ROOFING PREPARATION - GENERAL

- A. Notify Contracting Officer's Representative of planned operations, daily.
 - 1. Identify location and extent of roofing removal.
 - 2. Request authorization to proceed.

3.4 PARTIAL ROOFING SYSTEM REMOVAL

- A. Remove existing roofing completely, exposing structural roof deck at locations and to extent indicated on drawings.
 - 1. Remove cover board, roof insulation, vapor retarder and substrate board.
 - 2. Remove or cut-off roofing system fasteners.

3.5 TEMPORARY ROOFING

- A. Install temporary roofing to maintain building watertight.
- B. Remove temporary roofing before installing new roofing.
- C. Prepare temporary roofing to receive new roofing.

3.6 EXISTING MEMBRANE PREPARATION FOR NEW ROOFING

- A. Remove existing roofing surface projections and irregularities. Produce smooth surface to receive recover boards.
 - 1. Broom clean existing surface.

3.7 BASE FLASHING REMOVAL

- A. Expose base flashings to permit removal.
 - 1. Two-Piece Counterflashings: Remove cap flashing and store for reuse.
 - 2. Single Piece Counterflashings: Carefully bend counterflashing.
 - 3. Metal Copings: Remove decorative cap and store for reuse.
- B. Remove existing base flashings.
 - 1. Clean substrates to receive new flashings.
- C. Replace counterflashings damaged during removal.
 - 1. Counterflashings: See Section 07 60 00 FLASHING AND SHEET METAL.
- D. Remove existing parapet sheathing and inspect parapet framing.
 - 1. Notify Contracting Officer's Representative of damaged framing.
- E. Install pressure-preservative treated plywood sheathing, 15 mm (19/32 inch) thick.

3.8 RECOVER BOARD INSTALLATION

- A. Install recover boards over existing roof insulation and roofing membrane with butted joints. Stagger end joints in adjacent rows.
- B. Fasten recover boards to resist wind-uplift.
 - 1. Uplift Resistance: Base on pull out resistance determined by specified field testing.

3.9 FIELD QUALITY CONTROL

- A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.
 - 1. Fastener Pull Out Tests: ANSI/SPRI FX-1(2016).
- B. Existing Roofing System Warrantor Services:
 - 1. Inspect reroofing preparation and roofing installation to verify compliance with existing warranty conditions.
 - 2. Submit reports of field inspections, and supplemental instructions issued during inspections.

3.10 DISPOSAL

- A. Collect waste materials in containers.
- B. Remove waste materials from project site, regularly, to prevent accumulation.
- C. Legally dispose of waste materials.

- - E N D - -

SECTION 07 13 52
MODIFIED BITUMINOUS SHEET WATERPROOFING

PART 1 - GENERAL**1.1 SUMMARY**

A. Section Includes:

1. Modified bituminous sheet material used for exterior below grade waterproofing and split slab waterproofing.

1.2 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. Federal Specifications (Fed. Spec.):

UU-B-790A Notice 2 v04-1992 Building Paper, Vegetable Fiber: (Kraft, Waterproofed, Water Repellent, and Fire Resistant).

C. ASTM International (ASTM):

C578-19.....Rigid, Cellular Polystyrene Thermal Insulation.

D41/D41M-11(2016).....Asphalt Primer Used in Roofing, Dampproofing and Waterproofing.

D4586/D4586M-07(2018)...Asphalt Roof Cement, Asbestos-Free.

D6380/D6380M-03(2018)...Asphalt Roll Roofing (Organic Felt).

D. American Hardboard Association (AHA):

A135.4-(r2020).....Basic Hardboard.

1.3 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.

1. Required Participants:

- a. Contracting Officer's Representative.
- b. Contractor.
- c. Installer.
- d. Other installers responsible for adjacent and intersecting work, including substrate and flashing installers.

2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.

- a. Installation schedule.
- b. Installation sequence.
- c. Preparatory work.
- d. Protection before, during, and after installation.
- e. Installation.

- f. Terminations.
 - g. Transitions and connections to other work.
 - h. Inspecting and testing.
 - i. Other items affecting successful completion.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings: Show size, configuration, and installation details.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Installation instructions.
 - 3. Warranty.
- D. Samples:
 - 1. Waterproofing and Flashing Sheet: 200 mm (8 inch) square, each type and color.
 - 2. Insulation: 200 mm (8 inch) square.
- E. Test reports: Certify products comply with specifications.
- F. Certificates: Certify products comply with specifications.
- G. Qualifications: Substantiate qualifications comply with specifications:
 - 1. Installer with project experience list.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications:
 - 1. Regularly installs specified products.
 - 2. Installed specified products with satisfactory service on five similar installations for minimum five years.
 - a. Project Experience List: Provide contact names and addresses for completed projects.

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight conditioned facility.

- B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

- A. Environment:

- 1. Product Temperature: Minimum 4 degrees C (40 degrees F) for minimum 48 hours before installation.
 - 2. Weather Limitations: Install waterproofing only during dry current and forecasted weather conditions.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant waterproofing system against material and manufacturing defects and agree to repair any leak caused by a defect in the waterproofing system materials or workmanship of the installer.
 - 1. Warranty Period: 10 years.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

- A. Waterproofing System: Modified bituminous sheet material for exterior below grade and split slab waterproofing.

2.2 PRODUCTS - GENERAL

- A. Provide each product from one manufacturer.
- B. Sustainable Construction
 - 1. Insulation Recycled Content: Rigid Foam: 9 percent total recycled content, minimum.

2.3 BITUMINOUS SHEET

- A. Cold applied waterproofing membrane composed primarily of modified bituminous material prefabricated in sheet form designed for below grade exterior and split slab waterproofing. Sheet reinforced with fibers at manufacturer's option.
- B. Thickness: Not less than 3.0mm (120 mils), plus or minus 0.13 mm (5 mils), and bonded to 0.1 mm (4 mil) thick plastic sheet.
- C. Provide release sheet to prevent bonding of bituminous sheet to itself.

2.4 PROTECTION MATERIAL

- A. Polystyrene Insulation: ASTM C578, Type I or VIII, 13 mm (1/2 inch) minimum thickness.
- B. Hardboard: AHA A135.4, Service Type, 6 mm (1/4 inch) thick.

- C. Waterproofed Building Paper: Fed. Spec. UU-B-790A Notice 2, Type I, Grade C.
- D. Roll Roofing: ASTM D6380/D6380M, Class S (smooth), Type III with minimum net mass per unit area of roofing, 2495 g/sq. m (51 lbs./100 sq. ft.).

2.5 ACCESSORIES

- A. Patching Compound: Factory-prepared, non-shrinking, fast-setting, cementitious adhesive compound containing no ferrous metal or oxide.
- B. Primer: ASTM D41/D41M.
- C. Roof Cement: ASTM D4586/D4586M.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
 - 1. Concrete surfaces cured minimum time recommended by waterproofing manufacturer.
 - 2. Substrate to be dry as recommended by waterproofing manufacturer.
- B. Protect existing construction and completed work from damage.
- C. Correct substrate deficiencies.
 - 1. Fill voids, joints, and cracks with patching compound.
- D. Clean substrates. Remove contaminants capable of preventing full adhesion.
- E. Priming:
 - 1. Prime concrete and masonry surfaces.
 - 2. Application method, amount of primer and condition of primer before installation of bituminous sheet as recommended by primer manufacturer.
 - 3. Reprime when required according to manufacturer's instructions.

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 WATERPROOFING INSTALLATION

- A. Bituminous Sheet Installation:
 - 1. Remove release sheet before application.
 - 2. Lay bituminous sheet from low point to high point so laps shed water.

3. Treat expansion, construction and control joints and evident working cracks as expansion joints. Apply bituminous sheet in double thickness over joint by first applying a strip of bituminous sheet minimum 200 mm (8 inches) wide, centered over joint.
4. Lap seams minimum 50 mm (2 inches).
5. Lay succeeding sheet with laps and roll or press into place.
6. Repair misaligned or inadequately lapped seams according to manufacturer's instructions.
7. Seal seams and terminations according to sheet manufacturer's instructions.

B. Corner Treatment:

1. At inside and outside corners, apply double cover using an initial strip minimum 280 mm (11 inches) wide, centered along axis of corner.
2. Cover each strip completely by the regular application of bituminous sheet.
3. Provide a fillet or cant on inside corners.
4. Form cants using patching compound.
5. Do not use wood, fiber, and insulating materials for cants.

C. Projection Treatment:

1. Apply a double layer of bituminous sheet around pipes and similar projections at least 150 mm (6 inches) wide.
2. At drains, apply a bead of roof cement over a double layer of bituminous sheet under clamping rings.

D. Patching:

1. Repair tears, punctures, air blisters, and inadequately lapped seams, according to manufacturer's instructions before protection course is applied.

E. Permanent Protection:

1. Vertical Surfaces:
 - a. Install hardboard, polystyrene insulation, or roll roofing protection material.
 - b. Extend protection full height from footing to top of backfill.
 - c. If graded backfill is used, use roll roofing or hardboard.

F. Horizontal Surfaces:

1. Install roll roofing protection under concrete wearing courses.
2. Install roll roofing, hardboard, or polystyrene insulation under earth backfill.

3. Where no concrete wearing course occurs or when surfaces will bear heavy traffic and will not immediately be covered with a wearing course, use protection specified for vertical surfaces.

G. Temporary Protection:

1. When waterproofing materials are subjected to damage by sunlight and cannot be immediately protected as specified, protect waterproofing materials by waterproof building paper or suitable coating approved by manufacturer of waterproofing system used.

3.4 FIELD QUALITY CONTROL

- A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.

B. Testing:

1. Before any protection or wearing course is applied, test all horizontal applications of waterproofing with a minimum of 25 mm (1 inch) head of water above highest point and leave for 24 hours.
2. Mark leaks and repair when waterproofing is dry.
3. Certify, to Contracting Officer's Representative, that water tests have been made and that areas tested were found watertight.

C. Inspection:

1. Do not cover waterproofed surfaces by other materials or backfill until work is approved by Contracting Officer's Representative.

3.5 CLEANING

- A. Remove excess adhesive before adhesive sets.
- B. Clean exposed waterproofing surfaces. Remove contaminants and stains.

3.6 PROTECTION

- A. Protect waterproofing from construction operations.
- B. Remove protective materials immediately before acceptance.
- C. Repair damage.

- - - E N D - - -

**SECTION 07 21 13
THERMAL INSULATION**

PART 1 - GENERAL**1.1 SUMMARY**

A. Section Includes:

1. Thermal insulation.
 - a. Board or block insulation at foundation perimeter.
 - b. Batt or blanket insulation at exterior, framed and furred walls.
 - c. Board or block insulation at floor assemblies above unconditioned spaces.
 - d. Board or block insulation at masonry cavity walls.
 - e. Loose fill insulation at exterior hollow masonry walls.
2. Acoustical insulation.
 - a. Semi-rigid insulation at interior framed partitions.
 - b. Batt and blanket insulation at interior framed partitions.
 - c. Board insulation at interior concrete and masonry partitions.

1.2 RELATED WORK

- A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Adhesives VOC Limits.
- B. Section 04 20 00, UNIT MASONRY: Insulation for Cavity Face of Masonry.
- C. Section 07 84 00, FIRESTOPPING: Safing Insulation.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
 - C516-19.....Vermiculite Loose Fill Thermal Insulation.
 - C549-18.....Perlite Loose Fill Insulation.
 - C552-17e1 Cellular Glass Thermal Insulation.
 - C553-13(2019).....Mineral Fiber Blanket Thermal Insulation for
Commercial and Industrial Applications.
 - C578-19.....Rigid, Cellular Polystyrene Thermal Insulation.
 - C591-20.....Unfaced Preformed Rigid Cellular
Polyisocyanurate Thermal Insulation.
 - C612-14(2019).....Mineral Fiber Block and Board Thermal
Insulation.
 - C665-17.....Mineral-Fiber Blanket Thermal Insulation for
Light Frame Construction and Manufactured
Housing.

C728-17a.....Perlite Thermal Insulation Board.

C954-18.....Steel Drill Screws for the Application of
Gypsum Panel Products or Metal Plaster Base to
Steel Studs From 0.033 (0.84 mm) inch to 0.112
inch (2.84 mm) in thickness.

C1002-18.....Steel Self-Piercing Tapping Screws for
Application of Gypsum Panel Products or Metal
Plaster Bases to Wood Studs or Steel Studs.

D312/D312M-16a.....Asphalt Used in Roofing.

E84-20.....Surface Burning Characteristics of Building
Materials.

F1667-18a.....Driven Fasteners: Nails, Spikes, and Staples.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Show insulation type, thickness, and R-value for each location.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Adhesive indicating manufacturer recommendation for each application.
- D. Sustainable Construction Submittals:
 - 1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
 - 2. Low Pollutant-Emitting Materials: Show volatile organic compound types and quantities.

1.5 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight facility.
- B. Protect products from damage during handling and construction operations.
- C. Protect foam plastic insulation from UV exposure.

1.7 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS**2.1 INSULATION - GENERAL**

- A. Insulation Thickness:
 - 1. Provide thickness required by R-value shown on drawings.
 - 2. Provide thickness indicated when R-value is not shown on drawings.
- B. Insulation Types:
 - 1. Provide one insulation type for each application.
- C. Sustainable Construction Requirements:
 - 1. Insulation Recycled Content:
 - a. Polyisocyanurate/polyurethane rigid foam: 9 percent recovered material.
 - b. Polyisocyanurate/polyurethane foam-in-place: 5 percent recovered material.
 - c. Glass fiber reinforced: 6 percent recovered material.
 - d. Phenolic rigid foam: 5 percent recovered material.
 - e. Rock wool material: 75 percent recovered material.
 - 2. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
 - a. Non-Flooring Adhesives and Sealants.

2.2 THERMAL INSULATION

- A. Perimeter Insulation In Contact with Soil:
 - 1. Polystyrene Board: ASTM C578, Type IV, V, VI, VII, or IX.
 - 2. Cellular Glass Block: ASTM C552, Type I or IV.
- B. Exterior Framing or Furring Insulation:
 - 1. Mineral Fiber: ASTM C665, Type II, Class C, Category I where concealed by thermal barrier.
 - 2. Mineral Fiber: ASTM C665, Type III, Class A at other locations.
- C. Inside Face of Exterior Wall Insulation:
 - 1. Mineral Fiber Board: ASTM C612, Type IB or II.
 - 2. Perlite Board: ASTM C728.
 - 3. Cellular Glass Block: ASTM C552, Type I.
- D. Floor Assemblies Above Unconditioned Spaces:
 - 1. Mineral Fiber Board: ASTM C612, Type IB or Type II.
 - 2. Perlite Board: ASTM C728.

3. Cellular Glass Block: ASTM C552, Type I.

E. Masonry Cavity Wall Insulation:

1. Mineral Fiber Board: ASTM C612, Type II, with vapor retarder facing; maximum permeance 29 ng/Pa/s/sq. m (0.5 perms).
2. Polyurethane or Polyisocyanurate Board: ASTM C591, Type I, with vapor retarder facing; maximum permeance 29 ng/Pa/s/sq. m (0.5 perms).
3. Polystyrene Board: ASTM C578, Type X.
4. Perlite Board: ASTM C728.
5. Cellular Glass Block: ASTM C552, Type I or IV.

F. Masonry Fill Insulation:

1. Vermiculite Insulation: ASTM C516, Type II.
2. Perlite Insulation: ASTM C549, Type IV.

2.3 ACOUSTICAL INSULATION

A. Semi Rigid, Batts and Blankets:

1. Widths and lengths to fit tight against framing.
2. Mineral Fiber Batt or Blankets: ASTM C665, unfaced.
3. Maximum Surface Burning Characteristics: ASTM E84.
 - a. Flame Spread Rating: 25.
 - b. Smoke Developed Rating: 450.

B. Sound Deadening Board:

1. Mineral Fiber Board: ASTM C612, Type IB.
 - a. Thickness: 13 mm (1/2 inch).
2. Perlite Board: ASTM C728.
 - a. Thickness: 13 mm (1/2 inch).

2.4 ACCESSORIES

A. Fasteners:

1. Staples or Nails: ASTM F1667, zinc-coated, size and type to suit application.
2. Screws: ASTM C954 or ASTM C1002, size and length to suit application with washer minimum 50 mm (2 inches) diameter.
3. Impaling Pins: Steel pins with head minimum 50 mm (2 inches) diameter.
 - a. Length: As required to extend beyond insulation and retain cap washer when washer is placed on pin.
 - b. Adhesive: Type recommended by manufacturer to suit application.

- B. Insulation Adhesive: Nonflammable type recommended by insulation manufacturer to suit application.

- C. Tape: Pressure sensitive adhesive on one face.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Install insulation with vapor barrier facing the heated side, unless indicated otherwise.
- C. Install batt and blanket insulation with joints tight. Fill framing voids completely. Seal penetrations, terminations, facing joints, facing cuts, tears, and unlapped joints with tape.
- D. Fit insulation tight against adjoining construction and penetrations, unless indicated otherwise.

3.3 THERMAL INSULATION

- A. Perimeter Insulation In Contact with Soil:
 - 1. Vertical insulation:
 - a. Fill joints of insulation with same material used for bonding.
 - b. Bond polystyrene board to surfaces with adhesive.
 - c. Bond cellular glass insulation to surfaces with hot asphalt or adhesive cement.
 - 2. Horizontal insulation under concrete floor slab:
 - a. Lay insulation boards and blocks horizontally on level, compacted and drained fill.
 - b. Extend insulation from foundation walls towards center of building minimum 600 mm (24 inches).
- B. Exterior Framing or Furring Insulation:
 - 1. General:
 - a. Open voids are not acceptable.
 - b. Pack insulation around door frames and windows, in building expansion joints, door soffits, and other voids.

- c. Pack behind outlets, around pipes, ducts, and services encased in walls.
- d. Hold insulation in place with pressure sensitive tape.
- e. Lap facing flanges together over framing for continuous surface.
Seal penetrations through insulation and facings.
- 2. Metal Studs: Fasten insulation between metal studs, framing, and furring with pressure sensitive tape continuous along flanged edges.
- 3. Wood Studs:
 - a. Fasten insulation between wood studs or framing with nails or staples through flanged edges on face of stud.
 - b. Space fastenings maximum 150 mm (six inches) apart.
- 4. Roof Rafters and Floor Joists: Friction fit insulation between framing to provide minimum 50 mm (2 inch) air space between insulation and roof sheathing and subfloor.
- 5. Ceilings and Soffits:
 - a. Wood Framing:
 - 1) Fasten blanket insulation between wood framing and joists with nails or staples through flanged edges of insulation.
 - 2) Space fastenings maximum 150 mm (6 inches) on center.
 - b. Metal Framing:
 - 1) Fasten insulation between metal framing with pressure sensitive tape continuous along flanged edges.
 - 2) At metal framing and ceilings suspension systems, install insulation above suspended ceilings and metal framing at right angles to main runners and framing.
 - 3) Tape insulation tightly together without gaps. Cover metal framing members with insulation.
 - c. Ceiling Transitions:
 - 1) In areas where suspended ceilings transition to structural ceiling, install blanket or batt insulation.
 - 2) Extend insulation from suspended ceiling to underside of structure above.
 - 3) Secure blanket and batt with continuous cleats to structure above.
- C. Inside Face of Exterior Wall Insulation:
 - 1. Location: On interior face of solid masonry and concrete walls, beams, beam soffits, underside of floors, and to face of studs to support interior wall finish where indicated.

2. Bond insulation to solid vertical surfaces with adhesive. Fill joints with adhesive cement.
3. Fasten board insulation to face of studs with screws, nails or staples. Space fastenings maximum 300 mm (12 inches) on center. Stagger fasteners at board joints. Install fasteners at each corner.

D. Floor Assemblies Above Unconditioned Spaces:

1. Use impaling pins for attach insulation to underside of horizontal surfaces. Space fastenings as required to hold insulation in place and prevent sagging.
 - a. Bond insulation with adhesive when separate vapor retarder is used.

E. Masonry Cavity Wall Insulation:

1. Install insulation on exterior faces of concrete and masonry inner wythes of cavity walls.
2. Bond polystyrene board to surfaces with adhesive.
3. Bond polyurethane or polyisocyanurate board, and perlite board to surfaces with adhesive.
4. Bond cellular glass insulation to surfaces with hot asphalt or adhesive cement.
5. Fill insulation joints with same material used for bonding.

F. Masonry Fill Insulation:

1. Pour fill insulation in masonry unit hollow cores from tops of walls, or from sill where windows or other openings occur.
2. Pour in lifts of maximum 6 m (20 feet).

3.4 ACOUSTICAL INSULATION

A. General:

1. Install insulation without voids.
2. Pack insulation around door frames and windows, in building expansion joints, door soffits, and other voids.
3. Pack behind outlets, around pipes, ducts, and services encased in walls.
4. Hold insulation in place with pressure sensitive tape.
5. Lap facer flanges together over framing for continuous surface. Seal all penetrations through the insulation and facers.
6. Do not compress insulation below required thickness except where embedded items prevent required thickness.

B. Semi Rigid, Batts and Blankets:

1. When insulation is not full thickness of cavity, adhere insulation to one side of cavity, maintaining continuity of insulation and covering penetrations or embedments.

- a. Wood Framing:

- 1) Fasten blanket insulation between wood framing and joists with nails or staples through flanged edges of insulation.
- 2) Space fastenings maximum 150 mm (6 inches) on center.

- b. Metal Framing:

- 1) Fasten insulation between metal framing with pressure sensitive tape continuous along flanged edges.
- 2) At metal framing or ceilings suspension systems, install blanket insulation above suspended ceilings or metal framing at right angles to the main runners or framing.
- 3) Tape insulation tightly together so no gaps occur and metal framing members are covered by insulation.

- C. Sound Deadening Board: Secure with adhesive to masonry and concrete walls and with screws to metal framing. Secure sufficiently in place until subsequent cover is installed. Seal all cracks with caulking.

3.5 CLEANING

- A. Remove excess adhesive before adhesive sets.

3.6 PROTECTION

- A. Protect insulation from construction operations.
- B. Repair damage.

- - - E N D - - -

SECTION 07 32 13
CLAY ROOF TILES

PART 1 - GENERAL**1.1 SUMMARY**

A. Section Includes:

1. Clay roof tiles over underlayment nailed to roof sheathing.

1.2 RELATED WORK

- A. Section 06 10 00, ROUGH CARPENTRY:
- B. Section 07 60 00, FLASHING AND SHEET METAL: Counterflashing and Flashing of Roof Projections. Miscellaneous Wood Carpentry.
- C. Section 07 71 00, ROOF SPECIALTIES: Roof Hatches (Scuttles) and Roof Vents.
- D. Section 07 92 00, JOINT SEALANTS: Sealants.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
 - B3-13(2018).....Soft or Annealed Copper Wire.
 - C270-19a e1.....Mortar for Unit Masonry.
 - C920-18.....Elastomeric Joint Sealants.
 - C1167-11(2017).....Clay Roof Tiles.
 - D226/D226M-17.....Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing.
 - D1970/D1970M-20.....Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection.
 - D4586/D4586M-07(2018) e1. Asphalt Roof Cement, Asbestos-Free.
 - F1667-18a.....Driven Fasteners: Nails, Spikes, and Staples.

1.4 PREINSTALLATION MEETINGS

- A. Conduct pre-installation meeting at project site minimum 30 days before beginning Work of this section.
 - 1. Required Participants:
 - 1) Contracting Officer's Representative.
 - 2) Contractor.
 - 3) Installer.
 - 4) Other installers responsible for adjacent and intersecting work, including flashing and sheet metal.

2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
 - 1) Installation schedule.
 - 2) Installation sequence.
 - 3) Preparatory work.
 - 4) Protection before, during, and after installation.
 - 5) Installation.
 - 6) Terminations.
 - 7) Transitions and connections to other work.
 - 8) Other items affecting successful completion.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 1. Show size, configuration, and details of custom shapes.
- C. Manufacturer's Literature and Data:
 1. Description of each product.
 2. Installation instructions.
- D. Samples:
 1. Clay Roof Tiles: Full sized, each type and color.
 - 1) Submit quantity required to show full color range.
- E. Operation and Maintenance Data:
 1. Care instructions for clay roof tiles.

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Store tiles according to manufacturer's instructions. Store roll goods on end in upright position.
- B. Protect products from damage during handling and construction operations.
- C. Keep materials dry, covered completely and protected from weather.

1.8 FIELD CONDITIONS

- A. Environment: Mortaring Ambient Temperature: Minimum 4 degrees C (40 degrees F) and rising.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS**2.1 PRODUCTS - GENERAL**

- A. Basis of Design: Match Existing.
- B. Provide clay roof tile from one manufacturer and from one production run.

2.2 CLAY ROOF TILES

- A. Tiles for Repairs: Match existing tile color, size, and shape.

2.3 ROOFING NAILS

- A. Nails for Clay Roof Tiles: ASTM F1667, Type I, Style 23, copper slating nails.
 - 1. Length: Penetrate roof deck minimum 19 mm (3/4 inch).

2.4 ROOFING UNDERLAYMENT

- A. Organic Felt: ASTM D226/D226M, Type II, No. 30, non-perforated.
- B. Self-Adhering Modified Bituminous Underlayment: ASTM D1970/D1970M.

2.5 METAL FLASHING

- A. Provide metal roof flashings, including apron flashings, step flashings, valley flashings, drip edges, and vent pipe flashings specified in Section 07 60 00, FLASHING AND SHEET METAL.
 - 1. Metal: Copper.
 - 1) Valleys: 1 mm (20 oz., 0.039 inches) minimum.
 - 2) Other Locations: 0.55 mm (16 oz., 0.022 inches) minimum.

2.6 SNOW GUARDS

- A. Snow Guards: Individual copper snow guards for clay tile roofs, designed not to penetrate roof tiles.

2.7 ACCESSORIES

- A. Asphalt Roof Cement: ASTM D4586/D4586M, Type II.
- B. Mortar: ASTM C270, Type N or O. Match tile color.
- C. Joint Sealant: ASTM C920, nonstaining silicone, Type S, Grade NS, Class 100/50.
- D. Nailers: Preservative-treated wood complying with Section 06 10 00, ROUGH CARPENTRY.

E. Nose Clips: Manufacturer's standard copper nose clip.

F. Copper Wire: ASTM B3, 2.11 mm (0.083 inch) diameter, minimum.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for roofing installation.

1. Verify roof substrates are sound, within manufacturer's tolerances, and free from defects which would interfere with roofing installation.
2. Verify roof accessories, vent pipes and other projections through roof are in place and roof flashing is installed, or ready for installation, before installing clay roof tiles.
3. Ensure other construction operations requiring roof deck traffic are complete.

B. Protect existing construction and completed work from damage.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 METAL DRIP EDGE INSTALLATION

A. At eaves and rakes, install copper drip edges specified in Section 07 60 00, FLASHING AND SHEET METAL.

1. Eaves: Install metal drip edge before underlayment.
2. Rakes: Install metal drip edge after underlayment.

B. Secure metal drip edges with compatible nails spaced maximum 250 mm (10 inches) on center along inner edges.

3.4 FLASHING INSTALLATION

A. Install metal flashings at valleys and projections through deck such as chimneys and vent stacks. Install metal flashings to comply with requirements in Section 07 60 00, FLASHING AND SHEET METAL.

B. Install channel flashing at intersections with sideslope vertical surfaces.

1. Vertical Leg Height: 125 mm (5 inches) minimum.
2. Horizontal Leg Width: 75 mm (3 inches) minimum.
3. Lap each length of channel flashing 200 mm (8 inches) minimum.
4. Fasten vertical leg of channel flashing, 300 mm (12 inches) on center.

- C. Install step flashing at intersections with vertical surfaces.
 - 1. Length: Length of tile plus 50 mm (2 inches).
 - 2. Vertical Leg Height: 200 mm (8 inches) minimum.
 - 3. Horizontal Leg Width: 150 mm (6 inches) minimum.
- D. Install apron flashing to cover roof tiles at downslope sides of projections.
- E. Install crickets on upslope sides of projections.
- F. Overlap vertical leg of channel flashing and apron flashing with counterflashing 50 mm (2 inches) minimum.
- G. Valley Flashing: Shingle type, as indicated in Section 07 60 00, FLASHING AND SHEET METAL.
 - 1. Secure valley flashing according to manufacturer's instructions.
 - 2. Width: 300 mm (12 inches) minimum, both sides of valley.

3.5 UNDERLAYMENT INSTALLATION

- A. Install self-adhering sheet underlayment, working from low point to high point. Lap sides 90 mm (3-1/2 inches) minimum, and lap ends 150 mm (6 inches) minimum. Install at the following locations:
 - 1. Eaves and Rakes: From edge of eave and rake to 600 mm (24 inches) minimum beyond inside face of exterior wall.
 - 1) Lap underlayment over eave metal drip edge.
 - 2. Valleys, Hips and Roof Slope Transitions: Centered over change in slope and extended 450 mm (18 inches) minimum on both sides.
 - 3. Ridges: Centered on ridge and extended 900 mm (36 inches) minimum on both sides. Do not cover ridge vent opening.
 - 4. Sidewalls and Projections through Roof: Extended 450 mm (18 inches) from projection and extended up projection 150 mm (6 inches) minimum.
 - 5. Roll underlayment to ensure adhesion to roof deck and metal flashings.
 - a. Install two layers organic felt underlayment on roof deck not covered by self-adhering sheet underlayment, with 150 mm (6 inches) minimum end laps, 75 mm (3 inches) minimum head laps, and 300 mm (12 inches) minimum ridge laps.
 - 6. Lap in direction of flow.
 - 7. Stagger vertical joints.
 - 8. Nail felt 125 mm (5 inches) on centers along laps.

3.6 ROOF ACCESSORY INSTALLATION

- A. Install roof vents before installing clay roof tiles.
- B. Lap underlayment over base flanges of roof accessory flashings.
- C. Install channel flashing and counterflashing at base of roof accessories.

3.7 NAILER INSTALLATION

- A. Fasten wood nailers to roof deck at ridges, hips, and rakes.

3.8 CLAY ROOF TILE INSTALLATION

- A. Lay courses parallel with eaves.
- B. Do not stretch courses.
- C. Space courses to finish even and parallel upper level terminations.
- D. Use special shapes to start and finish hips, ridges and rakes.
- E. Fit tiles closely at ridges, around vent pipes, flashing and other projections through roof.
- F. Secure each tile with two nails, where possible.
 - 1. Use copper wire fastening where nails are not possible.
- G. Install nose clips according to manufacturer's instructions.
- H. Cover nails and wire fastenings in finished work.
- I. Lay tile with minimum 75 mm (3 inches) end lap unless otherwise required by manufacturer.
- J. Recess eave closure tile minimum 38 mm (1-1/2 inches) from lower end of tile.
- K. Fill laps at the following locations with roof cement:
 - 1. End bands.
 - 2. Ridge cover tiles.
 - 3. Gable rakes at end bands.
 - 4. Gable rakes at field tiles.
- L. Use maximum 6 mm (1/4 inch) thick roof cement to level tile.
 - 1. Use mortar to level and bed tile where off-level dimension exceeds 6 mm (1/4 inch).
- M. Use sealant to point around eave closures, ridge cover joints, and top fixtures.
 - 1. Apply sealant cap bead over exposed fasteners.
 - 2. Comply with Section 07 92 00, JOINT SEALANTS.
- N. Coordinate with Section 07 60 00, FLASHING AND SHEET METAL for installation of flashing with tile work. Keep flashing concealed except where exposed on vertical surfaces.
- O. Valleys: Open.

1. Do not nail within valley.

3.9 RIDGE VENT INSTALLATION

- A. Install ridge vents over nailers.
 1. Extent: Continuous along ridges extending to within <distance> of rakes.
- B. Install clay roof tiles over ridge vents according to ridge vent manufacturer's instructions.

3.10 SNOW GUARD INSTALLATION

- A. Install snow guards in layout recommended by manufacturer.
 1. Fasten snow guards with fasteners concealed by tiles. Do not penetrate tiles.

3.11 REPAIR

- A. Replace damaged and stained tiles.

3.12 CLEANING

- A. Upon completion remove cement splatter and excess roof cement from clay roof tile and adjacent surfaces.

3.13 PROTECTION

- A. Protect clay roof tiles from construction operations.
- B. Do not allow traffic on roof after completion.

- - - E N D - - -

**SECTION 07 60 00
FLASHING AND SHEET METAL**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Formed sheet metal work for wall and roof flashing, copings, roof edge metal, fasciae, drainage specialties, and formed expansion joint covers are specified in this section.

1.2 RELATED WORK

- A. Division 07 ROOFING AND WALL SYSTEM: Flashing components of factory finished roofing and wall systems.
- B. Section 07 92 00, JOINT SEALANTS: Joint Sealants.
- C. Section 09 91 00, PAINTING: Paint materials and application.
- D. Division 22, PLUMBING: Integral flashing components of manufactured roof specialties and accessories or equipment.
- E. Division 23 HVAC: Integral flashing components of manufactured roof specialties and accessories or equipment.

1.3 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. Aluminum Association (AA):
- AA-C22A41.....Aluminum Chemically etched medium matte, with
clear anodic coating, Class I Architectural,
0.7-mil thick
- AA-C22A42.....Chemically etched medium matte, with integrally
colored anodic coating, Class I Architectural,
0.7 mils thick
- AA-C22A44.....Chemically etched medium matte with
electrolytically deposited metallic compound,
integrally colored coating Class I
Architectural, 0.7-mil thick finish
- C. American National Standards Institute/Single-Ply Roofing
Institute/Factory Mutual (ANSI/SPRI/FM):
- 4435/ES-1-11.....Wind Design Standard for Edge Systems Used with
Low Slope Roofing Systems
- D. American Architectural Manufacturers Association (AAMA):

AAMA 620-02.....Voluntary Specification for High Performance
Organic Coatings on Coil Coated Architectural
Aluminum

AAMA 621-02.....Voluntary Specification for High Performance
Organic Coatings on Coil Coated Architectural
Hot Dipped Galvanized (HDG) and Zinc-Aluminum
Coated Steel Substrates

E. ASTM International (ASTM):

A240/A240M-20.....Standard Specification for Chromium and
Chromium-Nickel Stainless Steel Plate, Sheet
and Strip for Pressure Vessels and for General
Applications.

A653/A653M-20.....Steel Sheet Zinc-Coated (Galvanized) or Zinc
Alloy Coated (Galvanized) by the Hot- Dip
Process

B32-08 (2014).....Solder Metal

B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate

B370-12 (2019).....Copper Sheet and Strip for Building
Construction

D173/D173M-03 (2018).....Bitumen-Saturated Cotton Fabrics Used in
Roofing and Waterproofing

D412-16.....Vulcanized Rubber and Thermoplastic Elastomers-
Tension

D1187/D1187M-97 (2018)...Asphalt Base Emulsions for Use as Protective
Coatings for Metal

D1784-20.....Rigid Poly (Vinyl Chloride) (PVC) Compounds and
Chlorinated Poly (Vinyl Chloride) (CPVC)
Compounds

D3656/D3656M-13.....Insect Screening and Louver Cloth Woven from
Vinyl-Coated Glass Yarns

D4586/D4586M-07 (2018)...Asphalt Roof Cement, Asbestos Free

F. Sheet Metal and Air Conditioning Contractors National Association
(SMACNA): Architectural Sheet Metal Manual.

G. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual

H. Federal Specification (Fed. Spec):

A-A-1925A.....Shield, Expansion; (Nail Anchors)

UU-B-790A.....Building Paper, Vegetable Fiber

- I. International Code Commission (ICC): International Building Code,
Current Edition

1.4 PERFORMANCE REQUIREMENTS

- A. Wind Uplift Forces: Resist the following forces per FM Approvals 1-49:
1. Wind Zone 1: 1.00 to 1.44 kPa (21 to 30 pound force/square foot):
2.87-kPa (60 pound force/square foot) perimeter uplift force, 4.31-kPa (90 pound force/square foot) corner uplift force, and 1.44-kPa (30 pound force/square foot) outward force.
- B. Wind Design Standard: Fabricate and install copings, roof-edge flashings tested per ANSI/SPRI/FM ES-1 to resist design pressure indicated on Drawings.

1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: For all specified items, including:
1. Flashings
 2. Copings
 3. Gravel Stop-Fascia
 4. Gutter and Conductors
 5. Expansion joints
 6. Fascia-cant
- C. Manufacturer's Literature and Data: For all specified items, including:
1. Two-piece counterflashing
 2. Thru wall flashing
 3. Expansion joint cover, each type
 4. Nonreinforced, elastomeric sheeting
 5. Copper clad stainless steel
 6. Polyethylene coated copper
 7. Bituminous coated copper
 8. Copper covered paper
 9. Fascia-cant
- D. Certificates: Indicating compliance with specified finishing requirements, from applicator and contractor.

PART 2 - PRODUCTS

2.1 FLASHING AND SHEET METAL MATERIALS

- A. Stainless Steel: ASTM A240, Type 302B, dead soft temper.
- B. Copper ASTM B370, cold-rolled temper.

- C. Bituminous Coated Copper: Minimum copper ASTM B370, weight not less than 1 kg/m² (3 oz/sf). Bituminous coating shall weigh not less than 2 kg/m² (6 oz/sf); or copper sheets may be bonded between two layers of coarsely woven bitumen-saturated cotton fabric ASTM D173. Exposed fabric surface shall be crimped.
- D. Copper Covered Paper: Fabricated of electro-deposit pure copper sheets ASTM B 370, bonded with special asphalt compound to both sides of creped, reinforced building paper, UU-B-790, Type I, style 5, or to a three ply sheet of asphalt impregnated crepe paper. Grooves running along the width of sheet.
- E. Polyethylene Coated Copper: Copper sheet ASTM B370, weighing 1 Kg/m² (3 oz/sf) bonded between two layers of (two mil) thick polyethylene sheet.
- F. Aluminum Sheet: ASTM B209, alloy 3003-H14 except alloy used for color anodized aluminum shall be as required to produce specified color. Alloy required to produce specified color shall have the same structural properties as alloy 3003-H14.
- G. Galvanized Sheet: ASTM, A653.
- H. Nonreinforced, Elastomeric Sheeting: Elastomeric substances reduced to thermoplastic state and extruded into continuous homogenous sheet (0.056 inch) thick. Sheeting shall have not less than 7 MPa (1,000 psi) tensile strength and not more than seven percent tension-set at 50 percent elongation when tested in accordance with ASTM D412. Sheeting shall show no cracking or flaking when bent through 180 degrees over a 1 mm (1/32 inch) diameter mandrel and then bent at same point over same size mandrel in opposite direction through 360 degrees at temperature of -30°C (-20 °F).

2.2 FLASHING ACCESSORIES

- A. Solder: ASTM B32; flux type and alloy composition as required for use with metals to be soldered.
- B. Rosin Paper: Fed-Spec. UU-B-790, Type I, Grade D, Style 1b, Rosin-sized sheathing paper, weighing approximately 3 Kg/10 m² (6 pounds/100 square feet).
- C. Bituminous Paint: ASTM D1187, Type I.
- D. Fasteners:
 - 1. Use copper, copper alloy, bronze, brass, or stainless steel for copper and copper clad stainless steel, and stainless steel for stainless steel and aluminum alloy. Use galvanized steel or stainless steel for galvanized steel.

2. Nails:

- a. Minimum diameter for copper nails: 3 mm (0.109 inch).
 - b. Minimum diameter for aluminum nails 3 mm (0.105 inch).
 - c. Minimum diameter for stainless steel nails: 2 mm (0.095 inch) and annular threaded.
 - d. Length to provide not less than 22 mm (7/8 inch) penetration into anchorage.
3. Rivets: Not less than 3 mm (1/8 inch) diameter.
4. Expansion Shields: Fed Spec A-A-1925A.
- E. Sealant: As specified in Section 07 92 00, JOINT SEALANTS for exterior locations.
- F. Insect Screening: ASTM D3656, 18 by 18 regular mesh.
- G. Roof Cement: ASTM D4586.

2.3 SHEET METAL THICKNESS

- A. Except as otherwise shown or specified use thickness or weight of sheet metal as follows:
- B. Concealed Locations (Built into Construction):
1. Copper: 30g (10 oz) minimum 0.33 mm (0.013 inch thick).
 2. Stainless steel: 0.25 mm (0.010 inch) thick.
 3. Copper clad stainless steel: 0.25 mm (0.010 inch) thick.
 4. Galvanized steel: 0.5 mm (0.021 inch) thick.
- C. Exposed Locations:
1. Copper: 0.4 Kg (16 oz).
 2. Stainless steel: 0.4 mm (0.015 inch).
 3. Copper clad stainless steel: 0.4 mm (0.015 inch).
- D. Thickness of aluminum or galvanized steel is specified with each item.

2.4 FABRICATION, GENERAL

- A. Jointing:
1. In general, copper, stainless steel and copper clad stainless steel joints, except expansion and contraction joints, shall be locked and soldered.
 2. Jointing of copper over 0.5 Kg (20 oz) weight or stainless steel over 0.45 mm (0.018 inch) thick shall be done by lapping, riveting and soldering.
 3. Joints shall conform to following requirements:
 - a. Flat-lock joints shall finish not less than 19 mm (3/4 inch) wide.

- b. Lap joints subject to stress shall finish not less than 25 mm (one inch) wide and shall be soldered and riveted.
 - c. Unsoldered lap joints shall finish not less than 100 mm (4 inches) wide.
- 4. Flat and lap joints shall be made in direction of flow.
- 5. Edges of bituminous coated copper, copper covered paper, nonreinforced elastomeric sheeting and polyethylene coated copper shall be jointed by lapping not less than 100 mm (4 inches) in the direction of flow and cementing with asphalt roof cement or sealant as required by the manufacturer's printed instructions.
- 6. Soldering:
 - a. Pre tin both mating surfaces with solder for a width not less than 38 mm (1 1/2 inches) of uncoated copper, stainless steel, and copper clad stainless steel.
 - b. Wire brush to produce a bright surface before soldering lead coated copper.
 - c. Treat in accordance with metal producers recommendations other sheet metal required to be soldered.
 - d. Completely remove acid and flux after soldering is completed.
- B. Expansion and Contraction Joints:
 - 1. Fabricate in accordance with the Architectural Sheet Metal Manual recommendations for expansion and contraction of sheet metal work in continuous runs.
 - 2. Space joints as shown or as specified.
 - 3. Space expansion and contraction joints for copper, stainless steel, and copper clad stainless steel at intervals not exceeding 7200 mm (24 feet).
 - 4. Space expansion and contraction joints for aluminum at intervals not exceeding 5400 mm (18 feet), except do not exceed 3000 mm (10 feet) for gravel stops and fascia-cant systems.
 - 5. Fabricate slip-type or loose locked joints and fill with sealant unless otherwise specified.
 - 6. Fabricate joint covers of same thickness material as sheet metal served.
- C. Cleats:
 - 1. Fabricate cleats to secure flashings and sheet metal work over 300 mm (12 inches) wide and where specified.

2. Provide cleats for maximum spacing of 300 mm (12 inch) centers unless specified otherwise.
3. Form cleats of same metal and weights or thickness as the sheet metal being installed unless specified otherwise.
4. Fabricate cleats from 50 mm (2 inch) wide strip. Form end with not less than 19 mm (3/4 inch) wide loose lock to item for anchorage. Form other end of length to receive nails free of item to be anchored and end edge to be folded over and cover nail heads.

D. Edge Strips or Continuous Cleats:

1. Fabricate continuous edge strips where shown and specified to secure loose edges of the sheet metal work.
2. Except as otherwise specified, fabricate edge strips or minimum 0.6 Kg (24 ounce) copper, 0.6 mm (0.024 inch) thick stainless steel or 1.25 mm (0.050 inch) thick aluminum.
3. Use material compatible with sheet metal to be secured by the edge strip.
4. Fabricate in 3000 mm (10 feet) maximum lengths with not less than 19 mm (3/4 inch) loose lock into metal secured by edge strip.
5. Fabricate Strips for fascia anchorage to extend below the supporting wood construction to form a drip and to allow the flashing to be hooked over the lower edge at least 19 mm (3/4-inch).
6. Fabricate anchor edge maximum width of 75 mm (3 inches) or of sufficient width to provide adequate bearing area to insure a rigid installation using 1 Kg (32 oz) copper, 0.8 mm (0.031 inch) thick stainless steel, or 1.6 mm (0.0625 inch) thick aluminum.

E. Drips:

1. Form drips at lower edge of sheet metal counter-flashings (cap flashings), fascias, gravel stops, wall copings, by folding edge back 13 mm (1/2 inch) and bending out 45 degrees from vertical to carry water away from the wall.
2. Form drip to provide hook to engage cleat or edge strip for fastening for not less than 19 mm (3/4 inch) loose lock where shown.

F. Edges:

1. Edges of flashings concealed in masonry joints opposite drain side shall be turned up 6 mm (1/4 inch) to form dam, unless otherwise specified or shown otherwise.
2. Finish exposed edges of flashing with a 6 mm (1/4 inch) hem formed by folding edge of flashing back on itself when not hooked to edge

strip or cleat. Use 6 mm (1/4 inch) minimum penetration beyond wall face with drip for through-wall flashing exposed edge.

3. All metal roof edges shall meet requirements of IBC, current edition.

G. Metal Options:

1. Where options are permitted for different metals use only one metal throughout.
2. Stainless steel may be used in concealed locations for fasteners of other metals exposed to view.
3. Where copper gravel stops, copings and flashings will carry water onto cast stone, stone, or architectural concrete, or stainless steel.

2.5 FINISHES

- A. Use same finish on adjacent metal or components and exposed metal surfaces unless specified or shown otherwise.
- B. In accordance with NAAMM Metal Finishes Manual AMP 500, unless otherwise specified.
- C. Finish exposed metal surfaces as follows, unless specified otherwise:
 1. Copper: Mill finish.
 2. Stainless Steel: Finish No. 2B or 2D.
 3. Aluminum:
 - a. Clear Finish: AA-C22A41 medium matte, clear anodic coating, Class 1 Architectural, 18 mm (0.7 mils) thick.
 - b. Colored Finish: AA-C22A42 (anodized) or AA-C22A44 (electrolytically deposited metallic compound) medium matte, integrally colored coating, Class 1 Architectural, 18 mm (0.7 mils) thick. Dyes will not be accepted.
 - c. Fluorocarbon Finish: AAMA 620, high performance organic coating.
 - d. Mill finish.
 4. Steel and Galvanized Steel:
 - a. Finish painted under Section 09 91 00, PAINTING unless specified as prefinished item.
 - b. Manufacturer's finish:
 - 1) Baked on prime coat over a phosphate coating.
 - 2) Baked-on prime and finish coat over a phosphate coating.
 - 3) Fluorocarbon Finish: AAMA 621, high performance organic coating.

2.6 THROUGH-WALL FLASHINGS

- A. Form through-wall flashing to provide a mechanical bond or key against lateral movement in all directions. Install a sheet having 2 mm (1/16 inch) deep transverse channels spaced four to every 25 mm (one inch), or ribbed diagonal pattern, or having other deformation unless specified otherwise.
 - 1. Fabricate in not less than 2400 mm (8 feet) lengths; 3000 mm (10 feet) maximum lengths.
 - 2. Fabricate so keying nests at overlaps.
- B. For Masonry Work When Concealed Except for Drip:
 - 1. Either copper, stainless steel, or copper clad stainless steel.
 - 2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
 - 3. Form exposed portions of flashing with drip, approximately 6 mm (1/4 inch) projection beyond wall face.
- C. For Masonry Work When Exposed Edge Forms a Receiver for Counter Flashing:
 - 1. Use same metal and thickness as counter flashing.
 - 2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
 - 3. Form exposed portion as snap lock receiver for counter flashing upper edge.
- D. For Flashing at Architectural Precast Concrete Panels or Stone Panels.
 - 1. Use plan flat sheet of stainless steel.
 - 2. Form exposed portions with drip as specified or receiver.
- E. Windowsill Flashing and Lintel Flashing:
 - 1. Use either copper, stainless steel, copper clad stainless-steel plane flat sheet, or nonreinforced elastomeric sheeting, bituminous coated copper, copper covered paper, or polyethylene coated copper.
 - 2. Fabricate flashing at ends with folded corners to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening.
 - 3. Turn up back edge as shown.
 - 4. Form exposed portion with drip as specified or receiver.
- F. Door Sill Flashing:
 - 1. Where concealed, use either 0.5 Kg (20 ounce) copper, 0.5 mm (0.018 inch) thick stainless steel, or 0.5 mm (0.018 inch) thick copper clad stainless steel.
 - 2. Where shown on drawings as combined counter flashing under threshold, sill plate, door sill, or where subject to foot traffic,

use either 0.6 Kg (24 ounce) copper, 0.6 mm (0.024 inch) stainless steel, or 0.6 mm (0.024 inch) thick stainless steel.

3. Fabricate flashing at ends to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening with folded corners.

2.7 BASE FLASHING

- A. Use metal base flashing at vertical surfaces intersecting built-up roofing without cant strips or where shown.
 1. Use either copper, or stainless steel, thickness specified unless specified otherwise.
 2. When flashing is over 250 mm (10 inches) in vertical height or horizontal width use either 0.5 Kg (20 oz) copper or 0.5 mm (0.018 inch) stainless steel.
 3. Use stainless steel at aluminum roof curbs where flashing contacts the aluminum.
 4. Use either copper, or stainless steel at pipe flashings.
- B. Fabricate metal base flashing up vertical surfaces not less than 200 mm (8 inch) nor more than 400 mm (16 inch).
- C. Fabricate roof flange not less than 100 mm (4 inches) wide unless shown otherwise. When base flashing length exceeds 2400 mm (8 feet) form flange edge with 13 mm (1/2 inch) hem to receive cleats.
- D. Form base flashing bent from strip except pipe flashing. Fabricate ends for riveted soldered lap seam joints. Fabricate expansion joint ends as specified.
- E. Pipe Flashing: (Other than engine exhaust or flue stack)
 1. Fabricate roof flange not less than 100 mm (4 inches) beyond sleeve on all sides.
 2. Extend sleeve up and around pipe and flange out at bottom not less than 13 mm (1/2 inch) and solder to flange and sleeve seam to make watertight.
 3. At low pipes 200 mm (8 inch) to 450 mm (18 inch) above roof:
 - a. Form top of sleeve to turn down into the pipe at least 25 mm (one inch).
 - b. Allow for loose fit around and into the pipe.
 4. At high pipes and pipes with goosenecks or other obstructions which would prevent turning the flashing down into the pipe:
 - a. Extend sleeve up not less than 300 mm (12 inch) above roofing.
 - b. Allow for loose fit around pipe.

2.8 COUNTERFLASHING (CAP FLASHING OR HOODS)

- A. Either copper or stainless steel, unless specified otherwise.
- B. Fabricate to lap base flashing a minimum of 100 mm (4 inches) with drip:
 - 1. Form lock seams for outside corners. Allow for lap joints at ends and inside corners.
 - 2. In general, form flashing in lengths not less than 2400 mm (8 feet) and not more than 3000 mm (10 feet).
 - 3. Two-piece, lock in type flashing may be used in-lieu-of one piece counter-flashing.
 - 4. Manufactured assemblies may be used.
 - 5. Where counterflashing is installed at new work use an integral flange at the top designed to be extended into the masonry joint or reglet in concrete.
 - 6. Where counterflashing is installed at existing work use surface applied type, formed to provide a space for the application of sealant at the top edge.
- C. One-piece Counterflashing:
 - 1. Back edge turned up and fabricate to lock into reglet in concrete.
 - 2. Upper edge formed to extend full depth of masonry unit in mortar joint with back edge turned up 6 mm (1/4 inch).
- D. Two-Piece Counterflashing:
 - 1. Receiver to extend into masonry wall depth of masonry unit with back edge turned up 6 mm (1/4 inch) and exposed edge designed to receive and lock counterflashing upper edge when inserted.
 - 2. Counterflashing upper edge designed to snap lock into receiver.
- E. Surface Mounted Counterflashing; one or two piece:
 - 1. Use at existing or new surfaces where flashing cannot be inserted in vertical surface.
 - 2. One piece fabricate upper edge folded double for 65 mm (2 1/2 inches) with top 19 mm (3/4 inch) bent out to form "V" joint sealant pocket with vertical surface. Perforate flat double area against vertical surface with horizontally slotted fastener holes at 400 mm (16 inch) centers between end holes. Option: One piece surface mounted counter-flashing (cap flashing) may be used. Fabricate as detailed on Plate 51 of SMACNA Architectural Sheet Metal Manual.
 - 3. Two pieces: Fabricate upper edge to lock into surface mounted receiver. Fabricate receiver joint sealant pocket on upper edge and

lower edge to receive counterflashing, with slotted fastener holes at 400 mm (16 inch) centers between upper and lower edge.

F. Pipe Counterflashing:

1. Form flashing for water-tight umbrella with upper portion against pipe to receive a draw band and upper edge to form a "V" joint sealant receiver approximately 19 mm (3/4 inch) deep.
2. Fabricate 100 mm (4 inch) overlap at end.
3. Fabricate draw band of same metal as counter flashing. Use 0.6 Kg (24 oz) copper or 0.33 mm (0.013 inch) thick stainless steel or copper coated stainless steel.
4. Use stainless steel bolt on draw band tightening assembly.
5. Vent pipe counter flashing may be fabricated to omit draw band and turn down 25 mm (one inch) inside vent pipe.

G. Where vented edge decks intersect vertical surfaces, form in one piece, shape to slope down to a point level with and in front of edge-set notched plank; then, down vertically, overlapping base flashing.

2.9 GRAVEL STOPS

A. General:

1. Fabricate in lengths not less than 2400 mm (8 feet) long and maximum of 3000 mm (10 feet).
2. Fabricate internal and external corners as one-piece with legs not less than 600 mm (2 feet) or more than 1200 mm (4 feet) long.
3. Fabricate roof flange not less than 100 mm (4 inches) wide.
4. Fabricate top edge to extend above roof not less than 25 mm (one inch) for embedded gravel aggregate and not less than 100 mm (4 inches) for loose laid ballast.
5. Fabricate lower edge outward at an angle of 45 degrees to form drip and as fascia or as counter flashing as shown:
 - a. Fabricate of one-piece material of suitable width for fascia height of 250 mm (10 inch) maximum or counterflashing lap of not less than 100 mm (4 inch) over base flashing.
 - b. Fabricate bottom edge of formed fascia to receive edge strip.
 - c. When fascia bottom edge forms counter flashing over roofing lap roofing not less than 150 mm (6 inches).

B. Formed Flat Sheet Metal Gravel Stops and Fascia:

1. Fabricate as shown of .05 mm (0.018 inch) thick stainless steel, 0.5 Kg (20 ounce) copper, or 1.25 mm (0.050 inch) thick aluminum.

2. When fascia exceeds 150 mm (6 inches) in depth, form one or more horizontal stops not less than 13 mm (1/2 inch) high in the fascia.
 3. Fabricate as two-piece fascia when fascia depth exceeds 250 mm (10 inches).
 4. At joint between ends of sheets, provide a concealed clip soldered or welded near one end of each sheet to hold the adjoining sheet in lapped position. The clip shall be approximately 100 mm (4 inches) wide and shall be the full depth of the fascia less 25 mm (one inch) at top and bottom. Clip shall be of the same thickness as the fascia.
 5. Provide edge strip as specified with lower hooked edge bent outward at an angle of 45 degrees.
- C. Formed (Corrugated Sheet) Sheet Metal Gravel Stops and Fascia:
1. Fabricate as shown of 0.4 mm (0.015 inch) thick stainless steel, 0.5 Kg (16 ounce) copper or 0.8 mm (0.032 inch) thick aluminum.
 2. Sheets shall have 2 mm (1/16 inch) deep corrugations either transversely or diagonally rolled into the sheet. Crimped sheets are not acceptable.
 3. Factory fabricate prepackaged system, complete with fastenings.
 4. Provide concealed flashing splice plate at joints not less than 150 mm (6 inches) long and continuous edge strips at lower edge of fascia made from same metal.
 5. Fabricate as two-piece fascia when fascia depth exceeds 175 mm (7 inches).

2.10 HANGING GUTTERS

- A. Fabricate gutters of not less than the following:
1. 0.5Kg (20 oz) copper.
 2. 0.6mm (0.025inch) thick stainless steel.
 3. 0.8mm (0.032inch) thick aluminum.
- B. Fabricate hanging gutters in sections not less than 2400 mm (8 feet) long, except at ends of runs where shorter lengths are required.
- C. Building side of gutter shall be same height as exterior side.
- D. Gutter Bead: Stiffen outer edge of gutter by folding edge over approximately 19 mm (3/4 inch) toward roof and down approximately 19 mm (3/4 inch) unless shown otherwise.
- E. Gutter Spacers:
1. Fabricate of same material and thickness as gutter.

2. Fabricate 25 mm (one inch) wide strap and fasten to gutters not over 900 mm (36 inches) on center.
3. Turn back edge up 25 mm (one inch) and lap front edge over gutter bead.
4. Rivet and solder to gutter except rivet and seal to aluminum.

F. Outlet Tubes:

1. Form outlet tubes to connect gutters to conductors of same metal and thickness as gutters extend into the conductor 75 mm (3 inch). Flange upper end of outlet tube 13 mm (1/2 inch).
2. Lock and solder longitudinal seam except use sealant in lieu of solder with aluminum.
3. Solder tube to gutter. Seal aluminum tube to gutter and rivet to gutter.
4. Fabricate basket strainers of same material as gutters.

G. Gutter Brackets:

1. Fabricate of same metal as gutter. Use the following:
 - a. 6 by 25 mm (1/4 by 1 inch) copper.
 - b. 3 by 40 mm (1/8 by 1 1/2 inch) stainless steel.
 - c. 6 by 25 mm (1/4 by 1 inch) aluminum.
2. Fabricate to gutter profile.
3. Drill two 5 mm (3/16 inch) diameter holes in anchor leg for countersunk flat head screws.

2.11 CONDUCTORS (DOWNSPOUTS)

- A. Fabricate conductors of same metal and thickness as gutters in sections approximately 3000 mm (10 feet) long [with 19 mm (3/4 inch) wide flat locked seams].
 1. Fabricate open face channel shape with hemmed longitudinal edges.
- B. Fabricate elbows by mitering, riveting, and soldering except seal aluminum in lieu of solder. Lap upper section to the inside of the lower piece.
- C. Fabricate conductor brackets or hangers of same material as conductor, 2 mm (1/16 inch) thick by 25 mm (one inch) minimum width. Form to support conductors 25 mm (one inch) from wall surface in accordance with Architectural Sheet Metal Manual for rectangular and round shapes.
- D. Conductor Heads:
 1. Fabricate of same material as conductor.
 2. Fabricate conductor heads to not less than 250 mm (10 inch) wide by 200 mm (8 inch) deep by 200 mm (8 inches) from front to back.

3. Form front and side edges channel shape not less than 13 mm (1/2 inch) wide flanges with edge hemmed.
4. Slope bottom to sleeve to conductor or downspout at not less than 60 degree angle.
5. Extend wall edge not less than 25 mm (one inch) above front edge.
6. Solder joints for watertight assembly.
7. Fabricate outlet tube or sleeve at bottom not less than 50 mm (2 inches) long to insert into conductor.

2.12 SPLASHPANS

- A. Fabricate splashpans from the following:
 1. 0.4 Kg (16 oz) copper.
 2. 0.4 mm (0.015 inch) thick stainless steel.
 3. 1.25 mm (0.050 inch) thick aluminum.
- B. Fabricate in accordance with Architectural Sheet Metal Manual Plate 35 with not less than two ribs as shown in alternate section.

2.13 REGLETS

- A. Fabricate reglets of one of the following materials:
 1. 0.4 Kg (16 ounce) copper.
 2. Stainless steel, not less than 0.3 mm (0.012 inch) thick.
 3. Plastic coated extruded aluminum, not less than 1.4 mm (0.055 inch) thick prefilled with butyl rubber sealer and complete with plastic wedges inserted at 1000 mm (40 inches) on centers.
 4. Plastic, ASTM D1784, Type II, not less than 2 mm (0.075 inch) thick.
- B. Fill open-type reglets with fiberboard or other suitable separator, to prevent crushing of the slot during installation.
- C. Bend edges of reglets for setting into concrete to an angle of not less than 45 degrees and make wide enough to provide firm anchorage in the concrete.
- D. Fabricate reglets for building into horizontal masonry mortar joints not less than 19 mm (3/4 inch) deep, nor more than 25 mm (one inch) deep.
- E. Fabricate mitered corners, fittings, and special shapes as may be required by details.
- F. Reglets for concrete may be formed to receive flashing and have a 10 mm (3/8 inch), 45 degree snap lock.

2.14 INSULATED EXPANSION JOINT COVERS

- A. Either type optional, use only one type throughout.
- B. Types:

1. Construct of two preformed, stainless steel strips, not less than 0.4 mm (0.015 inch) thick, mechanically and adhesively bonded to both sides of a 2 mm (1/16 inch) thick neoprene or butyl sheet, or to a 0.4 mm (32 mil) thick reinforced chlorinated polyethylene sheet. Adhesively attach a 10 mm (3/8 inch) thick sheet of closed cell, neoprene foam insulation, to the underside of the neoprene, butyl, or chlorinated polyethylene sheet.
 2. Constructed of a 2 mm (1/16 inch) thick vinyl sheet, flanged at both sides with stainless steel strips not less than 0.4 mm (0.015 inch) thick. Vinyl sheet locked and encased by the stainless steel strip and prepunched for nailing. A 10 mm (3/8 inch) thick closed cell polyvinyl chloride foam insulating strip shall be heat laminated to the underside of the vinyl sheet between the stainless steel strips.
- C. Expansion joint covers shall have factory fabricated mitered corners, crossing tees, and other necessary accessories. Furnish in the longest available lengths.
- D. Metal flange of sufficient width to extend over the top of the curb and down curb sides 50 mm (2 inches) with hemmed edge for lock to edge strip.

2.15 FLUE OR STACK FLASHING

- A. Flashing at penetrations through roofing shall consist of a metal collar, sheet metal flashing sleeve and hood.
- B. Fabricate collar with roof flange of 1.2 mm (0.047 inch) minimum thick black iron or galvanized steel sheet.
1. Fabricate inside diameter of collar 100 mm (4 inches) larger than the outside diameter of the item penetration the roofing.
 2. Extend collar height from structural roof deck to not less than 350 mm (14 inches) above roof surface.
 3. Fabricate collar roof flange not less than 100 mm (4 inches) wide.
 4. Option: Collar may be of steel tubing 3 mm (0.125 inch) minimum wall thickness, with not less than four, 50 mm x 100 mm x 3 mm (2 inch by 4 inch by 0.125 inch) thick tabs bottom edge evenly spaced around tube in lieu of continuous roof flange. Full butt weld joints of collar.
- C. Fabricate sleeve base flashing with roof flange of either copper, stainless steel, or copper clad stainless steel.
1. Fabricate sleeve roof flange not less than 100 mm (4 inches) wide.
 2. Extend sleeve around collar up to top of collar.

3. Flange bottom of sleeve out not less than 13 mm (1/24 inch) and soldered to 100 mm (4 inch) wide flange to make watertight.
 4. Fabricate interior diameter 50 mm (2 inch) greater than collar.
- D. Fabricate hood counter flashing from same material and thickness as sleeve.
1. Fabricate the same as pipe counter flashing except allow not less than 100 mm (4 inch) lap below top of sleeve and to form vent space minimum of 100 mm (4 inch) wide.
 2. Hem bottom edge of hood 13 mm (1/2 inch).
 3. Provide a 50 mm (2 inch) deep drawband.
- E. Fabricate insect screen closure between sleeve and hood. Secure screen to sleeve with sheet metal screws.

2.16 SCUPPERS

- A. Fabricate scuppers with minimum of 100 mm (4 inch) wide flange.
- B. Provide flange at top on through wall scupper to extend to top of base flashing.
- C. Fabricate exterior wall side to project not less than 13 mm (1/2 inch) beyond face of wall with drip at bottom outlet edge.
- D. Fabricate not less than 100 mm (4 inch) wide flange to lap behind gravel stop fascia.
- E. Fabricate exterior wall flange for through wall scupper not less than 25 mm (one inch) wide on top and sides with edges hemmed.
- F. Fabricate gravel stop bar of 25 mm x 25 mm (one by one inch) angle strip soldered to bottom of scupper.
- G. Fabricate scupper not less than 200 mm (8 inch) wide and not less than 125 mm (5 inch) high for through wall scupper.
- H. Solder joints watertight.

2.17 GOOSENECK ROOF VENTILATORS

- A. Form of 1.3 mm (0.0508 inch) thick sheet aluminum, reinforce as necessary for rigidity, stiffness, and connection to curb, and to be watertight.
1. Form lower-edge to sleeve to curb.
 2. Curb:
 - a. Form for 100 mm (4 inch) high sleeve to ventilator.
 - b. Form for concealed anchorage to structural curb and to bear on structural curb.
 - c. Form bottom edge of curb as counterflashing to lap base flashing.

B. Provide open end with 1.6 mm (16 gage), stainless steel wire guard of 13 mm (1/2 inch) square mesh.

1. Construct suitable aluminum angle frame to retain wire guard.
2. Rivet angle frame to end of gooseneck.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:

1. Install flashing and sheet metal items as shown in Sheet Metal and Air Conditioning Contractors National Association, Inc., publication, ARCHITECTURAL SHEET METAL MANUAL, except as otherwise shown or specified.
2. Apply Sealant as specified in Section 07 92 00, JOINT SEALANTS.
3. Apply sheet metal and other flashing material to surfaces which are smooth, sound, clean, dry and free from defects that might affect the application.
4. Remove projections which would puncture the materials and fill holes and depressions with material compatible with the substrate. Cover holes or cracks in wood wider than 6 mm (1/4 inch) with sheet metal compatible with the roofing and flashing material used.
5. Coordinate with masonry work for the application of a skim coat of mortar to surfaces of unit masonry to receive flashing material before the application of flashing.
6. Apply a layer of 7 Kg (15 pound) saturated felt followed by a layer of rosin paper to wood surfaces to be covered with copper. Lap each ply 50 mm (2 inch) with the slope and nail with large headed copper nails.
7. Confine direct nailing of sheet metal to strips 300 mm (12 inch) or less wide. Nail flashing along one edge only. Space nail not over 100 mm (4 inches) on center unless specified otherwise.
8. Install bolts, rivets, and screws where indicated, specified, or required in accordance with the SMACNA Sheet Metal Manual. Space rivets at 75 mm (3 inch) on centers in two rows in a staggered position. Use neoprene washers under fastener heads when fastener head is exposed.
9. Coordinate with roofing work for the installation of metal base flashings and other metal items having roof flanges for anchorage and watertight installation.

10. Nail continuous cleats on 75 mm (3 inch) on centers in two rows in a staggered position.
11. Nail individual cleats with two nails and bend end tab over nail heads. Lock other end of cleat into hemmed edge.
12. Install flashings in conjunction with other trades so that flashings are inserted in other materials and joined together to provide a watertight installation.
13. Where required to prevent galvanic action between dissimilar metal isolate the contact areas of dissimilar metal with sheet lead, waterproof building paper, or a coat of bituminous paint.
14. Isolate aluminum in contact with dissimilar metals others than stainless steel, white bronze or other metal compatible with aluminum by:
 - a. Paint dissimilar metal with a prime coat of zinc-chromate or other suitable primer, followed by two coats of aluminum paint.
 - b. Paint dissimilar metal with a coat of bituminous paint.
 - c. Apply an approved caulking material between aluminum and dissimilar metal.
15. Paint aluminum in contact with or built into mortar, concrete, plaster, or other masonry materials with a coat of bituminous paint.
16. Paint aluminum in contact with absorptive materials that may become repeatedly wet with two coats of bituminous paint or two coats of aluminum paint.
17. Bitumen Stops:
 - a. Install bitumen stops for built-up roof opening penetrations through deck and at formed sheet metal gravel stops.
 - b. Nail leg of bitumen stop at 300 mm (12 inch) intervals to nailing strip at roof edge before roofing material is installed.

3.2 THROUGH-WALL FLASHING

A. General:

1. Install continuous through-wall flashing between top of concrete foundation walls and bottom of masonry building walls; at top of concrete floors; under masonry, concrete, or stone copings and elsewhere as shown.
2. Where exposed portions are used as a counterflashings, lap base flashings at least 100 mm (4 inches) and use thickness of metal as specified for exposed locations.

3. Exposed edge of flashing may be formed as a receiver for two piece counter flashing as specified.
 4. Terminate exterior edge beyond face of wall approximately 6 mm (1/4 inch) with drip edge where not part of counter flashing.
 5. Turn back edge up 6 mm (1/4 inch) unless noted otherwise where flashing terminates in mortar joint or hollow masonry unit joint.
 6. Terminate interior raised edge in masonry backup unit approximately 38 mm (1 1/2 inch) into unit unless shown otherwise.
 7. Under copings terminate both edges beyond face of wall approximately 6 mm (1/4 inch) with drip edge.
 8. Lap end joints at least two corrugations, but not less than 100 mm (4 inches). Seal laps with sealant.
 9. Where dowels, reinforcing bars and fastening devices penetrate flashing, seal penetration with sealing compound. Sealing compound is specified in Section 07 92 00, JOINT SEALANTS.
 10. Coordinate with other work to set in a bed of mortar above and below flashing so that total thickness of the two layers of mortar and flashing are same as regular mortar joint.
 11. Where ends of flashing terminate turn ends up 25 mm (1 inch) and fold corners to form dam extending to wall face in vertical mortar or veneer joint.
 12. Turn flashing up not less than 200 mm (8 inch) between masonry or behind exterior veneer.
 13. When flashing terminates in reglet extend flashing full depth into reglet and secure with lead or plastic wedges spaced 150 mm (6 inch) on center.
 14. Continue flashing around columns:
 - a. Where flashing cannot be inserted in column reglet hold flashing vertical leg against column.
 - b. Counterflash top edge with 75 mm (3 inch) wide strip of saturated cotton unless shown otherwise. Secure cotton strip with roof cement to column. Lap base flashing with cotton strip 38 mm (1 1/2 inch).
- B. Flashing at Top of Concrete Foundation Walls Where concrete is exposed. Turn up not less than 200 mm (8 inch) high and into masonry backup mortar joint or reglet in concrete backup as specified.
- C. Flashing at Top of Concrete Floors (except where shelf angles occur): Place flashing in horizontal masonry joint not less than 200 mm (8

inch) below floor slab and extend into backup masonry joint at floor slab 38 mm (1 1/2 inch).

- D. Flashing at Cavity Wall Construction: Where flashing occurs in cavity walls turn vertical portion up against backup under waterproofing, if any, into mortar joint. Turn up over insulation, if any, and horizontally through insulation into mortar joint.

E. Flashing at Veneer Walls:

1. Install near line of finish floors over shelf angles or where shown.
2. Turn up against sheathing.
3. At stud framing, hem top edge 19 mm (3/4 inch) and secure to each stud with stainless steel fasteners through sheathing.
4. At concrete backing, extend flashing into reglet as specified.
5. Coordinate with installation of waterproofing or asphalt felt for lap over top of flashing.

F. Lintel Flashing when not part of shelf angle flashing:

1. Install flashing full length of lintel to nearest vertical joint in masonry over veneer.
2. Turn ends up 25 mm (one inch) and fold corners to form dam and extend end to face of wall.
3. Turn back edge up to top of lintel; terminate back edge as specified for back-up wall.

G. Windowsill Flashing:

1. Install flashing to extend not less than 100 mm (4 inch) beyond ends of sill into vertical joint of masonry or veneer.
2. Turn back edge up to terminate under window frame.
3. Turn ends up 25 mm (one inch) and fold corners to form dam and extend to face of wall.

H. Door Sill Flashing:

1. Install flashing under bottom of plate sills of doors over curbs opening onto roofs. Extend flashing out to form counter flashing or receiver for counter flashing over base flashing. Set in sealant.
2. Extend sill flashing 200 mm (8 inch) beyond jamb opening. Turn ends up one inch in vertical masonry joint, extend end to face of wall. Join to counter flashing for watertight joint.
3. Where doors thresholds cover over waterproof membranes install sill flashing over waterproof membrane under thresholds. Extend beyond opening to cover exposed portion of waterproof membrane and not less

than 150 mm (6 inch) beyond door jamb opening at ends. Turn up approximately 6 mm (1/4 inch) under threshold.

I. Flashing at Masonry, Stone, or Precast Concrete Copings:

1. Install flashing with drips on both wall faces unless shown otherwise.
2. Form penetration openings to fit tight against dowel or other item with edge turned up. Seal penetrations with sealant.

3.3 BASE FLASHING

A. Install where roof membrane type base flashing is not used and where shown.

1. Install flashing at intersections of roofs with vertical surfaces or at penetrations through roofs, to provide watertight construction.
2. Install metal flashings and accessories having flanges extending out on top of the built-up roofing before final bituminous coat and roof aggregate is applied.
3. Set flanges in heavy trowel coat of roof cement and nail through flanges into wood nailers over bituminous roofing.
4. Secure flange by nailing through roofing into wood blocking with nails spaced 75 mm (3 inch) on centers or, when flange over 100 mm (4 inch) wide terminate in a 13 mm (1/2 inch) folded edge anchored with cleats spaced 200 mm (8 inch) on center. Secure one end of cleat over nail heads. Lock other end into the seam.

B. For long runs of base flashings install in lengths of not less than 2400 mm (8 feet) nor more than 3000 mm (ten feet). Install a 75 mm (3 inch) wide slip type, loose lock expansion joint filled with sealant in joints of base flashing sections over 2400 mm (8 feet) in length. Lock and solder corner joints at corners.

C. Extend base flashing up under counter flashing of roof specialties and accessories or equipment not less than 75 mm (3 inch).

3.4 COUNTERFLASHING (CAP FLASHING OR HOODS)

A. General:

1. Install counterflashing over and in conjunction with installation of base flashings, except as otherwise specified or shown.
2. Install counterflashing to lap base flashings not less than 100 mm (4 inch).
3. Install upper edge or top of counterflashing not less than 225 mm (9 inch) above top of the roofing.

4. Lap joints not less than 100 mm (4 inch). Stagger joints with relation to metal base flashing joints.
5. Use surface applied counterflashing on existing surfaces and new work where not possible to integrate into item.
6. When fastening to concrete or masonry, use screws driven in expansion shields set in concrete or masonry. Use screws to wood and sheet metal. Set fasteners in mortar joints of masonry work.

B. One Piece Counterflashing:

1. Where flashing is installed at new masonry, coordinate to ensure proper height, embed in mortar, and end lap.
2. Where flashing is installed in reglet in concrete insert upper edge into reglet. Hold flashing in place with lead wedges spaced not more than 200 mm (8 inch) apart. Fill joint with sealant.
3. Where flashing is surface mounted on flat surfaces.
 - a. When top edge is double folded anchor flat portion below sealant "V" joint with fasteners spaced not over 400 mm (16 inch) on center:
 - 1) Locate fasteners in masonry mortar joints.
 - 2) Use screws to sheet metal or wood.
 - b. Fill joint at top with sealant.
4. Where flashing or hood is mounted on pipe.
 - a. Secure with draw band tight against pipe.
 - b. Set hood and secure to pipe with a one by 25 mm x 3 mm (1 x 1/8 inch) bolt on stainless steel draw band type clamp, or a stainless worm gear type clamp.
 - c. Completely fill joint at top with sealant.

C. Two-Piece Counterflashing:

1. Where receiver is installed at new masonry coordinate to ensure proper height, embed in mortar, and lap.
2. Surface applied type receiver:
 - a. Secure to face construction in accordance, with manufacturers' instructions.
 - b. Completely fill space at the top edge of receiver with sealant.
3. Insert counter flashing in receiver in accordance with fabricator or manufacturer's instructions and to fit tight against base flashing.

- D. Where vented edge occur install so lower edge of counterflashing is against base flashing.

- E. When counter flashing is a component of other flashing install as shown.

3.5 REGLETS

- A. Install reglets in a manner to provide a watertight installation.
- B. Locate reglets not less than 225 mm (9 inch) nor more than 400 mm (16 inch) above roofing, and not less than 125 mm (5 inch) nor more than 325 mm (13 inch) above cant strip.
- C. Butt and align end joints on each section of reglet and securely hold in position until concrete or mortar are hardened:
1. Coordinate reglets for anchorage into concrete with formwork construction.
 2. Coordinate reglets for masonry to locate horizontally into mortar joints.

3.6 GRAVEL STOPS

- A. General:
1. Install gravel stops and fascias with allowance for expansion at each joint; minimum of 6 mm (1/4 inch).
 2. Extend roof flange of gravel stop and splice plates not less than four inches out over roofing and nail or screw to wood nailers. Space fasteners on 75 mm (3 inch) centers in staggered pattern.
 3. Install continuous cleat for fascia drip edge. Secure with fasteners as close to lower edge as possible on 75 mm (3 inch) centers.
 4. Where ends of gravel stops and fascias abut a vertical wall, provide a watertight, flashed and sealant filled joint.
 5. Set flange in roof cement when installed over built-up roofing.
 6. Edge securement for low-slope roofs: Low-slope membrane roof systems metal edge securement, except gutters, shall be designed in accordance with ANSI/SPRI/FM ES-1, except the basic wind speed shall be determined from Figure 1609, of IBC 2003.
- B. Sheet metal gravel stops and fascia:
1. Install with end joints of splice plates sheets lapped three inches.
 2. Hook the lower edge of fascia into a continuous edge strip.
 3. Lock top section to bottom section for two-piece fascia.
- C. Corrugated sheet gravel stops and fascia:
1. Install 300 mm (12 inch) wide sheet flashing centered under joint. A combination bottom and cover plate, extending above and beneath the joint, may be used.
 2. Hook lower edge of fascia into a continuous edge strip.

D. Scuppers:

1. Install scupper with flange behind gravel stops; leave 6 mm (1/4 inch) joint to gravel stop.
2. Set scupper at roof water line and fasten to wood blocking.
3. Use sealant to seal joint with fascia gravel stops at ends.
4. Coordinate to lap over conductor head and to discharge water into conductor head.

3.7 COPINGS**A. General:**

1. On walls topped with a wood plank, install a continuous edge strip on the front and rear edge of the plank. Lock the coping to the edge strip with a 19 mm (3/4 inch) loose lock seam.
2. Where shown turn down roof side of coping and extend down over base flashing as specified for counter-flashing. Secure counter-flashing to lock strip in coping at continuous cleat.
3. Install ends adjoining existing construction so as to form space for installation of sealants. Sealant is specified in Section 07 92 00, JOINT SEALANTS.

B. Aluminum Coping:

1. Install with 6 mm (1/4 inch) joint between ends of coping sections.
2. Install joint covers, centered at each joint, and securely lock in place.

C. Stainless steel and Copper Copings:

1. Join ends of sheets by a 19 mm (3/4 inch) locked and soldered seam, except at intervals of 9600 mm (32 feet), provide a 38 mm (1 1/2 inch) loose locked expansion joint filled with sealant or mastic.
2. At straight runs between 7200 mm (24 feet) and 19200 mm (64 feet) locate expansion joint at center.
3. At straight runs that exceed 9600 mm (32 feet) and form the leg of a corner locate the expansion joint not more than 4800 mm (16 feet) from the corner.

3.8 FLASHING

- A. Set collar where shown and secure roof tabs or flange of collar to structural deck with 13 mm (1/2 inch) diameter bolts.
- B. Set flange of sleeve base flashing not less than 100 mm (4 inch) beyond collar on all sides as specified for base flashing.

- C. Install hood to above the top of the sleeve 50 mm (2 inch) and to extend from sleeve same distance as space between collar and sleeve beyond edge not sleeve:
 - 1. Install insect screen to fit between bottom edge of hood and side of sleeve.
 - 2. Set collar of hood in high temperature sealant and secure with one by 3 mm (1/8 inch) bolt on stainless steel draw band type, or stainless steel worm gear type clamp. Install sealant at top of head.

3.9 HANGING GUTTERS

- A. Hang gutters with high points equidistant from downspouts. Slope at not less than 1:200 (1/16 inch per foot).
- B. Lap joints, except for expansion joints, at least 25 mm (one inch) in the direction of flow. Rivet and seal or solder lapped joints.
- C. Support gutters in brackets spaced not more than 600 mm (24 inch) on centers, brackets attached to facial or wood nailer by at least two screws or nails.
 - 1. For copper or copper clad stainless steel gutters use brass or bronze brackets.
 - 2. For stainless steel gutters use stainless steel brackets.
 - 3. For aluminum gutters use aluminum brackets or stainless steel brackets.
 - 4. Use brass or stainless steel screws.
- D. Secure brackets to gutters in such a manner as to allow free movement of gutter due to expansion and contraction.
- E. Gutter Expansion Joint:
 - 1. Locate expansion joints midway between outlet tubes.
 - 2. Provide at least a 25 mm (one inch) expansion joint space between end baffles of gutters.
 - 3. Install a cover plate over the space at expansion joint.
 - 4. Fasten cover plates to gutter section on one side of expansion joint only.
 - 5. Secure loose end of cover plate to gutter section on other side of expansion joint by a loose-locked slip joint.
- F. Outlet Tubes: Set bracket strainers loosely into gutter outlet tubes.

3.10 CONDUCTORS (DOWNSPOUTS)

- A. Where scuppers discharge into downspouts install conductor head to receive discharge with back edge up behind drip edge of scupper. Fasten

and seal joint. Sleeve conductors to gutter outlet tubes and fasten joint and joints between sections.

- B. Set conductors plumb and clear of wall, and anchor to wall with two anchor straps, located near top and bottom of each section of conductor. Strap at top shall be fixed to downspout, intermediate straps and strap at bottom shall be slotted to allow not less than 13 mm (1/2 inch) movement for each 3000 mm (10 feet) of downspout.
- C. Install elbows, offsets and shoes where shown and required. Slope not less than 45 degrees.

3.11 SPLASH PANS

- A. Install where downspouts discharge on low slope roofs unless shown otherwise.
- B. Set in roof cement prior to pour coat installation or sealant compatible with single ply roofing membrane.

3.12 GOOSENECK ROOF VENTILATORS

- A. Install on structural curb not less than 200 mm (8 inch) high above roof surface.
- B. Securely anchor ventilator curb to structural curb with fasteners spaced not over 300 mm (12 inch) on center.
- C. Anchor gooseneck to curb with screws having neoprene washers at 150 mm (6 inch) on center.

- - - E N D - - -

**SECTION 07 81 00
APPLIED FIREPROOFING**

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies spray-applied mineral fiber and cementitious coverings to provide fire resistance to interior structural steel members shown.

1.2 RELATED WORK:

- A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals, as described below:
 - 1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
- C. Installer qualifications.
- D. Testing laboratory accreditations.
- E. Manufacturer's Literature and Data:
 - 1. Manufacturer's complete and detailed application instructions and specifications.
 - 2. Manufacturer's repair and patching instructions.
- F. Certificates:
 - 1. Certificate from testing laboratory attesting fireproofing material and application method meet the specified fire ratings.
 - a. List thickness and density of material required to meet fire ratings.
 - b. Accompanied by complete test report and test record.
 - 2. Manufacturer's certificate indicating sprayed-on fireproofing material supplied under the Contract is same within manufacturing tolerance as fireproofing material tested.
- G. Miscellaneous:
 - 1. Manufacturer's written approval of surfaces to receive sprayed-on fireproofing.
 - 2. Manufacturer's written approval of completed installation.
 - 3. Manufacturer's written approval of the applicators of fireproofing material.

1.3 PRODUCT DELIVERY, STORAGE AND HANDLING:

- A. Deliver to job site in sealed containers marked and labeled to show manufacturer's name and brand and UL certification markings of compliance with the specified requirements.
- B. Remove damaged or opened containers from the site.
- C. Store the materials off the ground, under cover, away from damp surfaces.
- D. Keep dry until ready for use.
- E. Remove materials that have been exposed to water before installation from the site.

1.4 FIELD CONDITIONS:

- A. Temperature: Do not apply fireproofing when substrate or ambient temperature is below 4 degrees C (40 degrees F) unless temporary protection and heat are provided to maintain temperature at or above stated value during application and for 24 hours before and after application.
- B. Humidity: Maintain relative humidity levels within limits recommended by fireproofing manufacturer.
- C. Ventilation: Provide ventilation to properly dry the fireproofing after application. Provide a minimum of four (4) air exchanges per hour by forced air circulation. When permitted by Contracting Officer Representative (COR), ventilate by natural circulation.

1.5 QUALITY ASSURANCE:

- A. Installer Qualifications: A firm or individual certified, licensed, or otherwise qualified by fireproofing manufacturer as experienced and with sufficient trained staff to install manufacturer's products according to specified requirements. Submit manufacturer's certification that each installer is trained and qualified to install the specified fireproofing. Submit evidence that each installer has a minimum of three (3) years' experience and a minimum of four (4) installations using the specified fireproofing.
- B. Testing Laboratory Accreditation Requirements: Construction materials testing laboratories must be accredited by a laboratory accreditation authority. Submit a copy of the Certificate of Accreditation and Scope of Accreditation.
- C. Test for fire endurance in accordance with ASTM E119, for fire rating specified, in a nationally recognized laboratory.

- D. Manufacturer's inspection and approval of surfaces to receive fireproofing.
- E. Manufacturer's approval of fireproofing applications.
- F. Manufacturer's approval of completed installation.
- G. Manufacturer's representative is to observe and advise at the commencement of application and is required to visit the site as required thereafter for the purpose of ascertaining proper application.
- H. Pre-Application Test Area.
 - 1. Apply a test area consisting of a typical overhead fireproofing installation, including not less than 4.5 m (15 feet) of beam and deck.
 - a. Apply to one (1) column.
 - b. Apply for the hourly ratings required in the construction documents.
 - 2. Install in location selected by the COR, for approval by the representative of the fireproofing material manufacturer and the COR.
 - 3. Perform Bond test for cohesive and adhesive strength in accordance with ASTM E736 for each applied fireproofing design used.
 - 4. Perform density test in accordance with ASTM E736 for each applied fireproofing design used.
 - 5. Do not proceed in other areas until installation of test area has been completed and approved.
 - 6. Keep approved installation area open for observation as criteria for sprayed-on fireproofing.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. ASTM International (ASTM):
 - C841-03(R2013).....Installation of Interior Lathing and Furring
 - C847-14.....Metal Lath
 - E84-14.....Surface Burning Characteristics of Building Materials
 - E119-12a.....Fire Tests of Building Construction and Materials
 - E605-93(R2011).....Thickness and Density of Sprayed Fire-Resistive Materials Applied to Structural Members

- E736-00 (R2011) Cohesion/Adhesion of Sprayed Fire-Resistive
Materials Applied to Structural Members
- E759-92 (R2011) The Effect of Deflection on Sprayed Fire-
Resistive Material Applied to Structural
Members
- E760-92 (R2011) Impact on Bonding of Sprayed Fire-Resistive
Material Applied to Structural Members
- E761-92 (R2011) Compressive Strength of Fire-Resistive Material
Applied to Structural Members
- E859-93 (R2011) Air Erosion of Sprayed Fire-Resistive Materials
Applied to Structural Members
- E937-93 (R2011) Corrosion of Steel by Sprayed Fire-Resistive
Material Applied to Structural Members
- E1042-02 (R2014) Acoustically, Absorptive Materials Applied by
Trowel or Spray.
- G21-13.....Determining Resistance of Synthetic Polymeric
Materials to Fungi
- C. Underwriters Laboratories, Inc. (UL):
Fire Resistance Directory...Latest Edition including Supplements
- D. Warnock Hersey (WH):
Certification Listings..Latest Edition
- E. Factory Mutual System (FM):
Approval Guide.....Latest Edition including Supplements
- F. Environmental Protection Agency (EPA):
40 CFR 59(2014).....National Volatile Organic Compound Emission
Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 SPRAYED-ON FIREPROOFING:

- A. ASTM E1042, Class (a), Category A.
 - 1. Type I, factory mixed cementitious materials with approved aggregate.
 - 2. Type II, factory mixed mineral fiber with integral inorganic binders minimum 240 kg per cubic meter (15 lb. per cubic feet) density per ASTM E605 test unless specified otherwise. Use in areas that are completely encased.
- B. Materials containing asbestos are not permitted.
- C. Fireproofing characteristics when applied in the thickness and density required to achieve the fire-rating specified.

	Characteristic	Test	Results
1.	Deflection	ASTM E759	No cracking, spalling, or delamination when backing to which it is applied has a deflection up to 1/120 in 3 m (10 ft.)
2.	Corrosion-Resistance	ASTM E937	No promotion of corrosion of steel.
3.	Bond Impact	ASTM E760	No cracking, spalling, or delamination.
4.	Cohesion/Adhesion (Bond Strength)	ASTM E736	Minimum cohesive/adhesive strength of 9.57 kPa (200 lbf per sq. ft.) for protected areas. 19.15 kPa (400 lbf per sq. ft.) for exposed areas.
5.	Air Erosion	ASTM E859	Maximum gain weight of the collecting filter 0.27 gm per sq. meter (0.025 gm per sq. ft.).

6.	Compressive Strength	ASTM E761	Minimum compressive strength 48 kPa (1000 psf).
7.	Surface Burning Characteristics with adhesive and sealer to be used	ASTM E84	Flame spread 25 or less smoke developed 50 or less
8.	Fungi Resistance	ASTM G21	Resistance to mold growth when inoculated with aspergillus niger (28 days for general application)

2.2 ADHESIVE:

- A. Bonding adhesive for Type II (fibrous) materials as recommended and supplied by the fireproofing material manufacturer.
- B. Adhesive may be an integral part of the material or applied separately to surface receiving fireproofing material.

2.3 SEALER:

- A. Sealer for Type II (fibrous) material as recommended and supplied by the fireproofing material manufacturer.
- B. Surface burning characteristics as specified for fireproofing material.
- C. Fungus resistant.
- D. Sealer may be an integral part of the material or applied separately to the exposed surface. When applied separately use contrasting color pigmented sealer, white preferred.
- E. VOC content: Product to comply with VOC content limits of authorities having jurisdiction and the following VOC limits when calculated according to 40 CFR 59, (EPA Method 24):
 - 1. Flat Paints and Coatings: 50 g/L.
 - 2. Nonflat Paints and Coatings: 150 g/L.
 - 3. Primers, Sealers, and Undercoaters: 200 g/L.

2.4 WATER:

- A. Clean, fresh, and free from organic and mineral impurities.
- B. pH of 6.9 to 7.1.

2.5 MECHANICAL BOND MATERIAL:

- A. Expanded Metal Lath: ASTM C847, minimum weight of 0.92 kg per square meter (1.7 pounds per square yard) or as required, according to fire-resistance designs indicated and fire proofing manufacturer's written instructions.
- B. Fasteners: ASTM C841.

- C. Reinforcing Fabric: Glass- or carbon-fiber fabric of type, weight, and form required to comply with fire-resistance designs indicated; approved and provided by fireproofing manufacturer.
- D. Reinforcing Mesh: Metallic mesh reinforcement of type, weight, and form required to comply with fire-resistance design indicated; approved and provided by fireproofing manufacturer. Include pins and attachments.

PART 3 - EXECUTION

3.1 EXAMINATION:

- A. Verify surfaces to receive fireproofing are clean and free of dust, soot, oil, grease, water soluble materials or any foreign substance which would prevent adhesion of the fireproofing material.
- B. Verify hangers, inserts and clips are installed before the application of fireproofing material.
- C. Verify ductwork, piping, and other obstructing material and equipment is not installed that will interfere with fireproofing installation.
- D. Verify concrete work on steel decking and concrete encased steel is completed.
- E. When applied in conjunction with roof structures or roof decks, verify that roofing, installation of rooftop HVAC equipment, and other related work are complete.
- F. Verify temperature and enclosure conditions required by fire-proofing material manufacturer.
- G. Conduct tests according to fireproofing manufacturer's written instructions to verify that substrates are free of substances capable of interfering with bond. Submit test report.

3.2 APPLICATION:

- A. Do not start application until written approval has been obtained from manufacturer of fireproofing materials that surfaces have been inspected by the manufacturer or his representative and are suitable to receive sprayed-on fireproofing.
- B. Coordinate application of fireproofing material with other trades.
- C. Cover other work and exterior openings subject to damage from fallout or overspray of fireproofing materials during application.
- D. Application of Metal Lath:
 - 1. Apply to beam and columns having painted surfaces which fail ASTM E736 Bond Test requirements in pre-application test area.
 - 2. Apply to beam flanges 305 mm (12-inches) or more in width.
 - 3. Apply to column flanges 406 mm (16-inches) or more in width.

4. Apply to beam or column web 406 mm (16-inches) or more in depth.
 5. Tack weld or mechanically fasten on maximum of 305 mm (12-inch) center.
 6. Lap and tie lath member in accordance with ASTM C841.
- E. Mix and apply in accordance with manufacturer's instructions.
1. Mechanically control material and water ratios.
 2. Apply adhesive and sealer, when not an integral part of the materials, in accordance with the manufacturer's instructions.
 3. Apply to density and thickness indicated in UL Fire Resistance Directory, FM Approval Guide, or WH Certification Listings unless specified otherwise. Test in accordance with ASTM E119.
 4. Minimum ASTM E605 applied dry density per cubic meter (cubic foot) for the underside of the walk on deck (interstitial) hung purlin or beam and steel deck, columns in interstitial spaces and mechanical equipment rooms to be as follows:
 - a. Type I - 350 kg per cubic meter (22 lb. per cubic ft.).
 - b. Type II - 240 kg per cubic meter (15 lb. per cubic ft.).
 - c. Provide materials with higher density of 640 kg per cubic metric (40 lb. per cubic feet) in mechanical rooms and parking garages.
- F. Complete application is to be completed in one area. Inspection and approval by the COR is required before removal of application equipment and proceeding with further work.

3.3 FIELD TESTS:

- A. The applied fireproofing to be tested by a COR approved independent testing laboratory and paid for by the Contractor. Submit test reports documenting results of tests on the applied material in the project.
- B. COR will select area to be tested in specific bays on each floor using a geometric grid pattern. Apply test sample every 929 square meters (10,000 square feet) of floor area or two (2) for each floor, whichever produces the greatest number of test areas.
- C. Test for thickness and density in accordance with ASTM E605. Areas showing thickness less than that required as a result of fire endurance test are not acceptable.
- D. Areas showing less than required fireproofing characteristics are not suitable for the following field tests.
 1. Test for cohesion/adhesion: ASTM E736.
 2. Test for bond impact strength: ASTM E760.

3.4 PATCHING AND REPAIRING:

- A. Inspect after mechanical, electrical and other trades have completed work in contact with fireproofing material, but before sprayed material is covered by subsequent construction.
- B. Perform corrective measures in accordance with fireproofing material manufacturer's recommendations.
 - 1. Respray areas requiring additional fireproofing material to provide the required thickness and replace dislodged or removed material.
 - 2. Spray material for patching by machine directly on point to be patched, or into a container and then hand apply.
 - 3. Do not hand mix material.
- C. Repair:
 - 1. Respray test and rejected areas.
 - 2. Patch fireproofing material which is removed or disturbed after approval.
- D. Perform final inspection of sprayed areas after patching and repair.

3.6 SCHEDULE:

- A. Apply fireproofing material in interior structural steel members and on underside of interior steel floor and roof decks, except on following surfaces:
 - 1. Structural steel and underside of steel decks in elevator or dumbwaiter machine rooms.
 - 2. Steel members in elevator hoist ways.
 - 3. Areas used as air handling plenums.
 - 4. Steel to be encased in concrete or designated to receive other type of fireproofing.

Fire Rating Schedule			
Type	Element	Hourly Rating	UL Design Reference
Spray	Columns supporting one floor	2	UL Y615
Spray	Columns supporting more than one floor	2	UL Y615
Spray	Columns supporting roof	1	UL Y615
Spray	Floor decks	2	UL D902
Spray	Floor supports	2	UL N634
Spray	Roof decks	1	UL D902
Spray	Roof supports	1	UL D902

- - - E N D - - -

**SECTION 07 84 00
FIRESTOPPING**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Provide UL or equivalent approved firestopping system for the closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction.
- B. Provide UL or equivalent approved firestopping system for the closure of openings in walls against penetration of gases or smoke in smoke partitions.

1.2 RELATED WORK

- A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Sustainable Design Requirements.
- B. Section 07 81 00, APPLIED FIREPROOFING: Spray applied fireproofing.
- C. Section 07 92 00, JOINT SEALANTS: Sealants and application.
- D. Section 23 31 00, HVAC DUCTS AND CASINGS: Fire and smoke damper assemblies in ductwork.
- E. Section 23 37 00, AIR OUTLETS AND INLETS: Fire and smoke damper assemblies in ductwork.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals, as described below:
 - 1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
- C. Installer qualifications.
- D. Inspector qualifications.
- E. Manufacturer's literature, data, and installation instructions for types of firestopping and smoke stopping used.
- F. List of FM, UL, or WH classification number of systems installed.
- G. Certified laboratory test reports for ASTM E814 tests for systems not listed by FM, UL, or WH proposed for use.
- H. Submit certificates from manufacturer attesting that firestopping materials comply with the specified requirements.

1.4 DELIVERY AND STORAGE

- A. Deliver materials in their original unopened containers with manufacturer's name and product identification.

- B. Store in a location providing protection from damage and exposure to the elements.

1.5 QUALITY ASSURANCE

- A. FM, UL, or WH or other approved laboratory tested products will be acceptable.
- B. Installer Qualifications: A firm that has been approved by FM Global according to FM Global 4991 or been evaluated by UL and found to comply with UL's "Qualified Firestop Contractor Program Requirements." Submit qualification data.
- C. Inspector Qualifications: Contractor to engage a qualified inspector to perform inspections and final reports. The inspector to meet the criteria contained in ASTM E699 for agencies involved in quality assurance and to have a minimum of two years' experience in construction field inspections of firestopping systems, products, and assemblies. The inspector to be completely independent of, and divested from, the Contractor, the installer, the manufacturer, and the supplier of material or item being inspected. Submit inspector qualifications.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. ASTM International (ASTM):
 - E84-20.....Surface Burning Characteristics of Building Materials
 - E699-16.....Standard Specification for Agencies Involved in Testing, Quality Assurance, and Evaluating of Manufactured Building Components
 - E814-13a(2017).....Fire Tests of Penetration Firestop Systems
 - E2174-20a.....Standard Practice for On-Site Inspection of Installed Firestop Systems
 - E2393-20.....Standard Practice for On-Site Inspection of Installed Fire Resistive Joint Systems and Perimeter Fire Barriers
- C. FM Global (FM):
 - Annual Issue Approval Guide Building Materials
 - 4991-13.....Approval of Firestop Contractors
- D. Underwriters Laboratories, Inc. (UL):
 - Annual Issue Building Materials Directory

E. Annual Issue Fire Resistance Directory

723-Edition 11(2018)....Standard for Test for Surface Burning
Characteristics of Building Materials
1479-04(2015).....Fire Tests of Penetration Firestops

F. Intertek Testing Services - Warnock Hersey (ITS-WH):

Annual Issue Certification Listings

G. Environmental Protection Agency (EPA):

40 CFR 59(2014).....National Volatile Organic Compound Emission
Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 FIRESTOP SYSTEMS

- A. Provide either factory built (Firestop Devices) or field erected (through-Penetration Firestop Systems) to form a specific building system maintaining required integrity of the fire barrier and stop the passage of gases or smoke. Firestop systems to accommodate building movements without impairing their integrity.
- B. Through-penetration firestop systems and firestop devices tested in accordance with ASTM E814 or UL 1479 using the "F" or "T" rating to maintain the same rating and integrity as the fire barrier being sealed. "T" ratings are not required for penetrations smaller than or equal to 101 mm (4 inches) nominal pipe or 0.01 square meter (16 square inches) in overall cross sectional area.
- C. Firestop sealants used for firestopping or smoke sealing to have the following properties:
1. Contain no flammable or toxic solvents.
 2. Release no dangerous or flammable out gassing during the drying or curing of products.
 3. Water-resistant after drying or curing and unaffected by high humidity, condensation or transient water exposure.
 4. When installed in exposed areas, capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.
 5. VOC Content: Firestopping sealants and sealant primers to comply with the following limits for VOC content when calculated according to 40 CFR 59, (EPA Method 24):
 - a. Sealants: 250 g/L.
 - b. Sealant Primers for Nonporous Substrates: 250 g/L.
 - c. Sealant Primers for Porous Substrates: 775 g/L.

- D. Firestopping system or devices used for penetrations by glass pipe, plastic pipe or conduits, unenclosed cables, or other non-metallic materials to have following properties:
 - 1. Classified for use with the particular type of penetrating material used.
 - 2. Penetrations containing loose electrical cables, computer data cables, and communications cables protected using firestopping systems that allow unrestricted cable changes without damage to the seal.
- E. Maximum flame spread of 25 and smoke development of 50 when tested in accordance with ASTM E84 or UL 723. Material to be an approved firestopping material as listed in UL Fire Resistance Directory or by a nationally recognized testing laboratory.
- F. FM, UL, or WH rated or tested by an approved laboratory in accordance with ASTM E814.
- G. Materials to be nontoxic and noncarcinogen at all stages of application or during fire conditions and to not contain hazardous chemicals. Provide firestop material that is free from Ethylene Glycol, PCB, MEK, and asbestos.
- H. For firestopping exposed to view, traffic, moisture, and physical damage, provide products that do not deteriorate when exposed to these conditions.
 - 1. For piping penetrations for plumbing and wet-pipe sprinkler systems, provide moisture-resistant through-penetration firestop systems.
 - 2. For floor penetrations with annular spaces exceeding 101 mm (4 inches) or more in width and exposed to possible loading and traffic, provide firestop systems capable of supporting the floor loads involved either by installing floor plates or by other means acceptable to the firestop manufacturer.
 - 3. For penetrations involving insulated piping, provide through-penetration firestop systems not requiring removal of insulation.

2.2 SMOKE STOPPING IN SMOKE PARTITIONS

- A. Provide silicone sealant in smoke partitions as specified in Section 07 92 00, JOINT SEALANTS.
- B. Provide mineral fiber filler and bond breaker behind sealant.
- C. Sealants to have a maximum flame spread of 25 and smoke developed of 50 when tested in accordance with ASTM E84.

- D. When used in exposed areas capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Submit product data and installation instructions, as required by article, submittals, after an on-site examination of areas to receive firestopping.
- B. Examine substrates and conditions with installer present for compliance with requirements for opening configuration, penetrating items, substrates, and other conditions affecting performance of firestopping. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Remove dirt, grease, oil, laitance and form-release agents from concrete, loose materials, or other substances that prevent adherence and bonding or application of the firestopping or smoke stopping materials.
- B. Remove insulation on insulated pipe for a distance of 150 mm (6 inches) on each side of the fire rated assembly prior to applying the firestopping materials unless the firestopping materials are tested and approved for use on insulated pipes.
- C. Prime substrates where required by joint firestopping system manufacturer using that manufacturer's recommended products and methods. Confine primers to areas of bond; do not allow spillage and migration onto exposed surfaces.
- D. Masking Tape: Apply masking tape to prevent firestopping from contacting adjoining surfaces that will remain exposed upon completion of work and that would otherwise be permanently stained or damaged by such contact or by cleaning methods used to remove smears from firestopping materials. Remove tape as soon as it is possible to do so without disturbing seal of firestopping with substrates.

3.3 INSTALLATION

- A. Do not begin firestopping work until the specified material data and installation instructions of the proposed firestopping systems have been submitted and approved.
- B. Install firestopping systems with smoke stopping in accordance with FM, UL, WH, or other approved system details and installation instructions.

C. Install smoke stopping seals in smoke partitions.

3.4 CLEAN-UP

- A. As work on each floor is completed, remove materials, litter, and debris.
- B. Clean up spills of liquid type materials.
- C. Clean off excess fill materials and sealants adjacent to openings and joints as work progresses by methods and with cleaning materials approved by manufacturers of firestopping products and of products in which opening and joints occur.
- D. Protect firestopping during and after curing period from contact with contaminating substances or from damage resulting from construction operations or other causes so that they are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated firestopping immediately and install new materials to provide firestopping complying with specified requirements.

3.5 INSPECTIONS AND ACCEPTANCE OF WORK

- A. Do not conceal or enclose firestop assemblies until inspection is complete and approved by the Contracting Officer Representative (COR).
- B. Furnish service of approved inspector to inspect firestopping in accordance with ASTM E2393 and ASTM E2174 for firestop inspection, and document inspection results. Submit written reports indicating locations of and types of penetrations and type of firestopping used at each location; type is to be recorded by UL listed printed numbers.

- - - E N D - - -

**SECTION 07 92 00
JOINT SEALANTS**

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section covers interior and exterior sealant and their application, wherever required for complete installation of building materials or systems.

1.2 RELATED WORK (INCLUDING BUT NOT LIMITED TO THE FOLLOWING):

- A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Sealing of Site Work Concrete Paving: Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS.
- C. Masonry Control and Expansion Joint: Section 04 20 00, UNIT MASONRY.
- D. Firestopping Penetrations: Section 07 84 00, FIRESTOPPING.
- E. Glazing: Section 08 80 00, GLAZING.
- F. Sound Rated Gypsum Partitions/Sound Sealants: Section 09 29 00, GYPSUM BOARD.
- G. Mechanical Work: Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

1.3 QUALITY ASSURANCE:

- A. Installer Qualifications: An experienced installer with a minimum of three (3) years' experience and who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance. Submit qualification.
- B. Source Limitations: Obtain each type of joint sealant through one (1) source from a single manufacturer.
- C. Product Testing: Obtain test results from a qualified testing agency based on testing current sealant formulations within a 12-month period.
 - 1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021.
 - 2. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C920, and where applicable, to other standard test methods.
 - 3. Test elastomeric joint sealants according to SWRI's Sealant Validation Program for compliance with requirements specified by

- reference to ASTM C920 for adhesion and cohesion under cyclic movement, adhesion-in peel, and indentation hardness.
4. Test other joint sealants for compliance with requirements indicated by referencing standard specifications and test methods.
- D. Preconstruction Field-Adhesion Testing: Before installing elastomeric sealants, field test their adhesion to joint substrates according to Method A, Field-Applied Sealant Joint Hand Pull Tab, in Appendix X1.1 in ASTM C1193 or Method A, Tail Procedure, in ASTM C1521.
1. Locate test joints where indicated in construction documents or, if not indicated, as directed by COR.
 2. Conduct field tests for each application indicated below:
 - a. Each type of elastomeric sealant and joint substrate indicated.
 - b. Each type of non-elastomeric sealant and joint substrate indicated.
 3. Notify COR seven (7) days in advance of dates and times when test joints will be erected.
- F. Mockups: Before installing joint sealants, apply elastomeric sealants as follows to verify selections and to demonstrate aesthetic effects and qualities of materials and execution:
1. Joints in mockups of assemblies that are indicated to receive elastomeric joint sealants.

1.4 CERTIFICATION:

- A. Contractor is to submit to the COR written certification that joints are of the proper size and design, that the materials supplied are compatible with adjacent materials and backing, that the materials will properly perform to provide permanent watertight, airtight or vapor tight seals (as applicable), and that materials supplied meet specified performance requirements.

1.5 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals, as described below:
1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
- C. Installer qualifications.
- D. Contractor certification.
- E. Manufacturer's installation instructions for each product used.
- F. Cured samples of exposed sealants for each color.

G. Manufacturer's Literature and Data:

1. Primers
2. Sealing compound, each type, including compatibility when different sealants are in contact with each other.

H. Manufacturer warranty.

1.6 PROJECT CONDITIONS:

A. Environmental Limitations:

1. Do not proceed with installation of joint sealants under following conditions:
 - a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 degrees C (40 degrees F).
 - b. When joint substrates are wet.

B. Joint-Width Conditions:

1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

C. Joint-Substrate Conditions:

1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

1.7 DELIVERY, HANDLING, AND STORAGE:

- A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.
- B. Carefully handle and store to prevent inclusion of foreign materials.
- C. Do not subject to sustained temperatures exceeding 32 degrees C (90 degrees F) or less than 5 degrees C (40 degrees F).

1.8 DEFINITIONS:

- A. Definitions of terms in accordance with ASTM C717 and as specified.
- B. Backing Rod: A type of sealant backing.
- C. Bond Breakers: A type of sealant backing.
- D. Filler: A sealant backing used behind a back-up rod.

1.9 WARRANTY:

- A. Construction Warranty: Comply with FAR clause 52.246-21 "Warranty of Construction".

- B. Manufacturer Warranty: Manufacturer shall warranty their sealant for a minimum of five (5) years from the date of installation and final acceptance by the Government. Submit manufacturer warranty.

1.10 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. ASTM International (ASTM):
- C509-06.....Elastomeric Cellular Preformed Gasket and Sealing Material
 - C612-14.....Mineral Fiber Block and Board Thermal Insulation
 - C717-14a.....Standard Terminology of Building Seals and Sealants
 - C734-06 (R2012).....Test Method for Low-Temperature Flexibility of Latex Sealants after Artificial Weathering
 - C794-10.....Test Method for Adhesion-in-Peel of Elastomeric Joint Sealants
 - C919-12.....Use of Sealants in Acoustical Applications.
 - C920-14a.....Elastomeric Joint Sealants.
 - C1021-08 (R2014).....Laboratories Engaged in Testing of Building Sealants
 - C1193-13.....Standard Guide for Use of Joint Sealants.
 - C1248-08 (R2012).....Test Method for Staining of Porous Substrate by Joint Sealants
 - C1330-02 (R2013).....Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants
 - C1521-13.....Standard Practice for Evaluating Adhesion of Installed Weatherproofing Sealant Joints
 - D217-10.....Test Methods for Cone Penetration of Lubricating Grease
 - D1056-14.....Specification for Flexible Cellular Materials—Sponge or Expanded Rubber
 - E84-09.....Surface Burning Characteristics of Building Materials
- C. Sealant, Waterproofing and Restoration Institute (SWRI).
The Professionals' Guide
- D. Environmental Protection Agency (EPA):

40 CFR 59(2014).....National Volatile Organic Compound Emission
Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 SEALANTS:

A. Exterior Sealants:

1. S-# Vertical surfaces, provide non-staining ASTM C920, Type S or M, Grade NS, Class 25, Use NT.
2. S-# Horizontal surfaces, provide ASTM C920, Type S or M, Grade P, Class 25, Use T.
3. Provide location(s) of exterior sealant as follows:
 - a. Joints formed where frames and subsills of windows, doors, louvers, and vents adjoin masonry, concrete, or metal frames. Provide sealant at exterior surfaces of exterior wall penetrations.
 - b. Metal to metal.
 - c. Masonry to masonry or stone.
 - d. Stone to stone.
 - e. Cast stone to cast stone.
 - f. Masonry expansion and control joints.
 - g. Wood to masonry.
 - h. Masonry joints where shelf angles occur.
 - i. Voids where items penetrate exterior walls.
 - j. Metal reglets, where flashing is inserted into masonry joints, and where flashing is penetrated by coping dowels.

B. Floor Joint Sealant:

1. ASTM C920, Type S or M, Grade P, Class 25, Use T.
2. S-# Provide location(s) of floor joint sealant as follows.
 - a. Seats of metal thresholds exterior doors.
 - b. Control and expansion joints in floors, slabs, ceramic tile, and walkways.

C. Interior Sealants:

1. VOC Content of Interior Sealants: Sealants and sealant primers used inside the weatherproofing system are to comply with the following limits for VOC content when calculated according to 40 CFR 59, (EPA Method 24):
 - a. Architectural Sealants: 250 g/L.
 - b. Sealant Primers for Nonporous Substrates: 250 g/L.
 - c. Sealant Primers for Porous Substrates: 775 g/L.//

2. S-# Vertical and Horizontal Surfaces: ASTM C920, Type S or M, Grade NS, Class 25, Use NT.
3. S-# Food Service: Use a Vinyl Acetate Homopolymer, or other low VOC, non-toxic sealant approved for use in food preparation areas.
4. Provide location(s) of interior sealant as follows:
 - a. Typical narrow joint 6 mm, (1/4 inch) or less at walls and adjacent components.
 - b. Perimeter of doors, windows, access panels which adjoin concrete or masonry surfaces.
 - c. Interior surfaces of exterior wall penetrations.
 - d. Joints at masonry walls and columns, piers, concrete walls or exterior walls.
 - e. Perimeter of lead faced control windows and plaster or gypsum wallboard walls.
 - f. Exposed isolation joints at top of full height walls.
 - g. Joints between bathtubs and ceramic tile; joints between shower receptors and ceramic tile; joints formed where nonplanar tile surfaces meet.
 - h. Joints formed between tile floors and tile base cove; joints between tile and dissimilar materials; joints occurring where substrates change.
 - i. Behind escutcheon plates at valve pipe penetrations and showerheads in showers.
- D. Acoustical Sealant:
 1. Conforming to ASTM C919; flame spread of 25 or less; and a smoke developed rating of 50 or less when tested in accordance with ASTM E84. Acoustical sealant have a consistency of 250 to 310 when tested in accordance with ASTM D217; remain flexible and adhesive after 500 hours of accelerated weathering as specified in ASTM C734; and be non-staining.
 2. Provide location(s) of acoustical sealant as follows:
 - a. Exposed acoustical joint at sound rated partitions.
 - b. Concealed acoustic joints at sound rated partitions.
 - c. Joints where item pass-through sound rated partitions.

2.2 COLOR:

- A. Sealants used with exposed masonry are to match color of mortar joints.
- B. Sealants used with unpainted concrete are to match color of adjacent concrete.

- C. Color of sealants for other locations to be light gray or aluminum, unless otherwise indicated in construction documents.

2.3 JOINT SEALANT BACKING:

- A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
 - 1. Type C: Closed-cell material with a surface skin.
- C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056 or synthetic rubber (ASTM C509), nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32 degrees C (minus 26 degrees F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.
- D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

2.4 FILLER:

- A. Mineral fiberboard: ASTM C612, Class 1.
- B. Thickness same as joint width.
- C. Depth to fill void completely behind back-up rod.

2.5 PRIMER:

- A. As recommended by manufacturer of caulking or sealant material.
- B. Stain free type.

2.6 CLEANERS-NON POROUS SURFACES:

- A. Chemical cleaners compatible with sealant and acceptable to manufacturer of sealants and sealant backing material. Cleaners to be free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

PART 3 - EXECUTION**3.1 INSPECTION:**

- A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.
- B. Coordinate for repair and resolution of unsound substrate materials.
- C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

3.2 PREPARATIONS:

- A. Prepare joints in accordance with manufacturer's instructions and SWRI (The Professionals' Guide).
- B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.
 - 1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
 - 2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include but are not limited to the following:
 - a. Concrete.
 - b. Masonry.
 - c. Unglazed surfaces of ceramic tile.
 - 3. Remove laitance and form-release agents from concrete.
 - 4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants. Nonporous surfaces include but are not limited to the following:
 - a. Metal.
 - b. Glass.
 - c. Porcelain enamel.
 - d. Glazed surfaces of ceramic tile.
- C. Do not cut or damage joint edges.
- D. Apply non-staining masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.
 - 1. Do not leave gaps between ends of sealant backings.
 - 2. Do not stretch, twist, puncture, or tear sealant backings.

3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions or as indicated by pre-construction joint sealant substrate test.
 1. Apply primer prior to installation of back-up rod or bond breaker tape.
 2. Use brush or other approved means that will reach all parts of joints. Avoid application to or spillage onto adjacent substrate surfaces.

3.3 BACKING INSTALLATION:

- A. Install backing material, to form joints enclosed on three sides as required for specified depth of sealant.
- B. Where deep joints occur, install filler to fill space behind the backing rod and position the rod at proper depth.
- C. Cut fillers installed by others to proper depth for installation of backing rod and sealants.
- D. Install backing rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.
- E. Where space for backing rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.

3.4 SEALANT DEPTHS AND GEOMETRY:

- A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.
- B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

3.5 INSTALLATION:

- A. General:
 1. Apply sealants and caulking only when ambient temperature is between 5 degrees C and 38 degrees C (40 degrees and 100 degrees F).
 2. Do not install polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
 3. Do not install sealant type listed by manufacture as not suitable for use in locations specified.

4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.
 5. Avoid dropping or smearing compound on adjacent surfaces.
 6. Fill joints solidly with compound and finish compound smooth.
 7. Tool exposed joints to form smooth and uniform beds, with slightly concave surface conforming to joint configuration per Figure 5A in ASTM C1193 unless shown or specified otherwise in construction documents. Remove masking tape immediately after tooling of sealant and before sealant face starts to "skin" over. Remove any excess sealant from adjacent surfaces of joint, leaving the working in a clean finished condition.
 8. Finish paving or floor joints flush unless joint is otherwise detailed.
 9. Apply compounds with nozzle size to fit joint width.
 10. Test sealants for compatibility with each other and substrate. Use only compatible sealant. Submit test reports.
 11. Replace sealant which is damaged during construction process.
- B. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise. Take all necessary steps to prevent three-sided adhesion of sealants.
- C. Interior Sealants: Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all cut-outs and intersections with the adjoining construction unless specified otherwise.
1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
 2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
 3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.
 4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cutouts to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
 5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

3.6 FIELD QUALITY CONTROL:

- A. Field-Adhesion Testing: Field-test joint-sealant adhesion to joint substrates according to Method A, Field-Applied Sealant Joint Hand Pull Tab, in Appendix X1 in ASTM C1193 or Method A, Tail Procedure, in ASTM C1521.
 - 1. Extent of Testing: Test completed elastomeric sealant joints as follows:
 - a. Perform 10 tests for first 305 m (1000 feet) of joint length for each type of elastomeric sealant and joint substrate.
 - b. Perform one test for each 305 m (1000 feet) of joint length thereafter or one test per each floor per elevation.
- B. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements. Record results in a field adhesion test log.
- C. Inspect tested joints and report on following:
 - 1. Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test each type of product and joint substrate.
 - 2. Compare these results to determine if adhesion passes sealant manufacturer's field-adhesion hand-pull test criteria.
 - 3. Whether sealants filled joint cavities and are free from voids.
 - 4. Whether sealant dimensions and configurations comply with specified requirements.
- D. Record test results in a field adhesion test log. Include dates when sealants were installed, names of persons who installed sealants, test dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant fill, sealant configuration, and sealant dimensions.
- E. Repair sealants pulled from test area by applying new sealants following same procedures used to originally seal joints. Ensure that original sealant surfaces are clean and new sealant contacts original sealant.
- F. Evaluation of Field-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements, will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

3.7 CLEANING:

- A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by manufacturer of the adjacent material or if not otherwise indicated by the caulking or sealant manufacturer.
- B. Leave adjacent surfaces in a clean and unstained condition.

- - - E N D - - -

SECTION 08 11 13
HOLLOW METAL DOORS AND FRAMES

PART 1 - GENERAL**1.1 SUMMARY**

- A. Section Includes:
1. Hollow metal doors and transom panels hung in hollow metal frames at interior and exterior locations.
 2. Hollow metal door frames for wood doors and borrowed lights at interior locations.
 3. Glazed openings and louvers in hollow metal doors.

1.2 RELATED WORK

- A. Section 05 50 00, METAL FABRICATIONS: Frames fabricated of structural steel.
- B. Section 08 71 00, DOOR HARDWARE: Door Hardware:
- C. Section 08 80 00, GLAZING: Glazing.
- D. Card Readers and Biometric Devices: SEE DRAWINGS.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American National Standard Institute (ANSI):
- A250.8-2014.....Standard Steel Doors and Frames
- C. ASTM International (ASTM):
- A240/A240M-15b.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
- A653/A653M-15.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip
- A1008/A1008M-15.....Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy and High Strength Low Alloy with Improved Formability, Solution Hardened, and Bake Hardenable
- B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate
- B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate (Metric)
- B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes

- B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Profiles, and Tubes (Metric)
- D3656/D3656M-13.....Insect Screening and Louver Cloth Woven from
Vinyl Coated Glass Yarns
- E90-09.....Laboratory Measurement of Airborne Sound
Transmission Loss of Building Partitions and
Elements
- D. Federal Specifications (Fed. Spec.):
- L-S-125B.....Screening, Insect, Nonmetallic
- E. Master Painters Institute (MPI):
- No. 18.....Primer, Zinc Rich, Organic
- F. National Association of Architectural Metal Manufacturers (NAAMM):
- AMP 500-06.....Metal Finishes Manual
- G. National Fire Protection Association (NFPA):
- 80-16.....Fire Doors and Other Opening Protectives
- H. UL LLC (UL):
- 10C-09.....Positive Pressure Fire Tests of Door Assemblies
- 1784-15.....Air Leakage Tests of Door Assemblies and Other
Opening Protectives
- I. Department of Veterans Affairs
- VA Physical Security and Resiliency Design Manual October 1, 2020

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA,
AND SAMPLES.
- B. Submittal Drawings:
1. Show size, configuration, and fabrication and installation details.
- C. Manufacturer's Literature and Data:
1. Description of each product.
 2. Include schedule showing each door and frame requirements fire label
and smoke control label for openings.
 3. Installation instructions.
- D. Sustainable Construction Submittals:
1. Recycled Content: Identify post-consumer and pre-consumer recycled
content percentage by weight.
- E. Test reports: Certify products comply with specifications.
1. Sound rated door.
- F. Qualifications: Substantiate qualifications comply with specifications.
1. Manufacturer with project experience list.

G. Blast Design Calculations.

1. Submit calculations for review and approval prepared by qualified blast consultant, with a minimum of 5 years of experience in design of blast resistant window systems, verifying door assembly including anchors comply with specified blast resistance performance. The magnitudes of the design threats W1, W2 and GP1, GP2 are defined in the Physical Security and Resiliency Design Standards Data Definitions which is a document separate from the referenced VA Security and Resiliency Design Manual. The Physical Security and Resiliency Design Standards Data Definitions are provided on a need-to-know basis by the structural blast specialist performing the blast design on VA projects. It is the responsibility of the delegated engineer responsible for the design of blast resistant doors to request and obtain the Physical Security and Resiliency Design Data Standard Data Definitions from the VA Office of Construction and Facilities Management (CFM). Any associated delays or increased costs due to failure to obtain this information will be borne by the contractor.

1.5 QUALITY ASSURANCE

A. Manufacturer Qualifications:

1. Regularly manufactures specified products.
2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
 - a. Project Experience List: Provide contact names and addresses for completed projects.

1.6 DELIVERY

- A. Fasten temporary steel spreaders across the bottom of each door frame before shipment.
- B. Deliver products in manufacturer's original sealed packaging.
- C. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.
- D. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight conditioned facility.
- B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS**2.1 SYSTEM PERFORMANCE**

- A. Design hollow metal doors and frames complying with specified performance:
1. Fire Doors and Frames: UL 10C; NFPA 80 labeled.
 - a. Fire Ratings: See drawings.
 2. Stair Doors: Temperature rise rated fire doors.
 3. Smoke Control Doors and Frames: UL 1784; NFPA 80 labeled, maximum 0.15424 cubic meter/second/square meter (3.0 cubic feet/minute/square foot) at 24.9 Pa (0.10 inches water gauge) pressure differential.
 4. Sound Rated Doors and Frames: Minimum 45 sound transmission class (STC) when tested according to ASTM E90.
 5. Thermal Resistance: 6 R-value minimum at exterior doors.

2.2 MATERIALS

- A. Stainless Steel: ASTM A240/A240M; Type 304.
B. Sheet Steel: ASTM A1008/A1008M, cold-rolled.
C. Galvanized Sheet Steel: ASTM A653.
D. Insect Screening: ASTM D3656/D3656M, 18 by 18 aluminum wire mesh.
E. Aluminum Sheet: ASTM B209M (ASTM B209).
F. Aluminum Extrusions: ASTM B221M (ASTM B221).

2.3 PRODUCTS - GENERAL

- A. Provide hollow metal doors and frames from one manufacturer.
B. Sustainable Construction Requirements:
 1. Steel Recycled Content: 30 percent total recycled content, minimum.
 2. Stainless Steel Recycled Content: 70 percent total recycled content, minimum.
 3. Aluminum Recycled Content: 50 percent total recycled content, minimum.

2.4 HOLLOW METAL DOORS

- A. Hollow Metal Doors: ANSI A250.8; See drawings for sizes and designs.
 1. Interior Doors: Level 3 and Physical Performance Level A, extra-heavy duty; Model 2, seamless at stairs, and security, locations.

2. Exterior Doors: Level 3 and Physical Performance Level A, extra-heavy duty; Model 2, seamless at all locations.

B. Door Faces:

1. Interior Doors: Galvanized sheet steel minimum Z120 or ZF120 (G40 or A40) coating.
2. Exterior Doors: Galvanized sheet steel minimum Z120 or ZF120 (G40 or A40) coating.

C. Door Cores:

1. Interior Doors: Kraft paper honeycomb.
2. Exterior Doors: Polystyrene.
3. Fire Doors: Manufacturer's standard complying with specified fire rating performance.

2.5 HOLLOW METAL FRAMES

- A. Hollow Metal Frames: ANSI A250.8; face welded. See drawings for sizes and designs.

1. Interior Frames:

- a. Level 3 Hollow Metal Doors: 1.3 mm (0.053 inch) thick.
- b. Wood Doors and Borrowed Lights: 1.3 mm (0.053 inch) thick.

2. Interior Borrowed Light Frames: 1.3 mm (0.051 inch) thick.

B. Frame Materials:

1. Interior Frames: Galvanized sheet steel minimum Z120 or ZF120 (G40 or A40) coating.
2. Exterior Frames: Galvanized sheet steel minimum Z120 or ZF120 (G40 or A40) coating.

2.6 LOUVERS

- A. If louvers are provided in blast resistant doors both the louver and the door must meet the blast resistance requirements noted in this specification.

- B. Louver Style: Sight-proof permitting free ventilation.

1. Provide insect screen and wire guards at exterior doors.

- C. Louver Construction: Sheet metal matching door faces.

1. Interior Door Louvers: 0.8 mm (0.032 inch) thick.
2. Exterior Door Louvers: 1.3 mm (0.053 inch) inch thick.

- D. Screen Frames: Extruded or tubular aluminum.

1. Wire Guard Fabric: 0.9 mm (0.35 inch) diameter aluminum wire, spaced 1.58 mm (.0625 inch) on center both directions.

2.7 FABRICATION

- A. Hardware Preparation: ANSI A250.8; for hardware specified in Section 08 71 00, DOOR HARDWARE.
- B. Hollow Metal Door Fabrication:
 - 1. Close top edge of exterior doors flush and seal to prevent water intrusion.
 - 2. Fill spaces between vertical steel stiffeners with insulation.
- C. Fire and Smoke Control Doors:
 - 1. Close top and vertical edges flush.
 - 2. Apply steel astragal to active leaf at pair and double egress doors.
 - a. Exception: Where vertical rod exit devices are specified for both leaves swinging in same direction.
 - 3. Fire and Smoke Control Door Clearances: NFPA 80.
- D. Custom Metal Hollow Doors:
 - 1. Provide custom hollow metal doors where nonstandard steel doors are shown on drawings.
 - a. Provide door sizes, design, materials, construction, gauges, and finish as specified for standard steel doors.
- E. Sound Rated Doors:
 - 1. Seals: Integral spring type automatic door bottom seal.
 - 2. Fabricate vision panel cutouts and frames to receive double glazing as shown on drawings.
- F. Transom Panel Fabrication:
 - 1. Fabricate panels as specified for doors.
 - 2. Fabricate bottom edge with rabbet stop where no transom bar occurs.
- G. Hollow Metal Frame Fabrication:
 - 1. Fasten mortar guards to back of hardware reinforcements, except on lead-lined frames.
 - 2. Concealed Closers in Head Frame: Provide 1 mm (0.042 inch) thick steel removable stop sections for access to concealed face plates and control valves, except when cover plates are furnished with closer.
 - 3. Terminated Stops: ANSI A250.8.
 - 4. Borrowed Light and Panel Opening Frames:
 - a. Provide integral stop on exterior, corridor, or secure side of door.
 - b. Design rabbet width and depth to receive glazing material or panel shown on drawings.

5. Two Piece Frames:

- a. One-piece unequal leg finished rough buck sub-frames as shown, drilled for anchor bolts.
- b. Unequal leg finished frames formed to fit subframes and secured to subframe legs with countersunk, flat head screws, spaced 300 mm (12 inches) on center at head and jambs on both sides.
- c. Preassemble at factory for alignment.

6. Frame Anchors:

a. Floor anchors:

- 1) Provide extension type floor anchors to compensate for depth of floor fills.
- 2) Provide 1.3 mm (0.053 inch) thick steel clip angles welded to jamb and drilled to receive floor fasteners.
- 3) Provide 50 mm by 50 mm by 9 mm (2 inch by 2 inch by 3/8 inch) clip angle for lead lined frames, drilled for floor fasteners.
- 4) Provide mullion 2.3 mm (0.093 inch) thick steel channel anchors, drilled for two floor fasteners and frame anchor screws.
- 5) Provide continuous 1 mm (0.042 inch) thick steel rough bucks drilled for floor fasteners and frame anchor screws for sill sections.
 - a) Space floor bolts 50 mm (24 inches) on center.

b. Jamb anchors:

- 1) Place anchors on jambs:
 - a) Near top and bottom of each frame.
 - b) At intermediate points at maximum 600 mm (24 inches) spacing.
- 2) Form jamb anchors from steel minimum 1 mm (0.042 inch) thick.
- 3) Anchors set in masonry: Provide adjustable anchors designed for friction fit against frame and extended into masonry minimum 250 mm (10 inches). Provide one of following types:
 - a) Wire Loop Type: 5 mm (3/16 inch) diameter wire.
 - b) T-Shape type.
 - c) Strap and stirrup type: Corrugated or perforated sheet steel.
- 4) Anchors for stud partitions: Provide tabs for securing anchor to sides of studs. Provide one of the following:
 - a) Welded type.

- b) Lock-in snap-in type.
 - 5) Anchors for frames set in prepared openings:
 - a) Steel pipe spacers 6 mm (1/4 inch) inside diameter, welded to plate reinforcing at jamb stops, or hat shaped formed strap spacers 50 mm (2 inches) wide, welded to jamb near stop.
 - b) Drill jamb stop and strap spacers for 6 mm (1/4 inch) flat head bolts to pass through frame and spacers.
 - c) Two-piece frames: Subframe or rough buck drilled for 6 mm (1/4 inch) bolts.
 - 6) Anchors for observation windows and other continuous frames set in stud partitions.
 - a) Weld clip anchors to sills and heads of continuous frames over 1200 mm (4 feet) long.
 - b) Space maximum 600 mm (24 inches) on centers.
 - 7) Modify frame anchors to fit special frame and wall construction.
 - 8) Provide special anchors where shown on drawings and where required to suit application.
- H. Sound Rated Door Frames:
- 1. Seals: Integral continuous gaskets on frames.
- I. Louver Fabrication:
- 1. Fabricate louvers as complete units.
 - 2. Weld stationary blades to frames.
 - 3. Factory install louvers in door cutouts, welded to door.
- J. Louver Screen Fabrication:
- 1. Fabricate frame to hold wire fabric in channel with retaining bar anchor and to mount on surface of door with screws.
 - 2. Do not lap frame over louver opening.
 - 3. Miter frame corners and join by concealed mechanical fastenings extending about 57 mm (2-1/4 inches) into ends of each member.
 - 4. Drill frame and doors for screw attachment:
 - 5. Space screws 50 mm (2 inches) from end of each leg of frame and maximum 300 mm (12 inches) on center.
 - 6. Insect Screens: Fasten insect screens to interior side of doors with retaining bar against door and not exposed to view.
 - 7. Wire Guards: Fasten wire guard to exterior side of door with retaining bar against door and not exposed to view.

2.8 FINISHES

- A. Steel and Galvanized Steel: ANSI A250.8; shop primed.
- B. Stainless Steel: NAAMM AMP 500; No. 4 polished finish.
 - 1. Blend welds to match adjacent finish.
- C. Finish exposed surfaces after fabrication.
- D. Aluminum Anodized Finish: NAAMM AMP 500.
 - 1. Clear Anodized Finish: AA-C22A41; Class I Architectural, 0.018 mm (0.7 mil) thick.
 - 2. Color Anodized Finish: AA-C22A42 or AA-C22A44; Class I Architectural, 0.018 mm (0.7 mil) thick.
 - 3. Clear Anodized Finish: AA-C22A31; Class II Architectural, 0.01 mm (0.4 mil) thick.
 - 4. Color Anodized Finish: AA-C22A32 or AA-C22A34; Class II Architectural, 0.01 mm (0.4 mil) thick.

2.9 ACCESSORIES

- A. Primers: ANSI A250.8.
- B. Barrier Coating: ASTM D1187/D1187M.
- C. Welding Materials: AWS D1.1/D1.1M, type to suit application.
- D. Clips Connecting Members and Sleeves: Match door faces.
- E. Fasteners: Galvanized steel.
 - 1. Metal Framing: Steel drill screws.
 - 2. Masonry and Concrete: Expansion bolts and power actuated drive pins.
- F. Anchors: Galvanized steel.
- G. Galvanizing Repair Paint: MPI No. 18.
- H. Insulation: Unfaced mineral wool.

PART 3 - EXECUTION**3.1 PREPARATION**

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Apply barrier coating to metal surfaces in contact with cementitious materials to minimum 0.7 mm (30 mils) dry film thickness.

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
 - 2. Install fire doors and frames according to NFPA 80.

3. Install smoke control doors and frames according to NFPA 105.

3.3 FRAME INSTALLATION

- A. Apply barrier coating to concealed surfaces of frames built into masonry.
- B. Plumb, align, and brace frames until permanent anchors are set.
 1. Use triangular bracing near each corner on both sides of frames with temporary wood spreaders at midpoint.
 2. Use wood spreaders at bottom of frame when shipping spreader is removed.
 3. Where construction permits concealment, leave shipping spreaders in place after installation, otherwise remove spreaders when frames are set and anchored.
 4. Remove wood spreaders and braces when walls are built and jamb anchors are secured.
- C. Floor Anchors:
 1. Anchor frame jambs to floor with two expansion bolts.
 - a. Lead Lined Frames: Use 9 mm (3/8 inch) diameter bolts.
 - b. Other Frames: Use 6 mm (1/4 inch) diameter bolts.
 2. Power actuated drive pins are acceptable to secure frame anchors to concrete floors.
- D. Jamb Anchors:
 1. Masonry Walls:
 - a. Embed anchors in mortar.
 - b. Fill space between frame and masonry with grout or mortar as walls are built.
 2. Metal Framed Walls: Secure anchors to sides of studs with two fasteners through anchor tabs.
 3. Prepared Masonry and Concrete Openings:
 - a. Direct Securement: 6 mm (1/4 inch) diameter expansion bolts through spacers.
 - b. Subframe or Rough Buck Securement:
 - 1) 6 mm (1/4 inch) diameter expansion bolts on 600 mm (24 inch) centers.
 - 2) Power activated drive pins on 600 mm (24 inches) centers.
 - c. Secure two-piece frames to subframe or rough buck with machine screws on both faces.
- E. Frames for Sound Rated Doors: Fill frames with insulation.
- F. Lead Lined Frames:

1. Extend jambs and anchor with clip angles to structure above.
 - a. Fasteners to Concrete: Minimum two, 9 mm (3/8 inch) diameter expansion bolts or power actuated drive pins.
 - b. Connection to Structural Steel: Welded.

G. Touch up damaged factory finishes.

1. Repair galvanized surfaces with galvanized repair paint.
2. Repair painted surfaces with touch up primer.

3.4 DOOR INSTALLATION

- A. Install doors plumb and level.
- B. Adjust doors for smooth operation.
- C. Touch up damaged factory finishes.
 1. Repair galvanized surfaces with galvanized repair paint.
 2. Repair painted surfaces with touch up primer.

3.5 CLEANING

- A. Clean exposed door and frame surfaces. Remove contaminants and stains.

3.6 PROTECTION

- A. Protect doors and frames from traffic and construction operations.
- B. Remove protective materials immediately before acceptance.
- C. Repair damage.

- - - E N D - - -

**SECTION 08 14 00
INTERIOR WOOD DOORS**

PART 1 - GENERAL**1.1 SUMMARY**

A. Section Includes:

1. Interior flush wood doors transparent finish.
2. Interior stile and rail wood doors transparent finish.

1.2 RELATED WORK

- A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Paints and Coatings and Composite Wood and Agrifiber VOC Limits.
- B. Section 08 71 00, DOOR HARDWARE: Door Hardware including hardware location (height).
- C. Section 08 11 13, HOLLOW METAL DOORS AND FRAMES: Installation of Doors.
- D. Section 08 71 00, DOOR HARDWARE: Installation of Door Hardware.
- E. Section 08 80 00, GLAZING: Glazing in doors.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American National Standards Institute/Window and Door Manufacturers Association (ANSI/WDMA):
 1. I.S. 1A-13 - Architectural Wood Flush Doors.
 2. I.S. 6A-13 - Interior Architectural Stile and Rails Doors.
- C. ASTM International (ASTM):
 1. E90-09(2016) - Laboratory Measurements of Airborne Sound Transmission Loss of Building Partitions and Elements.
- D. National Fire Protection Association (NFPA):
 1. 80-16 - Fire Doors and Other Opening Protectives.
 2. 252-12 - Fire Tests of Door Assemblies.
- E. UL LLC (UL):
 1. 10C-09 - Positive Pressure Fire Tests of Door Assemblies.
- F. Window and Door Manufacturers Association (WDMA):
 1. TM 7-14 - Cycle-Slam Test.
 2. TM 8-14 - Hinge Loading Test.
 3. TM 10-14 - Screw Holding Capacity.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.
2. Include details of glazing.
3. Indicate project specific requirements not included in Manufacturer's Literature and Data submittal.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Fire rated doors showing conformance with NFPA 80.

D. Samples:

1. Corner section of flush veneered door 300 mm (12 inches) square, showing details of construction, labeled to show grade and type number and conformance to specified standard.
2. Veneer sample 200 mm by 275 mm (8 inch by 11 inch) showing specified wood species sanded to receive a transparent finish. Factory finish veneer sample where the prefinished option is accepted.

E. Sustainable Construction Submittals:

1. Low Pollutant-Emitting Materials:
Show volatile organic compound types and quantities.

F. Test Reports: Indicate products comply with specifications.

1. Screw Holding Capacity Test.
2. Cycle-Slam Test.
3. Hinge-Loading Test.

G. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

1.5 QUALITY ASSURANCE

A. Manufacturer Qualifications:

1. Regularly and presently manufactures specified products.
2. Manufactures specified products with satisfactory service on five similar installations for minimum five years.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

1. Minimum 0.15 mm (6 mil) polyethylene bags or cardboard packaging to remain unbroken during delivery and storage.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, and manufacture date.

1. Identify door opening corresponding to Door Schedule.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging. Retain packaging for door protection after installation.

1.7 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight conditioned facility.
 - 1. Store doors according to ANSI/WDMA I.S. 1A.
- B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

- A. Environment:
 - 1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
 - 2. Work Area Ambient Temperature Range: 21 to 27 degrees C (70 to 80 degrees F) continuously, beginning 48 hours before installation.
 - 3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.
- Comply with door manufacturer's instructions for relative humidity.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant interior factory finished flush and stile and rail wood doors against material and manufacturing defects.
 - 1. Warranty Period: Lifetime of original installation.

PART 2 - PRODUCTS**2.1 PRODUCTS - GENERAL**

- A. Provide each product from one manufacturer.
- B. Sustainable Construction Requirements:
 - 1. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
 - 2. Paints and coatings.
 - 3. Composite wood and agrifiber.

2.2 FLUSH WOOD DOORS

- A. General:
 - 1. ANSI/WDMA I.S. 1A, Extra Heavy Duty.
 - 2. Adhesive: Type II.
 - 3. Core: Structural composite lumber, except when mineral core is required for fire rating.
 - 4. Thickness: 44 mm (1-3/4 inches) unless otherwise shown or specified.
- B. Faces:
 - 1. ANSI/WDMA I.S. 1A.

2. One species throughout project unless scheduled or otherwise shown.
 3. Transparent Finished Faces: Premium Grade. Rotary cut. Match existing species.
 4. Match face veneers for doors for uniform effect of color and grain at joints.
 5. Door Edges: Same species as door face veneer, except maple is acceptable for stile face veneer on birch doors.
 6. In existing buildings, where doors are required to have transparent finish, use wood species, grade, and assembly of face veneers to match adjacent existing doors.
 7. Painted Finishes: Custom Grade, mill option close grained hardwood, premium or medium density overlay.
 8. Factory sand doors for finishing.
- C. Wood For Stops, Louvers, Muntins and Moldings for Flush Doors Required to Have Transparent Finish:
1. Solid wood of same species as face veneer, except maple is acceptable on birch doors.
 2. Glazing:
 - a. On non-fire-rated doors, use applied wood stops nailed tightly on room side and attached on opposite side with flathead, countersunk wood screws, spaced approximately 125 mm (5 inches) on center.
 3. Wood Louvers:
 - a. Door manufacturer's standard product, fabricated of solid wood sections.
 - 1) Wood Slats: minimum 5 mm (3/16 inch) thick.
 - 2) Stiles routed out to receive slats.
 - 3) Secure louvers in prepared cutouts with wood stops.
- D. Stiles and Rails:
1. Composite material having screw withdrawal force greater than minimum performance level value when tested according to WDMA TM 10.
 2. Provide adequate blocking for bottom of doors having mechanically operated door bottom seal meeting or exceeding performance duty level per WDMA TM 10 for horizontal door edge screw holding.
 3. Rabbeted transom meeting rail edges match face veneers of doors. Bottom rail of transom panel match face veneer on non-rabbeted meeting rail edge.

E. Fire-Rated Wood Doors:

1. Fire Resistance Rating:
 - a. B Label: 1-1/2 hours.
 - b. C Label: 3/4 hour.
2. Provide 20-minute smoke-rated doors in smoke-rated barriers.
3. Labels:
 - a. Comply with NFPA 252, UL 10C, and labeled by qualified testing and inspection agency showing fire resistance rating.
 - 1) Metal labels with raised or incised markings.
4. Performance Criteria for Stiles of Doors Utilizing Standard Mortise Leaf Hinges:
 - a. Hinge Loading: WDMA TM 8. Average of 10 test samples for Extra Heavy Duty doors.
 - b. Direct Screw Withdrawal: WDMA TM 10 for Extra Heavy Duty doors. Average of 10 test samples using a steel, fully threaded #12 wood screw.
 - c. Cycle-Slam: 1,000,000 cycles with no loose hinge screws or other visible signs of failure when tested according to WDMA TM 7.
5. Hardware Reinforcement:
 - a. Provide fire and smoke rated doors with hardware reinforcement blocking.
 - b. Size of lock blocks as required to secure hardware specified.
 - c. Top, Bottom and Intermediate Rail Blocks: Minimum 125 mm (5 inches) by full core width.
 - d. Reinforcement blocking in compliance with labeling requirements. Mineral material similar to core is not acceptable.
6. Other Core Components: Manufacturer's standard as allowed by labeling requirements.
7. Glazed Vision Panel Frame: Steel approved for use in labeled doors.
8. Astragal: Steel type for pairs of doors.

F. Smoke Barrier Doors:

1. Glazed Vision Panel Frame: Steel approved for use in labeled doors.
2. Astragal: Steel type for pairs of doors, including double egress doors.

G. Sound Rated Doors:

1. Fabricated as specified for flush wood doors with additional construction requirements to comply with specified sound transmission class (STC).

2. STC Rating of door assembly in place when tested according to ASTM E90 by independent acoustical testing laboratory minimum 35.

- a. Accessories:

- 1) Frame Gaskets and Automatic Door Bottom Seal: As specified in Section 08 71 00, DOOR HARDWARE.

H. Dutch Doors:

1. Consist of two sections, each fabricated as specified for flush doors.
2. Construct shelf as detailed, from clear hardwood stock of same species as face veneer of door.
3. Place shelf on top of lower section of door and support as shown with a pair of wood or wrought steel brackets.
4. Prime steel brackets for finish painting.

2.3 STILE AND RAIL WOOD DOORS

A. Doors: ANSI/WDMA I.S. 6A; Grade Premium, Custom, size and design shown on drawings.

B. Species: Ponderosa pine.

C. Door Panels:

1. Grain of face of panels parallel with longest dimensions of panel.
2. Flat panels: Veneered composite core, minimum 16 mm (5/8 inch) thick.
3. Raised panels: Unless otherwise shown, thickness of raised panels minimum the following:
 - a. For 44 mm (1-3/4 inch) thick doors: 28 mm (1-1/8 inch) thick.
4. Where armor plate is required for paneled doors, provide panels with plywood fillers, glued in place, and finished.

D. Stops and Molds:

1. Solid sticking both sides, same material as stiles and rails, coped joints.
2. Glazed Vision Panel Frame: Applied wood stops nailed on interior side of door.

E. Louvers: Size as shown.

2.4 FABRICATION

A. Factory machine interior wood doors to receive hardware, bevels, undercuts, cutouts, accessories and fitting for frame.

1. Factory fit fire rated doors according to NFPA 80.

B. Rout doors for hardware using templates and location heights specified in Section 08 71 00, DOOR HARDWARE.

- C. Factory fit doors to frame, bevel lock edge of doors 3 mm (1/8 inch) for each 50 mm (2 inches) of door thickness undercut where shown.
- D. Clearances between Doors and Frames and Floors:
 - 1. Fire Rated Doors: Comply with NFPA 80.
 - a. Doors with Automatic Bottom Seal: Maximum clearance 10 mm (3/8 inch) at threshold.
 - b. Other Door Bottoms: Maximum 3 mm (1/8 inch) clearance at the jambs, heads, and meeting stiles, and a 19 mm (3/4 inch) clearance at bottom, except as otherwise specified.
 - 2. Door Jambs, Heads, and Meeting Stiles: Maximum 3 mm (1/8 inch).
- E. Provide cutouts for glazed and louver openings.
- F. Finish surfaces, including both faces, top and bottom and edges of the doors smooth to touch.
- G. Identify each door on top edge.
 - 1. Mark with stamp, brand or other indelible mark, giving manufacturer's name, door's trade name, construction of door, date of manufacture and quality.
 - 2. Mark door or provide separate certification including name of inspection organization.
 - 3. Identify door manufacturing standard, including glue type.
 - 4. Identify veneer and quality certification.
 - 5. Identification of preservative treatment for stile and rail doors.

2.5 FINISHES

- A. Field Finished Doors: Seal top and bottom edges of doors with two coats of catalyzed polyurethane or water-resistant sealer.
- B. Factory Transparent Finish:
 - 1. Factory finish flush and stile and rail wood doors.
 - a. ANSI/WDMA I.S. 1A Section F-3 Finish System Descriptions for System 5, Conversion Varnish or System 7, Catalyzed Vinyl.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
 - 1. Verify door frames are properly anchored.
 - 2. Verify door frames are plumb, square, in plane, and within tolerances for door installation.
- B. Protect existing construction and completed work from damage.
- C. Install astragal on active leaf of pair of smoke doors and one leaf of double egress smoke doors.

3.2 INSTALLATION

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. Install fire rated doors according to NFPA 80.
 - 2. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 PROTECTION

- A. After installation, place shipping container over door and tape in place.
 - 1. Do not apply tape to door faces and edges.
- B. Provide protective covering over exposed hardware in addition to covering door.
- C. Maintain covering in good condition until removal is directed by Contracting Officer's Representative.

- - - E N D - - -

SECTION 08 17 10
INTEGRATED DOOR ASSEMBLIES

PART 1 - GENERAL**1.1 SUMMARY**

- A. Section Includes:
 - 1. Integrated door assemblies including metal door frame, door, and hardware, unless specified in another Section, installed at cross-corridor locations.
- B. Smoke and draft control seals, unless specified in another Section.

1.2 RELATED WORK

- A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Non-Flooring Adhesives and Sealants and Paints and Coatings VOC Limits.
- B. Section 08 71 00, DOOR HARDWARE: Lock Cylinders.
- C. Section 08 71 13, AUTOMATIC DOOR OPERATORS: Automatic Door Operators.
- D. DIVISION 26, ELECTRICAL: Electrical Power.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. Builders Hardware Manufacturers Association (BHMA):
 - A156.3-14.....Exit Devices.
 - A156.26-06.....Continuous Hinges.
 - A156.32-14.....Integrated Door Opening Assemblies.
- C. ASTM International (ASTM):
 - A1011/A1011M-18a.....Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength.
 - E2180-18.....Determining the Activity of Incorporated Antimicrobial Agents in Polymeric or Hydrophobic Materials.
- D. Door and Hardware Institute (DHI):
 - 1. Recommended Locations for Architectural Hardware for Standard Doors & Frames (2004).
 - 2. Recommended Locations for Builders' Hardware Custom Steel Doors & Frames (1996).
- E. National Fire Protection Association (NFPA):
 - 105-16.....Smoke Door Assemblies and Other Opening Protectives.

252-12.....Fire Tests of Door Assemblies.

F. Steel Door Institute (SDI):

A250.3-11.....Test Procedure and Acceptance Criteria for
Factory Applied Finish Coatings for Steel Doors
and Frames.

A250.8-14.....Specifications for Standard Steel Doors and
Frames.

A250.10-11.....Test Procedure and Acceptance Criteria for
Prime Painted Steel Surfaces for Steel Doors
and Frames.

G. UL LLC (UL):

10C-09.....Positive Pressure Fire Tests of Door
Assemblies.

1784-15.....Air Leakage Tests of Door Assemblies and Other
Opening Protectives.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before
beginning Work of this section.

1. Required Participants:

- a. Contracting Officer's Representative.
- b. Contractor.
- c. Installer.
- d. Other installers responsible for adjacent and intersecting work,
including electrical.

2. Meeting Agenda: Distribute agenda to participants minimum 3 days
before meeting.

- a. Installation schedule.
- b. Installation sequence.
- c. Preparatory work.
- d. Protection before, during, and after installation.
- e. Installation.
- f. Transitions and connections to other work.
- g. Other items affecting successful completion.

3. Document and distribute meeting minutes to participants to record
decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA,
AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.
2. For each opening, list finish hardware items included in assembly, finish, degree of opening, and electrical rough-in requirements according to Door Schedule.
3. Submit templates to door and frame manufacturers to ensure proper size and location of hardware.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Installation instructions.

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
2. Low Pollutant-Emitting Materials:
 - a. Show volatile organic compound types and quantities.

E. Certificates: Indicate integrated door assemblies comply with specifications.

1. Show fire rated integrated door assembly is UL Listed for specified application.

F. Qualifications: Substantiate qualifications comply with specifications.

1. Installer.

G. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.
2. Maintenance and adjustment instructions for integrated door assemblies.

1.6 QUALITY ASSURANCE**A. Installer Qualifications:**

1. Regularly installs specified products.
2. Installed specified products with satisfactory service on five similar installations for minimum five years.
 - a. Provide contact names and addresses for completed projects when requested by Contracting Officer's Representative.

1.7 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight facility.
- B. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

- A. Field Measurements: Verify field conditions affecting integrated door assembly fabrication and installation. Show field measurements on Submittal Drawings.
 - 1. Coordinate field measurement and fabrication schedule to avoid delay.
 - 2. Coordinate electrical work for electrified hardware installation.

1.10 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant door closers and hinges against material and manufacturing defects.
 - 1. Warranty Periods:
 - a. Door Closers: 10 years.
 - b. Steel Pinned Continuous Hinges: 10 years.

PART 2 - PRODUCTS**2.1 SYSTEM PERFORMANCE**

- A. Design integrated door assemblies complying with specified performance:
 - 1. BHMA A156.32: Grade 1: 1,000,000 cycles.
- B. Fire Rated Doors:
 - 1. Fire Resistance Rating: As shown in Door Schedule.
 - 2. Label: Comply with NFPA 252, UL 10C, and labeled by qualified testing and inspection agency showing fire resistance rating.
- C. Smoke Rated Doors:
 - 1. Smoke Resistance Rating: As shown in Door Schedule.
 - 2. Label: Comply with NFPA 105, UL 1784, and labeled by qualified testing and inspection agency showing smoke resistance rating.

2.2 PRODUCTS - GENERAL

- A. Basis of Design: See contract Drawings.
- B. Provide each integrated door assembly from one manufacturer.
- C. Sustainable Construction Requirements:
 - 1. Steel Recycled Content: 30 percent total recycled content, minimum.

2. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:

- a. Non-flooring adhesives and sealants.
- b. Paints and coatings.

2.3 INTEGRATED DOOR ASSEMBLY

- A. Metal Doors: SDI A250.8; Level 2 and Physical Performance Level B, heavy duty; Model 2 seamless.
 1. Face: ASTM A1011/A1011M; cold rolled steel, 1.0 mm (0.04 inches) thick, minimum.
 - a. Cladding: Plastic laminate.
 2. Core: Kraft paper honeycomb or polystyrene.
 3. Thickness: 44 mm (1-3/4 inch).
 4. Reinforce door for hardware installation.
- B. Metal Frames: SDI A250.8 Level 2.
 1. Metal: ASTM A1011/A1011M; cold rolled steel, 1.3 mm (0.05 inches) thick, minimum.
 2. Construction: Continuously welded.
 3. Reinforce frame for hardware.
 - a. Continuous Hinges: 2.3 mm (0.09 inches) thick.
 - b. Other Hardware: Comply with SDI A250.8.
 4. Frame Anchors: Provide adjustable type anchors coordinated with wall construction, minimum 4 per jamb.
- C. Integrated Hardware:
 1. Exit Device: BHMA A156.3; Grade 1, passage function, inset in door face, clean and unobtrusive in design.
 - a. Push Bar End Caps: Metal, plated satin nickel (BHMA 619) finish.
 - b. Exit Device Trim: Lever matching door hardware specified in Section 08 71 00, DOOR HARDWARE.
 2. Continuous Hinges: BHMA A156.26.
 - a. Plastic Laminate Clad Doors: Wrap-around style hinge guards and provide stainless steel wrap-around edge guards at strike edge of door.
 3. Other Hardware: As scheduled in this section.

2.4 FINISHES

- A. Hardware Finish Symbols:

TABLE I - Hardware Finish Symbols

US	BHMA 156.18	Description

US	BHMA 156.18	Description
USP	600	Primed for field painting
US15	619	Dull Nickel Plated
US26D	626/652	Satin Chrome Plated
US28	628	Satin Aluminum
US32	629	Bright Stainless
US32D	630	Satin Stainless
N/A	689	Aluminum Painted

B. Finish Requirements:

1. Door Faces: Plastic Laminate.
2. Frames: Prime painted, SDI A250.10.
3. Door Hardware:
 - a. Continuous Hinges: BHMA 630.
 - b. Push Bar: BHMA 630 clad with BHMA 619 end caps.
 - c. Exit Device Trim: BHMA 630.
 - d. Push/Pull Trim: BHMA 626.
 - e. Door Closers: BHMA 689.
 - f. Miscellaneous: To match other finishes.
4. Anti-Microbial Coating: ASTM E2180; ionic silver coating.
5. Apply coating to hand-operated hardware including levers, pulls, push bars, push plates, and paddles.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.

3.2 INSTALLATION - INTEGRATED DOOR ASSEMBLIES

- A. Install products according to manufacturer's instructions and approved submittal drawings.
- B. Install door hardware at locations indicated in DHI Recommended Locations for Architectural Hardware for Standard Steel Doors & Frames and DHI Recommended Locations for Builders' Hardware Custom Steel Doors & Frames, unless otherwise indicated, or to comply with requirements of governing regulations, or if otherwise directed by Contracting Officer's Representative.
- C. Install door hardware in compliance with manufacturers' instructions, and templates. Comply with specified degree of opening for doors with automatic operators and overhead door closers. Securely fasten

hardware. Confirm operating parts move freely and smoothly without binding, sticking, and excessive clearance.

- D. Coordinate installation and interface wiring with fire alarm and smoke detection systems. Provide auxiliary contacts, relays, and interface for fire alarm and security systems.
- E. Remove or protect door hardware, before painting and finishing performed after integrated door assembly installation.
- F. Adjust and check door assembly and each operating hardware item to ensure correct operation and function. Replace products which cannot be adjusted to operate as intended.
- G. Final Adjustment: Perform final hardware check and adjustment maximum one month before building acceptance or partial building occupancy.

3.3 CLEANING

- A. Clean exposed surfaces, including hardware. Do not use cleaners that will harm finishes.

3.4 PROTECTION

- A. Protect integrated door assemblies from construction operations.

3.5 SCHEDULES

- A. The following is a general listing of the Integrated Door Assembly requirements and is not intended for use as a final door submittal. Provide hardware items required by established standards and practices, and to meet IBC and NFPA 101 whether specified or not in the following listed groups.

HW-12C

Each [ADO] Pair Integrated Double Egress Doors to Have:	RATED
1 Steel Frame	-
1 Integrated Pair Doors w/Exit Devices	Q2331 x TYPE 8 EXIT DEVICES (F01)
2 Continuous Hinges	A51031B
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Closers	C02011/C02021 (PT4D, PT4H)
2 Magnetic Holders	C00011 TRI-VOLTAGE
1 Set Self-Adhesive Seals	R0E154

- 1. Power, wiring, conduit, and fire alarm connection by Division 26.

- - - E N D - - -

**SECTION 08 31 13
ACCESS DOORS AND FRAMES**

PART 1 - GENERAL**1.1 SUMMARY**

A. Section Includes:

1. Access doors and panels installed in walls and ceilings.

1.2 RELATED WORK

- A. Section 05 50 00, METAL FABRICATIONS: Wire Mesh and Screen Access Doors.
- B. Section 08 71 00, DOOR HARDWARE: Lock Cylinders.
- C. Section 09 91 00, PAINTING: Field Painting.
- D. Section 21 13 13, WET-PIPE SPRINKLER SYSTEMS: Access Doors for Control or Drain Valves.
- E. Section 21 12 16, DRY-PIPE SPRINKLER SYSTEMS: Access Doors for Control or Drain Valves.
- F. Section 22 40 00, PLUMBING FIXTURES: Access Doors for Plumbing Valves.
- G. Section 23 31 00, HVAC DUCTS AND CASINGS: Locations of Access Doors for Ductwork Cleanouts.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American Welding Society (AWS):
- D1.3/D1.3M-2018.....Structural Welding Code - Sheet Steel
(6th Edition.
- C. ASTM International (ASTM):
- A653/A653M-20.....Steel Sheet, Zinc-Coated (Galvanized) or
Zinc-Iron Alloy-Coated (Galvannealed) by the
Hot-Sip Process.
- A1008/A1008M-18.....Steel, Sheet, Cold-Rolled, Carbon, Structural,
High-Strength Low-Alloy, High-Strength
Low-Alloy with Improved Formability, Solution
Hardened, and Bake Hardenable.
- A666-15.....Annealed or Cold-Worked Austenitic Stainless
Steel sheet, Strip, Plate, and Flat Bar.
- E119-20.....Fire Test of Building Construction and
Materials.
- D. National Fire Protection Association (NFPA):
- 80-2019 Edition.....Fire Doors and Other Opening Protectives.
- 252-2017 Edition.....Fire Tests of Door Assemblies.

E. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual.

F. UL LLC (UL):

Listed.....Online Certifications Directory.
10B-08 (Edition 10).....Standard for Fire Tests of Door Assemblies.
263-11 (Edition 14).....Fire Tests of Building Construction and
Materials.

PART 2 - SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Show size, configuration, and fabrication and installation details.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Installation instructions.
- D. Sustainable Construction Submittals:
 - 1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

2.2 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

2.3 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight facility.
- B. Protect products from damage during handling and construction operations.

2.4 FIELD CONDITIONS

- A. Field Measurements: Verify field conditions affecting access door fabrication and installation. Show field measurements on Submittal Drawings.
 - 1. Coordinate field measurement and fabrication schedule to avoid delay.

2.5 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

2.6 MATERIALS

- A. Steel Sheet: ASTM A1008/A1008M.
- B. Galvanized Steel: ASTM A653/A653M.
- C. Stainless Steel: ASTM A666; Type 302 or Type 304.

2.7 PRODUCTS - GENERAL

- A. Provide each product from one manufacturer.
- B. Sustainable Construction Requirements:
 - 1. Steel Access Doors Recycled Content: 30 percent total recycled content, minimum.
 - 2. Stainless Steel Access Doors Recycled Content: 70 percent total recycled content, minimum.

2.8 ACCESS DOORS, FIRE-RATED

- A. Door Construction:
 - 1. Ceiling Access Door Construction: ASTM E119 or UL 263.
 - 2. Wall Access Doors: NFPA 252 or UL 10B.
- B. Label: Class B opening according to UL 10B or test by another nationally recognized laboratory. 1 hour fire-rated with maximum temperature rise of 120 degrees C (216 degrees F).
- C. Door Panel: Minimum 0.9 mm (0.0359 inch) thick sheet, with mineral-fiber insulation core, insulated sandwich type construction.
- D. Frame: Minimum 1.5 mm (0.0598 inch) thick steel sheet, depth and configuration to suit material and construction type where installed.
 - 1. Frame Flange: Provide at units installed in concrete, masonry, or gypsum board.
 - 2. Exposed Joints in Flange: Weld and grind smooth.
 - 3. Provide expanded galvanized metal lath perimeter wings when installed in plaster, except veneer plaster.
- E. Provide automatic closing device.
- F. Hinge: Continuous steel hinge with stainless steel pin.
- G. Lock: Self-latching, mortise type with provision for fitting flush a standard screw-in type lock cylinder.
 - 1. Lock cylinder specified in Section 08 71 00, DOOR HARDWARE.
 - 2. Latch release device operable from inside of door.
- H. Anchors for Fire-Rated Access Doors: Comply with requirements of applicable fire test.

2.9 ACCESS DOORS, FLUSH PANEL, NON-RATED

- A. Door Panel:
 - 1. 1.9 mm (0.07 inch) thick steel sheet.

2. Reinforce to maintain flat surface.

B. Frame:

1. 1.5 mm (0.06 inch) thick steel sheet, depth and configuration to suit material and construction type where installed.
2. Frame Flange: Provide at units installed in concrete, masonry, and gypsum board.
3. Exposed Joints in Flange: Weld and grind smooth.
4. Provide expanded galvanized metal lath perimeter wings when installed in plaster, except veneer plaster.

C. Hinge:

1. Concealed spring hinge, 175 degrees of opening.
2. Removable hinge pin to allow removal of door panel from frame.

D. Lock:

1. Flush, screwdriver-operated cam lock.
2. Tamper proof screws (spanner head locks) for access panels in Behavioral Health Areas.

2.10 ACCESS DOOR, RECESSED PANEL, NON-RATED

A. Door Panel:

1. 1.2 mm (0.05 inch) thick steel sheet to form a 25 mm (1 inch) deep recessed pan to accommodate installation of acoustical units and other materials where shown in walls and ceiling.
2. Reinforce to prevent sagging.

B. Frame:

1. 1.5 mm (0.06 inch) thick steel sheet of depth and configuration to suit installation in suspension system of ceiling or wall framing.
2. Extend sides of frame to protect edge of acoustical units when door panel is in open position.
3. Provide shims, bushings, clips and other devices necessary for installation.

C. Hinge: Continuous steel hinge with stainless steel pin, or concealed hinge.

D. Lock:

1. Flush screwdriver-operated cam lock.
2. Plastic sleeve or grommet to protect hole made in acoustical unit for screwdriver access to lock.
3. Tamper proof screws (spanner head locks) for access panels in Behavioral Health Areas.

2.11 FABRICATION - GENERAL

- A. Size: Minimum 600 mm (24 inches) square door unless otherwise shown or required to suit opening in suspension system of ceiling.
- B. Component Fabrication: Straight, square, flat and in same plane where required.
 - 1. Exposed Edges: Slightly rounded, without burrs, snags and sharp edges.
 - 2. Exposed Welds: Continuous, ground smooth.
 - 3. Welding: AWS D1.3/D1.3M.
- C. Locks and Non-Continuous Hinges: Provide in numbers required to maintain alignment of door panel with frame. For fire-rated doors, provide hinges and locks as required by fire test.
- D. Anchoring: Make provisions in frame for anchoring to adjacent construction. Provide anchors in size, number and location on four sides to secure access door to substrate. Provide anchors as required by fire test.

2.12 FINISHES

- A. Steel Paint Finish:
 - 1. Powder-Coat Finish: Manufacturer's standard two-coat finish system consisting of the following:
 - a. One coat primer.
 - b. One coat thermosetting topcoat.
 - c. Dry-film Thickness: 0.05 mm (2 mils) minimum.

2.13 ACCESSORIES

- A. Fasteners: Type and size recommended by access door manufacturer, to suit application.
 - 1. Stainless Steel Access Doors: Stainless steel fasteners.
 - 2. Other Access Doors: Galvanized steel fasteners.

PART 3 - EXECUTION**3.1 PREPARATION**

- A. Examine and verify substrate suitability for product installation.
 - 1. Verify access door locations and sizes provide required maintenance access to installed building services components.
- B. Protect existing construction and completed work from damage.

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Install access doors and panels permitting access to service valves, traps, dampers, cleanouts, and other mechanical, electrical and conveyor control items concealed in walls and partitions and concealed above gypsum board and plaster ceilings.
- C. Install fire rated access door according to NFPA 80.
- D. Install fire-rated doors in fire-rated partitions and ceilings.
- E. Install flush access panels in partitions and in gypsum board and plaster ceilings.

3.3 ACCESS DOOR AND FRAME INSTALLATION

- A. Wall Installations: Install access doors in openings with sides vertical.
- B. Ceiling Installations: Install access doors parallel to ceiling suspension grid or room partitions.
- C. Frames without Flanges: Install frame flush with surrounding finish surfaces.
- D. Frames with Flanges: Overlap opening, with face uniformly spaced from finish surface.
- E. Recessed Panel Access Doors: Install with face of surrounding materials flush with door panel installed finish.
- F. Secure frames to adjacent construction with fasteners.
- G. Install type, size and quantity of anchoring device suitable for material surrounding opening to maintain alignment, and resist displacement, during normal use of access door.
- H. Field Painting Primed Access Doors: Comply with the requirements of Section 09 91 00, PAINTING.

3.4 ADJUSTMENT

- A. Adjust hardware so door panel opens freely.
- B. Adjust door when closed so door panel is centered in frame.

- - - E N D - - -

**SECTION 08 33 43
OVERHEAD COILING SMOKE CURTAINS FOR ELEVATOR DOORS**

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Overhead Coiling Smoke Curtains for Elevator Doors.

1.2 RELATED SECTIONS

- A. Section 14 21 00 - Electric Traction Elevators.
- B. Section 14 24 00 - Hydraulic Elevators.
- C. Section 28 30 00 - Detection and Alarms.

1.3 COORDINATION

- A. Coordinate smoke curtain assemblies with power, signal, fire-alarm, and smoke-detection systems specified in Division 26 and Division 28.
- B. Coordinate elevator smoke-protective curtain assemblies with elevator hoistway door frames specified in Division 14.
- C. Coordinate smoke-protective curtain assemblies with ceilings for operational clearances and maintenance access requirements.
- D. Coordinate smoke-protective curtain assemblies with walls for support requirements, rating continuity above ceilings, and recessed wall switches.
- E. Coordinate requirements for metal supports required for smoke-protective curtain assemblies.

1.4 INFORMATIONAL SUBMITTALS

- A. Submit under provisions of Section 01 30 00.
- B. Product Data: Manufacturer's product information and data sheets for each product specified in this section, including:
 - 1. Substrate preparation instructions and recommendations.
 - 2. Installation means and methods.
 - 3. Recommendations and requirements for proper storage and handling.
- C. Shop Drawings:
 - 1. Submit Manufacturer's approved shop drawings detailing the section and elevation views of each product to be installed.
 - 2. Coordinate with locations listed on Contract Drawings.
- D. Warranty Information:
 - 1. Submit confirmation and details of manufacturer's warranty, extended warranty, and replacement policies.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For smoke-protective curtain assemblies to include in emergency, operation, and maintenance manuals.
- B. Field quality-control reports for required testing.

1.6 QUALITY ASSURANCE

A. Qualifications:

1. Manufacturer: Minimum of seven (7) years' experience in manufacturing draft-control curtain assemblies at a facility in the United States that have been successfully installed in compliance with requirements of authorities having jurisdiction.
2. Installers: An entity that employs installers and supervisors who are trained and approved by manufacturer for both installation and maintenance of units required for this Project.

1.7 DELIVERY, STORAGE AND HANDLING

- A. Deliver, store and handle materials and products in accordance with the manufacturer's instructions and recommendations and industry standards.
- B. Store all materials in the manufacturer's original packaging until ready for installation. Protect all products from damage or exposure to adverse weather conditions.

1.8 PROJECT CONDITIONS

- A. Prior to fabrication, verify that dimensions are consistent with those found in the construction drawings. Where discrepancies exist, confirm the proper dimensions with the Architect before proceeding with work.

1.9 WARRANTY

- A. Manufacturer Warranty: Provide manufacturer's warranty covering parts and labor costs to repair or replace part that fail to perform.
 1. Warranty Period: Parts and labor warranty for 12 months from date of Substantial Completion or date of purchase, whichever comes first.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Basis of Design Manufacturer: DSI Smoke and Fire Curtains.
 1. Phone: (866) 534-3667.
 2. Website: www.doorsysing.com
- B. Manufacturer List:
 1. Manufacturer: DSI Smoke and Fire Curtains.
- C. Substitution Limitations:
 1. Submit substitution requests in accordance with provisions of Section 01 60 00.
 2. Single manufacturer to provide, from a single source, a fully integrated smoke-and-draft containment system consisting of smoke-and-draft-protective curtains and the following components:
 - a. Smoke-and-Draft-Protective Curtain Operators.

b. Smoke-and-Draft-Protective Curtain Controls.

2.2 SMOKE-PROTECTIVE CURTAIN ASSEMBLIES FOR ELEVATOR ENTRANCES

- A. Alarm-activated transparent-film smoke curtain assembly complying with ICC-ES AC77 and NFPA 105.
 - 1. Basis of Design Product: DSI-600 Fire Rated Elevator Smoke Containment System.
- B. Smoke-Protective Curtain Assemblies: Provide smoke-protective curtains listed and labeled with the letter "S" by a qualified testing agency for smoke- and draft-control based on testing in accordance with UL 1784 without an artificial bottom seal; with maximum air-leakage rate of 3.0 cfm/sq. ft. (0.01524 cu. m/s x sq. m) of opening at 0.10 inch wg (24.9 Pa) for both ambient and elevated temperature tests in accordance with ICC-ES AC77.
- C. Curtain Materials: Provide manufacturer's standard curtain complying with each of the following:
 - 1. Flame-Spread and Smoke-Developed Indexes: No greater than 25 and 50, respectively, when tested in accordance with ASTM E84.
 - 2. The fabric curtain shall be manufactured from VG455 woven glass fiber cloth. The woven glass fiber fabric shall have a nominal weight of no less than 455g/square meter and shall be UL listed for at least one hour fire rating.
 - 3. Screen Reinforcement: Provide film with reinforcement to limit deflection or tearing.
 - 4. A weighted bottom bar shall be provided to prevent deflection and ensure correct operation under gravity.
- D. Curtain Egress: Provide curtain that is operable from the egress side without use of keys, tools, special knowledge, or effort in excess of the opening force requirements of authorities having jurisdiction.
 - 1. Egress Switch: Include switch to rewind screen into housing to comply with egress requirements of ASME A17.1.
 - a. Switch Size and Color: Provide switch no less than 4 by 4 inches and in contrasting color with curtain.
 - b. Switch Operation: Provide switch operable with a closed fist or a loose grip, not requiring finger movements in compliance with the requirements of authorities having jurisdiction.
 - c. Switch Location: Between 15 and 48 inches above finished floor level in compliance with forward reach requirements of authorities having jurisdiction.

2. Manual Egress: Provide curtain allowing fail-safe manual egress with less than 15 pounds release pressure in the direction of travel.
 - a. Opening Size: Provide curtain with manual egress opening of at least 32 inches in compliance with the requirements of authorities having jurisdiction.
- E. Curtain Attachment: Provide curtain that forms a pressure-resisting seal by magnetic adhesion with flexible multi-pole magnetic strips attached to longitudinal edges of film with low modulus silicone adhesive.
 1. Curtain Installation: Provide curtain attachment systems that do not require modification of the elevator jamb including direct or mechanical attachment.
 2. Elevator Door Frames: Type 430 ferritic stainless steel elevator door frames to create seal with curtain by magnetic adhesion.
 - a. Auxiliary Rails: Provide 16-gauge ASTM A240/240M, Type 430, ferritic stainless steel vertical rails above elevator door head to create seal with curtain by magnetic adhesion no less than 2 inches (51 mm) wide, 1 inch (25 mm) deep.
 3. Auxiliary Rails: Provide vertical rails to create seal with curtain by magnetic adhesion.
 - a. Material: 16-gauge ASTM A240/240M, Type 430, ferritic stainless steel.
 - b. Size: At least 2 inches (51 mm) wide, 1 inch (25 mm) deep.
- F. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- G. Curtain Housing: Provide sheet metal housings containing support rollers and associated electronics.
 1. Coordinate operator wiring requirements and electrical characteristics with building electrical system.
 2. Housing includes electrical junction box that does require the removal of any part of the building in accordance with NFPA 70.
 3. Provide electrical junction box access through housing in the open condition.
 4. Curtain housing to contain all components required for operation.
 5. Housing Finish: Manufacturer's standard powder coat finish in white.
 6. Housing Finish: Manufacturer's standard powder coat finish in custom RAL color.
 7. Housing Finish: Manufacturer's standard stainless steel.

H. Curtain Operation: Controlled descent automatically by fail-safe, gravity-closing deployment and motorized rewind.

1. Curtain deploys on activation of one of the following:

- a. Local Smoke Detector.
- b. Building Fire Alarm.
- c. Testing Key Switch

2. Release Mechanism: Labelled as defined by UL864.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates upon which work will be installed.

- 1. Verify related work performed under other sections is complete and in accordance with Shop Drawings.
- 2. Verify wall surfaces and elevator door frames are acceptable for installation of smoke containment system components.

B. Coordinate with responsible entity to perform corrective work on unsatisfactory substrates.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

D. Verify that locations of concealed reinforcements have been clearly marked for the installer.

E. Locate reinforcement points and clearly mark their locations if not already done.

3.2 PREPARATION

A. Clean surfaces prior to installation.

B. Prepare surfaces as recommended by the manufacturer for achieving optimal results.

3.3 INSTALLATION

A. Install in accordance with manufacturer's current installation instructions and industry recognized best practices.

B. Install in accordance with all code bodies having jurisdiction.

3.4 CLEANING AND PROTECTION

A. Clean and remove all stains, grime, or other soils using soap and water. Only use detergents approved by the manufacturer for use on the finishes specified. Do not use acid solutions, steel wool, and other harsh abrasives.

B. Damaged products must be repaired or replaced prior to substantial completion.

C. Protect installed products until completion of work specified in this section.

3.5 FIELD QUALITY CONTROL

A. Field Test: Follow manufacturer's cycle test procedures.

1. Notify Owner's Representative, local Fire Marshal, alarm sub-contractor and elevator sub-contractor or service company minimum one week in advance of scheduled testing.
2. Complete maintenance service record.

3.6 DEMONSTRATION

A. Demonstrate required testing and maintenance procedures to Owner's Representative.

3.7 MAINTENANCE AND TESTING

- A. Perform minimum semi-annual maintenance and testing on each smoke containment system as required by the manufacturer's warranty, code agency evaluation reports, and as required by local authority having jurisdiction.
1. Retain permanent record of tests.
- B. Future Painting: Paint elevator door frame and/or auxiliary rails in accordance with Operation and Maintenance Manual.
- C. Fire Event: Owner shall engage a qualified inspector to assess unit(s) after exposure to a fire event.

- - - E N D - - -

**SECTION 08 71 00
DOOR HARDWARE**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Door hardware and related items necessary for complete installation and operation of doors.

1.2 RELATED WORK

- A. Caulking: Section 07 92 00 JOINT SEALANTS.
- B. Application of Hardware: Section 08 14 00, WOOD DOORS; Section 08 11 13, HOLLOW METAL DOORS AND FRAMES; Section 08 17 10, INTEGRATED DOOR ASSEMBLIES; Section 08 71 13, AUTOMATIC DOOR OPERATORS Section 32 31 33, CHAIN LINK FENCES AND GATES.
- C. Painting: Section 09 91 00, PAINTING.
- D. Card Readers: Section 28 13 11, PHYSICAL ACCESS CONTROL SYSTEMS.
- E. Electrical: Division 26, ELECTRICAL.
- F. Fire Detection: Section 28 31 00, FIRE DETECTION AND ALARM.

1.3 GENERAL

- A. All hardware shall comply with ABAAS, (Architectural Barriers Act Accessibility Standard) unless specified otherwise.
- B. Provide rated door hardware assemblies where required by most current version of the International Building Code (IBC).
- C. Hardware for Labeled Fire Doors and Exit Doors: Conform to requirements of NFPA 80 for labeled fire doors and to NFPA 101 for exit doors, as well as to other requirements specified. Provide hardware listed by UL, except where heavier materials, large size, or better grades are specified herein under paragraph HARDWARE SETS. In lieu of UL labeling and listing, test reports from a nationally recognized testing agency may be submitted showing that hardware has been tested in accordance with UL test methods and that it conforms to NFPA requirements.
- D. Hardware for application on metal and wood doors and frames shall be made to standard templates. Furnish templates to the fabricator of these items in sufficient time so as not to delay the construction.
- E. The following items shall be of the same manufacturer, except as otherwise specified:
 - 1. Mortise locksets.
 - 2. Hinges for hollow metal and wood doors.
 - 3. Surface applied overhead door closers.

4. Exit devices.
5. Floor closers.

1.4 WARRANTY

- A. Automatic door operators shall be subject to the terms of FAR Clause 52.246-21, except that the Warranty period shall be two years in lieu of one year for all items except as noted below:
1. Locks, latchsets, and panic hardware: 5 years.
 2. Door closers and continuous hinges: 10 years.

1.5 MAINTENANCE MANUALS

- A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on all door hardware. Provide installation instructions with the submittal documentation.

1.6 SUBMITTALS

- A. Submittals shall be in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Submit 6 copies of the schedule per Section 01 33 23. Submit 2 final copies of the final approved schedules to VAMC Locksmith as record copies (VISN Locksmith if the VAMC does not have a locksmith).
- B. Hardware Schedule: AHC certified hardware consultant to prepare and submit hardware schedule in the following form:

Hardware Item	Quantity	Size	Reference Publication Type No.	Finish	Mfr. Name and Catalog No.	Key Control Symbols	UL Mark (if fire rated and listed)	ANSI/BHMA Finish Designation

- C. Samples and Manufacturers' Literature:

1. Samples: All hardware items (proposed for the project) that have not been previously approved by Builders Hardware Manufacturers Association shall be submitted for approval. Tag and mark all items with manufacturer's name, catalog number and project number.
2. Samples are not required for hardware listed in the specifications by manufacturer's catalog number, if the contractor proposes to use the manufacturer's product specified.

- D. Certificate of Compliance and Test Reports: Submit certificates that hardware conforms to the requirements specified herein. Certificates shall be accompanied by copies of reports as referenced. The testing shall have been conducted either in the manufacturer's plant and certified by an independent testing laboratory or conducted in an independent laboratory, within four years of submittal of reports for approval.

1.7 DELIVERY AND MARKING

- A. Deliver items of hardware to job site in their original containers, complete with necessary appurtenances including screws, keys, and instructions. Tag one of each different item of hardware and deliver to COR for reference purposes. Tag shall identify items by Project Specification number and manufacturer's catalog number. These items shall remain on file in COR's office until all other similar items have been installed in project, at which time the COR will deliver items on file to Contractor for installation in predetermined locations on the project.

1.8 PREINSTALLATION MEETING

- A. Convene a preinstallation meeting not less than 30 days before start of installation of door hardware. Require attendance of parties directly affecting work of this section, including Contractor and Installer, Architect, Project Engineer and VA Locksmith, Hardware Consultant, and Hardware Manufacturer's Representative. Review the following:
1. Inspection of door hardware.
 2. Job and surface readiness.
 3. Coordination with other work.
 4. Protection of hardware surfaces.
 5. Substrate surface protection.
 6. Installation.
 7. Adjusting.
 8. Repair.
 9. Field quality control.
 10. Cleaning.

1.9 INSTRUCTIONS

- A. Hardware Set Symbols on Drawings: Except for protective plates, door stops, mates, thresholds and the like specified herein, hardware requirements for each door are indicated on drawings by symbols. Symbols for hardware sets consist of letters (e.g., "HW") followed by a number.

Each number designates a set of hardware items applicable to a door type.

B. Keying: All cylinders shall be keyed into existing Grand Master Key System. Provide removable core cylinders that are removable only with a special key or tool without disassembly of knob or lockset. Cylinders shall be 6 pin type. Keying information shall be furnished at a later date by the COR.

C. Keying: A new Great Grandmaster key shall be established for this project. The key system shall be small format (Best size and profile) removable core type as previously described. The key blanks shall be protected by a utility patent with a minimum seven years remaining on the patent from the start of construction and protected by contract-controlled distribution. The manufacturer shall furnish code pattern listings in both paper and electronic formats so keys may be reproduced by code.; provide electronic format in file type required by project's key control software. The manufacturer shall design the new key system with the capacity to rekey the existing system and also provide for 25 percent expansion capability beyond this requirement. Submit a keying chart for approval showing proposed keying layout and listing expansion capacity.

1. Keying information will be furnished to the Contractor by the COR.
2. Supply information regarding key control of cylinder locks to manufacturers of equipment having cylinder type locks. Notify COR immediately when and to whom keys or keying information is supplied. Return all such keys to the COR.

1.10 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. In text, hardware items are referred to by series, types, etc., listed in such specifications and standards, except as otherwise specified.

B. ASTM International (ASTM):

F883-13.....Padlocks

E2180-18.....Standard Test Method for Determining the
Activity of Incorporated Antimicrobial Agent(s)
In Polymeric or Hydrophobic Materials

C. American National Standards Institute/Builders Hardware Manufacturers Association (ANSI/BHMA):

A156.1-06.....Butts and Hinges
A156.2-03.....Bored and Pre-assembled Locks and Latches
A156.3-08.....Exit Devices, Coordinators, and Auto Flush Bolts
A156.4-08.....Door Controls (Closers)
A156.5-14.....Cylinders and Input Devices for Locks.
A156.6-05.....Architectural Door Trim
A156.8-05.....Door Controls-Overhead Stops and Holders
A156.11-14.....Cabinet Locks
A156.12-05 Interconnected Locks and Latches
A156.13-05.....Mortise Locks and Latches Series 1000
A156.14-07 Sliding and Folding Door Hardware
A156.15-06.....Release Devices-Closer Holder, Electromagnetic
and Electromechanical
A156.16-08.....Auxiliary Hardware
A156.17-04 Self-Closing Hinges and Pivots
A156.18-06.....Materials and Finishes
A156.20-06 Strap and Tee Hinges, and Hasps
A156.21-09.....Thresholds
A156.22-05.....Door Gasketing and Edge Seal Systems
A156.23-04.....Electromagnetic Locks
A156.24-03.....Delayed Egress Locking Systems
A156.25-07 Electrified Locking Devices
A156.26-06.....Continuous Hinges
A156.28-07 Master Keying Systems
A156.29-07 Exit Locks and Alarms
A156.30-03 High Security Cylinders
A156.31-07 Electric Strikes and Frame Mounted Actuators
A156.36-10.....Auxiliary Locks
A250.8-03.....Standard Steel Doors and Frames

D. National Fire Protection Association (NFPA):

80-10.....Fire Doors and Other Opening Protectives
101-09.....Life Safety Code

E. Underwriters Laboratories, Inc. (UL):

Building Materials Directory (2008)

PART 2 - PRODUCTS**2.1 BUTT HINGES**

- A. ANSI A156.1. Provide only three-knuckle hinges, except five-knuckle where the required hinge type is not available in a three-knuckle version (e.g., some types of swing-clear hinges). The following types of butt hinges shall be used for the types of doors listed, except where otherwise specified:
1. Exterior Doors: Type A2112/A5112 for doors 900 mm (3 feet) wide or less and Type A2111/A5111 for doors over 900 mm (3 feet) wide. Hinges for exterior outswing doors shall have non-removable pins. Hinges for exterior fire-rated doors shall be of stainless-steel material.
 2. Interior Doors: Type A8112/A5112 for doors 900 mm (3 feet) wide or less and Type A8111/A5111 for doors over 900 mm (3 feet) wide. Hinges for doors exposed to high humidity areas (shower rooms, toilet rooms, kitchens, janitor rooms, etc. shall be of stainless-steel material.
- B. Provide quantity and size of hinges per door leaf as follows:
1. Doors up to 1210 mm (4 feet) high: 2 hinges.
 2. Doors 1210 mm (4 feet) to 2260 mm (7 feet 5 inches) high: 3 hinges minimum.
 3. Doors greater than 2260 mm (7 feet 5 inches) high: 4 hinges.
 4. Doors up to 900 mm (3 feet) wide, standard weight: 114 mm x 114 mm (4-1/2 inches x 4-1/2 inches) hinges.
 5. Doors over 900 mm (3 feet) to 1065 mm (3 feet 6 inches) wide, standard weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
 6. Doors over 1065 mm (3 feet 6 inches) to 1210 mm (4 feet), heavy weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
 7. Provide heavy-weight hinges where specified.
 8. At doors weighing 330 kg (150 pounds) or more, furnish 127 mm (5 inch) high hinges.
- C. See Articles "MISCELLANEOUS HARDWARE" and "HARDWARE SETS" for pivots and hinges other than butts specified above and continuous hinges specified below.

2.2 CONTINUOUS HINGES

- A. ANSI/BHMA A156.26, Grade 1-600.
1. Listed under Category N in BHMA's "Certified Product Directory."
- B. General: Minimum 0.120-inch- (3.0-mm-) thick, hinge leaves with minimum overall width of 4 inches (102 mm); fabricated to full height of door

and frame and to template screw locations; with components finished after milling and drilling are complete

C. Continuous, Barrel-Type Hinges: Hinge with knuckles formed around a Teflon-coated 6.35mm (0.25-inch) minimum diameter pin that extends entire length of hinge.

1. Base Metal for Exterior Hinges: Stainless steel.
2. Base Metal for Interior Hinges: Stainless steel
3. Base Metal for Hinges for Fire-Rated Assemblies: Stainless steel.
4. Provide with non-removable pin (hospital tip option) at lockable outswing doors.
5. Where required to clear adjacent casing, trim, and wall conditions and allow full door swing, provide wide throw hinges of minimum width required.
6. Provide with manufacturer's cut-outs for separate mortised power transfers and/or mortised automatic door bottoms where they occur.
7. Where thru-wire power transfers are integral to the hinge, provide hinge with easily removable portion to allow easy access to wiring connections.
8. Where models are specified that provide an integral wrap-around edge guard for the hinge edge of the door, provide manufacturer's adjustable threaded stud and machine screw mechanism to allow the door to be adjusted within the wrap-around edge guard.

2.3 DOOR CLOSING DEVICES

A. Closing devices shall be products of one manufacturer for each type specified.

2.4 OVERHEAD CLOSERS

A. Conform to ANSI A156.4, Grade 1.

B. Closers shall conform to the following:

1. The closer shall have minimum 50 percent adjustable closing force over minimum value for that closer and have adjustable hydraulic back check effective between 60 degrees and 85 degrees of door opening.
2. Where specified, closer shall have hold-open feature.
3. Size Requirements: Provide multi-size closers, sizes 1 through 6, except where multi-size closer is not available for the required application.
4. Material of closer body shall be forged or cast.
5. Arm and brackets for closers shall be steel, malleable iron or high strength ductile cast iron.

6. Where closers are exposed to the exterior or are mounted in rooms that experience high humidity, provide closer body and arm assembly of stainless-steel material.
7. Closers shall have full size metal cover; plastic covers will not be accepted.
8. Closers shall have adjustable hydraulic back-check, separate valves for closing and latching speed, adjustable back-check positioning valve, and adjustable delayed action valve.
9. Provide closers with any accessories required for the mounting application, including (but not limited to) drop plates, special soffit plates, spacers for heavy-duty parallel arm fifth screws, bullnose or other regular arm brackets, longer or shorter arm assemblies, and special factory templating. Provide special arms, drop plates, and templating as needed to allow mounting at doors with overhead stops and/or holders.
10. Closer arms or backcheck valve shall not be used to stop the door from overswing, except in applications where a separate wall, floor, or overhead stop cannot be used.
11. Provide parallel arm closers with heavy duty rigid arm.
12. Where closers are to be installed on the push side of the door, provide parallel arm type except where conditions require use of top jamb arm.
13. Provide all surface closers with the same body attachment screw pattern for ease of replacement and maintenance.
14. All closers shall have a 1 ½" (38mm) minimum piston diameter.

2.5 FLOOR CLOSERS AND FLOOR PIVOT SETS

- A. Comply with ANSI A156.4. Provide stainless steel floor plates for floor closers and floor pivots, except where metal thresholds occur. Provide cement case for all floor closers. Floor closers specified for fire doors shall comply with Underwriters Laboratories, Inc., requirements for concealed type floor closers for classes of fire doors indicated on drawings. Hold-open mechanism, where required, shall engage when door is opened 105 degrees, except when door swing is limited by building construction or equipment, the hold-open feature shall engage when door is opened approximately 90 degrees. The hold-open mechanism shall be selectable on/off by turning a screw through the floor plate. Floor closers shall have adjustable hydraulic back-check, adjustable close speed, and adjustable latch speed. Provide closers with delayed action

where a hold-open mechanism is not required. Floor closers shall be multi-sized. Single acting floor closers shall also have built in dead stop. Where required, provide closers with special cement cases appropriate for shallow deck installation or where concrete joint lines run through the floor breakout. At offset-hung doors installed in deep reveals, provide special closer arm and spindle to allow for installation. Where stone or terrazzo is applied over the floor closer case, provide closer without floor plate and with extended spindle (length as required) and special cover pan (depth as required) to allow closer to be accessed without damaging the material applied over the closer. Pivots for non-labeled doors shall be cast, forged or extruded brass or bronze.

B. Where floor closer appears in hardware set provide the following as applicable.

1. Double Acting Floor Closers: Type C06012.
2. Single Acting Floor Closer: Type C06021 (center pivoted).
(Intermediate pivot is not required).
3. Single Acting Floor Closers: Type C06041 (offset pivoted).
4. Single Acting Floor Closer for Labeled Fire Doors: Type C06051
(offset pivoted).
5. Single Acting Floor Closers for Lead Lined Doors: Type C06071 (offset pivoted).

2.6 DOOR STOPS

- A. Conform to ANSI A156.16.
- B. Provide door stops wherever an opened door or any item of hardware thereon would strike a wall, column, equipment or other parts of building construction. For concrete, masonry or quarry tile construction, use expansion shields for mounting door stops.
- C. Where cylindrical locks with turn pieces or pushbuttons occur, equip wall bumpers Type L02251 (rubber pads having concave face) to receive turn piece or button.
- D. Provide floor stops (Type L02141 or L02161) in office areas; Type L02121 x 3 screws into floor elsewhere. Wall bumpers, where used, must be installed to impact the trim or the door within the leading half of its width. Floor stops, where used, must be installed within 4-inches of the wall face and impact the door within the leading half of its width.
- E. Where drywall partitions occur, use floor stops, Type L02141 or L02161 in office areas, Type L02121 elsewhere.

- F. Provide stop Type L02011, as applicable for exterior doors. At outswing doors where stop can be installed in concrete, provide stop mated to concrete anchor set in 76mm (3-inch) core-drilled hole and filled with quick-setting cement.
- G. Omit stops where floor mounted door holders are required and where automatic operated doors occur.
- H. Provide appropriate roller bumper for each set of doors (except where closet doors occur) where two doors would interfere with each other in swinging.
- I. Provide appropriate door mounted stop on doors in individual toilets where floor or wall mounted stops cannot be used.
- J. Provide overhead surface applied stop Type C02541, ANSI A156.8 on patient toilet doors in bedrooms where toilet door could come in contact with the bedroom door.
- K. Provide door stops on doors where combination closer magnetic holders are specified, except where wall stops cannot be used or where floor stops cannot be installed within 4-inches of the wall.
- L. Where the specified wall or floor stop cannot be used, provide concealed overhead stops (surface-mounted where concealed cannot be used).

2.7 OVERHEAD DOOR STOPS AND HOLDERS

- A. Conform to ANSI Standard A156.8. Overhead holders shall be of sizes recommended by holder manufacturer for each width of door. Set overhead holders for 110 degrees opening, unless limited by building construction or equipment. Provide Grade 1 overhead concealed slide type: stop-only at rated doors and security doors, hold-open type with exposed hold-open on/off control at all other doors requiring overhead door stops.

2.8 FLOOR DOOR HOLDERS

- A. Conform to ANSI Standard A156.16. Provide extension strikes for Types L01301 and L01311 holders where necessary.

2.9 LOCKS AND LATCHES

- A. Conform to ANSI A156.2. Locks and latches for doors 45 mm (1-3/4 inch) thick or over shall have beveled fronts. Lock cylinders shall have not less than six pins. Cylinders for all locksets shall be removable core type. Cylinders shall be furnished with construction removable cores and construction master keys. Cylinder shall be removable by special key or tool. Construct all cores so that they will be interchangeable into the core housings of all mortise locks, rim locks, cylindrical locks, and

any other type lock included in the Great Grand Master Key System. Disassembly of lever or lockset shall not be required to remove core from lockset. All locksets or latches on double doors with fire label shall have latch bolt with 19 mm (3/4 inch) throw, unless shorter throw allowed by the door manufacturer's fire label. Provide temporary keying device or construction core to allow opening and closing during construction and prior to the installation of final cores.

B. In addition to above requirements, locks and latches shall comply with following requirements:

1. Mortise Lock and Latch Sets: Conform to ANSI/BHMA A156.13. Mortise locksets shall be series 1000, minimum Grade 2. All locksets and latchsets, except on designated doors in Psychiatric (Mental Health) areas, shall have lever handles fabricated from cast stainless steel. Provide sectional (lever x rose) lever design matching existing. No substitute lever material shall be accepted. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Lock function F02 shall be furnished with emergency tools/keys for emergency entrance. All lock cases installed on lead lined doors shall be lead lined before applying final hardware finish. Furnish armored fronts for all mortise locks. Where mortise locks are installed in high-humidity locations or where exposed to the exterior on both sides of the opening, provide non-ferrous mortise lock case.
2. Cylindrical Lock and Latch Sets: levers shall meet ADA (Americans with Disabilities Act) requirements. Cylindrical locksets shall be series 4000 Grade I. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Provide lever design to match design selected by Architect or to match existing lever design. Where two turn pieces are specified for lock F76, turn piece on inside knob shall lock and unlock inside knob, and turn piece on outside knob shall unlock outside knob when inside knob is in the locked position. (This function is intended to allow emergency entry into these rooms without an emergency key or any special tool.)
3. Auxiliary locks shall be as specified under hardware sets and conform to ANSI A156.36.

4. Locks on designated doors in Psychiatric (Mental Health) areas shall be paddle type with arrow projection covers and be UL Listed. Provide these locks with paddle in the down position on both sides of the door. Locks shall be fabricated of wrought stainless steel.

2.10 PUSH-BUTTON COMBINATION LOCKS

- A. ANSI/BHMA A156.5, Grade 1. Battery operated pushbutton entry.
- B. Construction: Heavy duty mortise lock housing conforming to ANSI/BHMA A156.13, Grade 1. Lever handles and operating components in compliance with the ABAAS and the ADA Accessibility Guidelines. Match lever handles of locks and latches on adjacent doors.
- C. Special Features: Key override to permit a master keyed security system and a pushbutton security code activated passage feature to allow access without using the entry code.

2.11 ELECTROMAGNETIC LOCKS

- A. ANSI/BHMA A156.23; electrically powered, of strength and configuration indicated; with electromagnet attached to frame and armature plate attached to door. Listed under Category E in BHMA's "Certified Product Directory."
 1. Type: Full exterior or full interior, as required by application indicated.
 2. Strength Ranking: 1500-pound force (6672 N).
 3. Inductive Kickback Peak Voltage: Not more than 53V.
 4. Residual Magnetism: Not more than 4-pound force (18 N) to separate door from magnet.
- B. Delayed-Egress Locks: BHMA A156.24. Listed under Category G in BHMA's "Certified Product Directory".
 1. Means of Egress Doors: Lock releases within 15 seconds after applying a force not more than 15-pound force (67 N) for not more than 3 seconds, as required by NFPA 101.
 2. Security Grade: Activated from secure side of door by initiating device.
 3. Movement Grade: Activated by door movement as initiating device.
 4. The lock housing shall not project more than 4-inches (101mm) from the underside of the frame head stop.

2.12 ELECTRIC STRIKES

- A. ANSI/ BHMA A156.31 Grade 1.
- B. General: Use fail-secure electric strikes at fire-rated doors.

2.13 KEYS

- A. Stamp all keys with change number and key set symbol. Furnish keys in quantities as follows:

Locks/Keys	Quantity
Cylinder locks	2 keys each
Cylinder lock change key blanks	100 each different keyway
Master-keyed sets	6 keys each
Grand Master sets	6 keys each
Great Grand Master set	5 keys
Control key	2 keys

- B. Psychiatric keys shall be cut so that first two bittings closest to the key shoulder are shallow to provide greater strength at point of greatest torque.

2.14 KEY CABINET

- A. ANSI Standard A156.11. Provide key cabinet made of cold rolled, 1.2 mm (0.0478 inch) thick furniture steel electro-welded. Doors shall have "no sag" continuous brass-pin piano type hinge and be equipped with chrome plated locking door handles, hook cam and mechanical pushbutton door lock. Key Cabinet and Key Control System shall accommodate all keys for this project plus 25 percent. Provide minimum number of multiple cabinets where a single cabinet of largest size will not accommodate the required number of keys.
- B. Key tags shall consist of two sets: Permanent self-locking and loan key snaphook type with tag colors as follows: Red fiber marker of the permanent self-locking type approximately 32 mm (1-1/4 inch) in diameter engraved with the legend "FILE KEY MUST NOT BE LOANED." Also furnish for each hook a white cloverleaf key marker with snap-hooks engraved with the legend "LOAN KEY."
- C. The manufacturer of the lock cylinders and locks shall attach a key tag to keys of each lock cylinder and shall mark thereon the respective item number and key change number. Provide each group of keys in a key gathering envelope (supplied by Key Cabinet Manufacturer) in which the lock manufacturer shall include the following information: Item number, key change number and door number. The contractor shall furnish the Key Cabinet Manufacturer the hardware and keying schedules and change keys.

- D. The Key Cabinet Manufacturer shall set up a three-way cross index system, including master keys, listing the keys alphabetically, the hooks numerically and the key changes numerically on different colored index cards. Index cards shall be typewritten and inserted in a durable binder. Attach the keys to the two sets of numbered tags supplied with the cabinet. (The permanent tag and the loan key tag). Instruct the owner in proper use of the system. Install cabinet as directed by the COR.

2.15 ARMOR PLATES, KICK PLATES, MOP PLATES AND DOOR EDGING

- A. Conform to ANSI Standard A156.6.
- B. Provide protective plates as specified below:
1. Kick plates, mop plates and armor plates of metal, Type J100 series.
 2. Provide kick plates and mop plates where specified. Kick plates shall be 254 mm (10 inches) or 305 mm (12 inches) high. Mop plates shall be 152 mm (6 inches) high. Both kick and mop plates shall be minimum 1.27 mm (0.050 inches) thick. Provide kick and mop plates beveled on all 4 edges (B4E). On push side of doors where jamb stop extends to floor, make kick plates 38 mm (1-1/2 inches) less than width of door, except pairs of metal doors which shall have plates 25 mm (1 inch) less than width of each door. Extend all other kick and mop plates to within 6 mm (1/4 inch) of each edge of doors. Kick and mop plates shall butt astragals. For jamb stop requirements, see specification sections pertaining to door frames.
 3. Kick plates and/or mop plates are not required on following door sides:
 - a. Armor plate side of doors.
 - b. Exterior side of exterior doors.
 - c. Closet side of closet doors.
 - d. Both sides of aluminum entrance doors.
 4. Armor plates for doors are listed under Article "Hardware Sets".

Armor plates shall be thickness as noted in the hardware set, 875 mm (35 inches) high and 38 mm (1-1/2 inches) less than width of doors, except on pairs of metal doors. Provide armor plates beveled on all 4 edges (B4E). Plates on pairs of metal doors shall be 25 mm (1 inch) less than width of each door. Where top of intermediate rail of door is less than 875 mm (35 inches) from door bottom, extend armor plates to within 13 mm (1/2 inch) of top of intermediate rail. On doors

equipped with panic devices, extend armor plates to within 13 mm (1/2 inch) of panic bolt push bar.

5. Where louver or grille occurs in lower portion of doors, substitute stretcher plate and kick plate in place of armor plate. Size of stretcher plate and kick plate shall be 254 mm (10 inches) high.
6. Provide stainless steel edge guards where so specified at wood doors. Provide mortised type instead of surface type except where door construction and/or ratings will not allow. Provide edge guards of bevel and thickness to match wood door. Provide edge guards with factory cut-outs for door hardware that must be installed through or extend through the edge guard. Provide full-height edge guards except where door rating does not allow; in such cases, provide edge guards to height of bottom of typical lockset armor front. Forward edge guards to wood door manufacturer for factory installation on doors.

2.16 EXIT DEVICES

- A. Conform to ANSI Standard A156.3. Exit devices shall be Grade 1; type and function are specified in hardware sets. Provide flush with finished floor strikes for vertical rod exit devices in interior of building. Trim shall have cast satin stainless steel lever handles of design similar to locksets, unless otherwise specified. Provide key cylinders for keyed operating trim and, where specified, cylinder dogging.
- B. Surface vertical rod panics shall only be provided less bottom rod; provide fire pins as required by exit device and door fire labels. Do not provide surface vertical rod panics at exterior doors.
- C. Concealed vertical rod panics shall be provided less bottom rod at interior doors, unless lockable or otherwise specified; provide fire pins as required by exit device and door fire labels. Where concealed vertical rod panics are specified at exterior doors, provide with both top and bottom rods.
- D. Where removable mullions are specified at pairs with rim panic devices, provide mullion with key-removable feature.
- E. At non-rated openings with panic hardware, provide panic hardware with key cylinder dogging feature.
- F. Exit devices for fire doors shall comply with Underwriters Laboratories, Inc., requirements for Fire Exit Hardware. Submit proof of compliance.

2.17 FLUSH BOLTS (LEVER EXTENSION)

- A. Conform to ANSI A156.16. Flush bolts shall be Type L24081 unless otherwise specified. Furnish proper dustproof strikes conforming to ANSI A156.16, for flush bolts required on lower part of doors.
- B. Lever extension manual flush bolts shall only be used at non-fire-rated pairs for rooms only accessed by maintenance personnel.
- C. Face plates for cylindrical strikes shall be rectangular and not less than 25 mm by 63 mm (1 inch by 2-1/2 inches).
- D. Friction-fit cylindrical dustproof strikes with circular face plate may be used only where metal thresholds occur.
- E. Provide extension rods for top bolt where door height exceeds 2184 mm (7 feet 2 inches).

2.18 FLUSH BOLTS (AUTOMATIC)

- A. Conform to ANSI A156.3. Dimension of flush bolts shall conform to ANSI A115. Bolts shall conform to Underwriters Laboratories, Inc., requirements for fire door hardware. Flush bolts shall automatically latch and unlatch. Furnish dustproof strikes conforming to ANSI A156.16 for bottom flushbolt. Face plates for dustproof strike shall be rectangular and not less than 38 mm by 90 mm (1-1/2 by 3-1/2 inches).
- B. At interior doors, provide auto flush bolts less bottom bolt, unless otherwise specified, except at wood pairs with fire-rating greater than 20 minutes; provide fire pins as required by auto flush bolt and door fire labels.

2.19 DOOR PULLS WITH PLATES

- A. Conform to ANSI A156.6. Pull Type J401, 152 mm CTC (6 inches CTC) length by 19 mm (3/4 inches) diameter minimum with plate Type J302, 90 mm by 381 mm (3-1/2 inches by 15 inches), unless otherwise specified. Provide pull with projection of 57.2 mm (2 1/4 inches) minimum and a clearance of 38.1 mm (1 1/2 inches) minimum. Cut plates of door pull plate for cylinders, or turn pieces where required.

2.20 PUSH PLATES

- A. Conform to ANSI A156.6. Metal, Type J302, 203 mm (8 inches) wide by 406.4 mm (16 inches) high. Provide metal Type J302 plates 102 mm (4 inches) wide by 406.4 mm (16 inches) high where push plates are specified for doors with stiles less than 203 mm (8 inches) wide. Cut plates for cylinders, and turn pieces where required.

2.21 COMBINATION PUSH AND PULL PLATES

- A. Conform to ANSI 156.6. Type J303, stainless steel 3 mm (1/8 inch) thick, 80 mm (3-1/3 inches) wide by 800 mm (16 inches) high, top and bottom edges shall be rounded. Secure plates to wood doors with 38 mm (1-1/2 inch) long No. 12 wood screws. Cut plates for turn pieces, and cylinders where required. Pull shall be mounted down.

2.22 COORDINATORS

- A. Conform to ANSI A156.16. Coordinators, when specified for fire doors, shall comply with Underwriters Laboratories, Inc., requirements for fire door hardware. Coordinator may be omitted on exterior pairs of doors where either door will close independently regardless of the position of the other door. Coordinator may be omitted on interior pairs of non-labeled open where open back strike is used. Open back strike shall not be used on labeled doors. Paint coordinators to match door frames, unless coordinators are plated. Provide bar type coordinators, except where gravity coordinators are required at acoustic pairs. For bar type coordinators, provide filler bars for full width and as required, brackets for push-side surface mounted closers, overhead stops, and vertical rod panic strikes.

2.23 THRESHOLDS

- A. Conform to ANSI A156.21, mill finish extruded aluminum, except as otherwise specified. In existing construction, thresholds shall be installed in a bed of sealant with ¼-20 stainless steel machine screws and expansion shields. In new construction, embed aluminum anchors coated with epoxy in concrete to secure thresholds. Furnish thresholds for the full width of the openings.
- B. For thresholds at elevators entrances see other sections of specifications.
- C. At exterior doors and any interior doors exposed to moisture, provide threshold with non-slip abrasive finish.
- D. Provide with miter returns where threshold extends more than 12 mm (0.5 inch) beyond face of frame.

2.24 AUTOMATIC DOOR BOTTOM SEAL AND RUBBER GASKET FOR LIGHT PROOF OR SOUND CONTROL DOORS

- A. Conform to ANSI A156.22. Provide mortise or under-door type, except where not practical. For mortise automatic door bottoms, provide type specific for door construction (wood or metal).

2.25 WEATHERSTRIPS (FOR EXTERIOR DOORS)

- A. Conform to ANSI A156.22. Air leakage shall not to exceed 0.50 CFM per foot of crack length ($0.000774\text{m}^3/\text{s}/\text{m}$).

2.26 MISCELLANEOUS HARDWARE

- A. Access Doors (including Sheet Metal, Screen and Woven Wire Mesh Types): Except for fire-rated doors and doors to Temperature Control Cabinets, equip each single or double metal access door with Lock Type E07213, conforming to ANSI A156.11. Key locks as directed. Ship lock prepaid to the door manufacturer. Hinges shall be provided by door manufacturer.
- B. Cylinders for Various Partitions and Doors: Key cylinders same as entrance doors of area in which partitions and door occur, except as otherwise specified. Provide cylinders to operate locking devices where specified for following partitions and doors:
1. Folding doors and partitions.
 2. Wicket door (in roll-up door assemblies).
 3. Slide-up doors.
 4. Swing-up doors.
 5. Fire-rated access doors-Engineer's key set.
 6. Doors from corridor to electromagnetic shielded room.
 7. Day gate on vault door.
- C. Mutes: Conform to ANSI A156.16. Provide door mutes or door silencers Type L03011 or L03021, depending on frame material, of white or light gray color, on each steel or wood door frame, except at fire-rated frames, lead-lined frames and frames for sound-resistant, lightproof and electromagnetically shielded doors. Furnish 3 mutes for single doors and 2 mutes for each pair of doors, except double-acting doors. Provide 4 mutes or silencers for frames for each Dutch type door. Provide 2 mutes for each edge of sliding door which would contact door frame.

2.27 PADLOCKS FOR VARIOUS DOORS, GATES AND HATCHES

- A. ASTM E883, size 50 mm (2 inch) wide chain; furnish extended shackles as required by job conditions. Provide padlocks, with key cylinders, for each door in following areas as noted.
- B. Key padlocks as follows:
1. Chain Link Fence Gates for Electrical Substation and other Fenced Buildings or Areas: Engineer's set, except as otherwise specified.
 2. Chain Link Fence Gates for Oxygen Storage Buildings: Maintenance supply set.
 3. Roof Access and Scuttles: Engineer's set.

- C. Omit padlocks on communicating refrigerator doors.

2.28 THERMOSTATIC TEMPERATURE CONTROL VALVE CABINETS

- A. Where lock is shown, equip each cabinet door (metal) with lock Type E06213, conforming to ANSI A156.36. Key locks in Key Sets approved by Contracting Officer. See mechanical drawings and specifications for location of cabinets.
- B. Cabinet manufacturer shall supply the hinges, bolts and pulls. Ship locks to cabinet manufacturer for installation.

2.29 HINGED WIRE GUARDS (FOR WINDOWS, DOORS AND TRANSOMS) AND WIRE PARTITION DOORS

- A. Butt hinges, type A8133 (special swaging) 100 mm by 90 mm (4 inches by 3-1/2 inches), Finish US2C.
 - 1. 3 hinges for guards over 1060 mm (3-1/2 feet) high.
 - 2. 2 hinges for guards less than 1060 mm (3-1/2 feet) high.
- B. Conform to ANSI A156.36. Lock Type E06081 for guards and Type E06061 for partitions.
 - 1. Keying: Except as noted otherwise, key locks like entrance door or space wherein guards and partitions are located except as otherwise specified.
 - 2. Key locks for partitions enclosing mechanical and electrical equipment in Engineer's Set. (See detailed drawings for number of locks and butt hinges required for each guard).

2.30 FINISHES

- A. Exposed surfaces of hardware shall have ANSI A156.18, finishes as specified below. Finishes on all hinges, pivots, closers, thresholds, etc., shall be as specified below under "Miscellaneous Finishes." For field painting (final coat) of ferrous hardware, see Section 09 91 00, PAINTING.
- B. 626 or 630: All surfaces on exterior and interior of buildings, except where other finishes are specified.
- C. Miscellaneous Finishes:
 - 1. Hinges --exterior doors: 626 or 630.
 - 2. Hinges --interior doors: 652 or 630.
 - 3. Pivots: Match door trim.
 - 4. Door Closers: Factory applied paint finish. Dull or Satin Aluminum color.
 - 5. Thresholds: Mill finish aluminum.
 - 6. Cover plates for floor hinges and pivots: 630.

7. Other primed steel hardware: 600.

D. Hardware Finishes for Existing Buildings: U.S. Standard finishes shall match finishes of hardware in (similar) existing spaces except where otherwise specified.

E. Special Finish: Exposed surfaces of hardware for dark bronze anodized aluminum doors shall have oxidized oil rubbed bronze finish (dark bronze) finish on door closers shall closely match doors.

F. Anti-microbial Coating: All hand-operated hardware (levers, pulls, push bars, push plates, paddles, and panic bars) shall be provided with an anti-microbial/anti-fungal coating that has passed ASTM E2180 tests. Coating to consist of ionic silver (Ag+). Silver ions surround bacterial cells, inhibiting growth of bacteria, mold, and mildew by blockading food and respiration supplies.

2.31 BASE METALS

A. Apply specified U.S. Standard finishes on different base metals as following:

Finish	Base Metal
652	Steel
626	Brass or bronze
630	Stainless steel

PART 3 - EXECUTION

3.1 HARDWARE HEIGHTS

A. For existing buildings locate hardware on doors at heights to match existing hardware. The Contractor shall visit the site, verify location of existing hardware and submit locations to VA COR for approval.

B. For new buildings locate hardware on doors at heights specified below, with all hand-operated hardware centered within 864 mm (34 inches) to 1200 mm (48 inches), unless otherwise noted:

C. Hardware Heights from Finished Floor:

- 1.Exit devices centerline of strike (where applicable) 1024 mm (40-5/16 inches).
- 2.Locksets and latch sets centerline of strike 1024 mm (40-5/16 inches).
- 3.Deadlocks centerline of strike 1219 mm (48 inches).
- 4.Hospital arm pull 1168 mm (46 inches) to centerline of bottom supporting bracket.
- 5.Centerline of door pulls to be 1016 mm (40 inches).

6. Push plates and push-pull shall be 1270 mm (50 inches) to top of plate.

7. Push-pull latch to be 1024 mm (40-5/16 inches) to centerline of strike.

8. Locate other hardware at standard commercial heights. Locate push and pull plates to prevent conflict with other hardware.

3.2 INSTALLATION

A. Closer devices, including those with hold-open features, shall be equipped and mounted to provide maximum door opening permitted by building construction or equipment. Closers shall be mounted on side of door inside rooms, inside stairs, and away from corridors except security bedroom, bathroom and anteroom doors which shall have closer installed parallel arm on exterior side of doors. At exterior doors, closers shall be mounted on interior side. Where closers are mounted on doors they shall be mounted with hex nuts and bolts; foot shall be fastened to frame with machine screws.

B. Hinge Size Requirements:

Door Thickness	Door Width	Hinge Height
45 mm (1-3/4 inch)	900 mm (3 feet) and less	113 mm (4-1/2 inches)
45 mm (1-3/4 inch)	Over 900 mm (3 feet) but not more than 1200 mm (4 feet)	125 mm (5 inches)
35 mm (1-3/8 inch) (hollow core wood doors)	Not over 1200 mm (4 feet)	113 mm (4-1/2 inches)

C. Hinge leaves shall be sufficiently wide to allow doors to swing clear of door frame trim and surrounding conditions.

D. Where new hinges are specified for new doors in existing frames or existing doors in new frames, sizes of new hinges shall match sizes of existing hinges; Existing hinges shall not be reused on door openings having new doors and new frames. Coordinate preparation for hinge cut-outs and screw-hole locations on doors and frames.

E. Hinges Required Per Door:

Door Description	Number butts
Doors 1500 mm (5 ft) or less in height	2 butts
Doors over 1500 mm (5 ft) high and not over 2280 mm (7 ft 6 in) high	3 butts

Door Description	Number butts
Doors over 2280 mm (7 feet 6 inches) high	4 butts
Dutch type doors	4 butts
Doors with spring hinges 1370 mm (4 feet 6 inches) high or less	2 butts
Doors with spring hinges over 1370 mm (4 feet 6 inches)	3 butts

- F. Fastenings: Suitable size and type and shall harmonize with hardware as to material and finish. Provide machine screws and lead expansion shields to secure hardware to concrete, ceramic or quarry floor tile, or solid masonry. Fiber or rawl plugs and adhesives are not permitted. All fastenings exposed to weather shall be of nonferrous metal.
- G. After locks have been installed; show in presence of COR that keys operate their respective locks in accordance with keying requirements. (All keys, Master Key level and above shall be sent Registered Mail to the Medical Center Director along with the bitting list. Also a copy of the invoice shall be sent to the COR for his records.) Installation of locks which do not meet specified keying requirements shall be considered sufficient justification for rejection and replacement of all locks installed on project.

3.3 FINAL INSPECTION

- A. Installer to provide letter to VA Resident/Project Engineer that upon completion, installer has visited the Project and has accomplished the following:
- 1.Re-adjust hardware.
 - 2.Evaluate maintenance procedures and recommend changes or additions and instruct VA personnel.
 - 3.Identify items that have deteriorated or failed.
 - 4.Submit written report identifying problems.

3.4 DEMONSTRATION

- A. Demonstrate efficacy of mechanical hardware and electrical, and electronic hardware systems, including adjustment and maintenance procedures, to satisfaction of Resident/Project Engineer and VA Locksmith.

3.5 HARDWARE SETS

- A. Following sets of hardware correspond to hardware symbols shown on drawings. Only those hardware sets that are shown on drawings will be

required. Disregard hardware sets listed in specifications but not shown on drawings.

64490 OPT0239478 VERSION 1

HW SET: 01

	HINGES	QUANTITY & TYPE AS REQUIRED
1	PASSAGE LATCH	F01
1	SURFACE CLOSER	C02011/C02021
1	KICK PLATE	J102
1	WALL STOP	L02101 CONVEX
2	SELF-ADHESIVE SEALS	ROY154
1	AUTO DOOR BOTTOM	ROY346 - HEAVY DUTY
1	THRESHOLD	TYPE AS REQUIRED

FUNCTION: (F01) PASSAGE LATCH. BOTH LEVERS ALWAYS UNLOCKED.

HW SET: 02

	HINGES	QUANTITY & TYPE AS REQUIRED
1	OFFICE LOCK	F04
1	WALL STOP	L02101 CONVEX
1	SELF-ADHESIVE SEALS	ROY154
1	VIEWER	L03221 - 190 DEGREE

FUNCTION: (F04) OFFICE LOCK. LATCHBOLT RETRACTED BY LEVER EITHER SIDE. OUTSIDE LEVER LOCKED/UNLOCKED BY BUTTON IN FACE. WHEN LOCKED, KEY IN OUTSIDE LEVER RETRACTS LATCH. INSIDE LEVER ALWAYS UNLOCKED FOR FREE EGRESS. AUXILIARY LATCH DEADLOCKS LATCH BOLT WHEN DOOR IS CLOSED.

HW SET: 03

	HINGES	QUANTITY & TYPE AS REQUIRED
1	CLASSROOM LOCK	F05
1	SURFACE CLOSER	C02011/C02021
1	KICK PLATE	J102
1	WALL STOP	L02101 CONVEX
1	SELF-ADHESIVE SEALS	ROY154
1	AUTO DOOR BOTTOM	ROY346 - HEAVY DUTY

FUNCTION: (F05) CLASSROOM LOCK. OUTSIDE LEVER LOCKED AND UNLOCKED BY OUTSIDE KEY. INSIDE LEVER ALWAYS UNLOCKED. AUXILIARY LATCH DEADLOCKS LATCHBOLT WHEN DOOR IS CLOSED.

HW SET: 04

	HINGES	QUANTITY & TYPE AS REQUIRED
1	STOREROOM LOCK	F07
1	SURFACE CLOSER	C02011/C02021
1	KICK PLATE	J102
1	WALL STOP	L02101 CONVEX
1	SELF-ADHESIVE SEALS	ROY154

FUNCTION: (F07) STOREROOM LOCK. FIXED OUTSIDE TRIM - OUTSIDE KEY RETRACTS LATCH. INSIDE LEVER ALWAYS UNLOCKED. AUXILIARY LATCH DEADLOCKS LATCH BOLT WHEN DOOR IS CLOSED.

HW SET: 05

	HINGES	QUANTITY & TYPE AS REQUIRED
1	STOREROOM LOCK	F07
1	KICK PLATE	J102
1	WALL STOP	L02101 CONVEX

FUNCTION: (F07) STOREROOM LOCK. FIXED OUTSIDE TRIM - OUTSIDE KEY RETRACTS LATCH. INSIDE LEVER ALWAYS UNLOCKED. AUXILIARY LATCH DEADLOCKS LATCH BOLT WHEN DOOR IS CLOSED.

HW SET: 06

	HINGES	QUANTITY & TYPE AS REQUIRED
1	STOREROOM LOCK	F07
1	SURFACE CLOSER	C02011/C02021 WITH STOP ARM
1	KICK PLATE	J102
1	SELF-ADHESIVE SEALS	ROY154

FUNCTION: (F07) STOREROOM LOCK. FIXED OUTSIDE TRIM - OUTSIDE KEY RETRACTS LATCH. INSIDE LEVER ALWAYS UNLOCKED. AUXILIARY LATCH DEADLOCKS LATCH BOLT WHEN DOOR IS CLOSED.

HW SET: 07

	HINGES	QUANTITY & TYPE AS REQUIRED
1	FLUSH BOLT	TYPE 27 LESS BOTTOM BOLT
1	STOREROOM LOCK	F07
2	OH STOP	C01541-ADJUSTABLE

FUNCTION: (F07) STOREROOM LOCK. FIXED OUTSIDE TRIM - OUTSIDE KEY RETRACTS LATCH. INSIDE LEVER ALWAYS UNLOCKED. AUXILIARY LATCH DEADLOCKS LATCH BOLT WHEN DOOR IS CLOSED.

HW SET: 08

1	CONT. HINGE	A51011B
1	PRIVACY LOCK	F22 X OCCUPANCY INDICATOR X COIN TURN
1	OH STOP	C01541-ADJUSTABLE
1	SURFACE CLOSER	C02011/C02021
1	KICK PLATE	J102
1	MOP PLATE	J103

FUNCTION: (F22) PRIVACY LOCK WITH INDICATOR. OUTSIDE LEVER LOCKED BY INSIDE TURN. OUTSIDE LEVER UNLOCKED BY INSIDE TURN, INSIDE LEVER, OUTSIDE COIN TURN, OR CLOSING DOOR. INSIDE LEVER ALWAYS UNLOCKED. OUTSIDE INDICATOR DISPLAYS OCCUPIED/VACANT STATUS.

HW SET: 09

1	CONTINUOUS HINGE	A51111B DOOR EDGE GUARD
1	STOREROOM LOCK	F07
1	SURFACE CLOSER	C02011/C02021
1	ARMOR PLATE	J101
1	DOOR EDGE GUARD	J211
1	WALL STOP	L02101 CONVEX
1	SELF-ADHESIVE SEALS	ROY154

L908FUNCTION: (F07) STOREROOM LOCK. FIXED OUTSIDE TRIM - OUTSIDE KEY RETRACTS LATCH. INSIDE LEVER ALWAYS UNLOCKED. AUXILIARY LATCH DEADLOCKS LATCH BOLT WHEN DOOR IS CLOSED.

HW SET: 10

	HINGES	QUANTITY & TYPE AS REQUIRED
1	PASSAGE LATCH	F01
1	SURFACE CLOSER	C02011/C02021 WITH STOP ARM
1	KICK PLATE	J102
1	GASKETING	R3E164
1	DOOR SWEEP	ROY416
1	THRESHOLD	TYPE AS REQUIRED

FUNCTION: (F01) PASSAGE LATCH. BOTH LEVERS ALWAYS UNLOCKED.

HW SET: 11

	HINGES	QUANTITY & TYPE AS REQUIRED
1	PRIVACY LOCK	F13 X OCCUPANCY INDICATOR
1	SURFACE CLOSER	C02011/C02021
1	KICK PLATE	J102
1	WALL STOP	L02101 CONVEX

FUNCTION: (F13) KEYED PRIVACY LOCK WITH INDICATOR. OUTSIDE LEVER LOCKED/UNLOCKED BY OUTSIDE KEY OR INSIDE THUMB TURN. DEADBOLT THROWN/RETRACTED BY OUTSIDE KEY OR INSIDE THUMB TURN. TURNING INSIDE LEVER RETRACTS DEADBOLT AND UNLOCKS OUTSIDE LEVER. INSIDE LEVER ALWAYS UNLOCKED. OUTSIDE TRIM INDICATES OCCUPIED/VACANT STATUS.

HW SET: 12

	HINGES	QUANTITY & TYPE AS REQUIRED
1	TRANSFER HINGE	4-WIRE TYPE AS REQUIRED
1	EU STOREROOM LOCK	F07 E06 (FAIL SECURE)
1	SURFACE CLOSER	C02011/C02021
1	KICK PLATE	J102
1	WALL STOP	L02101 CONVEX
1	SELF-ADHESIVE SEALS	ROY154
1	AUTO DOOR BOTTOM	ROY346 - HEAVY DUTY
1	THRESHOLD	TYPE AS REQUIRED
1	CREDENTIAL READER	BY DIVISION 28
1	POWER SUPPLY	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED

FUNCTION: (F07 E06) ELECTRIFIED STOREROOM LOCK - FAIL SECURE. OUTSIDE KEY OR INSIDE LEVER RETRACTS LATCH. OUTSIDE LEVER UNLOCKED BY ELECTRONIC ACCESS CONTROL SYSTEM. INSIDE LEVER ALWAYS UNLOCKED. UPON LOSS OF POWER, OUTSIDE LEVER REMAINS LOCKED.

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.
CARD READER BY DIVISION 28.

HW SET: 13

1	CONTINUOUS HINGE	A51111B DOOR EDGE GUARD
1	CLASSROOM LOCK	F05
1	ELECTRIC STRIKE	E09321 (FAIL SECURE)
1	OH STOP	C01541-ADJUSTABLE
1	SURFACE CLOSER	C02011/C02021
1	ARMOR PLATE	J101
1	DOOR EDGE GUARD	J211
1	SELF-ADHESIVE SEALS	ROY154
1	AUTO DOOR BOTTOM	ROY346 - HEAVY DUTY
1	THRESHOLD	TYPE AS REQUIRED
1	CREDENTIAL READER	BY DIVISION 28
1	POWER SUPPLY	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED

FUNCTION: (F05) CLASSROOM LOCK. OUTSIDE LEVER LOCKED AND UNLOCKED BY OUTSIDE KEY. INSIDE LEVER ALWAYS UNLOCKED. AUXILIARY LATCH DEADLOCKS LATCHBOLT WHEN DOOR IS CLOSED. ELECTRIC STRIKE UNLOCKED BY ELECTRONIC ACCESS CONTROL SYSTEM FOR PUSH/PULL OPERATION.

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.
CARD READER BY DIVISION 28.

HW SET: 14

	HINGES	QUANTITY & TYPE AS REQUIRED
1	STOREROOM LOCK	F07
1	ELECTRIC STRIKE	E09321 (FAIL SECURE)
1	SURFACE CLOSER	C02011/C02021 WITH STOP ARM
1	KICK PLATE	J102
1	GASKETING	R3E164
1	AUTO DOOR BOTTOM	ROY346 - HEAVY DUTY
1	THRESHOLD	TYPE AS REQUIRED
1	CREDENTIAL READER	BY DIVISION 28
1	POWER SUPPLY	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED

FUNCTION: (F07) STOREROOM LOCK. FIXED OUTSIDE TRIM - OUTSIDE KEY RETRACTS LATCH. INSIDE LEVER ALWAYS UNLOCKED. AUXILIARY LATCH DEADLOCKS LATCH BOLT WHEN DOOR IS CLOSED. ELECTRIC STRIKE UNLOCKED BY ELECTRONIC ACCESS CONTROL SYSTEM FOR PUSH/PULL OPERATION.

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.
CARD READER BY DIVISION 28.

HW SET: 15

1	WIRELESS ELECTRONIC LOCK	BY DIVISION 28
	HINGES	QUANTITY & TYPE AS REQUIRED
1	SURFACE CLOSER	C03011
1	KICK PLATE	J102
1	WALL STOP	L02101 CONVEX
2	SELF-ADHESIVE SEALS	ROY154
1	AUTO DOOR BOTTOM	ROY346 - HEAVY DUTY
1	THRESHOLD	TYPE AS REQUIRED
2	VIEWER	L03221 - 190 DEGREE

WIRELESS ELECTRONIC LOCK BY DIVISION 28.

HW SET: 16

1	WIRELESS ELECTRONIC LOCK	BY DIVISION 28
	HINGES	QUANTITY & TYPE AS REQUIRED
1	SURFACE CLOSER	C03011 WITH STOP ARM
1	KICK PLATE	J102
2	SELF-ADHESIVE SEALS	ROY154
1	AUTO DOOR BOTTOM	ROY346 - HEAVY DUTY
1	THRESHOLD	TYPE AS REQUIRED
2	VIEWER	L03221 - 190 DEGREE

WIRELESS ELECTRONIC LOCK BY DIVISION 28.

HW SET: 17

	HINGES	QUANTITY & TYPE AS REQUIRED
1	PASSAGE LATCH	F01
1	DELAYED EGRESS MAG	E18501 WITH INTERNAL PLUNGER SWITCH
1	SURFACE CLOSER	C02011/C02021
1	KICK PLATE	J102
1	WALL STOP	L02101 CONVEX
1	CREDENTIAL READER	BY DIVISION 28
1	POWER SUPPLY	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED

FUNCTION: (F01) PASSAGE LATCH. BOTH LEVERS ALWAYS UNLOCKED. WHEN ARMED, DELAYED EGRESS MAG LOCKS DOOR TO PREVENT EGRESS FOR (15) SECONDS AND SOUNDS INTERNAL ALARM. DELAYED EGRESS HARDWARE ARMED/DISARMED/RESET BY ELECTRONIC ACCESS CONTROL SYSTEM. DELAYED EGRESS HARDWARE TO DISARM IMMEDIATELY UPON LOSS OF POWER OR ACTUATION OF FIRE ALARM SYSTEM.

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.
CARD READER BY DIVISION 28.

HW SET: 18

	HINGES	QUANTITY & TYPE AS REQUIRED
1	TRANSFER HINGE	4-WIRE TYPE AS REQUIRED
1	CYLINDER	TYPE AS REQUIRED
1	ELEC PANIC HARDWARE	TYPE 1, F08 E06
1	SURFACE CLOSER	C02011/C02021
1	KICK PLATE	J102
1	WALL STOP	L02101 CONVEX
1	CREDENTIAL READER	BY DIVISION 28
1	POWER SUPPLY	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED

FUNCTION: (F08 E06) ELECTRIFIED STOREROOM PANIC HARDWARE - FAIL SECURE. OUTSIDE KEY OR INSIDE PUSH PAD RETRACTS LATCH. OUTSIDE LEVER UNLOCKED BY ELECTRONIC ACCESS CONTROL SYSTEM. INSIDE PUSH PAD ALWAYS UNLOCKED. UPON LOSS OF POWER, OUTSIDE LEVER REMAINS LOCKED.

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.
CARD READER BY DIVISION 28.

HW SET: 19

2	GATE HINGE	X INTEGRAL CLOSER
1	PASSAGE LATCH	F01
1	DELAYED EGRESS MAG	E18501 WITH INTERNAL PLUNGER SWITCH
1	CREDENTIAL READER	BY DIVISION 28
1	POWER SUPPLY	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED

FUNCTION: (F01) PASSAGE LATCH. BOTH LEVERS ALWAYS UNLOCKED. WHEN ARMED, DELAYED EGRESS MAG LOCKS DOOR TO PREVENT EGRESS FOR (15) SECONDS AND SOUNDS INTERNAL ALARM. DELAYED EGRESS HARDWARE ARMED/DISARMED/RESET BY ELECTRONIC ACCESS CONTROL SYSTEM. DELAYED EGRESS HARDWARE TO DISARM IMMEDIATELY UPON LOSS OF POWER OR ACTUATION OF FIRE ALARM SYSTEM.

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.
CARD READER BY DIVISION 28.

HW SET: 20

SPECIALTY INTEGRATED DOOR ASSEMBLY BY DIV 08 71 10.

HW SET: 21

SPECIALTY INTEGRATED DOOR ASSEMBLY - DOOR AND HARDWARE BY DIVISION 08 71 10.
AUTOMATIC OPERATOR BY DIVISION 08 71 13.

- - - E N D - - -

SECTION 08 71 13
AUTOMATIC DOOR OPERATORS

PART 1 - GENERAL**1.1 SUMMARY**

- A. Section Includes:
 - 1. Automatic operators for swinging.

1.2 RELATED WORK

- A. Section 08 71 00, DOOR HARDWARE: Door Hardware.
- B. Division 26, ELECTRICAL Electric General Wiring, Connections and Equipment Requirements.
- C. Division 28, ELECTRONIC SAFETY AND SECURITY: Access Control Devices.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
 - 1. B209-14 - Aluminum and Aluminum-Alloy Sheet and Plate.
 - 2. A1008/A1008M-20 - Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Baked Hardenable.
- C. Builders Hardware Manufacturers Association (BHMA):
 - 1. BHMA A156.10-11 - Power Operated Pedestrian Doors.
- D. National Fire Protection Association (NFPA):
 - 1. 101-15 - Life Safety Code.
- E. Underwriters Laboratories (UL):
 - 1. 325-13 - Standard for Doors, Drapery, Gate, Louver, and Window Operators and Systems.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Show size, configuration, and fabrication and installation details.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Installation instructions.
 - 3. Warranty.
- D. Sustainable Construction Submittals:
 - 1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

- E. Test reports: Certify each product complies with specifications.
- F. Qualifications: Substantiate qualifications comply with specifications.
 - 1. Manufacturer with project experience list.
 - 2. Installer with project experience list.
- G. Operation and Maintenance Data:
 - 1. Care instructions for each exposed finish product.
 - 2. Start-up, maintenance, troubleshooting, emergency, and shut-down instructions for each operational product.

1.5 QUALITY ASSURANCE

- A. Manufacturer's Qualifications:
 - 1. Regularly manufactures specified products.
 - 2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
 - a. Provide contact names and addresses for completed projects when requested by Contracting Officer's Representative.
- B. Installer's Qualifications: Experienced installer, approved by the manufacturer.

1.6 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant automatic door operators against material and manufacturing defects.
 - 1. Warranty Period: Two years.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

- A. Comply with requirements of BHMA A156.10. Unless otherwise indicated on Drawings, provide operators that move doors from fully closed to fully opened position in five seconds maximum time interval, when speed adjustment is at maximum setting.
- B. Equipment: Conforming to UL 325. Provide key operated power disconnect wall switch for each door installation.
- C. Electrical Wiring, Connections and Equipment: Motors, starters, controls, associated devices, and interconnecting wiring required for installation. Equipment and wiring as specified in Division 26, ELECTRICAL.

2.2 PRODUCTS - GENERAL

- A. Provide door operators from one manufacturer.
- B. Provide one type of operator throughout project.

C. Sustainable Construction Requirements:

1. Steel Recycled Content: 30 percent total recycled content, minimum.
2. Aluminum Recycled Content: 80 percent total recycled content, minimum.

2.3 SWING DOOR OPERATORS

A. General:

1. Type: Institutional type.
2. Size: As recommended by manufacturer for door weight and sizes.

B. Function:

1. Provide operators, enclosed in housing, permitting opening of door by energizing motor and stopped by electrically reducing Voltage and stalling motor against mechanical stop.
2. Door to close by means of spring energy, and closing force controlled by gear system and motor being used as dynamic brake without power or controlled by hydraulic closer in electro-hydraulic operators.
3. Opening and Closing Speeds: Field adjustable.
4. Operators with checking mechanism providing cushioning action at last part of door travel, in both opening and closing cycle.
5. Operators capable of recycling doors instantaneously to fully open position from any point in closing cycle when control switch is activated.
6. When automatic power is interrupted or shut-off, permit doors to easily open manually without damage to automatic operator system.

C. Connect hardware with drive arm attached to door with pin linkage rotating in a self-lubricating bearing. Prevent doors from pivoting on shaft of operator.

D. Operator Housing:

1. ASTM B209, Type 6063-T5 aluminum alloy, 112 mm (4-1/2 inches) wide by 140 mm (5.5 inches) high by 3.2 mm (0.125 inch) thick, aluminum extrusions with enclosed end caps for application to 100 mm (4 inches) and larger frame systems.

E. Power Operator:

1. Completely assembled and sealed unit including gear drive transmission, mechanical spring and bearings, located in aluminum case and filled with special lubricant for extreme temperature conditions. Rubber mounted units with provisions for easy

maintenance and replacement, without removing door from pivots or frame.

F. Motors:

1. Provide with interlock to prevent operation when doors are electrically locked from opening.

G. Electrical Control:

1. Self-contained electrical control unit, including necessary transformers, relays, rectifiers, and other electronic components for proper operation and switching of power operator.
2. Connecting Harnesses: Interlocking plugs.

H. Accessories:

1. Metal mounting supports, brackets and other accessories necessary for installation of operators at head of door frames.

I. Microprocessor Controls:

1. Multi-function microprocessor control providing adjustable hold open time (1-30 seconds) with fully adjustable opening speed, LED indications for sensor input signals and operator status and power assist close options. Control capable of receiving activation signals from any device with normally open dry contact output.
2. Hold doors held open by low Voltage applied to the continuous duty motor.
3. Controls:
 - a. Adjustable safety circuit that monitors door operation and stops opening direction of door if obstruction is sensed.
 - b. Recycle feature that reopens door if obstruction is sensed at any point during closing cycle.
 - c. Standard three position key switch with functions for ON, OFF, and HOLD OPEN, mounted on operator enclosure, door frame, or wall, as indicated on drawings.

2.4 POWER UNITS

- A. Self-contained, electric operated and independent of door operator.
1. Capacity and size of power circuits according to automatic door operator manufacturer's specifications and Division 26 - ELECTRICAL.

2.5 DOOR CONTROLS

- A. Control Devices: BHMA A156.10; control opening and closing functions.
- B. Open doors when control device is actuated; hold doors in open positions; then, close doors after a adjustable time period, unless safety device or reactivated control interrupts operation.

C. Manual Controls:

1. Push Plate Wall Switch: Recessed type, stainless steel push plate minimum 100 mm by 100 mm (4 inch by 4 inch), with 13 mm (1/2 inch) high letters "To Operate Door-Push" engraved on face of plate.

D. Motion Detector:

1. Mounting: Surface or concealed.
2. Detection Area: 1500 mm (60 inches) deep and 1500 mm (60 inches) across, plus or minus 150 mm (6 inches).
3. Response Time: 25 milliseconds, maximum.
4. Control Power: 24 Volt DC.
5. Design units to be unaffected by cleaning material, solvents, dust, dirt and outdoor weather conditions.

2.6 SAFETY DEVICES

- A. Swing Doors: Install presence sensor on pull side of door to detect any person standing in door swing path and prevent door from opening.

1. Time delay Switches: Adjustable between 3 to 60 seconds and control closing cycle of doors.

- B. Install decal signs with "In" or "Do Not Enter" on both faces of each door where shown.

PART 3 - EXECUTION**3.1 PREPARATION**

- A. Examine and verify substrate suitability for product installation.

1. Verify door opening is correctly sized and within acceptable tolerances.

- B. Protect existing construction and completed work from damage.

3.2 INSTALLATION

- A. Install products according to manufacturer's instructions and approved submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

- B. Coordinate door installation with other related work.

- C. Install manual controls and power disconnect switches recessed or semi-flush mounted in partitions.

- D. Secure operator components to adjacent construction with suitable fastenings.

- E. Conceal conduits, piping, and electric equipment, in finish work.

- F. Install power units in locations shown.

1. Where units are mounted on walls, provide metal supports or shelves for units.
 2. Ensure equipment, including time delay switches, are accessible for maintenance and adjustment.
- G. Ensure operators are adjusted and function properly for type of expected traffic.
- H. Synchronize each leaf of pair doors to open and close simultaneously. Permit each door leaf to be opened manually, independent of other door leaf.
- I. Install controls at positions shown and ensuring convenience for expected traffic.
- J. Push Plate Wall Switches Mounting Height: 1000 mm (40 inches) maximum, unless otherwise approved by Contracting Officer's Representative.

3.3 DEMONSTRATION AND TRAINING

- A. Instruct VA personnel in proper automatic door operator operation and maintenance.
1. Trainer: Manufacturer approved instructor.
 2. Training Time: 2 hours minimum.
- B. Coordinate instruction to VA personnel with VA Contracting Officer's Representative.

- - - E N D - - -

**SECTION 08 80 00
GLAZING**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies the following:
 - 1. Glass.
 - 2. Plastic glazing.
 - 3. Glazing materials and accessories for both factory and field glazed assemblies.

1.2 RELATED WORK

- A. Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS: Sustainable Design Requirements.
- B. Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, and Section 08 14 00, WOOD DOORS: Sound resistant doors.
- C. Section 10 28 00, TOILET, BATH, AND LAUNDRY ACCESSORIES: Mirrors.
- D. Section 26 05 19, LOW VOLTAGE ELECTRICAL POWER AND CONDUCTORS AND CABLES: Wiring (120 V AC, 15A or 20A).
- E. Intrusion Detection: Section 28 16 11, INTRUSION DETECTION SYSTEM.
- F. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Junction and Switch Boxes.

1.3 LABELS

- A. Temporary labels:
 - 1. Provide temporary label on each light of glass and plastic material identifying manufacturer or brand and glass type, quality and nominal thickness.
 - 2. Label in accordance with NFRC label requirements.
 - 3. Temporary labels are to remain intact until glass and plastic material is approved by Contracting Officer Representative (COR).
- B. Permanent labels:
 - 1. Locate in corner for each pane.
 - 2. Label in accordance with ANSI Z97.1 and SGCC label requirements.
 - a. Tempered glass.
 - b. Laminated glass or have certificate for panes without permanent label.
 - c. Organic coated glass.
 - 3. Bullet resistance glass or plastic assemblies:

- a. Bullet resistance glass or plastic assemblies in accordance with UL 752 requirements for power rating specified.
 - b. Identify each security glazing permanently with glazing manufacturer's name, date of manufacture, product number, and DOS Code number inconspicuously located in lower corner on protective side and visible after glazing is framed.
 - c. The "attack (threat) side" is to be identified in bold lettering on each side of glazing with removable label.
4. Fire rated glazing assemblies: Mark in accordance with IBC.

1.4 PERFORMANCE REQUIREMENTS

- A. General: Design glazing system consistent with guidance and practices presented in the GANA Glazing Manual, GANA Laminated Glazing Manual, and GANA Sealant Manual, as applicable to project. Installed glazing is to withstand applied loads, thermal stresses, thermal movements, building movements, permitted tolerances, and combinations of these conditions without failure, including loss or glass breakage attributable to defective manufacture, fabrication, or installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; unsafe engagement of the framing system; deflections beyond specified limits; or other defects in construction.
- B. Glazing Unit Design: Design glass, including engineering analysis meeting requirements of authorities having jurisdiction. Thicknesses listed are minimum. Coordinate thicknesses with framing system manufacturers.
1. Design glass in accordance with ASTM E1300, and for conditions beyond the scope of ASTM E1300, by a properly substantiated structural analysis.
 2. Design Wind Pressures: As indicated on construction documents in accordance with ASCE 7.
 3. Wind Design Data: In accordance with ASCE 7.
 4. Maximum Lateral Deflection: For glass supported on all four edges, limit center-of-glass deflection at design wind pressure to not more than the structural capacity of the glazing unit, the threshold at which frame engagement is no longer safely assured, 1/100 times the short-side length, or 19 mm (0.75 inch), whichever is less.
- C. Ballistic- and Blast- resistant glass or plastic glazing assemblies:

1. For blast-resistant and ballistic-resistant units comply with requirements in Physical Security Design Manual for VA Life Safety Protected Facilities, and project-specific criteria provided on the drawings and specifications.
2. Spall Resistance: Laminated glazing is not permitted to produce spall to interior (protected side) when impacted with scheduled ballistics.
3. Tolerances:
 - a. Outside dimensions: Overall outside dimensions (height and width) of laminated security glazing is to maintain tolerance of ± 3 mm (± 0.12 inch).
 - b. Warpage: Out-of-flat (warpage or bowing) condition of laminates is not to exceed 2.5 mm per lineal meter (0.10 inch per 3.3 lineal foot). The condition, if present, is to be localized to extent not greater than 0.75 mm (0.03 inch) for any 0.3 meter (0.98 feet) section.
- D. Windborne-Debris-Impact Resistance: Comply with enhanced-protection testing requirements in ASTM E1996 for project wind zone when tested according to ASTM E1886, based upon testing of specimens not less than the size required for project and utilizing installation method identical to that specified for project.
 1. Project Wind Zone: Wind Zone 3.
 2. Large-Missile Test: For glazing located within 9.1 m (30 feet) of grade.
 3. Small-Missile Test: For glazing located more than 9.1 m (30 feet) above grade.
- E. Building Enclosure Vapor Retarder and Air Barrier:
 1. Utilize the inner pane of multiple pane sealed units for the continuity of the air barrier and vapor retarder seal.
 2. Maintain a continuous air barrier and vapor retarder throughout the glazed assembly from glass pane to heel bead of glazing sealant.

1.5 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals, as described below:
 1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
- C. Manufacturer's Certificates:

1. Certificate stating that fire-protection and fire-resistive glazing units meet code requirements for fire-resistance-rated assembly and applicable safety glazing requirements.
2. Certificate on solar heat gain coefficient when value is specified.
3. Certificate on "R" value when value is specified.
4. Certificate test reports confirming compliance with specified bullet resistive rating.
5. Certificate that blast resistant glass meets the specified requirements.

D. Manufacturer Warranty.

E. Manufacturer's Literature and Data:

1. Glass, each kind required.
2. Insulating glass units.
3. Transparent (one-way vision glass) mirrors.
4. Elastic compound for metal sash glazing.
5. Putty, for wood sash glazing.
6. Glazing cushion.
7. Sealing compound.
8. Bullet resistive material.
9. Plastic glazing material, each type required.

F. Samples:

1. Size: 305 mm by 305 mm (12 inches by 12 inches).
2. Tinted glass.
3. Reflective glass.
4. Transparent (one-way vision glass) mirrors.

G. Preconstruction Adhesion and Compatibility Test Report: Submit glazing sealant manufacturer's test report indicating glazing sealants were tested for adhesion to glass and glazing channel substrates and for compatibility with glass and other glazing materials.

1.6 DELIVERY, STORAGE AND HANDLING

- A. Delivery: Schedule delivery to coincide with glazing schedules so minimum handling of crates is required. Do not open crates except as required for inspection for shipping damage.
- B. Storage: Store cases according to printed instructions on case, in areas least subject to traffic or falling objects. Keep storage area clean and dry.

- C. Handling: Unpack cases following printed instructions on case. Stack individual windows on edge leaned slightly against upright supports with separators between each.
- D. Protect laminated security glazing units against face and edge damage during entire sequence of fabrication, handling, and delivery to installation location. Provide protective covering on exposed faces of glazing plastics, and mark inside as "INTERIOR FACE" or "PROTECTED FACE":
1. Treat security glazing as fragile merchandise and packaged and shipped in export wood cases with width end in upright position and blocked together in a mass. Storage and handling to comply with manufacturer's directions and as required to prevent edge damage or other damage to glazing resulting from effects of moisture, condensation, temperature changes, direct exposure to sun, other environmental conditions, and contact with chemical solvents.
 2. Protect sealed-air-space insulating glazing units from exposure to abnormal pressure changes, as could result from substantial changes in altitude during delivery by air freight. Provide temporary breather tubes which do not nullify applicable warranties on hermetic seals.
 3. Temporary protections: The glass front and polycarbonate back of glazing are to be temporarily protected with compatible, peelable, heat-resistant film which will be peeled for inspections and re-applied and finally removed after doors and windows are installed at destination. Since many adhesives will attack polycarbonate, the film used on exposed polycarbonate surfaces is to be approved and applied by manufacturer.
 4. Edge protection: To cushion and protect glass clad, and polycarbonate edges from contamination or foreign matter, the four (4) edges are to be sealed the depth of glazing with continuous standard-thickness thermoplastic rubber tape. Alternatively, continuous channel shaped extrusion of thermoplastic rubber are to be used, with flanges extending into face sides of glazing.
 5. Protect "Constant Temperature" units including every unit where glass sheet is directly laminated to or directly sealed with metal-tube type spacer bar to polycarbonate sheet, from exposures to ambient temperatures outside the range of 16 to 24 degrees C (60 to

75 degrees F), during the fabricating, handling, shipping, storing, installation, and subsequent protection of glazing.

1.7 PROJECT CONDITIONS:

- A. Field Measurements: Field measure openings before ordering tempered glass products to assure for proper fit of field measured products.

1.8 WARRANTY

- A. Construction Warranty: Comply with the FAR clause 52.246-21 "Warranty of Construction".
- B. Manufacturer Warranty: Manufacturer shall warranty their glazing from the date of installation and final acceptance by the Government as follows. Submit manufacturer warranty.
1. Bullet resistive plastic material to remain visibly clear without discoloration for 10 years.
 2. Insulating glass units to remain sealed for ten (10) years.
 3. Laminated glass units to remain laminated for five (5) years.
 4. Polycarbonate to remain clear and ultraviolet light stabilized for five (5) years.
 5. Insulating plastic to not have more than 6 percent decrease in light transmission and be ultraviolet light stabilized for ten (10) years.

1.9 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Architectural Manufacturers Association (AAMA):
- 800.....Test Methods for Sealants
 - 810.1-77.....Expanded Cellular Glazing Tape
- C. American National Standards Institute (ANSI):
- Z97.1-14.....Safety Glazing Material Used in
Building - Safety Performance Specifications
and Methods of Test
- D. American Society of Civil Engineers (ASCE):
- 7-10.....Wind Load Provisions
- E. ASTM International (ASTM):
- C542-05(2017).....Lock-Strip Gaskets
 - C716-06(2020).....Installing Lock-Strip Gaskets and Infill
Glazing Materials
 - C794-18.....Adhesion-in-Peel of Elastomeric Joint Sealants

C864-05(2019).....Dense Elastomeric Compression Seal Gaskets,
Setting Blocks, and Spacers

C920-18.....Elastomeric Joint Sealants

C964-20.....Standard Guide for Lock-Strip Gasket Glazing

C1036-16.....Flat Glass

C1048-18.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated
and Uncoated Glass.

C1172-19.....Laminated Architectural Flat Glass

C1349-17.....Standard Specification for Architectural Flat
Glass Clad Polycarbonate

C1376-15.....Pyrolytic and Vacuum Deposition Coatings on
Flat Glass

D635-18.....Rate of Burning and/or Extent and Time of
Burning of Self-Supporting Plastic in a
Horizontal Position

D4802-16.....Poly (Methyl Methacrylate) Acrylic Plastic
Sheet

E84-20.....Surface Burning Characteristics of Building
Materials

E119-20.....Standard Test Methods for Fire Test of Building
Construction and Material

E1300-16.....Load Resistance of Glass in Buildings

E1886-19.....Standard Test Method for Performance of
Exterior Windows, Curtain Walls, Doors, and
Impact Protective Systems Impacted by
Missile(s) and Exposed to Cyclic Pressure
Differentials

E1996-17.....Standard Specification for Performance of
Exterior Windows, Curtain Walls, Doors, and
Impact Protective Systems Impacted by Windborne
Debris in Hurricanes

E2141-14.....Test Methods for Assessing the Durability of
Absorptive Electrochromic Coatings on Sealed
Insulating Glass Units

E2190-19.....Insulating Glass Unit

E2240-06.....Test Method for Assessing the Current-Voltage
Cycling Stability at 90 Degree C (194 Degree F)

- of Absorptive Electrochromic Coatings on Sealed
Insulating Glass Units
- E2241-06.....Test Method for Assessing the Current-Voltage
Cycling Stability at Room Temperature of
Absorptive Electrochromic Coatings on Sealed
Insulating Glass Units
- E2354-10.....Assessing the Durability of Absorptive
Electrochromic Coatings within Sealed
Insulating Glass Units
- E2355-10.....Test Method for Measuring the Visible Light
Transmission Uniformity of an Absorptive
Electrochromic Coating on a Glazing Surface
- F1233-08(2019).....Standard Test Method for Security Glazing
Materials and Systems
- F1642/F1642M-17.....Test Method for Glazing and Glazing Systems
Subject to Airblast Loadings
- F. Code of Federal Regulations (CFR):
- 16 CFR 1201-10.....Safety Standard for Architectural Glazing
Materials
- G. Glass Association of North America (GANA):
- 2010 Edition.....GANA Glazing Manual
- 2008 Edition.....GANA Sealant Manual
- 2009 Edition.....GANA Laminated Glazing Reference Manual
- 2010 Edition.....GANA Protective Glazing Reference Manual
- H. International Code Council (ICC):
- IBC.....International Building Code
- I. Insulating Glass Certification Council (IGCC)
- J. Insulating Glass Manufacturer Alliance (IGMA):
- TB-3001-13.....Guidelines for Sloped Glazing
- TM-3000.....North American Glazing Guidelines for Sealed
Insulating Glass Units for Commercial and
Residential Use
- K. Intertek Testing Services - Warnock Hersey (ITS-WHI)
- L. National Fire Protection Association (NFPA):
- 80-16.....Fire Doors and Windows
- 252-12.....Fire Tests of Door Assemblies
- 257-12.....Standard on Fire Test for Window and Glass
Block Assemblies

- M. National Fenestration Rating Council (NFRC)
- N. Safety Glazing Certification Council (SGCC) 2012:
Certified Products Directory (Issued Semi-Annually).
- O. Underwriters Laboratories, Inc. (UL):
9-08(R2009).....Fire Tests of Window Assemblies
263-14.....Fire Tests of Building Construction and
Materials
752-11.....Bullet-Resisting Equipment.
- P. Department of Veterans Affairs:
- Q. Physical Security Design Manual for VA Mission Critical Protected
Facilities January 2015
- R. Architectural Design Manual for VA Facilities (VASDM)
- S. Environmental Protection Agency (EPA):
40 CFR 59(2014).....National Volatile Organic Compound Emission
Standards for Consumer and Commercial Products

PART 2 - PRODUCT

2.1 GLASS

- A. Provide minimum thickness stated and as additionally required to meet performance requirements.
 - 1. Provide minimum 6 mm (1/4 inch) thick glass units unless otherwise indicated.
- B. Obtain glass units from single source from single manufacturer for each glass type.
- C. Clear Glass:
 - 1. ASTM C1036, Type I, Class 1, Quality q3.
- D. Ultra-clear-Low-Iron Float Glass:
 - 1. ASTM C1036, Type I, Class 1, Quality q3 and with visible light transmission of not less than 90 percent.
- E. Tinted Heat reflective and low emissivity coated glass:
 - 1. ASTM C1036, Type I, Class 2, Quality q3.
- F. Patterned and Wired Flat Glass:
 - 1. ASTM C1036, Type II, Class 1, Pattern P1, Finish F1, Quality Q6, Mesh m1.

2.2 HEAT-TREATED GLASS

- A. Roller Wave Limits for Heat-Treated Glass: Orient all roller wave distortion parallel to bottom surface of glazing, and provide units complying with the following limitations:

1. Measurement Parallel to Line: Maximum peak to valley 0.203 mm (0.008 inch).
 2. Measurement Perpendicular to Line: Maximum 0.0254 mm (0.001 inch).
 3. Bow/Warp: Maximum 50 percent of bow and warp allowed by ASTM C1048.
- B. Clear Heat Strengthened Glass:
1. ASTM C1048, Kind HS, Condition A, Type I, Class 1, Quality q3.
- C. Tinted Heat Strengthened Glass:
1. ASTM C1048, Kind HS, Condition A, Type I, Class 2, Quality q3.
- D. Clear Tempered Glass:
1. ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.
- E. Tinted Tempered Glass.
1. ASTM C1048, Kind FT, Condition A, Type I, Class 2, Quality q3.
- F. Tempered Patterned Glass:
1. ASTM C1048, Kind FT, Type II, Class 1, Form 3, finish, pattern and quality as indicated in construction documents and scheduled.
- G. Frameless Mirror Flat Glass:
1. ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q2.
 2. Thickness, 6 mm (1/4 inch), ease edge.
 3. Silvered, copper coated and backing paint coated rear surface.
 4. Safety backing of adhesive backed polyethylene applied to back of mirror to retain fragments in case of breakage.
 5. Tamper-resistant attachments as recommended by manufacturer for width and height shown on Drawings.

2.3 COATED GLASS

- A. Ceramic Coated Vision Glass:
1. ASTM C1048, Kind HS or FT, Condition C, Type I, Quality q3 with ceramic coating applied by silk-screen process.
 2. Pattern as indicated in construction documents.

2.4 PLASTIC GLAZING

- A. Clear Acrylic Sheet:
1. ASTM D4802. Type UVF, Category A-1, clear, smooth both sides, and formulated with ultraviolet absorber.
 2. Thickness, as indicated in construction documents.
- B. Clear Acrylic Sheet, Abrasion Resistant:
1. ASTM D4802. Type UVF, Category A-1, Finish 3, clear, smooth, formulated with ultraviolet absorber, and having an abrasive resistant coating on both sides.
 2. Thickness, as indicated in construction documents.

C. Clear Polycarbonate Sheet:

1. ASTM C1349, Appendix X1, Type II, (coated mar-resistant, UV stabilized), with coating on both sides. Flame spread of 10 or less when tested per ASTM E84.
2. Thickness, as indicated in construction documents.

2.5 LAMINATED GLASS

- A. Laminated Glass: ASTM C1172. Two or more lites of heat treated glass bonded with polyvinyl butyral, ionomeric polymer, or cast-in-place and cured-transparent-resin interlayer complying with interlayer manufacturer's written instructions. Minimum total laminated thickness of 1/4" for blast resistant glazing.
- B. Interlayer: Use min. 0.75 mm (0.030 inch) thick interlayer for vertical glazing unless otherwise indicated in construction documents.
- C. Interlayer: Use 1.5 mm (0.060 inch) thick interlayer for:
 1. Horizontal or sloped glazing.
 2. Acoustical glazing.
 3. Assemblies requiring heat strengthened or fully tempered glass.
- D. Interlayer: Use 2.28 mm (0.090 inch) thick interlayer where required to meet performance requirements.
- E. Interlayer Color: Clear, unless otherwise indicated in construction documents.

2.6 INSULATING GLASS UNITS

- A. Provide factory fabricated, hermetically sealed glass unit consisting of two panes of glass separated by a dehydrated air space and comply with ASTM E2190. The exterior glass unit shall be fully tempered and the inner glass unit shall be laminated annealed at a minimum for all blast resistant glazing.
- B. Assemble units using glass types specified in Insulating Glass Schedule and Blast Glazing assembly requirements

2.7 FIRE PROTECTION AND FIRE RESISTANCE GLAZING

- A. Fire-Protection-Rated Glazing: Glazing units tested for use in fire door assemblies or fire windows, UL, ITS-WHI or equivalent listed and labeled by testing agency in accordance with IBC, for fire-protection ratings as indicated on construction documents, based upon positive-pressure testing per NFPA 257 or UL 9, and complying with NFPA 80.
 1. Hose-Stream Test: Units must comply, except units having fire-protection rating of 20 minutes.

2. Temperature Rise Limitation: Units over 0.065 square meter (100 square inch) must comply with 232 deg. C (450 degrees F) limitation.
 3. Labeling: Permanently label fire-protection-rated glazing units in accordance with IBC.
 4. Safety Glazing: Comply with 16 CFR 1201, Category II.
 5. Fire-Protection-Rated Tempered Glass: For 20-minute fire-protection-rated door assemblies, of thickness scheduled.
 6. Fire-Protection-Rated Laminated Ceramic Glazing: Units made from two lites of clear, ceramic glass, 8 mm (5/16 inch) total thickness, for rating scheduled.
- B. Fire-Resistance-Rated Glazing: Glazing units tested for use in fire wall assemblies, UL, ITS-WHI or equivalent listed and labeled by testing agency in accordance with IBC for fire-resistance ratings of wall assemblies as indicated on construction documents, based upon testing according to NFPA 252 and ASTM E119 or UL 263.
1. Labeling: Permanently label fire-resistance-rated glazing units in accordance with IBC.
 2. Safety Glazing: Comply with 16 CFR 1201, Category II.

2.8 GLAZING ACCESSORIES

- A. As required to supplement the accessories provided with the items to be glazed and to provide a complete installation. Ferrous metal accessories exposed in the finished work are to have a finish that will not corrode or stain while in service. Fire rated glazing to be installed with glazing accessories in accordance with the manufacturer's installation instructions.
- B. Setting Blocks: ASTM C864:
1. Silicone type.
 2. Channel shape; having 6 mm (1/4 inch) internal depth.
 3. Shore A hardness of 80 to 90 Durometer.
 4. Block lengths: 50 mm (2 inches) except 100 to 150 mm (4 to 6 inches) for insulating glass.
 5. Block width: Approximately 1.6 mm (1/16 inch) less than the full width of the rabbet.
 6. Block thickness: Minimum 4.8 mm (3/16 inch). Thickness sized for rabbet depth as required.
- C. Spacers: ASTM C864:
1. Channel shape having a 6 mm (1/4 inch) internal depth.

2. Flanges not less 2.4 mm (3/32 inch) thick and web 3 mm (1/8 inch) thick.
 3. Lengths: 25 to 76 mm (1 to 3 inches).
 4. Shore A hardness of 40 to 50 Durometer.
- D. Glazing Tapes:
1. Semi-solid polymeric based closed cell material exhibiting pressure-sensitive adhesion and withstanding exposure to sunlight, moisture, heat, cold, and aging.
 2. Shape, size and degree of softness and strength suitable for use in glazing application to prevent water infiltration.
 3. Complying with AAMA 800 for the following types:
 - a. AAMA 810.1, Type 1, for glazing applications in which tape acts as the primary sealant.
 - b. AAMA 810.1, Type 2, for glazing applications in which tape is used in combination with a full bead of liquid sealant.
- E. Spring Steel Spacer: Galvanized steel wire or strip designed to position glazing in channel or rabbeted sash with stops.
- F. Glazing Clips: Galvanized steel spring wire designed to hold glass in position in rabbeted sash without stops.
- G. Glazing Points (Sprigs): Pure zinc stock, thin, flat, triangular or diamond shaped pieces, 6 mm (1/4 inch) minimum size.
- H. Glazing Gaskets: ASTM C864:
1. Firm dense wedge shape for locking in sash.
 2. Soft, closed cell with locking key for sash key.
 3. Flanges may terminate above the glazing-beads or terminate flush with top of beads.
- I. Lock-Strip Glazing Gaskets: ASTM C542, shape, size, and mounting as indicated.
- J. Glazing Sealants: ASTM C920, silicone neutral cure:
1. Type S.
 2. Class 25 or 50 as recommended by manufacturer for application.
 3. Grade NS.
 4. Shore A hardness of 25 to 30 Durometer.
 5. VOC Content: For sealants used inside the weatherproofing system, not more than 250 g/L or less when calculating according to 40 CFR 59, (EPA Method 24).
- K. Structural Sealant: ASTM C920, silicone acetoxo cure:
1. Type S.

2. Class 25.
 3. Grade NS.
 4. Shore a hardness of 25 to 30 Durometer.
- L. Neoprene, EPDM, or Vinyl Glazing Gasket: ASTM C864.
1. Channel shape; flanges may terminate above the glazing channel or flush with the top of the channel.
 2. Designed for dry glazing.
- M. Color:
1. Color of glazing compounds, gaskets, and sealants used for aluminum color frames to match color of the finished aluminum and be nonstaining.
 2. Color of other glazing compounds, gaskets, and sealants which will be exposed in the finished work and unpainted are to be black, gray, or neutral color.
- N. Smoke Removal Unit Targets: Adhesive targets affixed to glass to identify glass units intended for removal for smoke control. Comply with requirements of local Fire Department.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verification of Conditions:
1. Examine openings for glass and glazing units; determine they are proper size; plumb; square; and level before installation is started.
 2. Verify that glazing openings conform with details, dimensions and tolerances indicated on manufacturer is approved shop drawings.
- B. Review for conditions which may adversely affect glass and glazing unit installation, prior to commencement of installation. Do not proceed with installation until unsatisfactory conditions have been corrected.
- C. Verify that wash down of adjacent masonry is completed prior to erection of glass and glazing units.

3.2 PREPARATION

- A. For sealant glazing, prepare glazing surfaces in accordance with GANA Sealant Manual.
- B. Determine glazing unit size and edge clearances by measuring the actual unit to receive the glazing.
- C. Shop fabricate and cut glass with smooth, straight edges of full size required by openings to provide GANA recommended edge clearances.
- D. Verify that components used are compatible.

- E. Clean and dry glazing surfaces.
- F. Prime surfaces scheduled to receive sealants, as determined by preconstruction sealant-substrate testing.

3.3 INSTALLATION - GENERAL

- A. Install in accordance with GANA Glazing Manual, GANA Sealant Manual, IGMA TB-3001, and IGMA TM-3000 unless specified otherwise.
- B. Glaze in accordance with recommendations of glazing and framing manufacturers, and as required to meet the Performance Test Requirements specified in other applicable sections of specifications.
- C. Set glazing without bending, twisting, or forcing of units.
- D. Do not allow glass to rest on or contact any framing member.
- E. Glaze doors and operable sash, in a securely fixed or closed and locked position, until sealant, glazing compound, or putty has thoroughly set.
- F. Patterned Glass:
 - 1. Install units with one patterned surface with smooth surface on the weather side.
 - 2. Install units in interior partitions with pattern in same direction in all openings.
- G. Tempered Glass: Install with roller distortions in horizontal position unless otherwise directed.
- H. Transparent (One-Way Vision Glass) Mirror: Use continuous channel glazing gasket.
- I. Plastic:
 - 1. Use dry glazing method.
 - 2. Use only neoprene or EPDM gaskets.
- J. Laminated Glass:
 - 1. Tape edges to seal interlayer and protect from glazing sealants.
 - 2. Do not use putty or glazing compounds.
- K. Insulating Glass Units:
 - 1. Glaze in compliance with glass manufacturer's written instructions.
 - 2. When glazing gaskets are used, they are to be of sufficient size and depth to cover glass seal or metal channel frame completely.
 - 3. Do not use putty or glazing compounds.
 - 4. Do not grind, nip, cut, or otherwise alter edges and corners of fused glass units after shipping from factory.
 - 5. Install with tape or gunnable sealant in wood sash.
- L. Fire Protective and Fire Resistance Glass:
 - 1. Wire Glass: Glaze in accordance with NFPA 80.

2. Other fire protective and fire-resistant glass: Glaze in accordance with manufacturer's installation instructions and NFPA 80.

M. Bullet Resisting Material:

1. Glaze as recommended by manufacturer, using glazing material which will permit expansion and contraction of the bullet resistive material in the frame.
2. The polycarbonate surface is not to be cleaned by scraping, razor blade, squeegee, or use of highly alkaline cleaner.
3. At no time is polycarbonate material be exposed to chemical solvents (benzene, gasoline, acetone, paint thinners) or aromatic hydrocarbons (toluene or xylene), nor should any of these solvents or fumes be used or present in confined area such as a security guard booth.
4. Due care is to be exercised (paint formula, ventilation, protection of polycarbonate) when painting becomes necessary to interiors of rooms of hardline glazed units; exposure to chemical solvents could result in irreparable damage to security glazings (delaminations, distortions, cracks, severe stress crazing, air bubbles, etc.).

3.4 INSTALLATION - WET/DRY METHOD (PREFORMED TAPE AND SEALANT)

- A. Cut glazing tape to length and set against permanent stops, 5 mm (3/16 inch) below sight line. Seal corners by butting tape and dabbing with butyl sealant.
- B. Apply heel bead of butyl sealant along intersection of permanent stop with frame ensuring full perimeter seal between glass and frame to complete the continuity of the air and vapor seal.
- C. Place setting blocks at 1/4 points with edge block no more than 152 mm (6 inches) from corners.
- D. Rest glazing on setting blocks and push against tape and heel bead of sealant with sufficient pressure to achieve full contact at perimeter of pane or glass unit.
- E. Install removable stops, with spacer strips inserted between glazing and applied stops, 6 mm (1/4 inch) below sight line. Place glazing tape on glazing pane or unit with tape flush with sight line.
- F. Fill gap between glazing and stop with sealant to depth equal to bite of frame on glazing, but not more than 9 mm (3/8 inch) below sight line. Sealant type is to be compatible with glazing tape.

- G. Apply cap bead of sealant along void between the stop and the glazing, to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

3.5 INSTALLATION - WET METHOD (SEALANT AND SEALANT)

- A. Place setting blocks at 1/4 points and install glazing pane or unit.
- B. Install removable stops with glazing centered in space by inserting spacer shims both sides at 600 mm (24 inch) intervals, 6 mm (1/4 inch) below sight line.
- C. Fill gaps between glazing and stops with sealant to depth of bite on glazing, but not more than 9 mm (3/8 inch) below sight line to ensure full contact with glazing and continue the air and vapor seal.
- D. Apply sealant to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

3.6 INSTALLATION - INTERIOR WET/DRY METHOD (TAPE AND SEALANT)

- A. Cut glazing tape to length and install against permanent stops, projecting 1.6 mm (1/16 inch) above sight line.
- B. Place setting blocks at 1/4 points with edge block no more than 150 mm (6 inches) from corners.
- C. Rest glazing on setting blocks and push against tape to ensure full contact at perimeter of pane or unit.
- D. Install removable stops, spacer shims inserted between glazing and applied stops at 600 mm (24 inch) intervals, 6 mm (1/4 inch) below sight line.
- E. Fill gaps between pane and applied stop with sealant to depth equal to bite on glazing, to uniform and level line. Sealant type is to be compatible with glazing tape.
- F. Trim protruding tape edge.

3.7 INSTALLATION - INTERIOR WET METHOD (COMPOUND AND COMPOUND)

- A. Install glazing resting on setting blocks. Install applied stop and center pane by use of spacer shims at 600 mm (24 inch) centers, kept 6 mm (1/4 inch) below sight line.
- B. Locate and secure glazing pane using spring wire clips.
- C. Fill gaps between glazing and stops with glazing compound until flush with sight line. Tool surface to straight line.

3.8 INSTALLATION - REGLAZING HISTORIC FRAMING

- A. Steel Windows: For glazing with glazing beads: ASTM C920.
- B. Wood Sash: For glazing with glazing beads: Tape or ASTM C920, gunnable sealant.

C. Lock-strip Gaskets: Follow ASTM C716 for installation.

3.9 REPLACEMENT AND CLEANING

- A. Clean new glass surfaces removing temporary labels, paint spots, and defacement after approval by COR.
- B. Replace cracked, broken, and imperfect glass, or glass which has been installed improperly.
- C. Leave glass, putty, and other setting material in clean, whole, and acceptable condition.

3.10 PROTECTION

- A. Protect finished surfaces from damage during erection, and after completion of work. Strippable plastic coatings on colored anodized finish are not acceptable.

3.11 MONOLITHIC GLASS SCHEDULE

- A. Glass Type MG# 1: Clear fully tempered float glass.
 - 1. Unit Thickness: 6 mm (0.23 inch).
 - 2. Safety glazing label required.

3.12 LAMINATED GLASS SCHEDULE

- A. Glass Type LG# 1: Clear laminated glass with two (2) lites of fully tempered float glass.
 - 1. Minimum Thickness of Each Glass Lite: 3 mm (0.12 inch).
 - 2. Interlayer Thickness: 1.52 mm (0.060 inch).
 - 3. Safety glazing label required.
 - 4. Application: Interior glazing of units unless otherwise scheduled.

3.13 INSULATING LAMINATED GLASS SCHEDULE (FORCE PROTECTION AND PHYSICAL SAFETY)

- A. Glass Type IL# 1: Clear insulating laminated glass.
 - 1. Overall Unit Thickness: 19 mm (3/4 inch).
 - 2. Outdoor Lite: Clear annealed float glass, except heat-strengthened float glass where required, and fully tempered float glass where indicated.
 - a. Minimum Thickness of Outdoor Lite: 4 mm (0.16 inch).
 - 3. Interspace Content: Argon.
 - 4. Indoor Lite: Clear laminated glass with two lites of annealed float glass, except heat-strengthened float glass where required, and fully tempered float glass where indicated.
 - a. Minimum Thickness of Each Glass Lite: 4 mm (0.16 inch).
 - b. Interlayer Thickness: 1.52 mm (0.060 inch).

5. Visible Light Transmittance: 75 percent minimum.
6. Solar Heat Gain Coefficient: 50 maximum.
7. Safety glazing label required.
8. Windborne debris-resistant glazing unit required.
9. Blast Resistance: Provide units meeting the following:
 - a. GP Value 1.

- - - E N D - - -

SECTION 08 88 16
INTEGRATED BLINDS GLAZING

PART 1 - GENERAL

1.1 1.01 DESCRIPTION OF WORK

- A. This Section includes the following types of glazing:
1. Sealed integrated blind glazing units for glazing of hollow metal-framed windows.
 2. Manual operators.

1.2 1.02 REFERENCES

- A. General: Standards listed by reference, including revisions by issuing authority, form a part of this specification section to extent indicated. Standards listed are identified by issuing authority, authority abbreviation, designation number, title or other designation established by issuing authority. Standards subsequently referenced herein are referred to by issuing authority abbreviation and standard designation.
- B. American National Standards Institute (ANSI): ANSI Z97.1: Standard for Safety Glazing Materials Used In Buildings - Safety Performance Specifications And Methods Of Test.
- C. American Society for Testing and Materials (ASTM):
1. B221 - Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
 2. C864 - Standard Specification for Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers.
 3. C920 - Standard Specification for Elastomeric Joint Sealants.
 4. C1048 - Standard Specification for Heat-Treated Flat Glass-Kind HS, Kind FT, Coated and Uncoated Glass.
 5. C1115 - Standard Specification for Dense Elastomeric Silicone Rubber Gaskets and Accessories.
 6. C1172 - Standard Specification for Laminated Architectural Flat Glass.
 7. C1294 - Standard Test Method for Compatibility of Insulating Glass Edge Sealants with Liquid-Applied Glazing Materials.
 8. C1330 - Standard Specification for Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants.
 9. E90 - Standard Test Method for Laboratory
 - a. Measurement of Air Borne Sound Transmission Loss of Building Partitions and Elements.

- b. E119 - Standard Test Methods for Fire Tests of Building Construction and Materials.
- c. E413 - Standard Classification for Rating Sound Insulation.
- d. E1332 - Standard Classification for Determination of Outdoor - Indoor Transmission Class.
- e. E2190 - Standard Specification for Insulating Glass Units Performance and Evaluation.
- D. Consumer Product Safety Commission (CPSC): CPSC 16 CFR 1201: 1. Safety Standard for Architectural Glazing Materials.
- E. Glass Association of North America (GANA): Engineering Standards Manual.
- F. National Fire Protection Associations (NFPA): 80 - Standard for Fire Doors and Fire Windows.

1.3 1.03 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of the Contract and Division 1 Specification Sections.
- B. Product Data: Descriptive data and performance attributes for integrated blind glass.
- C. Shop Drawings: Include plans, elevations, sections, details, hardware mounting heights, and attachments to other work.
- D. Selection Samples: For selection of factory-applied color finishes.
- E. Verification Samples: 8-1/2 x 13-1/2 inch minimum, integrated blind glass samples.
- F. Closeout Submittals:
 - 1. Owner's Manual including manufacturer's maintenance instructions.
 - 2. Warranties.

1.4 1.04 QUALITY ASSURANCE

- A. Installer Qualifications: Manufacturer's authorized representative who is trained for installation and maintenance of units required for this Project.
- B. Manufacturer Qualifications: Manufacturer specializing in manufacturing the products specified in this section. Company which specializes in the installation and assembly of sealed integral blind systems and glass and glazing.
- B. Source Limitations: Obtain integrated blinds glazing units through one source from a single manufacturer.
- C. Product Options: Drawings indicate sizes, profiles, and dimensional requirements of integrated blinds glazing units and are based on the specific system indicated.

1.5 1.05 DELIVERY, STORAGE, AND HANDLING

- A. Deliver and store glass units in upright position, on blocks, in dry and safe location.
- B. Do not place units in direct sunlight.
- C. C. Handle units using corner protectors.

1.6 1.06 PROJECT CONDITIONS

- A. Field Measurements: General Contractor shall verify openings to receive integrated blinds glazing units by field measurements before fabrication and indicate measurements on Shop Drawings.
- B. Mounting Surfaces: General Contractor shall verify all surfaces to be plumb, straight and secure; substrates to be of proper dimension and material.
- C. Other trades: General Contractor shall advise of any inadequate conditions or equipment.

1.7 1.07 COORDINATION

- A. Templates: Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing integrated blinds glazing units to comply with indicated requirements.

1.8 1.08 MOCK-UP

- A. Refer to Section 01 45 00 for general requirements.
- B. Locate mock-up as directed by Architect.
- C. Approved mock-up may remain as part of the Work.

1.9 1.09 WARRANTY

- A. Integrated blinds glazing units shall be free of defects in material and workmanship for a minimum period of five (5) years from the date of substantial completion.
- B. 1. Interior and Exterior Locations: Furnish manufacturer's 10-year warranty providing coverage against material obstruction of glass units by dust or film formation due to failure of hermetic seal.
- C. B. During the warranty period the Owner shall engage a factory-trained technician to perform service and affect repairs. An inspection shall be performed after each adjustment or repair and a completed inspection form shall be submitted to the Owner.
- D. C. During the warranty period all warranty work, including but not limited to emergency service, shall be performed during normal working hours.

PART 2 - PRODUCTS**2.1 2.01 MANUFACTURERS**

- A. Basis of Design Manufacturer: Kyler Industries; Product: Sani-Pane;
www.kyler-industries.com/sani-pane/.
- B. Other Acceptable Manufacturers:
 - 1. Unicel Architectural; Product: Vision Control or Vision Control Mini; www.unicelarchitectural.com.
- C. Substitutions: Not Permitted.

2.2 2.02 GENERAL

- A. General: Provide manufacturer's standard integrated blind glazing assemblies including glass, mechanical blinds, and controls required for a complete installation.
 - 1. Mechanically gear-driven micro-blind installed between two lites of glass, with internally-mounted control assembly coupled to an external Operator(s) which in turn control the tilt function of the internal blind slats.
- B. Blinds: Provide manufactured micro-blinds and accessories assembled and integrated with tempered glass, sealants, and controls.

2.3 2.03 MATERIALS

- A. Insulated Glass Blind
 - 1. Air Space: ¾ inch.
 - 2. Finish: Clear anodized.
 - 3. Tilt Operator Type: Angle knob; Dual control.
 - a. Refer to Drawings for location of tilt operator.
- B. Horizontal Louver Blinds, Aluminum Slats:
 - 1. Slats: 6010-T8 aluminum alloy, 0.625-inch wide by 0.008-inch thick, with crowned profile.
 - 2. Spacing: Manufacturer's standard.
 - 3. Finish: One color, baked polyester paint ultra-violet-resistant finish.
 - 4. Head and Bottom Rails: 6063-T5 aluminum alloy, painted in coordinated color with slats.
 - 5. Ladder Tapes and Plisse Cords: Thermally-fixed polyester, UV resistant, and evenly spaced to prevent long-term slat sag.
 - 6. Tilt Operating Mechanism: Injected molded glass filled nylon mounted to a solid brass core.
 - 7. Internal mechanism is comprised of solid brass and aluminum. Color to be black.

8. Colors, Textures, Patterns, and Gloss: Architect's selection from Manufacturer's Standard colors.

C. Glass Unit: Factory assembled units consisting of two lites of tempered glass separated by a 3/4 inch clear anodized air spacer, with an internal blind.

1. Heat-Treated Float Glass: ASTM C 1048; Type 1; Quality-Q3; Class 1 (clear) unless otherwise indicated; of kind and condition indicated.

a. Fabrication Process: By horizontal (roller-hearth) process with roll-wave distortion parallel to bottom edge of glass as installed unless otherwise indicated.

b. All glass to be fully tempered float glass.

2. Glass Thickness: 3/16 inch, minimum. Provide glazing in thicknesses/type as needed to comply with requirements indicated.

3. Overall Thickness insulated glass blind: 1 inch glazing pocket

4. Seal with manufacturer's standard sealant.

5. Air spacer: Manufacturer's standard clear anodized spacer material and construction.

6. Desiccant: Molecular sieve or silica gel, or blend of both.

D. Perimeter Sub-Frame

1. Entire perimeter Sub-frame consists of .062 thick extruded aluminum.

a. All sub-frame corners are cut (45 degree) and mechanically fastened with concealed fasteners.

2. Sub-frame color: Factory Custom color paint to match adjacent door and window frames in project.

E. Miscellaneous Glazing Materials: Refer to Section 08 80 00 - Glazing.

2.4 2.04 FABRICATION

A. Tolerances:

1. Space of approximately 1/8 inch on each side between slats and spacer, for free movement of system and allowing thermal transmission of aluminum slats.

2. Blind Width Tolerance: Plus zero; minus 1/16 inch.

3. Blind Height Tolerance: Plus 3/8 inch; minus zero. Bottom rail engages pins in vertical air spacer with some slack and is slightly above bottom air spacer.

PART 3 - EXECUTION

3.1 3.01 EXAMINATION

A. Examine conditions for compliance with requirements for installation tolerances, support, and other conditions affecting performance of

integrated blinds glazing units. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 3.02 PREPARATION

- A. Clean glazing rabbets; remove loose and foreign matter.
- B. Remove protective coatings on metal surfaces.
- C. Clean glass just prior to installation.

3.3 3.03 INSTALLATION

- A. General: Do not install damaged components. Insure adequate support has been provided at the header. Rigidly secure non-movement joints. Maintain manufacturer's recommended edge and face clearances between glass and frame members.
- B. Blinds: Install integrated blinds glazing units in accordance with manufacturer's installation instructions. Installation shall be plumb and true in alignment with established lines and grades. Anchor securely in place.
- C. Sealant Glazing Method
 - 1. Apply sealant to full depth of permanent stops.
 - 2. Press glass into sealant with slight lateral movement to ensure adhesion.
 - 3. Apply sealant to full depth of removable stops. Secure stops in position, forcing contact with sealant bead and completely filling joint.

3.4 3.04 ADJUSTING

- A. Adjust integrated blinds glazing units, and hardware for smooth and safe operation.

3.5 3.05 CLEANING AND PROTECTION

- A. Clean glass surfaces promptly after installation. Remove excess glazing and sealant compounds, dirt, and other substances. Repair damaged finish to match original finish. Comply with requirements in Section 08 80 00 - Glazing, for cleaning and maintaining glass.

- - - E N D - - -

**SECTION 08 90 00
LOUVERS AND VENTS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies fixed and operable wall louvers, door louvers and wall vents.

1.2 RELATED WORK

- A. Section 08 11 13, HOLLOW METAL DOORS AND FRAMES: Louvers in Steel Doors.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
1. Each type, showing material, finish, size of members, operating devices, method of assembly, and installation and anchorage details.
- C. Manufacturer's Literature and Data:
1. Each type of louver and vent.
- D. Color samples.
- E. Blast Design Calculations: Louver System and Anchorage
1. Submit calculations for review and approval prepared by qualified blast consultant, with a minimum of 5 years' experience in design of blast resistant window systems, verifying louver assembly including anchors comply with specified blast resistance performance. The magnitudes of the design threats W1,W2 and GP1,GP2 are defined in the Physical Security Design Standards Data Definitions which is a document separate from the referenced VA Security Design Manual. The Physical Security Design Standards Data Definitions are provided on a need-to-know basis by the blast/structural engineer performing the blast design on VA projects. It is the responsibility of the engineer of blast resistant windows to request and obtain the Physical Security Design Data Standard Data Definitions from the VA Office of Construction and Facilities Management (CFM). Any associated delays or increased costs due to failure to obtain this information will be borne by the contractor.

1.4 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. The Master Painters Institute (MPI):
Approved Product List - Updated Monthly
- C. ASTM International (ASTM):
A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
A653/A653M-20.....Steel Sheet Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot Dip Process
A1008/A1008M-20.....Steel, Sheet, Carbon, Cold Rolled, Structural, and High Strength Low-Alloy with Improved Formability
B209-14.....Aluminum and Aluminum Alloy, Sheet and Plate
B209M-14.....Aluminum and Aluminum Alloy, Sheet and Plate (Metric)
B221-14.....Aluminum and Aluminum Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
B221M-13.....Aluminum and Aluminum Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes (Metric)
D1187/D1187M-97(2018)...Asphalt-Base Emulsions for Use as Protective Coatings for Metal
- D. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual
- E. National Fire Protection Association (NFPA):
90A-15.....Installation of Air Conditioning and Ventilating Systems
- F. American Architectural Manufacturers Association (AAMA):
2605-13.....High Performance Organic Coatings on Architectural Extrusions and Panels
- G. Air Movement and Control Association, Inc. (AMCA):
500-L-07 Testing Louvers
- H. Department of Veterans Affairs:
VA Physical Security Design Manual for Life Safety Protected Facilities
January 2015

I. Protective Design Center

PDC-TR-08 Single Degree of Freedom Structural Response Limits for
Antiterrorism Design

PART 2 - PRODUCTS

2.1 MATERIALS:

- A. Aluminum, Extruded: ASTM B221M (B221).
- B. Stainless Steel: ASTM A240/A240M, Type 302B.
- C. Galvanized Steel Sheet: ASTM A653/A653M; G90 min.
- D. Carbon Steel and Sheet: ASTM A1008/A1008M (interior use louvers only).
- E. Aluminum, Plate and Sheet: ASTM B209M (B209); alloy 3003 or 5005 with temper as required for forming.
- F. Fasteners: Fasteners for securing louvers and wall vents to adjoining construction, except as otherwise specified or indicated in construction documents, to be toggle or expansion bolts of size and type as required for each specific type of installation and service condition.
 - 1. Where type, size, or spacing of fasteners is not shown or specified, submit shop drawings showing proposed fasteners, and method of installation.
 - 2. Fasteners for louvers, louver frames, and wire guards to be of stainless steel or aluminum with same finish as louvers.
 - 3. Fasteners for louvers, louver frames and wire guards within mental health areas to be non-removable/tamper-proof type.
- G. Inorganic Zinc Primer: MPI No. 19.
- H. Bituminous Coating: ASTM D1187/D1187M; cold applied asphalt mastic emulsion.

2.2 EXTERIOR WALL LOUVERS:

- A. General:
 - 1. Provide fixed and operable type louvers of size and design shown.
 - 2. Heads, sills and jamb sections are to have formed caulking slots or be designed to retain caulking. Head sections are to have exterior drip lip, and sill sections an integral water stop.
 - 3. Furnish louvers with sill extension or separate sill as shown.
 - 4. Frame is to be mechanically fastened or welded construction with welds dressed smooth and flush.
- B. Performance Characteristics:
 - 1. Weather louvers are to have a minimum of 50 percent free area and to pass 13000 mm/s (500 fpm) free area velocity at a pressure drop not

- exceeding 32.38 PA (0.13 inch) water gauge of free area for 15 minutes when tested per AMCA Standard 500-L.
2. Louvers are to bear AMCA certified rating seals for air performance and water penetration ratings.
 3. Blast Resistance:
 - A. Louvers in exterior walls shall be blast resistant and meet the following criteria per the VA Physical Security Design Manual for Life Safety Protected Facilities January 2015:
 1. Standoff Distance: 25 feet (Life Safety Protected)
 - a. Design Threat W1 at the standoff distance not to exceed pressure and impulse associated with GP1 threat for Life Safety Protected Buildings.
 - b. Deformation not to exceed those defined by B3 response per the Protective Design Center document PDC-TR-08 while experiencing design level pressures.
 - C. Aluminum Louvers:
 1. General: Frames, blades, sills and mullions (sliding interlocking type); 2 mm (0.078-inch) thick extruded 6063-T5 or -T52 aluminum. Blades to be drainable type and have reinforcing bosses.
 2. Louvers fixed: Make frame sizes 13 mm (1/2-inch) smaller than openings. Single louvers frames are not to exceed 1676 mm (66 inches) wide. When openings exceed 1676 mm (66 inches), provide twin louvers separated by mullion members.
 3. Louvers are to withstand the effects of gravity loads and the following wind loads and stresses within limits and under conditions indicated without permanent deformation of louver components, noise or metal fatigue caused by louver-blade rattle or flutter, or permanent damage to fasteners and anchors.
 - a. Wind load acting inward or outward of not less than 1436 Pa (30 pound per square foot.).
 4. Louvers, operable: Louver frame opening sizes, single louver sizes and mullion requirements are to be as specified for fixed louvers.
 - a. Blades: Attach blades to frame with aluminum pivot pins through nylon bearings. Fasten each blade to stainless steel operation arms that are connected to minimum 3 mm (1/8-inch) thick stainless steel operating bar arranged for simultaneous operation of blades.

- b. Spring/chain operation: Exposed operator activated by spring attached to operating bar and mounted on frame.
 - c. Hand crank operation: Hand crank operator activated by case hardened gears concealed in aluminum housing. Operators are to be removable and located at jambs. Provide one right-handed operator for each louver.
- D. Stainless Steel Louvers: Form stainless steel louvers using 1.6 mm (0.063-inch) thick sheet for frames, blades, sills and mullions.
- 1. Provide louver with fixed 45-degree drainable blades with water baffle. Make overall frame size 13 mm (1/2-inch) less than opening, unless otherwise indicated in construction documents.
 - 2. Single louver sections are not to exceed 1676 mm (66 inches) in width. For openings larger than 1676 mm (66 inches) wide, provide multiple sections not larger than 1676 mm (66 inches) wide separated by mullions.
- E. Formed Steel Louvers: Form galvanized louvers using 1.5 mm (0.059-inch) thick sheet for frames, blades, sills and mullions.
- 1. Provide louver with fixed 45-degree drainable blades with water baffle. Make overall frame size 13 mm (1/2-inch) less than opening, unless otherwise indicated in construction documents.
 - 2. Single louver sections are not to exceed 1676 mm (66 inches) in width. For openings larger than 1676 mm (66 inches) wide, provide multiple sections not larger than 1676 mm (66 inches) side separated by mullions.

2.3 CLOSURE ANGLES AND CLOSURE PLATES:

- A. Fabricate from 2 mm (0.078-inch) thick stainless steel or aluminum.
- B. Provide continuous closure angles and closure plates on inside head, jambs and sill of exterior wall louvers.
- C. Secure angles and plates to louver frames with screws, and to masonry or concrete with fasteners as indicated in construction documents.

2.4 WIRE GUARDS:

- A. Provide wire guards on outside of all exterior louvers, except on exhaust air louvers.
- B. Fabricate frames from 2 mm (0.078-inch) thick extruded or sheet aluminum designed to retain wire mesh.
- C. Wire mesh to be woven from not less than 1.6 mm (0.063-inch) diameter aluminum wire in 13 mm (1/2-inch) square mesh.

- D. Miter corners and join by concealed corner clips or locks extending not less than 57 mm (2-1/4 inches) into rails and stiles. Equip wire guards over 1219 mm (4 feet) in height with a mid-rail constructed as specified for frame components.
- E. Fasten frames to outside of louvers with aluminum or stainless-steel devices of same finish as louvers designed to allow removal and replacement without damage to the wire guard or the louver.

2.5 BLANK-OFF PANELS:

- A. Uninsulated panels attached with clips or screws as follows: Panel finish is to be finish type applied to louvers but black color.
 - 1. Aluminum sheet for aluminum louvers, 1.27 mm (0.050 inch) minimum thickness.
 - 2. Galvanized-steel sheet for galvanized-steel louvers, 1.02 mm (0.040 inch) minimum.
 - 3. Stainless-steel sheet for stainless-steel louvers, not less than 0.95 mm (0.038 inch) minimum.
- B. Insulated laminated panels consisting of an insulating core surfaced on back and front with metal sheets and attached to back of louver with clips on screws and gasketed or sealant sealed perimeter. Panel finish is to be same type of finish applied to louvers but black color.
 - 1. Thickness: 50 mm (2 inches).
 - 2. Aluminum sheet for aluminum louver 0.81 mm (0.032 inch) minimum.
 - 3. Galvanized-steel sheet for galvanized-steel louver 0.71 mm (0.028 inch) minimum.
 - 4. Stainless-steel sheet for stainless-steel louvers 0.79 mm (0.031 inch) minimum.
 - 5. Insulating Core: Rigid, glass-fiber-board insulation.

2.6 EXTERIOR DOOR LOUVERS:

- A. Fabricate of 1.6 mm (0.063-inch) thick extruded aluminum. Miter frames at corners and join by concealed corner brackets. Louvers are to be weather resistant type.
- B. Equip louvers on outside with wire guards, except omit wire guards for louvers in doors located completely below enclosed areaways.

2.7 INTERIOR DOOR LOUVERS:

- A. Fabricate louvers for interior doors and partitions of 1.2 mm (0.0472-inch) thick steel.
- B. Make louvers sight-proof type with stationary blades, except where light-proof louvers are required.

- C. Lightproof louvers are to have stationary blades and be designed to exclude passage of light but permit free ventilation.

2.8 WALL VENTS:

- A. Fabricate exterior wall vents from either 4.7 mm (0.185-inch) thick aluminum plate or 6 mm (1/4-inch) thick cast iron, perforated in diamond lattice pattern, with not over 19 mm (3/4-inch) openings.
- B. Vents are to have aluminum screen frame with aluminum alloy insect screening mounted on back of vent by means of 19 mm x 5 mm (3/4-inch by 3/16-inch) top and bottom bars screwed to grille.
- C. Vent Frames in Masonry: Fabricate of 45 mm x 30 mm x 5 mm (1-3/4 inch by 1-1/4 inch by 3/16-inch) steel angles bolted with 6 mm (1/4-inch) diameter expansion bolts at jambs.

2.9 AIR INTAKE VENTS:

- A. Fabricate exterior louvered wall ventilators for fresh air intake for air conditioning units from extruded aluminum, ASTM B221M (B221). Form with integral horizontal louvers and frame, with drip extending beyond face of wall and integral water stops.
- B. Provide aluminum closures where shown for inside face of dummy vents.
- C. Provide 0.8 mm (0.032-inch) thick aluminum sleeves where indicated in construction documents.

2.10 BRICK VENTS:

- A. Vents are to be of size shown formed of approximately 3 mm (0.125 inch) thick cast aluminum, or 3 mm (0.118 inch) extruded aluminum.
- B. Provide vents complete with aluminum screen frame with corrosion resistant insect screening mounted on back of vent.
- C. Provide vents with required anchors.

2.11 FINISH:

- A. In accordance with NAAMM Metal Finishes Manual: AMP 500-505
- B. Aluminum Louvers, Air Intake Vents, Wire Guards, Blank Off Panels:
 - 1. Anodized finish
 - a. AA-M10C22A42, chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 0.17 mm (0.7 mils) thick.
 - 2. Organic Finish: AAMA 2605 (Fluorocarbon coating) with total dry film thickness of not less than 0.03 mm (1.2 mil), color as indicated in Section 09 06 00, SCHEDULE FOR FINISHES.
 - A. Aluminum Wall Vents and Brick Vents: Sand blasted satin finish.

- B. Stainless Steel: Mechanical finish No. 4 in accordance with NAAMM Metal Finishes Manual.
- C. Galvanized Sheet Steel: Two-coat baked-enamel or powder-coat finish consisting of prime coat and thermosetting topcoat, with a minimum dry film thickness of 0.05 mm (2 mils).
 - 1. Paint interior surfaces of lightproof louvers with two (2) additional finish shop coats of baked-on flat black enamel.
 - 2. Finish painting of exposed surfaces of shop primed louvers is specified in Section 09 91 00, PAINTING.
 - 3. Manufacturer finished louvers and blank-off panels are to have color as indicated in Contract Documents.
- D. Steel: Surfaces of steel work, for which no other finish is specified, are to be cleaned free from scale, rust, oil and grease, and then given a light-colored prime paint after fabrication, except ferrous metals concealed in finished work. Paint all contact surfaces of assembled work (except welded contact surfaces) with an additional shop coat of similar paint.

2.12 PROTECTION:

- A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with a heavy coat of bituminous coating (complete coverage), or by separating the contact surfaces with a performed synthetic rubber tape having pressure sensitive adhesive coating on one side.
- B. Isolate the aluminum from plaster, concrete and masonry by coating aluminum with zinc-chromate primer.
- C. Protect finished surfaces from damage during fabrication, erection, and after completion of the work. Strippable plastic coating on colored anodized finish is not approved.

PART 3 - EXECUTION

3.1 INSTALLATION:

- A. Set work accurately, in alignment and where indicated in construction documents. Install plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Furnish setting drawings and instructions for installation of anchors and for the positioning of items having anchors to be built into masonry construction. Provide temporary bracing for such items until masonry is set.

- C. Provide anchoring devices and fasteners as shown and as necessary for securing louvers and vents to building construction as specified. Power actuated drive pins may be used, except for removal items and where members would be deformed or substrate damaged by their use.
- D. Set wall louvers and vents in masonry walls during progress of the work. If wall louvers and vents are not delivered to job in time for installation in prepared openings, make provision for later installation. Set in cast-in-place concrete in prepared openings.

3.2 CLEANING AND ADJUSTING:

- A. After installation, all exposed prefinished and plated items and all items fabricated from stainless steel and aluminum are to be cleaned as recommended by the manufacturer and protected from damage until completion of the project.
- B. All movable parts, including hardware, are to be cleaned and adjusted to operate as designed without binding or deformation of the members, so as to be centered in the opening of frame, and where applicable, to have all contact surfaces fit tight and even without forcing or warping the components.
- C. Restore louvers and vents damaged during installation and construction so no evidence remains of corrective work. If results of restoration are unsuccessful, as determined by Contracting Officer Representative (COR) damaged units and replace with new units.

- - - E N D - - -

SECTION 09 05 16
SUBSURFACE PREPARATION FOR FLOOR FINISHES

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section includes testing concrete for moisture and pH, remedial floor coating for concrete floor slabs having unsatisfactory moisture or pH conditions, floor leveling and repair as required.

1.2 RELATED WORK

- A. Section 07 92 00, JOINT SEALANTS.
- B. Section 09 65 16, RESILIENT SHEET FLOORING Section 09 65 19, RESILIENT TILE FLOORING; Section 09 67 23.20, RESINOUS EPOXY BASE WITH VINYL CHIP BROADCAST and ; Section 09 68 00, CARPETING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA and TEST DATA.
- B. Written approval confirming product compatibility with subfloor material manufacturer and the flooring manufacturer
- C. Product Data:
1. Moisture remediation system
 2. Underlayment Primer
 3. Cementitious Self-Leveling Underlayment
 4. Cementitious Trowel-Applied Underlayment (Not suitable for resinous floor finishes)
- D. Test Data:
1. Moisture test and pH results performed by a qualified independent testing agency or warranty holding manufacturer's technical representative.

1.4 DELIVERY AND STORAGE

- A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.
- B. Store material to prevent damage or contamination.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.
- B. ASTM International (ASTM):
- D638-14(2014).....Standard Test Method for Tensile Properties of
Plastics

D4259-18(2019).....Standard Practice for Preparation of Concrete
by Abrasion Prior to Coating Application.

C109/C109M-20b(2020)....Standard Test Method for Compressive Strength
of Hydraulic Cement Mortars (Using 2-in. or
[50-mm] Cube Specimens

7234-19(2020).....Standard Test Method for Pull-Off Adhesion
Strength of Coatings on Concrete Using Portable
Pull-Off Adhesion Testers

E96/E96M-16(2016).....Standard Test Methods for Water Vapor
Transmission of Materials

F710-1e1(2020).....Standard Practice for Preparing Concrete Floors
to Receive Resilient Flooring

F1869-16a.....Standard Test Method for Measuring Moisture
Vapor Emission Rate of Concrete Subfloor Using
Anhydrous Calcium Chloride

F2170-19a(2020).....Standard Test Method for Determining Relative
Humidity in Concrete Floor Slabs Using in situ
Probes

C348-20(2020).....Standard Test Method for Flexural Strength of
Hydraulic-Cement Mortars

C191-19(2020).....Standard Test Method for Time of Setting of
Hydraulic Cement by Vicat Needle

PART 2 - PRODUCTS

2.1 MOISTURE REMEDIATION COATING

A. System Descriptions:

1. High-solids, epoxy system designed to suppress excess moisture in concrete prior to an overlayment. For use under resinous products, VCT, tile and carpet where issues caused by moisture vapor are a concern.

B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up.

C. System Components: Verify specific requirements as systems vary by manufacturer. Verify build up layers and installation method. Verify compatibility with substrate. Use manufacturer's standard components, compatible with each other and as follows:

1. Liquid applied coating:
 - a. Resin: epoxy.

- b. Formulation Description: Multiple component high solids.
- c. Application: Per manufacturer's written installation requirements.
- d. Thickness: minimum 10 mils
- D. Material Vapor Permeance: Application shall achieve a permeance rating of less than 0.1 perm in accordance with ASTM E96/E96M.
- E. Maximum RH requirement: 100% testing in accordance with ASTM F2170.

Property	Test	Value
Tensile Strength	ASTM D638	4,400 psi
Volatile Organic Compound Limits (V.O.C.)	SCAMD Rule 1113 (Amended 02/05/2016)	25 grams per liter
Permeance	ASTM E96	0.1 perms
Tensile Modulus	ASTM D638	1.9X10 ⁵ psi
Percent Elongation	ASTM D638	12%
Cure Rate	Per manufacture's Data	4 hours Tack free with 24hr recoat window
Bond Strength	ASTM D7234	100% bond to concrete failure

2.2 CEMENTITIOUS SELF-LEVELING UNDERLAYMENT

- A. System Descriptions:
 - 1. High performance self-leveling underlayment resurfacer. Single component, self-leveling, cementitious material designed for easy application as an underlayment for all types of flooring materials. It is used for substrate repair and leveling.
- B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up. Gypsum-based products are unacceptable.
- C. System Characteristics:
 - 1. Wearing Surface: smooth
 - 2. Thickness: Ranging from feathered edge to 1", per application. Applications greater than 1" require additional 3/8" aggregate to mix or as recommended by manufacturer.

- D. Underlayment shall be calcium aluminate cement-based, containing Portland cement. Gypsum-based products are unacceptable.
- E. Compressive Strength: Minimum 4100 psi in 28 days in accordance with ASTM C109/C109M.
- F. Flexural Strength: Minimum 1000 psi in 28 days in accordance with ASTM C348
- G. Dry Time: Underlayment shall receive the application of moisture insensitive tile in 6 hours, floor coverings in 16 hours, and resinous flooring in 3-7 days.
- H. Primer: compatible and as recommended by manufacturer for use over intended substrate
- I. System Components: Manufacturer's standard components that are compatible with each other and as follows:
1. Primer:
 - a. Resin: copolymer
 - b. Formulation Description: single component ready to use.
 - c. Application Method: Squeegee and medium nap roller.
 - d. All puddles shall be removed, and material shall be allowed to dry, 1-2 hours at 70F/21C.
 - e. Number of Coats: (1) one.
 2. Grout Resurfacing Base:
 - a. Formulation Description: Single component, cementitious self-leveling high-early and high-ultimate strength grout.
 - b. Application Method: colloidal mix pump, cam rake, spike roll.
 - 1) Thickness of Coats: Per architectural scope, 1" lifts.
 - 2) Number of Coats: More than one if needed.
 - c. Aggregates: for applications greater than 1inch, require additional 3/8" aggregate to mix.

J.

Property	Test	Value
Compressive Strength	ASTM C109/C109M	2,200 psi @ 24 hrs 3,000 psi @ 7 days
Initial set time Final Set time	ASTM C191	30-45 min. 1 to 1.5 hours
Bond Strength	ASTM D7234	100% bond to concrete failure

2.3 CEMENTITIOUS TROWEL-APPLIED UNDERLAYMENT (NOT SUITABLE FOR RESINOUS FLOOR FINISHES)

- A. Underlayment shall be calcium aluminate cement-based, containing Portland cement. Gypsum-based products are unacceptable.
- B. Compressive Strength: Minimum 4000 psi in 28 days
- C. Trowel-applied underlayment shall not contain silica quartz (sand).
- D. Dry Time: Underlayment shall receive the application of floor covering in 15-20 minutes.

PART 3 - EXECUTION**3.1 ENVIRONMENTAL REQUIREMENTS**

- A. Maintain ambient temperature of work areas at not less than 16 degree C (60 degrees F), without interruption, for not less than 24 hours before testing and not less than three days after testing.
- B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation.
- C. Do not install materials when the temperatures of the substrate or materials are not within 60-85 degrees F/ 16-30 degrees C.

3.2 SURFACE PREPARATION

- A. Existing concrete slabs with existing floor coverings:
 - 1. Conduct visual observation of existing floor covering for adhesion, water damage, alkaline deposits, and other defects.
 - 2. Remove existing floor covering and adhesives. Comply with local, state and federal regulations and the RFCI Recommended Work Practices for Removal of Resilient Floor Coverings, as applicable to the floor covering being removed.
- B. Concrete shall meet the requirements of ASTM F710 and be sound, solid, clean, and free of all oil, grease, dirt, curing compounds, and any substance that might act as a bond-breaker before application. As required prepare slab by mechanical methods. No chemicals or solvents shall be used.
- C. General: Prepare and clean substrates according to flooring manufacturer's written instructions for substrate indicated.
- D. Prepare concrete substrates per ASTM D4259 as follows:
 - 1. Dry abrasive blasting.
 - 2. Wet abrasive blasting.
 - 3. Vacuum-assisted abrasive blasting.

4. Centrifugal-shot abrasive blasting.
5. Comply with manufacturer's written instructions.
- E. Repair damaged and deteriorated concrete according to flooring manufacturer's written recommendations.
- F. Verify that concrete substrates are dry.
- G. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with application only after substrates have maximum moisture-vapor-emission rate of per flooring manufactures formal and project specific written recommendation.
- H. Perform in situ probe test, ASTM F2170. Proceed with application only after substrates do not exceed a maximum potential equilibrium relative humidity per flooring manufacture's formal and project specific written recommendation.
- I. Provide a written report showing test placement and results.
- J. Prepare joints in accordance with Section 07 92 00, JOINT SEALANTS and material manufacturer's instructions.
- K. Alkalinity: Measure surface pH in accordance with procedures provided in ASTM F710 or as outlined by qualified testing agency or flooring manufacturer's technical representative.
- L. Tolerances: Subsurface shall meet the flatness and levelness tolerance specified on drawings or recommended by the floor finish manufacturer. Tolerance shall also not to exceed 1/4" deviation in 10'. As required, install underlayment to achieve required tolerance.
- M. Other Subsurface: For all other subsurface conditions, such as wood or metal, contact the floor finish or underlayment manufacturer, as appropriate, for proper preparation practices.

3.3 MOISTURE REMEDIATION COATING

- A. Where results of relative humidity testing (ASTM F2170) exceed the requirements of the specified flooring manufacturer, apply remedial coating as specified to correct excessive moisture condition.
- B. Prior to remedial floor coating installation mechanically prepare the concrete surface to provide a concrete surface profile in accordance with ASTM D4259.
- C. Mix and apply moisture remediation coating in accordance with manufacturer's instructions.

3.4 CEMENTITIOUS UNDERLAYMENT

- A. Install cementitious self-leveling underlayment as required to correct surface defects, floor flatness or levelness corrections to meet the

tolerance requirements as or detailed on drawings, address non-moving cracks or joints, provide a smooth surface for the installation of floor covering, or meet elevation requirements detailed on drawings.

B. Mix and apply in accordance with manufacturer's instructions.

3.5 PROTECTION

A. Prior to the installation of the finish flooring, the surface of the underlayment should be protected from abuse by other trades by the use of plywood, tempered hardwood, or other suitable protection course

3.6 FIELD QUALITY CONTROL

A. Where specified, field sampling of products shall be conducted by a qualified, independent testing facility.

- - - E N D - - -

SECTION 09 22 16
NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies steel studs wall systems, shaft wall systems, ceiling or soffit suspended or furred framing, wall furring, fasteners, and accessories for the screw attachment of gypsum board.

1.2 RELATED WORK

- A. Load bearing framing: Section 05 40 00, COLD-FORMED METAL FRAMING.
B. Support for wall mounted items: Section 05 50 00, METAL FABRICATIONS.
C. Ceiling suspension systems for acoustical tile or: Section 09 51 00, ACOUSTICAL CEILINGS and Section 09 29 00, GYPSUM BOARD.

1.3 TERMINOLOGY

- A. Description of terms shall be in accordance with ASTM C754, ASTM C11, ASTM C841 and as specified.
B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, or bar joists. In interstitial spaces with walk-on floors the underside of the walk-on floor is the underside of structure overhead.
C. Thickness of steel specified is the minimum bare (uncoated) steel thickness.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Manufacturer's Literature and Data:
1. Studs, runners and accessories.
2. Hanger inserts.
3. Channels (Rolled steel).
4. Furring channels.
5. Screws, clips and other fasteners.
C. Shop Drawings:
1. Typical ceiling suspension system.
2. Typical metal stud and furring construction system including details around openings and corner details.
3. Typical shaft wall assembly

4. Typical fire rated assembly and column fireproofing showing details of construction same as that used in fire rating test.

D. Test Results: Fire rating test designation, each fire rating required for each assembly.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

A. In accordance with the requirements of ASTM C754.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society For Testing And Materials (ASTM)

A641-09.....Zinc-Coated (Galvanized) Carbon Steel Wire

A653/653M-11.....Specification for Steel Sheet, Zinc Coated
(Galvanized) or Zinc-Iron Alloy-Coated
(Galvannealed) by Hot-Dip Process.

C11-10.....Terminology Relating to Gypsum and Related
Building Materials and Systems

C635-07.....Manufacture, Performance, and Testing of Metal
Suspension System for Acoustical Tile and
Lay-in Panel Ceilings

C636-08.....Installation of Metal Ceiling Suspension
Systems for Acoustical Tile and Lay-in Panels

C645-09.....Non-Structural Steel Framing Members

C754-11.....Installation of Steel Framing Members to
Receive Screw-Attached Gypsum Panel Products

C841-03 (R2008).....Installation of Interior Lathing and Furring

C954-10.....Steel Drill Screws for the Application of
Gypsum Panel Products or Metal Plaster Bases to
Steel Studs from 0.033 in. (0.84 mm) to 0.112
in. (2.84 mm) in Thickness

PART 2 - PRODUCTS

2.1 PROTECTIVE COATING

A. Galvanize steel studs, runners (track), and rigid (hat section) furring channels with coating designation of G40 or equivalent.

2.2 STEEL STUDS AND RUNNERS (TRACK)

A. ASTM C645, modified for thickness specified and sizes as shown.

1. Use C 645 steel, 0.75 mm (0.0296-inch) minimum base-metal (30 mil).

2. Runners same thickness as studs.

3. Use C 645 steel, 0.48mm (0.019 inch) minimum base-metal (19 mil) at partitions requiring STC rating of 45.B. Provide not less than two cutouts in web of each stud, approximately 300 mm (12 inches) from each end, and intermediate cutouts on approximately 600 mm (24-inch) centers.
- C. Doubled studs for openings and studs for supporting concrete backer-board.
- D. Studs 3600 mm (12 feet) or less in length shall be in one piece.
- E. Shaft Wall Framing:
 1. Conform to rated wall construction.
 2. C-H Studs.

2.3 FURRING CHANNELS

- A. Rigid furring channels (hat shape): ASTM C645.

2.4 FASTENERS, CLIPS, AND OTHER METAL ACCESSORIES

- A. ASTM C754, except as otherwise specified.
- B. For fire rated construction: Type and size same as used in fire rating test.
- C. Fasteners for steel studs thicker than 0.84 mm (0.033-inch) thick. Use ASTM C954 steel drill screws of size and type recommended by the manufacturer of the material being fastened.
- D. Clips: ASTM C841 (paragraph 6.11), manufacturer's standard items. Clips used in lieu of tie wire shall have holding power equivalent to that provided by the tie wire for the specific application.
- E. Tie Wire and Hanger Wire:
 1. ASTM A641, soft temper, Class 1 coating.
 2. Gage (diameter) as specified in ASTM C754 or ASTM C841.
- F. Attachments for Wall Furring:
 1. Manufacturers standard items fabricated from zinc-coated (galvanized) steel sheet.
 2. For concrete or masonry walls: Metal slots with adjustable inserts or adjustable wall furring brackets. Spacers may be fabricated from 1 mm (0.0396-inch) thick galvanized steel with corrugated edges.
- G. Power Actuated Fasteners: Type and size as recommended by the manufacturer of the material being fastened.

2.5 SUSPENDED CEILING SYSTEM FOR GYPSUM BOARD (OPTION)

- A. Conform to ASTM C635, heavy duty, with not less than 35 mm (1-3/8 inch) wide knurled capped flange face designed for screw attachment of gypsum board.

- B. Wall track channel with 35 mm (1-3/8 inch) wide flange.

PART 3 - EXECUTION

3.1 INSTALLATION CRITERIA

- A. Where fire rated construction is required for walls, partitions, columns, beams and floor-ceiling assemblies, the construction shall be same as that used in fire rating test.
- B. Construction requirements for fire rated assemblies and materials shall be as shown and specified, the provisions of the Scope paragraph (1.2) of ASTM C754 and ASTM C841 regarding details of construction shall not apply.

3.2 INSTALLING STUDS

- A. Install studs in accordance with ASTM C754, except as otherwise shown or specified.
- B. Space studs not more than 400 mm (16 inches) on center.
- C. Cut studs 6 mm to 9 mm (1/4 to 3/8-inch) less than floor to underside of structure overhead unless other noted.
- E. Extend studs to underside of structure overhead for fire rated partitions, smoke partitions, shafts, sound rated partitions and insulated exterior wall furring.
- G. Openings:
 - 1. Frame jambs of openings in stud partitions and furring with two studs placed back to back or as shown.
 - 2. Fasten back to back studs together with 9 mm (3/8-inch) long Type S pan head screws at not less than 600 mm (two feet) on center, staggered along webs.
 - 3. Studs fastened flange to flange shall have splice plates on both sides approximately 50 X 75 mm (2 by 3 inches) screwed to each stud with two screws in each stud. Locate splice plates at 600 mm (24 inches) on center between runner tracks.
- H. Fastening Studs:
 - 1. Fasten studs located adjacent to partition intersections, corners and studs at jambs of openings to flange of runner tracks with two screws through each end of each stud and flange of runner.
 - 2. Do not fasten studs to top runner track when studs extend to underside of structure overhead.
- I. Chase Wall Partitions:
 - 1. Locate cross braces for chase wall partitions to permit the installation of pipes, conduits, carriers and similar items.

2. Use studs or runners as cross bracing not less than 63 mm (2-1/2 inches wide).

J. Form expansion joints with double studs back to back spaced 75 mm (three inches) apart plus the width of the expansion joint.

K. Form control joint, with double studs spaced 13 mm (1/2-inch) apart.

3.3 INSTALLING WALL FURRING FOR FINISH APPLIED TO ONE SIDE ONLY

A. In accordance with ASTM C754, or ASTM C841 except as otherwise specified or shown.

B. Wall furring-Stud System:

1. Framed with 63 mm (2-1/2 inch) or narrower studs, 400 mm (16 inches) on center.
2. Brace as specified in ASTM C754 for Wall Furring-Stud System or brace with sections or runners or studs placed horizontally at not less than three foot vertical intervals on side without finish.
3. Securely fasten braces to each stud with two Type S pan head screws at each bearing.

3.4 INSTALLING SUPPORTS REQUIRED BY OTHER TRADES

- A. Provide for attachment and support of electrical outlets, plumbing, laboratory or heating fixtures, recessed type plumbing fixture accessories, access panel frames, wall bumpers, wood seats, toilet stall partitions, dressing booth partitions, urinal screens, chalkboards, tackboards, wall-hung casework, handrail brackets, recessed fire extinguisher cabinets and other items like auto door buttons and auto door operators supported by stud construction.
- B. Provide additional studs where required. Install metal backing plates, or special metal shapes as required, securely fastened to metal studs.

3.5 INSTALLING SHAFT WALL SYSTEM

- A. Conform to UL Design No. U415. Provide one hour fire rating Shaft wall where shown on drawings.
- B. Position J runners at floor and ceiling with the short leg toward finish side of wall. Securely attach runners to structural supports with power driven fasteners at both ends and 600 mm (24 inches) on center.
- C. After liner panels have been erected, cut C-H studs and E studs, from 9 mm (3/8-inch) to not more than 13 mm (1/2-inch) less than floor-to-ceiling height. Install C-H studs between liner panels with liner panels inserted in the groove.

- D. Install full-length steel E studs over shaft wall line at intersections, corners, hinged door jambs, columns, and both sides of closure panels.
- E. Suitably frame all openings to maintain structural support for wall:
 - 1. Provide necessary liner fillers and shims to conform to label frame requirements.
 - 2. Frame openings cut within a liner panel with E studs around perimeter.
 - 3. Frame openings with vertical E studs at jambs, horizontal J runner at head and sill.

3.6 INSTALLING FURRED AND SUSPENDED CEILINGS OR SOFFITS

- A. Install furred and suspended ceilings or soffits in accordance with ASTM C754 or ASTM C841 except as otherwise specified or shown for screw attached gypsum board ceilings.
 - 1. Space framing at 600 mm (24-inch) centers for gypsum board anchorage.
- D. Installing suspended ceiling system for gypsum board (ASTM C635 Option):
 - 1. Install only for ceilings to receive screw attached gypsum board.
 - 2. Install in accordance with ASTM C636.
 - a. Install main runners spaced 1200 mm (48 inches) on center.
 - b. Install 1200 mm (four foot) tees not over 600 mm (24 inches) on center; locate for edge support of gypsum board.
 - c. Install wall track channel at perimeter.

3.7 TOLERANCES

- A. Fastening surface for application of subsequent materials shall not vary more than 3 mm (1/8-inch) from the layout line.
- B. Plumb and align vertical members within 3 mm (1/8-inch.)
- C. Level or align ceilings within 3 mm (1/8-inch.)

- - - E N D - - -

**SECTION 09 29 00
GYPSUM BOARD**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies installation and finishing of gypsum board.

1.2 RELATED WORK

- A. Installation of steel framing members for walls, partitions, furring, soffits, and ceilings: Section 05 40 00, COLD-FORMED METAL FRAMING, and Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
- B. Acoustical Sealants: Section 07 92 00, JOINT SEALANTS.
- C. Cementitious Backer Board: Section 09 30 13, CERAMIC PORCELAIN TILING.

1.3 TERMINOLOGY

- A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.
- C. "Yoked": Gypsum board cut out for opening with no joint at the opening (along door jamb or above the door).

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
1. Cornerbead and edge trim.
 2. Finishing materials.
 3. Laminating adhesive.
 4. Gypsum board, each type.
- C. Shop Drawings:
1. Typical gypsum board installation, showing corner details, edge trim details and the like.
 2. Typical sound rated assembly, showing treatment at perimeter of partitions and penetrations at gypsum board.
 3. Typical shaft wall assembly.
 4. Typical fire rated assembly and column fireproofing, indicating details of construction same as that used in fire rating test.
- D. Samples:

1. Cornerbead.
2. Edge trim.
3. Control joints.

E. Test Results:

1. Fire rating test, each fire rating required for each assembly.
2. Sound rating test.

F. Certificates: Certify that gypsum board types, gypsum backing board types, cementitious backer units, and joint treating materials do not contain asbestos material.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

A. In accordance with the requirements of ASTM C840.

1.6 ENVIRONMENTAL CONDITIONS

A. In accordance with the requirements of ASTM C840.

1.7 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing And Materials (ASTM):

- C11-15.....Terminology Relating to Gypsum and Related
Building Materials and Systems
- C475-15.....Joint Compound and Joint Tape for Finishing
Gypsum Board
- C840-13.....Application and Finishing of Gypsum Board
- C919-12.....Sealants in Acoustical Applications
- C954-15.....Steel Drill Screws for the Application of
Gypsum Board or Metal Plaster Bases to Steel
Stud from 0.033 in. (0.84mm) to 0.112 in.
(2.84mm) in thickness
- C1002-14.....Steel Self-Piercing Tapping Screws for the
Application of Gypsum Panel Products or Metal
Plaster Bases to Wood Studs or Steel Studs
- C1047-14.....Accessories for Gypsum Wallboard and Gypsum
Veneer Base
- C1178/C1178M-18.....Specification for Coated Glass Mat Water
Resistant Backing Panel
- C1658-13.....Glass Mat Gypsum Panels
- C1396-14.....Gypsum Board

- C. Underwriters Laboratories Inc. (UL):
Latest Edition.....Fire Resistance Directory
- D. Inchcape Testing Services (ITS):
Latest Editions.....Certification Listings

PART 2 - PRODUCTS

2.1 GYPSUM BOARD

- A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise.
- B. Coreboard or Shaft Wall Liner Panels.
 - 1. ASTM C1396, Type X.
 - 2. ASTM C1658: Glass Mat Gypsum Panels,
 - 3. Coreboard for shaft walls 300, 400, 600 mm (12, 16, or 24 inches) wide by required lengths 25 mm (one inch) thick with paper faces treated to resist moisture.
- C. Water Resistant Gypsum Backing Board: ASTM C1178, Type X, 16 mm (5/8 inch) thick.
- D. Paper facings shall contain 100 percent post-consumer recycled paper content.

2.2 ACCESSORIES

- A. ASTM C1047, except form of 0.39 mm (0.015 inch) thick zinc coated steel sheet or rigid PVC plastic.
- B. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.

2.4 FASTENERS

- A. ASTM C1002 and ASTM C840, except as otherwise specified.
- B. ASTM C954, for steel studs thicker than 0.04 mm (0.33 inch).
- C. Select screws of size and type recommended by the manufacturer of the material being fastened.
- D. For fire rated construction, type and size same as used in fire rating test.
- E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

2.5 FINISHING MATERIALS AND LAMINATING ADHESIVE

- A. ASTM C475 and ASTM C840. Free of antifreeze, vinyl adhesives, preservatives, biocides and other VOC. Adhesive shall contain a maximum VOC content of 50 g/l.

PART 3 - EXECUTION**3.1 GYPSUM BOARD HEIGHTS**

- A. Extend all layers of gypsum board from floor to underside of structure overhead unless otherwise noted.

3.2 INSTALLING GYPSUM BOARD

- A. Coordinate installation of gypsum board with other trades and related work.
- B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.
- C. Moisture and Mold-Resistant Assemblies: Provide and install moisture and mold-resistant glass mat gypsum wallboard products with moisture-resistant surfaces complying with ASTM C1658 in locations which might be subject to moisture exposure during construction.
- D. Use gypsum boards in maximum practical lengths to minimize number of end joints.
- E. Bring gypsum board into contact, but do not force into place.
- F. Ceilings:
 - 1. For single-ply construction, use perpendicular application.
 - 2. For two-ply assemblies:
 - a. Use perpendicular application.
 - b. Apply face ply of gypsum board so that joints of face ply do not occur at joints of base ply with joints over framing members.
- G. Walls (Except Shaft Walls):
 - 1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
 - 2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
 - 3. Stagger screws on abutting edges or ends.
 - 4. For single-ply construction, apply gypsum board with long dimension either parallel or perpendicular to framing members as required to minimize number of joints.
 - 5. For two-ply gypsum board assemblies, apply base ply of gypsum board to assure minimum number of joints in face layer. Apply face ply of wallboard to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.

6. No offset in exposed face of walls and partitions will be permitted because of single-ply and two-ply or three-ply application requirements.
7. Control Joints ASTM C840 and as follows:
 - a. Locate at both side jambs of openings if gypsum board is not "yoked". Use one system throughout.
 - b. Not required for wall lengths less than 9000 mm (30 feet).
 - c. Extend control joints the full height of the wall or length of soffit/ceiling membrane.
- H. Acoustical or Sound Rated Partitions, Fire and Smoke Partitions:
 1. Cut gypsum board for a space approximately 3 mm to 6 mm (1/8 to 1/4 inch) wide around partition perimeter.
 2. Coordinate for application of caulking or sealants to space prior to taping and finishing.
 3. For sound rated partitions, use sealing compound (ASTM C919) to fill the annular spaces between all receptacle boxes and the partition finish material through which the boxes protrude to seal all holes and/or openings on the back and sides of the boxes. STC minimum values as shown.
- I. Electrical and Telecommunications Boxes:
 1. Seal annular spaces between electrical and telecommunications receptacle boxes and gypsum board partitions.
- J. Accessories:
 1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified.
 2. Install in one piece, without the limits of the longest commercially available lengths.
 3. Corner Beads:
 - a. Install at all vertical and horizontal external corners (bullnose), inside corner (cove) at transition from wall to ceiling, and where shown.
 - b. Use screws only. Do not use crimping tool.
 - c. Profile to match radius of existing corners, typical, except rooms with porcelain or ceramic wall tile.
 4. Edge Trim (casings Beads):
 - a. At both sides of expansion and control joints unless shown otherwise.

- b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.
- c. Where gypsum board surfaces of non-load bearing assemblies abut load bearing members.
- d. Where shown.

3.4 CAVITY SHAFT WALL

- A. Coordinate assembly with Section 09 22 16, NON-STRUCTURAL METAL FRAMING, for erection of framing and gypsum board.
- B. Conform to UL Design No. Conform to U415 (Non-loadbearing) for one-hour fire rating where shown.
- C. Cut coreboard (liner) panels 25 mm (one inch) less than floor-to-ceiling height, and erect vertically between J-runners on shaft side.
 - 1. Where shaft walls exceed 4300 mm (14 feet) in height, position panel end joints within upper and lower third points of wall.
 - 2. Stagger joints top and bottom in adjacent panels.
 - 3. After erection of J-struts of opening frames, fasten panels to J-struts with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.
- D. Gypsum Board:
 - 1. One hour wall with one layer on finish side of wall: Apply face layer of gypsum board vertically. Attach to studs with screws of sufficient length to secure to framing, spaced 300 mm (12 inches) on center in field and along edges.
 - 2. Where coreboard is covered with face layer of gypsum board, stagger joints of face layer from those in the coreboard base.
- E. Treat joints, corners, and fasteners in face layer as specified for finishing of gypsum board.

3.5 FINISHING OF GYPSUM BOARD

- A. Finish joints, edges, corners, and fastener heads in accordance with ASTM C840. Use Level 4 finish for all finished areas. Provide Level 5 finish at areas scheduled to receive gloss, semi-gloss or enamel paint.
- B. Before proceeding with installation of finishing materials, assure the following:
 - 1. Gypsum board is fastened and held close to framing or furring.
 - 2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.

- C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended ceilings to seal surface of gypsum board construction. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings and maintain the integrity of the smoke partition, fire rated and sound rated construction. Sanding is not required of non-decorated surfaces.

3.6 REPAIRS

- A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.
- B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.
- C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.
- D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non-decorated surface to provide smoke tight construction, fire protection equivalent to the fire rated construction, and STC equivalent to the sound rated construction.

- - - E N D - - -

SECTION 09 30 13
CERAMIC/PORCELAIN TILING

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies interior ceramic, porcelain, and waterproofing membranes for thin-set applications, crack isolation membranes, and tile backer board.

1.2 RELATED WORK

- A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Sustainable Design Requirements.
- B. Section 07 92 00, JOINT SEALANTS: Sealing of Joints.
- C. Section 07 95 13, EXPANSION JOINT COVER ASSEMBLIES: Preformed expansion joints in tile flooring.
- D. See Drawings: Color, Texture, Pattern, and Size of Field Tile and Trim Shapes, and Color of Grout Specified.
- E. Section 09 29 00, GYPSUM BOARD.
- F. Section 09 65 19, RESILIENT TILE FLOORING: Metal Edge Strips at Joints with New Resilient Flooring.
- G. Section 09 68 00, CARPETING: Metal Edge Strips at Joints with Carpeting.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals as described below:
1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
- C. Samples:
1. Base tile, each type, each color, each size.
 2. Mosaic floor tile panels, 228 by 228 mm (9 by 9 inches), each type, color, size and pattern.
 3. Porcelain tile, each type, color, patterns and size.
 4. Wall tile, each color, size and pattern.
 5. Metal Trim, each type, color, and size.
- D. Product Data:
1. Ceramic and porcelain tile, marked to show each type, size, and shape required.
 2. Urethane grout.

3. Cementitious backer unit.
4. Divider strip.
5. Elastomeric Waterproofing membrane and bond coat.
6. Reinforcing tape.
7. Leveling compound.
8. Latex-portland cement mortar and grout.
9. Commercial portland cement grout.
10. Slip resistant tile.
11. Waterproofing isolation membrane.
12. Fasteners.

a. Waterproof isolation membrane.

E. Installer Qualifications:

1. Submit letter stating installer's experience.

1.4 DELIVERY AND STORAGE

- A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.
- B. Store material to prevent damage or contamination.

1.5 QUALITY ASSURANCE

- A. Installers to be from a company specializing in performing installation of products specified and have a minimum of three (3) years' experience.
- B. Each type and color of tile to be provided from a single source.
- C. Each type and color of mortar, adhesive, and grout to be provided from the same source.

1.6 WARRANTY

- A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
 - A10.20-06(R2016).....Safe Operating Practices for Tile, Terrazzo and Marble Work
 - A108/A118/A136.1:2019...Installation of Ceramic Tile
 - A108.01-18.....Subsurfaces and Preparations by Other Trades
 - A108.02-19.....Materials, Environmental, and Workmanship

- A108.1B-17.....Installation of Ceramic Tile on a Cured
Portland Cement Mortar Setting Bed with Dry-Set
or Latex-Portland Cement Mortar
- A108.5-10 Ceramic Tile with Dry-Set Portland Cement
Mortar or Latex-Portland Cement Mortar
- A108.6-10.....Ceramic Tile with Chemical Resistant, Water
Cleanable Tile-Setting and -Grouting Epoxy
- A108.9-10.....Ceramic Tile with Modified Epoxy Emulsion
Mortar/Grout
- A108.10-17.....Grout in Tilework
- A108.11-18.....Interior Installation of Cementitious Backer
Units
- A108.13-16.....Load Bearing, Bonded, Waterproof Membranes for
Thin-Set Ceramic Tile and Dimension Stone
- A108.17-16.....Crack Isolation Membranes for Thin-Set Ceramic
Tile and Dimension Stone
- A118.3-13.....Chemical Resistant, Water Cleanable Tile-
Setting and -Grouting Epoxy and Water Cleanable
Tile-Setting Epoxy Adhesive
- A118.6-19.....Standard Cement Grouts for Tile Installation
- A118.7-1.....High Performance Cement Grouts for Tile
Installation
- A118.9-19.....Cementitious Backer Units
- A118.10-14.....Load Bearing, Bonded, Waterproof Membranes for
Thin-Set Ceramic Tile and Dimension Stone
Installation
- A118.12-14.....Crack Isolation Membranes for Thin-Set Ceramic
Tile and Dimension Stone Installation
- A137.1-17.....American National Standard Specifications for
Ceramic Tile
- C. ASTM International (ASTM):
- A666-15.....Annealed or Cold-Worked Austenitic Stainless
Steel Sheet, Strip, Plate and Flat Bar
- A1064/A1064M-18a.....Carbon-Steel Wire and Welded Wire
Reinforcement, Plain and Deformed, for Concrete
- C109/C109M-20b.....Standard Test Method for Compressive Strength
of Hydraulic Cement Mortars (Using 2 inch. or
[50-mm] Cube Specimens)

- C348-20.....Standard Test Method for Flexural Strength of Hydraulic-Cement Mortars
- C627-18.....Evaluating Ceramic Floor Tile Installation Systems Using the Robinson-Type Floor Tester
- C954-18.....Steel Drill Screws for the Application of Gypsum Board on Metal Plaster Base to Steel Studs from 0.033 in (0.84 mm) to 0.112 in (2.84 mm) in thickness
- C1002-18.....Steel Self-Piercing Tapping Screws for the Application of Panel Products
- C1127/C1127M-15.....Standard Guide for Use of High Solids Content, Cold Liquid-Applied Elastomeric Waterproofing Membrane with an Integral Wearing Surface
- C1325-19.....Non-Asbestos Fiber-Mat Reinforced Cementitious Backer Units
- D2240-15e1.....Test Method for Rubber Property - Durometer Hardness
- D. Code of Federal Regulation (CFR):
- 40 CFR 59.....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating
- E. Tile Council of North America, Inc. (TCNA):
- Handbook for Ceramic Tile Installation (2021)G. TCNA DCOF AcuTest-2012,Dynamic Coefficient of Friction Test

PART 2 - PRODUCTS

2.1 TILE

- A. Basis of Design: See Drawings. Architect approval required.
- B. Comply with ANSI A137.1, Standard Grade, except as modified:
1. Inspection procedures listed under the Appendix of ANSI A137.1.
 2. Abrasion Resistance Classification:
 - a. Tested in accordance with values listed in Table 1, ASTM C1027.
 - b. Class IV, 6000 revolutions for remaining areas.
 3. Slip Resistant Tile for Floors:
 - a. Coefficient of friction, when tested in accordance with ANSI A137.1 and measured per the TCNA DCOF AcuTest.
 - 1) Equal to or greater than .42 for level interior tile floors that will be walked on when wet.

4. Mosaic tile may be mounted or joined by a resinous bonding material along tile edges.
5. Back mounted tiles in showers,. Provide certification that the factory mounted tile has been used successfully in service at three (3) projects and is suitable for wet locations.
6. Factory Blending: For tile with color variations, within the ranges selected during sample submittals blend tile in the factory and package so tile units taken from one (1) package show the same range in colors as those taken from other packages and match approved samples.
7. Factory-Applied Temporary Protective Coating:
 - a. Protect exposed face surfaces (top surface) of tile against adherence of mortar and grout by pre-coating with a continuous film of hot applied petroleum paraffin wax.
 - b. Do not coat unexposed tile surfaces.
 - c. Pre-wax tiles set or grouted with latex modified mortars.
- C. Unglazed Ceramic Mosaic Tile: Nominal 6 mm (1/4 inch) thick; 1" hexagon; with cushion edges.
- D. Glazed Wall Tile: Nominal 4.76 mm (5/16 inch) thick; 12" x 24"; glazing.
- E. Metal Trim:
 1. Basis of Design: See Drawings. Architect approval required.

2.2 BACKER UNITS

- A. Cementitious Backer Units:
 1. Use in all areas to receive tile.
 2. Conform to ASTM C1325; Type A.
 3. Use in maximum lengths available to minimize end to end butt joints.

2.3 JOINT MATERIALS FOR CEMENTITIOUS BACKER UNITS

- A. Reinforcing Tape: Vinyl coated woven glass fiber mesh tape, open weave, 50 mm (2 inches) wide. Tape with pressure sensitive adhesive backing will not be permitted.
- B. Tape Embedding Material: Latex-portland cement mortar complying with ANSI A108.01.
- C. Joint material, including reinforcing tape, and tape embedding material, are to be as specifically recommended by the backer unit manufacturer.

2.4 FASTENERS

- A. Screws for Cementitious Backer Units.

1. Standard screws for gypsum board are not acceptable.
 2. Minimum 11 mm (7/16 inch) diameter head, corrosion resistant coated, with washers.
 3. ASTM C954 for steel 1 mm (0.033 inch) thick.
 4. ASTM C1002 for steel framing less than 0.0329 inch thick.
- B. Washers: Galvanized steel, 13 mm (1/2 inch) minimum diameter.

2.5 SETTING MATERIALS OR BOND COATS

- A. Conform to TCNA Handbook for Ceramic Tile Installation.
- B. Latex-Portland Cement Mortar: ANSI A118.4.
1. For wall applications, provide non-sagging, latex-portland cement mortar complying with ANSI A118.4.
 2. Prepackaged Dry-Mortar Mix: Factory-prepared mixture of portland cement; dry, redispersible, ethylene vinyl acetate additive; and other ingredients to which only water needs to be added at Project site.
- C. Elastomeric Waterproofing Membrane and Bond Coat (Option):
1. TCNA F122-21 (on-ground concrete at HAC); F122A-21 (above-ground concrete at Resident Toilets and HAC); B421C-21 (Resident showers stalls); F121-21 (Public Toilets).
 2. ANSI A118.10 and A118.12.
 3. One component polyurethane, liquid applied material having the following additional physical properties:
 - a. Hardness: Shore "A" between 40-60.
 - b. Elongation: Between 300-600 percent.
 - c. Tensile strength: Between .27 - .41 Newton per square millimeter (40-60 pounds per square inch gauge).
 - d. No volatile compounds (VOC).
 4. Coal tar modified urethanes are not acceptable.
- D. Waterproofing Isolation Membrane (Option):
1. Sheet System TCNA F122-21 (on-ground concrete at HAC); F122A-21 (above-ground concrete at Resident Toilets and HAC); B421C-21 (Resident Shower Stalls); F121-21 (Public Toilets).
 2. Composite sheet consisting of ASTM D5109, Type II, Grade I Chlorinated Polyethylene (CM) sheet reinforced on both sides with a non-woven polyester fiber.
 3. Designed for use in wet areas as an isolation and positive waterproofing membranes for thin-set bonding of sheet to substrate

and thin-set bonding of ceramic and porcelain tile. Suited for both horizontal and vertical applications.

4. Conform to the following additional physical properties:

Property	Units	Results	Test Method
Hardness Shore A	Points	70-80	ASTM D2240 (10 Second Reading)
Shrinkage	Percent	5 maximum	ASTM D1204
Brittleness		No crack remains flexible at temperature -37 degrees C (-35 degrees F)	ASTM D2497 13 mm (1/2-inch) Mandrel Bend
Retention of Properties after Heat Aging	Percent of original	80 Tensile 80 Breaking 80 Elongation	ASTM D3045, 90 degrees C (194 degrees F) for 168 hours

5. Manufacturer's standard sheet size with prefabricated or preformed inside and outside corners.

6. Sheet manufacturer's solvent welding liquid or xylene and edge sealant.

2.6 GROUTING MATERIALS

A. Basis of Design: See Drawings. Architect approval required.

B. Premium Pre-Mixed Urethane Polymer Resin Grout:

1. ANSI A118.3.
2. Water-based.
3. Color-coated quartz aggregate.
4. Built-in urethane sealer.
5. Antimicrobial.
6. Chemical and stain-resistant.
7. Crack-resistant.
8. UV-stable.

2.7 PATCHING AND LEVELING COMPOUND

A. Portland cement base, polymer-modified, self-leveling compound, manufactured specifically for resurfacing and leveling concrete floors. Products containing gypsum are not acceptable.

B. Provide a patching and leveling compound with the following minimum physical properties:

1. Compressive strength - 25 MPa (3500 psig) per ASTM C109/C109M.

- 2. Flexural strength - 7 MPa (1000 psig) per ASTM C348 (28 day value).
- 3. Tensile strength - 4.1 MPa (600 psi) per ANSI 118.7.
- 4. Density - 1.9.

- C. Capable of being applied in layers up to 38 mm (1-1/2 inches) thick without fillers and up to 101 mm (4 inches) thick with fillers, being brought to a feather edge, and being trowelled to a smooth finish.
- D. Primers, fillers, and reinforcement as required by manufacturer for application and substrate condition.
- E. Ready for use in 48 hours after application.

2.8 METAL FLOOR TRANSITION

- A. Basis of Design: See Drawings. Architect approval required.
- B. Height to match tile and setting-bed thickness.
- C. Embedded leg perforated and deformed for keying to mortar.
- D. Stainless-steel.

2.9 WATER

- A. Clean, potable and free from salts and other injurious elements to mortar and grout materials.

2.10 CLEANING COMPOUNDS

- A. Specifically designed for cleaning concrete and which will not prevent bond of subsequent tile setting materials including patching and leveling compounds and elastomeric waterproofing membrane and coat.
- B. Materials containing acid or caustic Material are not acceptable.

2.11 FLOOR MORTAR BED REINFORCING

- A. ASTM A1064/A1064M welded wire fabric without backing, MW3 x MW3 (2 x 2-W0.5 x W0.5).

2.12 POLYETHYLENE SHEET

- A. Polyethylene sheet conforming to ASTM D4397.
- B. Nominal thickness: 0.15mm (6 mils).

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

- A. Maintain ambient temperature of work areas at not less than 16 degrees C (60 degrees F), without interruption, for not less than 24 hours before installation and not less than three (3) days after installation.
- B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation and ANSI Specifications for installation.

- C. Do not install tile when the temperature is above 38 degrees C (100 degrees F).
- D. Do not install materials when the temperature of the substrate is below 16 degrees C (60 degrees F).
- E. Do not allow temperature to fall below 10 degrees C (50 degrees F) after third day of completion of tile work.

3.2 ALLOWABLE TOLERANCE

- A. Variation in plane of sub-floor, including concrete fills leveling compounds and mortar beds:
 - 1. Not more than 3 mm in 3048 mm (1/8 inch in 10 feet) where latex-portland cement mortar setting beds are used.
- B. Variation in Plane of Wall Surfaces:
 - 1. Not more than 3 mm in 2438 mm (1/8 inch in 8 feet) where latex-portland cement mortar setting materials is used.

3.3 SURFACE PREPARATION

- A. Patching and Leveling:
 - 1. Mix and apply patching and leveling compound in accordance with manufacturer's instructions.
 - 2. Fill holes and cracks and align concrete floors that are out of required plane with patching and leveling compound.
 - a. Thickness of compound as required to bring finish tile system to elevation shown on construction documents.
 - b. Float finish except finish smooth for elastomeric waterproofing.
 - c. At substrate expansion, isolation, and other moving joints, allow joint of same width to continue through underlayment.
 - 3. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.
- B. Mortar Bed for Slopes to Drains:
 - 1. Slope compound to drain where drains are shown on construction documents.
 - 2. Install mortar bed in depressed slab sloped to drains not less than 6.35 mm in 305 mm (1/4 inch per foot).
 - 3. Allow not less than 50 mm (2 inch) depression at edge of depressed slab.
 - 4. Screed for slope to drain and float finish.
 - 5. Cure mortar bed for not less than seven (7) days. Do not use curing compounds or coatings.

6. Perform flood test to verify mortar bed slopes to drain before installing tile. Contracting Officer Representative (COR) to be present during flood test.

C. Cleavage Membrane:

1. Install polythene sheet as cleavage membrane in depressed slab when waterproof membrane is bonded to top of mortar bed at Public Toilets (TCNA F121-21).
2. Turn up at edge of depressed floor slab to top of floor.

D. Walls:

1. In showers or other wet areas cover studs with polyethylene sheet.
2. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.

E. Existing Floors:

1. Remove existing composition floor finishes and adhesive. Prepare surface by grinding, chipping, self-contained power blast cleaning or other suitable mechanical methods to completely expose uncontaminated concrete or masonry surfaces. Follow safety requirements of ANSI A10.20.
2. Remove existing concrete for depressions as shown on drawings. Clean and level the substrate for new setting bed and cleavage membrane.

3.4 CEMENTITIOUS BACKER UNITS

- A. Remove polyethylene wrapping from cementitious backer units and separate to allow for air circulation. Allow moisture content of backer units to dry down to a maximum of 35 percent before applying joint treatment and tile.
- B. Install in accordance with ANSI A118.9 except as specified otherwise.
- C. Install units horizontally or vertically to minimize joints with end joints over framing members. Units with rounded edges; face rounded edge away from studs to form a "V" joint for joint treatment.
- D. Secure cementitious backer units to each framing member with screws spaced not more than 203 mm (8 inches) on center and not closer than 13 mm (1/2 inch) from the edge of the backer unit or as recommended by backer unit manufacturer. Install screws so that the screw heads are flush with the surface of the backer unit.
- E. Where backer unit joins shower pans or waterproofing, lap backer unit over turned up waterproof system. Install fasteners only through top one-inch of turned up waterproof systems.

F. Do not install joint treatment for seven (7) days after installation of cementitious backer unit.

G. Joint Treatment:

1. Fill horizontal and vertical joints and corners with latex-portland cement mortar. Apply fiberglass tape over joints and corners and embed with same mortar.
2. Leave 6 mm (1/4 inch) space for sealant at lips of sinks or other plumbing receptors.

3.5 METAL FLOOR TRANSITION

- A. Install metal transition in floor joints between ceramic tile floors and between tile floors and adjacent flooring of other materials. Install in accordance with manufacturer's instructions.
- B. Set transition in mortar to line and level centered under doors or in openings.
- C. At preformed sealant joint: Refer to Section 07 95 13, EXPANSION JOINT COVER ASSEMBLIES.
 1. Comply with recommendations in TCNA for Vertical and Horizontal Joint Design Essentials. TCNA Systems EJ 171.
 - a. Locate joint in tile surfaces directly above joint in sub-floor or where indicated when used with isolation membranes to allow off-setting of joint location from sub-floor joint.
 - b. Fasten full length to sub-floor using a construction adhesive.
 - c. Trowel setting material with full coverage over the entire leg.
 2. Set tile up against the joint ensuring that the top edge of the joint is flush or slightly below the top of the tile.

3.6 TILE - GENERAL

- A. Comply with ANSI A108/A118/A136 series of tile installation standards applicable to methods of installation and TCNA Installation Guidelines.
- B. Installing Mortar Beds for Floors:
 1. Install mortar bed in a manner that does not damage cleavage or waterproof membrane.
 2. Install floor mortar bed reinforcing centered in mortar fill.
 3. Screed finish to level plane or slope to drains shown on construction documents, float finish.
 4. For thin set systems cure mortar bed not less than seven (7) days. Do not use curing compounds or coatings.
- C. Setting Beds or Bond Coats:

1. Where recessed or depressed floor slabs are filled with portland cement mortar bed, set ceramic mosaic floor tile in latex-portland cement mortar over cured mortar bed except as specified otherwise, ANSI A108-1b, TCNA System F121-21 (Public Toilets) and B421C-21 (Resident Shower Stalls).
 2. Set floor tile in elastomeric bond coat over elastomeric waterproofing membrane OR in latex-portland cement mortar, ANSI A108.1b, over waterproofing isolation membrane as per ANSI 108.13, TCNA System F122-21 (on-ground concrete at HAC); F122A-21 (above-ground concrete at Resident Toilets and HAC); B421C-21 (Resident Shower Stalls); and F121-21 (Public Toilets).
 3. Set wall tile installed over concrete backer board in latex-portland cement mortar, ANSI A108.5.
 4. Set corner trim in same material specified for setting adjoining tile. Install in accordance with manufacturer's instructions.
- D. Workmanship:
1. Lay out tile work so that no tile less than one-half full size is used. Make all cuts on the outer edge of the field.
 2. Set tile firmly in place with finish surfaces in true planes. Align tile flush with adjacent tile unless shown otherwise on construction documents.
 3. Form intersections and returns accurately.
 4. Cut and drill tile neatly without marring surface.
 5. Cut edges of tile abutting penetrations, finish, or built-in items:
 - a. Fit tile closely around electrical outlets, piping, fixtures and fittings, so that plates, escutcheons, collars and flanges will overlap cut edge of tile.
 - b. Seal tile joints water tight as specified in Section 07 92 00, JOINT SEALANTS, around electrical outlets, piping fixtures and fittings before cover plates and escutcheons are set in place.
 6. Completed work is to be free from hollow sounding areas and loose, cracked or defective tile.
 7. Remove and reset tiles that are out of plane or misaligned.
 8. Floors:
 - a. On-ground concrete at HAC: TCNA F122-21.
 - b. Above-ground concrete at Resident Toilets and HAC: TCNA F122A-21
 - c. Public Toilets: TCNA F121-21.
 - d. Resident Shower Stalls: TCNA B421C-21.

- e. Extend floor tile beneath casework and equipment, except those units mounted in wall recesses.
 - f. Align finish surface of new tile work flush with other and existing adjoining floor finish where indicated in construction documents.
 - g. In areas where floor drains occur, slope tile to drains.
 - h. Push and vibrate tiles over 203 mm (8 inches) square to achieve full support of bond coat.
9. Walls:
- a. Typical: TCNA W244C-21.
 - b. Cover walls and partitions, including pilasters, furred areas, and freestanding columns from floor to ceiling, or from floor to nominal wainscot heights as indicated in construction documents with tile.
 - c. Finish reveals of openings with tile, except where other finish materials are indicated in construction documents.
 - d. Finish wall surfaces behind and at sides of casework and equipment, except those units mounted in wall recesses, with same tile as scheduled for room proper.
10. Joints:
- a. Keep all joints in line, straight, level, perpendicular and of even width unless shown otherwise on construction documents.
 - b. Make joints 2 mm (1/16 inch) wide for glazed wall tile and mosaic tile work.
11. Back Buttering: For installations indicated below, obtain 100 percent mortar coverage by complying with applicable special requirements for back buttering of tile in referenced ANSI A108/A118/A136 series of tile installation standards:
- a. Tile wall installations in wet areas, including showers.
 - b. Tile wall installations composed of tiles 203 by 203 mm (8 by 8 inches) or larger.

3.7 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH LATEX-PORTLAND CEMENT MORTAR (WITH WATERPROOFING ISOLATION MEMBRANE OPTION).

- A. Installation of Tile: ANSI A108.1B (Public Toilets and Resident Shower Stalls) and ANSI 108.5 (HAC and Resident Toilets), except as specified otherwise.
- B. Slope tile work to drains at not less than 3 mm in 305 mm (1/8 inch per foot).

3.8 CERAMIC AND PORCELAIN TILE INSTALLED WITH ELASTOMERIC BOND COAT (OPTION)

- A. Surface Preparation: Prepare surfaces as specified.
- B. Installation of Elastomeric Membrane: ANSI A118.10 and TCNA System F122-21 (on-ground concrete at HAC) and F122A-21 (above-ground concrete at Patient Toilets and HAC); B421C-21 (Resident Shower Stalls); and F121-21 (Public Toilets).
 - 1. Prime surfaces, where required, in accordance with manufacturer's instructions.
 - 2. Install first coat of membrane material in accordance with manufacturer's instructions, in thickness of 0.76 to 1.3 mm (30 to 50 mils).
 - 3. Extend material over flashing rings of drains and turn up vertical surfaces not less than 101 mm (4 inches) above finish floor surface.
 - 4. When material has set, recoat areas with a second coat of elastomeric membrane material for a total thickness of 1.3 to 1.9 mm (50 to 75 mils).
 - 5. After curing test for leaks with 25 mm (1 inch) of water for 24 hours.
- C. Installation of Tile in Elastomeric Membrane:
 - 1. Spread no more material than can be covered with tile before material starts to set.
 - 2. Apply tile in second coat of elastomeric membrane material in accordance with the coating manufacturer's instructions in lieu at aggregate surfacing specified in ASTM C1127. Do not install top coat over tile.

3.9 GROUTING

- A. Grout Type: Urethane Polymer Resin.
- B. Workmanship:
 - 1. Install and cure grout in accordance with the applicable standard.
 - 2. Water-Cleanable Grout: ANSI A118.3.

3.10 MOVEMENT JOINTS

- A. Prepare tile expansion, isolation, construction and contraction joints for installation of sealant. Refer to Section 07 92 00, JOINT SEALANTS.
- B. TCNA details EJ 171-21.
- C. At expansion joints, rake out joint full depth of tile and setting bed and mortar bed. Do not cut waterproof or isolation membrane.
- D. Rake out grout at joints between tile, service sink, and at toe of base, not less than 6 mm (1/4 inch) deep.

3.11 CLEANING:

- A. Thoroughly sponge and wash tile. Polish glazed surfaces with clean dry cloths.
- B. Methods and materials used are not permitted to damage or impair appearance of tile surfaces.
- C. The use of acid or acid cleaners on glazed tile surfaces is prohibited.
- D. Clean tile as recommended by the manufacturer of the grout and bond coat.

3.12 PROTECTION

- A. Keep traffic off tile floor, until grout and setting material is fully set and cured.
- B. Where traffic occurs over tile floor is unavoidable, cover tile floor with not less than 9 mm (3/8 inch) thick plywood, wood particle board, or hardboard securely taped in place. Do not remove protective cover until time for final inspection. Clean tile of any tape, adhesive and stains.

3.13 TESTING FINISH FLOOR

- A. Test floors in accordance with ASTM C627 to show compliance with codes 1 through 10.

- - - E N D - - -

SECTION 09 51 00
ACOUSTICAL CEILINGS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Acoustical units.
 - 2. Metal ceiling suspension system for acoustical ceilings.

1.2 RELATED REQUIREMENTS

- A. Color, pattern, and location of each type of acoustical unit: See Drawings.
- B. Ceiling Suspension System: Section 09 22 16, NON-STRUCTURAL METAL FRAMING.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
 - 1. A641/A641M-09a(2014) - Zinc-coated (Galvanized) Carbon Steel Wire.
 - 2. A653/A653M-15e1 - Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-coated (Galvannealed) by the Hot-Dip Process.
 - 3. C423-09a - Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method.
 - 4. C634-13 - Terminology Relating to Environmental Acoustics.
 - 5. C635/C635M-13a - Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings.
 - 6. C636/C636M-13 - Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels.
 - 7. D1779-98(2011) - Adhesive for Acoustical Materials.
 - 8. E84-15b - Surface Burning Characteristics of Building Materials.
 - 9. E119-16 - Fire Tests of Building Construction and Materials.
 - 10. E413-16 - Classification for Rating Sound Insulation.
 - 11. E580/E580M-14 - Installation of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Subject to Earthquake Ground Motions.
 - 12. E1264-14 - Classification for Acoustical Ceiling Products.
- C. International Organization for Standardization (ISO):
 - 1. ISO 14644-1 - Classification of Air Cleanliness.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Ceiling suspension system indicating manufacturer recommendation for each application.
 - 3. Installation instructions.
 - 4. Warranty.
- C. Samples:
 - 1. Acoustical units, 150 mm (6 inches) in size, each type.
 - a. Submit quantity required to show full color and texture range.
 - 2. Suspension system, trim and molding, 300 mm (12 inches) long.
 - 3. Colored markers for access service.
- D. Sustainable Construction Submittals:
 - 1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
 - 2. Biobased Content:
 - a. Show type and quantity for each product.
 - b. Show volatile organic compound types and quantities.
- E. Certificates: Certify products comply with specifications.
 - 1. Acoustical units, each type.
- F. Qualifications: Substantiate qualifications comply with specifications.
- G. Operation and Maintenance Data:
 - 1. Care instructions for each exposed finish product.

1.5 QUALITY ASSURANCE

- A. Manufacturer Qualifications:
 - 1. Regularly manufactures specified products.
 - 2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight, conditioned facility.

- B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment:

1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
2. Work Area Ambient Conditions: HVAC systems are complete, operational, and maintaining facility design operating conditions continuously, beginning 48 hours before installation until Government occupancy.
3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

- A. Ceiling System: Acoustical ceilings units on exposed grid suspension systems.

2.2 SYSTEM PERFORMANCE

- A. Design product complying with specified performance:
 1. Maximum Deflection: 1/360 of span, maximum.
- B. Surface Burning Characteristics: When tested according to ASTM E84.
 1. Flame Spread Rating: 25 maximum.
 2. Smoke Developed Rating: 50 maximum.

2.3 PRODUCTS - GENERAL

- A. Basis of Design: See Drawings. Architect approval required.
- B. Provide acoustical units from one manufacturer for each product type.
 1. Provide each product exposed to view from one production run.
- C. Provide suspension system from same manufacturer.
- D. Sustainable Construction Requirements:
 1. Mineral Base Recycled Content: 50 percent, total recycled content, minimum.
 2. Steel Recycled Content: 25 percent total recycled content, minimum.
 3. Biobased Content: 37 percent by weight biobased material, minimum.

2.4 ACOUSTICAL UNITS

- A. General:

1. Ceiling Panel and Tile: ASTM E1264, bio-based content according to USDA Bio-Preferred Product requirements.
 - a. Mineral Fiber: 3.6 kg/sq. m (3/4 psf) weight, minimum.
2. Classification: Provide type and form as follows:
 - a. ACT-1: Type III Units - Mineral base with water-based painted finish maximum 10 g/l VOC; Form 2 - Water felted, minimum 16 mm (5/8 inch) thick.
 - b. ACT-2: Type IV Units - Mineral base with membrane-faced overlay, Form 2 - Water felted, minimum 16 mm (5/8 inch) thick. Apply poly (vinyl) chloride over paint coat.
 - c. NRC (Noise Reduction Coefficient): ASTM C423, minimum 0.55 unless specified otherwise; not applicable for Type IV Units.
 - d. CAC (Ceiling Attenuation Class): ASTM E413, 33 unless specified otherwise.
 - e. LR (Light Reflectance): Minimum 0.75.
3. Lay-in panels: Sizes as indicated on Drawings, with square edges.
 - a. Sizes:
 - 1) Edge and Joint Detail: Square edges and joints as required to suit suspension and access system.
- B. SPECIAL FACED ACOUSTICAL TILE UNITS AT(SP): Anti-microbial coated surfaces suitable for use in Class 5 Clean Rooms per ISO 14644-1. Special faced acoustical tile units shall meet all general requirements stated in this specification. See Class IV product specified above.

2.5 METAL SUSPENSION SYSTEM

- A. General: ASTM C635, heavy-duty system, except as otherwise specified.
 1. Suspension System: Provide the following:
 - a. Galvanized cold-rolled steel, bonderized.
 2. Main and Cross Runner: Use same construction Do not use lighter-duty sections for cross runners.
- B. Exposed Grid Suspension System: Support of lay-in panels.
 1. Grid Width: 22 mm (7/8 inch) minimum with 8 mm (5/16 inch) minimum panel bearing surface.
 2. Molding: Fabricate from the same material with same exposed width and finish.
 3. Finish: Baked-on enamel flat texture finish.
 - a. Color: To match adjacent acoustical units.
- C. Carrying Channels Secondary Framing: Cold-rolled or hot-rolled steel, black asphaltic paint finish, rust free.

1. Weight per 300 m (per thousand linear feet), minimum:

Size		Cold-rolled		Hot-rolled	
mm	inches	kg	pound	kg	pound
38	1-1/2	215.4	475	508	1120
50	2	267.6	590	571.5	1260

- D. Anchors and Inserts: Provide anchors or inserts to support twice the loads imposed by hangers.

1. Hanger Inserts: Steel, zinc-coated (galvanized after fabrication).

- E. Clips: Galvanized steel, designed to secure framing member in place.

- F. Tile Splines: ASTM C635.

- G. Wire: ASTM A641.

1. Size:

- a. Wire Hangers: Minimum diameter 2.68 mm (0.1055 inch).

- b. Bracing Wires: Minimum diameter 3.43 mm (0.1350 inch).

2.6 ACCESSORIES

- A. Access Identification Markers: Colored markers with pressure sensitive adhesive on one side, paper or plastic, 6 to 9 mm (1/4 to 3/8 inch) diameter.

1. Color Code: Provide the following color markers for service identification:

Color	Service
Red	Sprinkler System: Valves and Controls
Green	Domestic Water: Valves and Controls
Yellow	Chilled Water and Heating Water
Orange	Ductwork: Fire Dampers
Blue	Ductwork: Dampers and Controls
Black	Gas: Laboratory, Medical, Air and Vacuum

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Remove existing acoustical panels and suspension system to permit new installation.
1. Dispose of removed materials.

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 ACOUSTICAL UNIT INSTALLATION

A. Applications:

1. Cut acoustic units for perimeter borders and penetrations to fit tight against penetration for joint not concealed by molding.

B. Layout acoustical unit symmetrically, with minimum number of joints.

C. Installation:

1. Install acoustic tiles after wet finishes have been installed and solvents have cured.
2. Install lay-in acoustic panels in exposed grid with minimum 6 mm (1/4 inch) bearing at edges on supports.
 - a. Install tile to lay level and in full contact with exposed grid.
 - b. Replace cracked, broken, stained, dirty, or tile.

3. Markers:

- a. Install color coded markers to identify the various concealed piping, mechanical, and plumbing systems.
- b. Attach colored markers to exposed grid on opposite sides of the units providing access.
- c. Attach marker on exposed ceiling surface of upward access acoustical unit.

D. Touch up damaged factory finishes.

1. Repair painted surfaces with touch up primer.

3.4 CEILING SUSPENSION SYSTEM INSTALLATION

A. General: Install according to ASTM C636.

1. Use direct or indirect hung suspension system or combination of both.
2. Support a maximum area of 1.48 sq. m (16 sq. ft.) of ceiling per hanger.
3. Prevent deflection in excess of 1/360 of span of cross runner and main runner.
4. Provide additional hangers located at each corner of support components.
5. Provide minimum 100 mm (4 inch) clearance from the exposed face of the acoustical units to the underside of ducts, pipe, conduit, secondary suspension channels, beams or joists; and steel beam or bar joist unless otherwise shown.

6. Provide main runners minimum 1200 mm (48 inches) in length.
7. Install hanger wires vertically.

B. Direct Hung Suspension System: ASTM C635.

1. Support main runners by hanger wires attached directly to the structure overhead.
2. Maximum spacing of hangers, 1200 mm (4 feet) on centers unless interference occurs by mechanical systems. Use indirect hung suspension system where not possible to maintain hanger spacing.

C. Anchorage to Structure:

1. Steel:

- a. Install carrying channels for attachment of hanger wires.
 - 1) Size and space carrying channels to support load within performance limit.
 - 2) Attach hangers to steel carrying channels, spaced four feet on center, unless area supported or deflection exceeds the amount specified.
- b. Attach carrying channels to the bottom flange of steel beams spaced not 1200 mm (4 feet) on center before fireproofing is installed. Weld or use steel clips for beam attachment.
- c. Attach hangers to bottom chord of bar joists or to carrying channels installed between the bar joists when hanger spacing prevents anchorage to joist. Rest carrying channels on top of the bottom chord of the bar joists, and securely wire tie or clip to joist.

D. Indirect Hung Suspension System: ASTM C635.

1. Space carrying channels for indirect hung suspension system maximum 1200 mm (4 feet) on center. Space hangers for carrying channels maximum 2400 mm (8 feet) on center or for carrying channels less than 1200 mm (4 feet) on center so as to insure that specified requirements are not exceeded.
2. Support main runners by specially designed clips attached to carrying channels.

3.5 CEILING TREATMENT

A. Moldings:

1. Install metal wall molding at perimeter of room, column, or edge at vertical surfaces.

2. Install special shaped molding at changes in ceiling heights and at other breaks in ceiling construction to support acoustical units and to conceal their edges.

3.6 CLEANING

- A. Clean exposed surfaces. Remove contaminants and stains.

- - - E N D - - -

**SECTION 09 65 13
RESILIENT BASE AND ACCESSORIES**

PART 1 - GENERAL**1.1 SUMMARY**

A. Section Includes:

1. Resilient base adhered to interior walls and partitions.
2. Resilient stair treads adhered to interior stair treads.

1.2 RELATED REQUIREMENTS

- A. Sheet Flooring Integral Base: Section 09 65 16, RESILIENT SHEET FLOORING.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
- F1861-16.....Resilient Wall Base.
 - D4259-18.....Preparation of Concrete by Abrasion Prior to Coating Application.
- C. Federal Specifications (Fed. Spec.):
- RR-T-650E (1994).....Treads, Metallic and Non-Metallic, Skid-Resistant.
- D. International Concrete Repair Institute (ICRI):
- 310.2R-2013.....Selecting and Specifying Concrete Surface Preparation for Sealers, Coatings, Polymer Overlays, and Concrete Repair.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
1. Description of each product.
 2. Adhesives and primers indicating manufacturer's recommendation for each application.
 3. Installation instructions.
- C. Samples:
1. Resilient Base: 150 mm (6 inches) long, each type and color.
 2. Resilient Stair Treads: 150 mm (6 inches) long, each type and color.
- D. Sustainable Construction Submittals:
1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
 2. Low Pollutant-Emitting Materials:

- a. Stair Treads: Submit Floor Score label.
 - b. Show volatile organic compound types and quantities.
- E. Operation and Maintenance Data:
- 1. Care instructions for each exposed finish product.

1.5 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight facility.
- B. Protect products from damage when handling and during construction operations.

1.7 FIELD CONDITIONS

- A. Environment:
 - 1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
 - 2. Work Area Ambient Temperature Range: 21 to 27 degrees C (70 to 80 degrees F) continuously, beginning 48 hours before installation.
 - 3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS**2.1 PRODUCTS**

- A. Basis of Design: See Drawings. Architect approval required.
- B. Provide each product from one manufacturer and from one production run.
- C. Sustainable Construction Requirements:
 - 1. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
 - a. Flooring Adhesives and Sealants.

2.2 RESILIENT BASE

- A. Resilient Base: 3 mm (1/8 inch) thick, 100 mm (4 inches) high.
 - 1. Type: Rubber or vinyl; use one type throughout.

2. ASTM F1861, Type TP thermoplastic rubber or Type TV thermoplastic vinyl, Group 2 - layered.

B. Applications:

1. Carpet Flooring Locations: Style A - Straight.
2. Other Locations: Style B - Cove.

2.3 PROFILE RESILIENT BASE

- A. Profile Resilient Base: 9.52 mm (3/8 inch) thick, 133 mm (5-1/4 inch) high.
1. Type: Rubber.
 2. ASTM F1861, Type TP, Group 1 Solid Resilient Thermo Plastic Rubber.

2.4 RESILIENT STAIR TREADS

- A. Angle Fit Resilient Stair Treads with Integrated Riser: Rubber, skid-resistant abrasive strip nosing.
1. Fed. Spec. RR-T-650, Composition A, Type 2.
 2. Abrasive Strips: Design for access by visually impaired.
 3. Nosing: Flexible, accommodating angle between tread and riser; shape suiting sub-tread.
 4. Size: Single piece full stair tread width and depth and riser height.

2.5 PRIMER (FOR CONCRETE FLOORS)

- A. Primer: Type recommended by adhesive manufacturer.

2.6 LEVELING COMPOUND (FOR CONCRETE FLOORS)

- A. Leveling Compound: Provide products mixed with latex or polyvinyl acetate resins.

2.7 ADHESIVES

- A. Adhesives: Low pollutant-emitting, water based type recommended by adhered product manufacturer for each application.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Correct substrate deficiencies.
1. Fill cracks, pits, and depressions with leveling compound.
 2. Remove protrusions; grind high spots.
 3. Apply leveling compound to achieve 3 mm (1/8 inch) in 3 m (10 feet) maximum surface variation.
- D. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.

1. Mechanically clean concrete floor substrate according to ASTM D4259.
 2. Surface Profile: ICRI Guideline No. 310.2R.
- E. Allow substrate to dry and cure.
- F. Perform flooring manufacturer's recommended bond, substrate moisture content, and pH tests.

3.2 INSTALLATION GENERAL

- A. Install products according to manufacturer's instructions.
1. When instructions deviate from specifications, submit proposed resolution for Contracting Officer consideration.

3.3 RESILIENT BASE INSTALLATION

- A. Applications:
1. Install resilient base in rooms scheduled on Drawings.
 2. Install resilient base on casework and other curb supported fixed equipment.
 3. Extend resilient base into closets, alcoves, and cabinet knee spaces, and around columns within scheduled room.
- B. Lay out resilient base with minimum number of joints.
1. Length: 600 mm (24 inches) minimum, each piece.
 2. Locate joints 150 mm (6 inches) minimum from corners and intersection of adjacent materials.
- C. Installation:
1. Apply adhesive uniformly for full contact between resilient base and substrate.
 2. Set resilient base with hairline butted joints aligned along top edge.
- D. Factory form corners and end stops.
1. V-groove back of outside corner.
 2. V-groove face of inside corner and notch cove for miter joint.
- E. Roll resilient base ensuring complete adhesion.

3.4 RESILIENT STAIR TREAD INSTALLATION

- A. Install resilient stair treads without joints on each stair tread substrate.
1. Install full width resilient stair treads on each intermediate and floor landing.
- B. Apply adhesive uniformly for full contact between resilient stair tread and substrate.
1. Roll resilient stair treads ensuring complete adhesion.

3.5 CLEANING

- A. Remove excess adhesive before adhesive sets.
- B. Clean exposed resilient base, and resilient stair tread surfaces.
Remove contaminants and stains.
 - 1. Clean with mild detergent. Leave surfaces free of detergent residue.

3.6 PROTECTION

- A. Prohibit traffic on resilient stair treads 72 hours, minimum, after installation.
- B. Protect products from construction traffic and operations.
 - 1. Cover resilient stair treads with reinforced kraft paper, and plywood or hardboard.
 - 2. Maintain protection until directed by Contracting Officer's Representative.
- C. Replace damaged products and re-clean.
 - 1. Damaged Products include cut, gouged, scraped, torn, and unbonded products.

- - - E N D - - -

**SECTION 09 65 16
RESILIENT SHEET FLOORING**

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Welded seam sheet flooring with heat welded seams and integral cove base.

1.2 RELATED REQUIREMENTS

- A. Adhesive VOC Limits: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Color, Pattern and Texture: See Drawings.
- C. Resilient Base over Base of Casework: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
1. D4259-88(2012) - Abrading Concrete.
 2. E648-15e1 - Standard Test Method for Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source.
 3. E662-15a - Standard Test Method for Specific Optical Density of Smoke Generated by Solid Materials.
 4. F1913-04(2014) - Vinyl Sheet Floor Covering Without Backing.
- C. International Concrete Repair Institute (ICRI):
1. 310.2R-13 - Selecting and Specifying Concrete Surface Preparation for Sealers, Coatings, and Polymer Overlays, and Concrete Repair.
- D. SCS Global Services (SCS):
1. FloorScore.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
1. Show size, configuration, and fabrication and installation details.
- B. Manufacturer's Literature and Data:
1. Description of each product.
 2. Application and Installation instructions.
 3. Warranty.
- C. Samples:

1. Sheet material, 38 mm by 300 mm (1-1/2 inch by 12 inch), of each color and pattern with welded seam using specified welding rod , 300 mm (12 inches) square for each type, pattern and color.
 2. Cap strip and fillet strip, 300 mm (12 inches) for integral base.
 3. Shop Drawings and Certificates: Layout of joints showing patterns where joints are expressed, and type and location of obscure type joints. Indicate orientation of directional patterns.
 4. Certificates: Quality Control Certificate Submittals and lists specified in paragraph, QUALIFICATIONS.
 5. Edge strips: 150 mm (6 inches) long each type.
 6. Primer: Pint container, each type.
- D. Sustainable Construction Submittals:
1. Low Pollutant-Emitting Materials:
 - a. Sheet Flooring: Submit FloorScore label.
 - b. Identify volatile organic compound types and quantities.
- E. Certificates: Certify products comply with specifications.
1. Heat welded seaming is manufacturer's prescribed method of installation.
- F. Qualifications: Substantiate qualifications comply with specifications.
1. Manufacturer.
 2. Installer.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: A company specializing in installation with minimum three (3) years' experience and employs experienced flooring installers who have retained, and currently hold, an INSTALL Certification, or a certification from a comparable certification program.
1. Installers to be certified by INSTALL or a comparable certification program with the following minimum criteria:
 - a. US Department of Labor approved four (4) year apprenticeship program, 160 hours a year.
 - b. Career long training.
 - c. Manufacturer endorsed training.
 - d. Fundamental journeyman skills certification.
- B. Furnish product type materials from the same production run.

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight, conditioned facility.
- B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

- A. Environment:
 - 1. Work Area Ambient Temperature Range: Minimum 18 to 38 degrees C (65 to 100 degrees F) continuously, beginning 48 hours before installation. Maintain room temperature above 18 degrees C (65 degrees F) after installation.
 - 2. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant resilient sheet flooring against material and manufacturing defects.
 - 1. Warranty Period: 2 years.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

- A. Sheet Flooring:
 - 1. Critical Radiant Flux: ASTM E648; 0.45 watts per sq.cm or more, Class I.
 - 2. Smoke Density: ASTM E662; less than 450.

2.2 PRODUCTS - GENERAL

- A. Basis of Design: See Drawings. Architect approval required.
- B. Provide vinyl sheet color and pattern from one production run.
- C. Sustainable Construction Requirements:
 - 1. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
 - a. Flooring Adhesives and Sealants.
 - b. Vinyl Sheet Flooring.

2.3 WELDED SEAM SHEET FLOORING WITH HEAT WELDED SEAMS

- A. Welded Seam Sheet Flooring (RSF): ASTM F1913; Vinyl, without backing.
 - 1. Wear Surface: Smooth.
 - 2. Thickness: 2 mm (0.080 inches).

2.4 ACCESSORIES

- A. Bonding Chemical: Flooring manufacturer's standard seam bonding chemical.
- B. Welding Rod: Flooring manufacturer's standard, in color matching field color of sheet flooring.
- C. Adhesives: Water resistant type recommended by flooring manufacturer to suit application.
- D. Base Accessories:
 - 1. Fillet Strip: 19 mm (3/4 inch) radius fillet strip compatible with flooring material.
 - 2. Cap Strip: J-Shape extruded flanged reducer strip compatible with flooring material approximately 25 mm (1 inch) exposed height with 13 mm (1/2 inch) flange.
- E. Leveling Compound:
 - 1. Provide cementitious type with latex or polyvinyl acetate resins additive.
- F. Primer:
 - 1. Type recommended by adhesive or flooring manufacturer.
- G. Provide welding rod at flooring transitions in lieu of edge strips.
- H. Sealant:
 - 1. As specified in Section 07 92 00, JOINT SEALANTS.
 - 2. Compatible with flooring.

PART 3 - EXECUTION**3.1 PREPARATION**

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Remove existing flooring to permit new installation.
 - 1. Do not use solvents for removing adhesives.
 - 2. Dispose of removed materials.
- D. Ensure interior finish work such as plastering, drywall finishing, concrete, ceiling work, and painting work is complete and dry before installation.
 - 1. Complete mechanical, electrical, and other work above ceiling line.
 - 2. Ensure heating, ventilating, and air conditioning systems are installed and operating in order to maintain temperature and humidity requirements.
- E. Correct substrate deficiencies.
 - 1. Fill cracks, pits, and dents with leveling compound.
 - 2. Grind, sand, or cut away protrusions. Grind high spots.

3. Level flooring substrate to 3 mm (1/8 inch) maximum variation.
- F. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.
 1. Mechanically clean concrete floor substrate according to ASTM D4259.
 2. Surface Profile: ICRI 310.2R CSP 3 to CSP 4.
- G. Perform flooring manufacturer's recommended bond, substrate moisture content, and pH tests.
- H. Broom or vacuum clean substrates immediately before flooring installation.
- I. Primer: Apply primer according to manufacturer's instructions.

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions.
 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 INSTALLATION OF FLOORING

- A. Flooring Layout:
 1. Arrange pattern in one direction with side and end joints pattern matched.
 2. Extend flooring wall-to-wall, under cabinets, casework, , and other equipment for seamless flooring installation.
 3. Arrange sheets to minimize seams.
 4. Locate seams in inconspicuous and low traffic areas, minimum 150 mm (6 inches) away from parallel joints in flooring substrates.
- B. Match edges of flooring for color shading and pattern at seams.
- C. Install flooring flush with adjacent floor finishes.
- D. Extend flooring into toe spaces, door reveals, closets, and similar openings.
- E. Install flooring fully adhered to substrate.
 1. Air pockets or loose edges are not acceptable.
 2. Trim sheet materials tight to flooring penetrations; seal joints at pipe with waterproof sealant specified in Section 07 92 00, JOINT SEALANTS.
- F. Butt joints tight, without gaps and bulges.
- G. Install welding rod at flooring transition in lieu of edge strips.

3.4 INTEGRAL COVE BASE INSTALLATION

- A. Set preformed fillet strip at floor intersection with walls and other vertical surfaces.

- B. Extend flooring over fillet strip and 100 mm (4 inches) up wall surface.
- C. Form straight or radius internal and external corners to suit Application.
- D. Adhere base to wall surface.
- E. Terminate base exposed top edge with cap strip. Seal cap strip to wall with sealant.
- F. Weld joints as specified for flooring.

3.5 HEAT WELDING

- A. Heat weld joints of flooring and base using welding rod.
- B. Rout joint, insert welding rod into routed space, and fuse flooring and welding rods for seamless, watertight installation.
 - 1. Fuse joints for seamless weld.
- C. Finish joints flush, free from voids, and recessed or raised areas.

3.6 CLEANING

- A. Remove excess adhesive before adhesive sets.
- B. Clean and polish materials.
- C. Vacuum floor thoroughly.
- D. Perform initial maintenance according to flooring manufacturer's instructions.
 - 1. Delay washing flooring until adhesive is fully set and welded joints can contain wash water.

3.7 PROTECTION

- A. Protect flooring from traffic and construction operations.
- B. Keep traffic off sheet flooring for minimum 24 hours after installation.
- C. Cover flooring with reinforced kraft paper, and plywood or hardboard.
- D. Remove protective materials immediately before acceptance.
- E. Repair damage.
- F. Buff flooring to uniform sheen.

- - - E N D - - -

**SECTION 09 65 19
RESILIENT TILE FLOORING**

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies the installation of luxury vinyl tile, electrostatic-dissipative tile, and accessories required for a complete installation.

1.2 RELATED WORK:

- A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS
- B. Resilient Base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.
- C. Subfloor Testing and Preparation: Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.
- D. Removal of Existing Construction Containing Asbestos: Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.
- E. Color, Pattern and Texture for Resilient Tile Flooring and Accessories: See Drawings.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals as described below:
 - 1. Volatile organic compounds per volume as described in PART 2 - PRODUCTS
 - 2. Postconsumer and preconsumer recycled content as described in PART 2 - PRODUCTS.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Resilient material manufacturer's recommendations for adhesives, underlayment, primers, and polish.
 - 3. Application, installation and maintenance instructions.
- D. Samples:
 - 1. Tile: Each type, color, thickness and finish.
 - 2. Edge Strips: Each type, color, thickness and finish.
- E. Shop Drawings:
 - 1. Layout of patterns as shown on the construction documents.
 - 2. Edge strip locations showing types and detail cross sections.
- F. Test Reports:

1. Abrasion resistance: Depth of wear for each tile type and color and volume loss of tile, certified by independent laboratory. Tested per ASTM F510/F510M.
2. Moisture and pH test results as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

1.4 DELIVERY:

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Materials from containers which have been distorted, damaged or opened prior to installation are not acceptable.

1.5 STORAGE:

- A. Store materials in a clean, dry, enclosed space off the ground, protected from harmful weather conditions and at temperature and humidity conditions recommended by the manufacturer. Protect adhesives from freezing. Store flooring, adhesives, and accessories in the spaces where they will be installed for at least 48 hours before beginning installation.

1.6 QUALITY ASSURANCE:

- A. Installer Qualifications: A company specializing in installation with minimum three (3) years' experience and employs experienced flooring installers who have retained, and currently hold, an INSTALL Certification, or a certification from a comparable certification program.
 1. Installers to be certified by INSTALL or a comparable certification program with the following minimum criteria:
 - a. US Department of Labor approved four (4) year apprenticeship program, 160 hours a year.
 - b. Career long training.
 - c. Manufacturer endorsed training.
 - d. Fundamental journeyman skills certification.
- B. Furnish product type materials from the same production run.

1.7 WARRANTY:

- A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".

1.8 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standards Institute(ANSI):
- ESD S97.2.....Floor Materials and Footwear - Voltage
Measurement on a Person
- C. ASTM International (ASTM):
- D2047-11.....Test Method for Static Coefficient of Friction
of Polish-Coated Flooring Surfaces as Measured
by the James Machine
- D2240-05 (R2010).....Test Method for Rubber Property-Durometer
Hardness
- D4078-02 (R2008).....Water Emulsion Floor Finish
- E648-14c.....Critical Radiant Flux of Floor Covering Systems
Using a Radiant Energy Source
- E662-14.....Specific Optical Density of Smoke Generated by
Solid Materials
- E1155/E1155M-14.....Determining Floor Flatness and Floor Levelness
Numbers
- F150-06.....Standard Test Method for Electrical Resistance
of Conductive and Static Dissipative Resilient
FlooringF510/F510M-14 Resistance to Abrasion
of Resilient Floor Coverings Using an Abrader
with a Grit Feed Method
- F710-11.....Preparing Concrete Floors to Receive Resilient
Flooring
- F925-13.....Test Method for Resistance to Chemicals of
Resilient Flooring
- F1700-13a.....Solid Vinyl Floor Tile
- F1869-11.....Test Method for Measuring Moisture Vapor
Emission Rate of Concrete Subfloor Using
Anhydrous Calcium Chloride
- F2170-11.....Test Method for Determining Relative Humidity
in Concrete Floor Slabs Using in Situ Probes
- F2195-13.....Linoleum Floor Tile
- D. Code of Federal Regulation (CFR):

40 CFR 59.....Determination of Volatile Matter Content, Water
Content, Density Volume Solids, and Weight
Solids of Surface Coating

E. International Standards and Training Alliance (INSTALL):

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS:

- A. Basis of Design: See Drawings. Architect approval required.
- B. Provide adhesives, underlayment, primers, and polish recommended by resilient floor material manufacturer.
- C. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E648.
- D. Smoke Density: Less than 450 per ASTM E662.
- E. Slip Resistance - Not less than 0.5 when tested with ASTM D2047.

2.3 ELECTROSTATIC DISSIPATIVE TILE:

- A. Basis of Design: See Drawings. Architect approval required.
- B. Tile Standard: ASTM F1344, Class I-B, homogenous rubber tile, through mottled, Grade 1.
- C. Conductivity: ASTM F150, $10^6 < 10^9$ (ohms).
- D. Static Generation: ANSI ESD S97.2, < 20 Volts.
- E. Hardness: 92, measured using Shore, Type A durometer per ASTM D2240.
- F. Wearing Surface: Smooth.
- G. Thickness: 2.0 mm (0.08 inch).

H. SIZE: 610 X 610 MM (24" X 24"). 2.4 LUXURY VINYL TILE:

- A. ASTM F1700, Class III, Printed Film Vinyl Tile, Type B.
- B. Thickness: 2.5 mm (0.098 inch).
- C. Sizes:
 - 1. LVT-1: 6" x 36".
 - 2. LVT-2: 12" x 12".
- D. Wear Layer: 40 mil.

2.5 ADHESIVES:

- A. Provide water resistant type adhesive for flooring, base and accessories as recommended by the manufacturer to suit substrate conditions. VOC content to be less than the 50 grams/L when calculated according to 40 CFR 59 (EPA Method 24). Submit manufacturer's descriptive data, documentation stating physical characteristics, and mildew and germicidal characteristics.

2.6 PRIMER FOR CONCRETE SUBFLOORS:

- A. Provide in accordance with Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

2.7 LEVELING COMPOUND FOR CONCRETE FLOORS:

- A. Provide cementitious products with latex or polyvinyl acetate resins in the mix in accordance with Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

2.8 CLEANERS:

- A. Cleaners: As recommended in writing by floor tile manufacturer.

2.10 EDGE STRIPS:

- A. Basis of Design: See Drawings. Profiles and heights as required for floor transitions. Provide stainless steel types as indicated on the construction documents for both edges and transitions of flooring materials specified.
- B. Provide cold weld at transition from LVT to EDT in lieu of edge strips.

PART 3 - EXECUTION**3.1 ENVIRONMENTAL REQUIREMENTS:**

- A. Maintain flooring materials and areas to receive resilient flooring at a temperature above 20 degrees C (68 degrees F) for three (3) days before application, during application and two (2) days after application, unless otherwise directly by the flooring manufacturer for the flooring being installed. Maintain a minimum temperature of 13 degrees C (55 degrees F) thereafter. Provide adequate ventilation to remove moisture from area and to comply with regulations limiting concentrations of hazardous vapors.
- B. Do not install flooring until building is permanently enclosed and wet construction in or near areas to receive tile materials is complete, dry and cured.

3.2 SUBFLOOR TESTING AND PREPARATION:

- A. Prepare and test surfaces to receive resilient tile and adhesive as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.
 - 1. Remove existing resilient floor and existing adhesive.
- B. Prepare concrete substrates in accordance with ASTM F710.
- C. Perform work regarding removal of flooring and adhesive containing asbestos as specified in Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT

3.3 INSTALLATION:

- A. Install in accordance with manufacturer's instructions for application and installation unless specified otherwise.
- B. Mix tile from at least two containers. An apparent line either of shades or pattern variance is not acceptable.
- C. Tile Layout:
 - 1. If layout is not shown on construction documents, lay tile symmetrically about center of room or space with joints aligned.
 - 2. Vary edge width as necessary to maintain full size tiles in the field, no edge tile to be less than 1/2 the field tile size, except where irregular shaped rooms make it impossible.
 - 3. Place tile pattern in the same direction; do not alternate tiles unless specifically indicated in the construction documents to the contrary.
- D. Application:
 - 1. Adhere floor tile to flooring substrates using a full spread of adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.
 - 2. Scribe, cut, and fit floor tiles to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.
 - 3. Extend floor tiles into toe spaces, door reveals, closets, and similar openings. Extend floor tiles to center of door openings.
 - 4. Roll tile floor with a minimum 45 kg (100 pound) roller.
- E. Seal joints at pipes with sealants in accordance with Section 07 92 00, JOINT SEALANTS.
- F. Installation of Edge Strips:
 - 1. Locate edge strips under center line of doors unless otherwise shown on construction documents.
 - 2. Set edge strips in adhesive.
 - 3. Where tile edge is exposed, butt edge strip to touch along tile edge.
 - 4. Where thin set ceramic tile abuts resilient tile, set edge strip against floor tile and against the ceramic tile edge.
- F. Install cold weld at transition from LVT to EDT in lieu of edge strips.

3.4 CLEANING AND PROTECTION:

- A. Clean adhesive marks on exposed surfaces during the application of resilient materials before the adhesive sets. Exposed adhesive is not acceptable.
- B. Keep traffic off resilient material for a minimum 72 hours after installation.
- C. Clean flooring as recommended in accordance with manufacturer's printed maintenance instructions and within the recommended time frame.
- D. When construction traffic occurs over tile, cover resilient materials with reinforced kraft paper properly secured and maintained until removal is directed by COR. At entrances and where wheeled vehicles or carts are used, cover tile with plywood, hardboard, or particle board over paper, secured and maintained until removal is directed by COR.
- E. When protective materials are removed and immediately prior to acceptance, replace damaged tile and edge strips, re-clean resilient materials.

3.5 LOCATION:

- A. Unless otherwise indicated in construction documents, install tile flooring under areas where casework, and other equipment occur.
- B. Extend tile flooring for room into adjacent closets and alcoves.

- - - E N D - - -

SECTION 09 67 23.20
RESINOUS (EPOXY BASE) WITH VINYL CHIP BROADCAST

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies Resinous (Resinous epoxy base with vinyl chip flake broadcast) flooring:
1. Resinous (epoxy) vinyl chip flake broadcast flooring system.

1.2 RELATED WORK

- A. Concrete and Moisture Vapor Barrier: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- B. Substrate Preparation for Floor Finishes: Section 09 05 16.
- C. Color and location of each type of resinous flooring: See Drawings.
- D. Floor Drains: Division 22, PLUMBING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
1. Description of each product to be provided.
 2. Application and installation instructions.
 3. Maintenance Instructions: Submit manufacturer's written instructions for recommended maintenance practices.
- C. Qualification Data: For Installer.
- D. Sustainable Submittal:
1. Product data for products having recycled content, submit documentation indicating percentages by weight of post-consumer and pre-consumer recycled content.
 - a. Include statements indicating costs for each product having recycled content.
 2. Product data for field applied, interior, paints, coatings, and primers, include printed statement of VOC content indicating compliance with environmental requirements.
- E. Samples:
1. Samples for color and texture selection from manufacturer's full line: For each resinous flooring system required, 6 inches (152 mm) square, applied to a rigid backing by installer for this project.
 2. Sample showing construction from substrate to finish surface in thickness specified, showing color and texture of finished surfaces.

- Finished flooring must match the approved samples in color and texture.
- F. Shop Drawings: Include plans, sections, component details, and attachment to other trades. Indicate layout of the following:
1. Edge configurations.
- G. Certifications and Approvals:
1. Manufacturer's certification of material and substrate compliance with specification.
 2. Manufacturer's approval of installer.
 3. Contractor's certificate of compliance with Quality Assurance requirements.
- H. Warranty: As specified in this section.

1.4 QUALITY ASSURANCE

- A. Manufacture Certificate: Manufacture shall certify that a particular resinous flooring system has been manufactured and in use for a minimum of five (5) years.
- B. Installer Qualifications: Engage an experienced installer (applicator) who is experienced in applying resinous flooring systems similar in material, design, and extent to those indicated for this project for a minimum period of five (5) years, whose work has resulted in applications with a record of successful in-service performance, and who is acceptable to resinous flooring manufacturer.
1. Engage an installer who is certified in writing by resinous flooring manufacturer as qualified to apply resinous flooring systems indicated.
 2. Contractor shall have completed at least ten (10) projects of similar size and complexity. Include list of at least five (5) projects. List must include owner (purchaser); address of installation, contact information at installation project site; and date of installation.
 3. Installer's Personnel: Employ persons trained for application of specified product.
- C. Source Limitations:
1. Obtain primary resinous flooring materials including primers, resins, hardening agents, grouting coats and finish or sealing coats from a single manufacturer.

2. Provide secondary materials, including patching and fill material, joint sealant, and repair material of type and from source recommended by manufacturer of primary materials.
- D. Pre-Installation Conference:
1. Convene a meeting not less than thirty days prior to starting work.
 2. Attendance:
 - a. Contractor
 - b. VA COR
 - c. Manufacturer and Installer's Representative
 3. Review the following:
 - a. Environmental requirements
 - 1) Air and surface temperature
 - 2) Relative humidity
 - 3) Ventilation
 - 4) Dust and contaminants
 - b. Protection of surfaces not scheduled to be coated
 - c. Inspect and discuss condition of substrate and other preparatory work performed
 - d. Review and verify availability of material; installer's personnel, equipment needed
 - e. Design and edge conditions.
 - f. Performance of the coating with chemicals anticipated in the area receiving the resinous (urethane and epoxy mortar/cement) flooring system
 - g. Application and repair
 - h. Field quality control
 - i. Cleaning
 - j. Protection of coating systems
 - k. One-year inspection and maintenance
 - l. Coordination with other work
- E. Manufacturer's Field Services: Manufacturer's representative shall provide technical assistance and guidance for surface preparation and application of resinous flooring systems.
- F. Contractor Job Site Log: Contractor shall document daily; the work accomplished environmental conditions and any other condition event significant to the long term performance of the urethane and epoxy mortar/cement flooring materials installation. The Contractor shall maintain these records for one year after Substantial Completion.

1.5 MATERIAL PACKAGING DELIVERY AND STORAGE

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Protect materials from damage and contamination in storage or delivery, including moisture, heat, cold, direct sunlight, etc.
- C. Maintain temperature of storage area between 60 and 80 degrees F (15 and 26 degrees C).
- D. Keep containers sealed until ready for use.
- E. Do not use materials beyond manufacturer's shelf life limits.
- F. Package materials in factory pre-weighed and in single, easy to manage batches sized for ease of handling and mixing proportions from entire package or packages. No On site weighing or volumetric measurements are allowed.

1.6 PROJECT CONDITIONS

- A. Environmental Limitations: Comply with resinous flooring manufacturer's written instructions for substrate temperature, ambient temperature, moisture, ventilation, and other conditions affecting resinous flooring application.
 - 1. Maintain material and substrate temperature between 65 and 85 degrees F (18 and 30 degrees C) during resinous flooring application and for not less than 24 hours after application.
 - 2. Concrete substrate:
 - a. Resinous flooring applications where moisture testing resulting in readings exceeding limits as defined in this specification under part 3, section 3.4, paragraph B, shall employ an multiple component 15 mil thick system designed to suppress excess moisture in concrete.
 - b. Application at a minimum thickness of 15 mils, over properly prepared concrete substrate as defined in section 3.4.
 - c. Moisture suppression system must meet the design standards as follows:

Property	Test	Value
Tensile Strength	ASTM D638	4,400 psi
Volatile Organic Compound Limits (V.O.C.)	EPA & LEED	25 grams per liter

Permeance	ASTM E96 @ 16mils/ 0.4mm on concrete	0.1 perms
Tensile Modulus	ASTM D638	1.9X10 ⁵ psi
Percent Elongation	ASTM D638	12%
Cure Rate	Per manufactures Data	4 hours Tack free with 24hr recoat window
Bond Strength	ASTM D7234	100% bond to concrete failure

- B. Lighting: Provide permanent lighting or, if permanent lighting is not in place, simulate permanent lighting conditions during resinous flooring application.
- C. Close spaces to traffic during resinous flooring application and for not less than 24 hours after application unless manufacturer recommends a longer period.

1.7 WARRANTY

- A. Work subject to the terms of the Article "Warranty of Construction" FAR clause 52.246-21.
- B. Warranty: Manufacture shall furnish a single, written warranty covering the full assembly (including substrata) for both material and workmanship for an extended period of three (3) full years from date of installation, or provide a joint and several warranty signed on a single document by manufacturer and applicator jointly and severally warranting the materials and workmanship for a period of three (3) full years from date of installation. A sample warranty letter must be included with bid package or bid may be disqualified.

1.8 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. ASTM Standard C722-04 (2012), "Standard Specification for Chemical-Resistant Monolithic Floor Surfacing," ASTM International, West Conshohocken, PA, 2006, DOI: 10.1520/C0722-04R12, www.astm.org.
 - 1. Specification covers the requirements for aggregate-filled, resin-based, monolithic surfacings for use over concrete.

C. ASTM International (ASTM):

C413-18.....	Absorption of Chemical-Resistant Mortars, Grouts, Monolithic Surfacing, and Polymer Concretes
C531-18.....	Linear Shrinkage and Coefficient of Thermal Expansion of Chemical-Resistant Mortars, Grouts, Monolithic Surfacing, and Polymer Concretes
D638-14.....	Tensile Properties of Plastics
D790-17.....	Flexural Properties of Unreinforced and Reinforced Plastics and Electrical Insulating Materials
D2047 (2017).....	Standard Test Method for Static Coefficient of Friction of Polish-Coated Flooring Surfaces as Measured by the James Machine.
D1308-02.....	Effect of Household Chemicals on Clear and Pigmented Organic Finishes
D2240-15e1.....	Rubber Property-Durometer Hardness
D4060-19.....	Abrasion Resistance of Organic Coatings by the Taber Abraser
D4226-19.....	Impact Resistance of Rigid (Poly-Vinyl Chloride) (PVC) Building Products
D4259-18.....	Abrading Concrete to alter the surface profile of the concrete and to remove foreign materials and weak surface laitance
E96/E96M-16).....	Water Vapor Transmission of Materials
F1869-16a.....	Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride
F2170-19a	Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes

PART 2 - PRODUCTS**2.1 SYSTEM DESCRIPTION FOR BROADCAST VINYL CHIP FLAKE**

- A. Basis of Design: See Drawings. Architect approval required.
- B. System Description:
 - 1. Monolithic, multi-component epoxy chemistry resinous flooring system. Primer with broadcast quartz aggregates, High performance multi-component solvent free epoxy undercoat, Vinyl chip flake

broadcast media in desired flake size (1/8"). High performance multi component epoxy and solvent free sealers. System overall thickness 3/16 to 1/4".

- C. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up.
- D. System Components: Verify specific requirements as systems vary by manufacturer. Verify build up layers of broadcast and installation method. Verify compatibility with substrate. Use manufacturer's standard components, compatible with each other and as follows:
 - 1. Primer (primer coat):
 - a. Resin: epoxy.
 - b. Formulation Description: Multiple component high solids.
 - c. Application Method: squeegee, back roll and broadcast.
 - d. Thickness of coat(s): 5 mil.
 - e. Number of Coats: One.
 - 2. Undercoat: (body coat)
 - a. Resin: Epoxy.
 - b. Formulation Description: Pigmented multi-component, high solids.
 - c. Application Method: Notched squeegee and Back roll.
 - d. Number of Coats: One.
 - e. Aggregates: vinyl chip flake broadcast into wet Undercoat.
 - f. Thickness of coat(s): 15 mils.
 - g. Number of Coats: One.
 - 3. Grout Coat:
 - a. Resin: Epoxy.
 - b. Formulation Description: Pigmented multi-component, high solids.
 - c. Application Method: Notched squeegee and Back roll .
 - d. Number of Coats: One.
 - e. Thickness of coat(s): 15 mils.
 - 4. Sealer Coat:
 - a. Resin: Epoxy.
 - b. Formulation Description: Multiple component high solids, no solvent UV stable.
 - c. Type/Finish: Clear Gloss.
 - d. Thickness of coat(s): 2-3 mils.
 - e. Number of Coats: (2) two.
 - f. Application: Squeegee and finish roll.

E. System Characteristics:

1. Color and Pattern: As selected by COR from manufacturer's standard colors.
2. Overall System Thickness: Nominal 3/16 to 1/4", 4.76 to 6.35 mm.
3. Finish: Texture finish.
4. Temperature Range: Systems vary by manufacturer; approximate range from a minimum of 45 to 150 degrees F.

F. Physical Properties:

1. Physical Properties of flooring system when tested as follows:

Property	Test	Value
Tensile Strength	ASTM D638	5,200 psi
Volatile Organic Compound Limits (V.O.C.)	EPA & LEED	Below 100 g/l
Flexural Strength	ASTM D790	4,000 psi
Water Absorption	ASTM C413	0.056%
Coefficient of Friction Dry/slip index wet	ASTM D2047	>.79 dry >.65 wet
Impact Resistance	ASTM D4226	> 160 in. lbs
Abrasion Resistance	ASTM D4060 CS-17	0.03 gm maximum weight loss
Thermal Coefficient of Linear Expansion	ASTM C531	17 x 10 ⁻⁶ in/in °F
Hardness Shore D	ASTM D2240	85 to 90
Bond Strength	ASTM D7234	100% bond to concrete failure

- G. Chemical Resistance in accordance ASTM D1308 - 02(2007) "Standard Test Method for Effect of Household Chemicals on Clear and Pigmented Organic Finishes". ASTM International, West Conshohocken, PA, 2006, DOI: 10.1520/D1308-02R07, www.astm.org. No effect to the following exposures:

1. Acetic acid (5 percent)
2. Ammonium hydroxide (10 percent)
3. Citric Acid (50 percent)
4. Fatty Acid

5. Motor Oil, 20W
6. Hydrochloric acid
7. Salt Water
8. Sodium Chloride
9. Sodium Hypochlorite (5.28 percent)
10. Sodium Hydroxide (10 percent)
11. Sulfuric acid (10 percent)
12. Trisodium phosphate (10 percent)
13. Urine, Feces
14. Hydrogen peroxide (28 percent)
15. Distilled water

2.2 SUPPLEMENTAL MATERIALS

- A. Textured Top Coat: Type recommended or produced by manufacturer of seamless resinous flooring system, type and profile for desired final finish.
- B. Joint Sealant: Type recommended or produced by resinous flooring manufacturer for type of service or joint conditioned indicated.
- C. Waterproof Membrane: Type recommended or produced by manufacturer of resinous floor coatings for type of service and conditions.
- D. Crack Isolation Membrane: Type recommended or produced by manufacturer of resinous flooring for conditions as.
- E. Anti-Microbial Additive: Incorporate anti-microbial chemical additive to prevent growth of most bacteria, algae, fungi, mold, mildew, yeast, etc..
- F. Patching and Fill Material: Resinous product of or approved by resinous coating manufacturer for application indicated. Resinous based materials only. Cementitious or single component product are not expectable.

PART 3 - EXECUTION

3.1 INSPECTION

- A. Examine the areas and conditions where monolithic resinous system with integral base is to be installed with the VA COR.
- B. Moisture Vapor Emission Testing: Perform moisture vapor transmission testing in accordance with ASTM F1869 to determine the MVER of the substrate prior to commencement of the work. See section 3.4, 3.

3.2 PROJECT CONDITIONS

- A. Maintain temperature of rooms (air and surface) where work occurs, between 70- and 90-degrees F (21 and 32 degrees C) for at least 48

hours, before, during, and 24 hours after installation. Maintain temperature at least 70 degrees F (21 degrees C) during cure period.

- B. Maintain relative humidity less than 75 percent.
- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.
- D. Maintain proper ventilation of the area during application and curing time period.
 - 1. Comply with infection control measures of the VA Medical Center.

3.3 INSTALLATION REQUIREMENTS

- A. The manufacturer's instructions for application and installation shall be reviewed with the VA COR for the seamless resinous (urethane and epoxy mortar).
- B. Substrate shall be approved by manufacture technical representative.

3.4 PREPARATION

- A. General: Prepare and clean substrates according to resinous flooring manufacturer's written instructions for substrate indicated. Provide clean, dry, and neutral Ph substrate for resinous flooring application.
- B. Concrete Substrates: Provide sound concrete surfaces free of laitance, glaze, efflorescence, curing compounds, form-release agents, dust, dirt, grease, oil, and other contaminants incompatible with resinous flooring.
 - 1. Prepare concrete substrates as recommended by resinous flooring manufacturer:
 - a. Comply with ASTM D4259 requirements unless manufacturer's written instructions are more stringent.
 - 2. Repair damaged and deteriorated concrete according to resinous flooring manufacturer's written recommendations.
 - 3. Verify that concrete substrates are dry.
 - a. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with application only after substrates have maximum moisture-vapor-emission rate of **3 lb of water/1000 square feet (1.36 kg of water/92.9 square meters)** in 24 hours. Per manufacturers recommendations.
 - b. MVT threshold for monolithic resinous flooring shall not exceed 3 lbs/1000 square feet (0.0001437 kPa) in a 24-hour period.
 - c. When MVT emission exceeds this limit, apply manufacturer's recommended vapor control primer or other corrective measures as

recommended by manufacturer prior to application of flooring or membrane systems.

- d. Perform in situ probe test, ASTM F2170. Proceed with application only after substrates do not exceed a maximum potential equilibrium relative humidity of 85 percent.
- e. Provide a written report showing test placement and results.
- 4. Verify that concrete substrates have neutral Ph and that resinous flooring will adhere to them. Perform tests recommended by manufacturer. Proceed with application only after substrates pass testing.
- C. Resinous Materials: Mix components and prepare materials according to resinous flooring manufacturer's written instructions.
- D. Use patching and fill material to fill holes and depressions in substrates according to manufacturer's written instructions.
- E. Treat control joints and other nonmoving substrate cracks to prevent cracks from reflecting through resinous flooring according to manufacturer's written recommendations. Allowances should be included for flooring manufacturer recommended joint fill material, and concrete crack treatment.

3.5 APPLICATION

- A. General: Apply components of resinous flooring system according to manufacturer's written instructions to produce a uniform, monolithic wearing surface of thickness indicated.
 - 1. Coordinate application of components to provide optimum adhesion of resinous flooring system to substrate, and optimum intercoat adhesion.
 - 2. Cure resinous flooring components according to manufacturer's written instructions. Prevent contamination during application and curing processes.
 - 3. At substrate expansion and isolation joints, provide joint in resinous flooring to comply with resinous flooring manufacturer's written recommendations.
 - a. Apply joint sealant to comply with manufacturer's written recommendations.
- B. Apply Primer: over prepared substrate at manufacturer's recommended spreading rate.

- C. Trowel mortar base: Mix mortar material according to manufacturer's recommended procedures. Climatic and non-climatic resinous flooring systems may vary slightly on mode of application. Application should be based upon the following: Uniformly spread mortar over substrate using a specially designed screed box adjusted to manufacturer's recommended height. Metal trowel (hand or power) single mortar coat in thickness indicated for flooring system, grout to fill substrate voids. When cured, sand to remove trowel marks and roughness.
- D. Broadcast: Immediately broadcast quartz silica aggregate into the primer using manufacturer's spray caster. Strict adherence to manufacturer's installation procedures and coverage rates is imperative.
- E. Under Coat: Mix base material according to manufacturer's recommended procedures. Uniformly spread mixed material over previously primed substrate using manufacturer's installation tool. Roll material with strict adherence to manufacturer's installation procedures and coverage rates.
- F. Broadcast: Immediately broadcast vinyl flakes into the body coat. Strict adherence to manufacturer's installation procedures and coverage rates is imperative. Remove excess un-bonded flakes by lightly brushing and vacuuming the floor surface.
- G. Grout Coat: Mix material according to manufacturer's recommended procedures. Uniformly spread mixed material using manufacturer's installation tool. Roll material with strict adherence to manufacturer's installation procedures and coverage rates.
- H. First Sealer: Mix and apply sealer with strict adherence to manufacturer's installation procedures.
- I. Second Sealer: Lightly sand first sealer coat. Mix and apply second sealer coat with strict adherence to manufacturer's installation procedures.

3.6 TOLERANCE

- A. From line of plane: Maximum 1/8 inch (3.18 mm) in total distance of flooring and base. Broadcast resinous flooring system will contour substrate. Deviation and tolerance are subject to concrete tolerance.
- B. From radius of cove: Maximum of 1/8 inch (3.18 mm) plus or 1/16-inch (1.59 mm) minus.

3.7 ENGINEERING DETAILS

- A. Chase edges to "lock" the flooring system into the concrete substrate along lines of termination.
- B. Penetration Treatment: Lap and seal resinous system onto the perimeter of the penetrating item by bridging over compatible elastomer at the interface to compensate for possible movement.
- C. Treat floor drains by chasing the flooring system to lock in place at point of termination.
- D. Treat control joints to bridge potential cracks and to maintain monolithic protection. Treat cold joints and construction joints to bridge potential cracks and to maintain monolithic protection on horizontal and vertical surfaces as well as horizontal and vertical interfaces.
- E. Discontinue Resinous floor system at vertical and horizontal contraction and expansion joints by installing backer rod and compatible sealant after coating installation is completed. Provide sealant type recommended by manufacturer for traffic conditions and chemical exposures to be encountered.

3.8 CURING, PROTECTION AND CLEANING

- A. Cure resinous flooring materials in compliance with manufacturer's directions, taking care to prevent contamination during stages of application and prior to completion of curing process.
- B. Close area of application for a minimum of 24 hours.
- C. Protect resinous flooring materials from damage and wear during construction operation.
 - 1. Cover flooring with kraft type paper.
 - 2. Optional 6 mm (1/4 inch) thick hardboard, plywood, or particle board where area is in foot or vehicle traffic pattern, rolling or fixed scaffolding and overhead work occurs.
- D. Remove temporary covering and clean resinous flooring just prior to final inspection. Use cleaning materials and procedures recommended by resinous flooring manufacturer.

- - - E N D - - -

**SECTION 09 68 00
CARPETING**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Section specifies carpet, molding, adhesives, and other items required for complete installation.

1.2 RELATED WORK

- A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Sustainable Design Requirements.
- B. Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES: Testing of Concrete Floors Before Installation.
- C. Drawings: Manufacturer, Color and Style of Carpet and Edge Strip.
- D. Section 09 65 13, RESILIENT BASE AND ACCESSORIES: Resilient Wall Base.

1.3 QUALITY ASSURANCE

- A. Installer Qualifications: A company specializing in carpet installation with a minimum three (3) years' experience and employing experienced flooring installers who have retained, and currently hold, an INSTALL Certification, or a certification from a comparable certification program, and a valid OSHA 10 certification.
 - 1. Installers to be certified by INSTALL or a comparable certification program with the following minimum criteria:
 - a. US Department of Labor approved four (4) year apprenticeship program, 160 hours a year.
 - b. Career long training.
 - c. Manufacturer endorsed training.
 - d. Fundamental journeyman skills certification.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals as described below:
 - 1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
- C. Product Data:
 - 1. Manufacturer's catalog data and printed documentation stating physical characteristics, durability, resistance to fading and flame resistance characteristics for each type of carpet material and installation accessory.

2. Manufacturer's printed installation instructions for the carpet, including preparation of installation substrate, seaming techniques and recommended adhesives and tapes.

D. Samples:

1. Carpet: "Production Quality" samples 305 x 305 mm (12 x 12 inches) of carpets, showing quality, pattern and color specified in Section 09 06 00, SCHEDULE FOR FINISHES.
2. Floor Edge Strip (Molding): 152 mm (6 inches) long of each color and type specified.

E. Shop Drawings: Installers layout plan showing seams and cuts for sheet carpet and carpet module.

F. Maintenance Data: Carpet manufacturer's maintenance instructions describing recommended type of cleaning equipment and material, spotting and cleaning methods and cleaning cycles.

G. Installer's Qualifications.

H. Manufacturer's warranty.

1.5 DELIVERY AND STORAGE

- A. Deliver carpet in manufacturer's original wrappings and packages clearly labeled with manufacturer's brand name, size, dye lot number and related information. Transport carpet to job site in a manner that prevents damage and distortion that might render it unusable. When bending or folding is unavoidable for delivery purposes, unfold carpet and lay flat immediately.
- B. Deliver adhesives in containers clearly labeled with manufacturer's brand name, number, installation instructions, safety instructions and flash points.
- C. Store in a clean, dry, well-ventilated area, protected from damage and soiling. Before installation, acclimate carpet to the atmospheric conditions of the areas in which it will be installed for 2 days prior to installation

1.6 ENVIRONMENTAL REQUIREMENTS

- A. Maintain areas in which carpeting is to be installed at a temperature between 18 - 35 degrees C (65 - 95 degrees F) with a maximum relative humidity of 65 percent for two (2) days before installation, during installation and for three (3) days after installation.
- B. Minimum Substrate Surface Temperature: 18 degrees C (65 degrees F) at time of installation.

- C. Three (3) days after installation, maintain minimum temperature of 10 degrees C (50 degrees F) for the duration of the contract.

1.7 WARRANTY

- A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".
- B. Manufacturer Warranty: Manufacturer shall warranty their carpet for a minimum of ten (10) years from date of installation and final acceptance by the Government. Submit manufacturer warranty.

1.8 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
ANSI/NSF 140-10.....Sustainable Carpet Assessment Standard
- C. American Association of Textile Chemists and Colorists (AATCC):
16-04.....Colorfastness to Light
134-11.....Electric Static Propensity of Carpets
165-08.....Colorfastness to Crocking: Textile Floor Coverings-AATCC Crockmeter Method
174-11.....Antimicrobial Activity Assessment of New Carpets
- D. ASTM International (ASTM):
D1335-17e1.....Tuft Bind of Pile Yarn Floor Coverings
D3278-20.....Flash Point of Liquids by Small Scale Closed-Cup Apparatus
D5116-17.....Determinations of Organic Emissions from Indoor Materials/Products
D5252-20.....Operation of the Hexapod Tumble Drum Tester
D5417-16.....Operation of the Vettermann Drum Tester
E648-19ae1.....Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source
- E. Code of Federal Regulation (CFR):
40 CFR 59.....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating
- F. The Carpet and Rug Institute (CRI):
CIS.....Carpet Installation Standard
- G. International Standards and Training Alliance (INSTALL)

H. International Organization for Standardization (ISO):

2551-81.....Machine-Made Textile Floor Coverings

I. U.S. Consumer Product and Safety Commission (CPSC):

16 CFR 1630.....Surface Flammability of Carpets and Rugs

PART 2 - PRODUCTS

2.1 CARPET

A. Basis of Design: See Drawings. Architect approval required.

B. Physical Characteristics:

1. Carpet free of visual blemishes, streaks, poorly dyed areas, fuzzing of pile yarn, spots or stains and other physical and manufacturing defects.

2. Type:

a. Carpet Construction: Tufted.

b. Carpet Type: Modular tile (24 by 24 inch square) with 0.15 percent growth/shrink rate in accordance with ISO 2551.

c. Pile Type: Level-loop. Pile type and thickness must conform to ADA requirements.

d. Pile Fiber: Commercial 100 percent branded (federally registered trademark), nylon continuous filament.

3. Static Control: Provide static control to permanently regulate static buildup to less than 3.5 kV when tested at 20 percent relative humidity and 21 degrees C (70 degrees F) in accordance with AATCC 134.

4. Backing Materials: Provide backing for release adhesive for modular tile installations. For healthcare installations, provide impervious moisture backing.

a. Modular Tile:

1) Primary Backing/Backcoating: Manufacturer's standard composite materials.

2) Secondary Backing: Manufacturer's standard material.

5. Appearance Retention Rating (ARR): Carpet to be tested and have the minimum 3.5 - 4.0 severe ARR when tested in accordance with either the ASTM D5252 (Hexapod) or ASTM D5417 (Vettermann) test methods using the number of cycles for short and long term tests as specified in the ASTM standard.

6. Tuft Bind: Comply with ASTM D1335 for tuft bind force required to pull a tuft or loop free from carpet backing with a minimum 36 N (8 pound) average force for modular carpet tile.

7. Colorfastness to Crocking: Dry and wet crocking and water bleed, comply with AATCC 165 Color Transference Chart for colors, minimum class 4 rating.
8. Colorfastness to Light (AATCC 16, Option 3): Color change between the exposed and unexposed carpet areas equivalent to a minimum of Grade 4 on the Gray Scale for Color Change after an exposure of 40 AFU (AATCC fading units) for all specified colors.
9. Delamination Strength: Minimum of 440 N/m (2.5 lb./inch) between secondary backing.
10. Flammability and Critical Radiant Flux Requirements:
 - a. Comply with 16 CFR 1630.
 - b. Test Carpet in accordance with ASTM E648.
 - c. Class I: Minimum critical radiant flux of 0.45 watts per square centimeter (2.9 watts per square inch).
 - d. Carpet in corridors, exits and Medical Facilities to be Class I.
11. Average Pile Yarn Density (APYD):
 - a. Corridors, lobbies, entrances, common areas or multipurpose rooms, open offices, waiting areas and dining areas: Minimum APYD 6000.
 - b. Other areas: Minimum APYD 4000.
12. VOC Limits: Use carpet that complies with the following limits for VOC content when tested according to ASTM D5116:
 - a. Carpet, Total VOCs: 0.5 mg/square meter x hour
 - b. Carpet, 4-PC (4-Phenylcyclohexene): 0.05 mg/square meter x hour
 - c. Carpet, Formaldehyde: 0.05 mg/square meter x hour.
 - d. Carpet, Styrene: 0.4 mg/square meter x hour

2.2 ADHESIVE AND CONCRETE PRIMER

- A. Provide water resistant, mildew resistant, nonflammable, and nonstaining adhesives and concrete primers for carpet installation. Provide release adhesive for modular tile carpet as recommended by the carpet manufacturer. Provide adhesives flashpoint of minimum 60 degrees C (140 degrees F) in accordance with ASTM D3278. Materials are to have a VOC maximum of 50 g/L when calculated according to 40 CFR 59, (EPA Method 24).

2.3 SEAMING TAPE

- A. Provide tape for seams as recommended by the carpet manufacturer for the type of seam used in installation. Seam sealant is to have a maximum VOC content of 50 g/L when calculated according to 40 CFR 59,

(EPA Method 24). Do not use sealants that contain 1,1,1-trichloroethane or toluene.

2.4 EDGE STRIPS (MOLDING)

- A. Basis of Design: See Drawings. Architect approval required.
- B. Metal:
 - 1. Profiles and heights as required for floor transitions.

PART 3 - EXECUTION

3.1 SURFACE PREPARATION

- A. Contractor to prepare and test surfaces to receive carpet and adhesives as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

3.2 GENERAL INSTALLATION

- A. Isolate area of installation from rest of building.
- B. Perform all work by manufacturer's approved installers. Conduct installation in accordance with the manufacturer's printed instructions and CRI CIS.
- C. Protect edges of carpet meeting hard surface flooring with molding and install in accordance with the molding manufacturer's printed instructions.
- D. Follow ventilation, personal protection, and other safety precautions recommended by the adhesive manufacturer. Continue ventilation during installation and for at least three (3) days following installation.
- E. Do not permit traffic or movement of furniture or equipment in carpeted area for 24 hours after installation.
- F. Complete other work which would damage the carpet prior to installation of carpet.
- G. Follow carpet manufacturer's recommendations for matching pattern and texture directions.
- H. Cut openings in carpet where required for installing equipment, pipes, outlets, and penetrations. Bind or seal cut edge of sheet carpet. Use additional adhesive to secure carpets around pipes and other vertical projections.

3.3 MODULAR TILE INSTALLATION

- A. Install per CRI CIS, Adhesive Application.
- B. Lay carpet modules with pile in same direction unless specified otherwise.
- C. Install carpet modules so that cleaning methods and solutions do not cause dislocation of modules.

- D. Lay carpet modules uniformly to provide tight flush joints free from movement when subject to traffic.

3.4 EDGE STRIPS INSTALLATION

- A. Install edge strips over exposed carpet edges adjacent to uncarpeted finish flooring.
- B. Set metal strips in adhesive.

3.5 PROTECTION AND CLEANING

- A. Once a carpet installation is complete, clean up scrap materials and debris, and vacuum the area, using manufacturer-approved equipment. Inspect seams carefully for evenness and protruding backing yarns, and inspect the perimeter of the installation for an acceptable finished appearance.
- B. Protect installed carpet if furniture is being moved, by laying plywood, fiberboard or porous non-staining sheeting material for minimum time practical. Based on manufacturer guidelines, protect carpet from rolling or foot traffic. Protect against other materials or renovation or construction activities, including dust, debris, paint, contractor traffic, until it is ready for its final use.
- C. Do not move furniture or equipment on unprotected carpeted surfaces.
- D. Just before final acceptance of work, remove protection and vacuum carpet clean.

- - - E N D - - -

SECTION 09 91 00
PAINTING

PART 1 - GENERAL

1.1 DESCRIPTION

A. Work of this Section includes all labor, materials, equipment, and services necessary to complete the painting and finishing as shown on the construction documents and/or specified herein, including, but not limited to, the following:

1. Prime coats which may be applied in shop under other sections.
2. Prime painting unprimed surfaces to be painted under this Section.
3. Painting items furnished with a prime coat of paint, including touching up of or repairing of abraded, damaged or rusted prime coats applied by others.
4. Painting ferrous metal (except stainless steel) exposed to view.
5. Painting galvanized ferrous metals exposed to view.
6. Painting gypsum drywall exposed to view.
7. Painting of wood exposed to view, except items which are specified to be painted or finished under other Sections of these specifications. Back painting of all wood in contact with concrete, masonry or other moisture areas.
8. Painting pipes, pipe coverings, conduit, ducts, insulation, hangers, supports and other mechanical and electrical items and equipment exposed to view.
9. Painting surfaces above, behind or below grilles, gratings, diffusers, louvers lighting fixtures, and the like, which are exposed to view through these items.
10. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.
11. Incidental painting and touching up as required to produce proper finish for painted surfaces, including touching up of factory finished items.
12. Painting of any surface not specifically mentioned to be painted herein or on construction documents, but for which painting is obviously necessary to complete the job, or work which comes within the intent of these specifications, is to be included as though specified.

1.2 RELATED WORK

A. Section 01 35 26, SAFETY REQUIREMENTS: Activity Hazard Analysis.

- B. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Sustainable Design Requirements.
- C. Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL: Lead Paint Removal.
- D. Section 04 05 13, MASONRY MORTARING: Masonry Repairs.
- E. Section 04 05 16, MASONRY GROUTING: Masonry Repairs.
- F. Division 05 METALS: Shop prime painting of steel and ferrous metals.
- G. Division 08 OPENINGS: Shop prime painting of steel and ferrous metals.
- H. Section 08 14 00, INTERIOR WOOD DOORS: Prefinished flush doors with transparent finishes.
- I. See Drawings: Type of Finish, Color, and Gloss Level of Finish Coat.
- J. Section 09 96 59, SPECIALTY GLAZED COATINGS: Glazed wall surfacing or tile like coatings.
- K. Division 14 CONVEYING EQUIPMENT: Shop prime painting of steel and ferrous metals.
- L. Division 21 FIRE SUPPRESSION: Shop prime painting of steel and ferrous metals.
- M. Division 22 PLUMBING: Shop prime painting of steel and ferrous metals.
- N. Division 23 HEATING; VENTILATION AND AIR-CONDITIONING: Shop prime painting of steel and ferrous metals.
- O. Division 26 ELECTRICAL: Shop prime painting of steel and ferrous metals.
- P. Division 27 COMMUNICATIONS: Shop prime painting of steel and ferrous metals.
- Q. Division 28 ELECTRONIC SAFETY AND SECURITY: Shop prime painting of steel and ferrous metals.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals as described below:
 - 1. Volatile organic compounds per volume as specified in
PART 2 - PRODUCTS.
- C. Manufacturer's Literature and Data:
 - 1. Before work is started, or sample panels are prepared, submit manufacturer's literature and technical data.
- D. Sample Panels:
 - 1. After painters' materials have been approved and before work is started, submit sample panels showing each type of finish and color specified.

2. Panels to Show Color: Composition board, 100 x 250 mm (4 x 10 inch).
3. Panel to Show Transparent Finishes: Wood of same species and grain pattern as wood approved for use, 100 x 250 mm (4 x 10 inch face) minimum, and where both flat and edge grain will be exposed, 250 mm (10 inches) long by sufficient size, 50 x 50 mm (2 x 2 inch) minimum or actual wood member to show complete finish.
4. Attach labels to panel stating the following:
 - a. Manufacturers name and product number of paints used.
 - b. Specification code number specified in Section 09 06 00, SCHEDULE FOR FINISHES.
 - c. Product type, color, and gloss level.
 - d. VA project title, VA project number, and VA contract number.
5. Strips showing not less than 50 mm (2 inch) wide strips of undercoats and 100 mm (4 inch) wide strip of finish coat.

1.4 DELIVERY AND STORAGE

- A. Deliver materials to site in manufacturer's sealed container marked to show following:
 1. Name of manufacturer.
 2. Product type.
 3. Batch number.
 4. Instructions for use.
 5. Safety precautions.
- B. In addition to manufacturer's label, provide a label legibly printed as following:
 1. Federal Specification Number, where applicable, and name of material.
 2. Surface upon which material is to be applied.
 3. Specify Coat Types: Prime; body; finish; etc.
- C. Maintain space for storage, and handling of painting materials and equipment in a ventilated, neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.
- D. Store materials at site at least 24 hours before using, at a temperature between 7 and 30 degrees C (45 and 85 degrees F).

1.5 QUALITY ASSURANCE

- A. Qualification of Painters: Use only qualified journeyman painters for the mixing and application of paint on exposed surfaces. Submit evidence that key personnel have successfully performed surface preparation and application of coating on a minimum of three (3) similar projects within the past three (3) years.

- B. Paint Coordination: Provide finish coats which are compatible with the prime paints used. Review other Sections of these specifications in which prime paints are to be provided to ensure compatibility of the total coatings system for the various substrates. Upon request from other subcontractors, furnish information on the characteristics of the finish materials proposed to be used, to ensure that compatible prime coats are used. Provide barrier coats over incompatible primers or remove and re-prime as required. Notify the Contracting Officer Representative (COR) in writing of any anticipated problems using the coating systems as specified with substrates primed by others.

1.6 REGULATORY REQUIREMENTS

- A. Paint materials are to conform to the restrictions of the local Environmental and Toxic Control jurisdiction.
1. Volatile Organic Compounds (VOC) Emissions Requirements: Field-applied paints and coatings that are inside the waterproofing system to not exceed limits of authorities having jurisdiction.
 2. Lead-Based Paint:
 - a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.
 - b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.
 - c. Do not use coatings having a lead content over 0.06 percent by weight of non-volatile content.
 - d. For lead-paint removal, see Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
 3. Asbestos: Provide materials that do not contain asbestos.
 4. Chromate, Cadmium, Mercury, and Silica: Provide materials that do not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
 5. Human Carcinogens: Provide materials that do not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
 6. Use high performance acrylic paints in place of alkyd paints.

1.7 SAFETY AND HEALTH

- A. Apply paint materials using safety methods and equipment in accordance with the following:

1. Comply with applicable Federal, State, and local laws and regulations, and with the ACCIDENT PREVENTION PLAN, including the Activity Hazard Analysis (AHA) as specified in Section 01 35 26, SAFETY REQUIREMENTS. The AHA is to include analyses of the potential impact of painting operations on painting personnel and on others involved in and adjacent to the work zone.
- B. Safety Methods Used During Paint Application: Comply with the requirements of SSPC PA Guide 10.
- C. Toxic Materials: To protect personnel from overexposure to toxic materials, conform to the most stringent guidance of:
 1. The applicable manufacturer's Material Safety Data Sheets (MSDS) or local regulation.
 2. 29 CFR 1910.1000.
 3. ACHIH-BKLT and ACGHI-DOC, threshold limit values.

1.8 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. American Conference of Governmental Industrial Hygienists (ACGIH):
 - ACGIH TLV-BKLT-2012.....Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)
 - ACGIH TLV-DOC-2012.....Documentation of Threshold Limit Values and Biological Exposure Indices, (Seventh Edition)
- C. ASME International (ASME):
 - A13.1-07(R2013).....Scheme for the Identification of Piping Systems
- D. Code of Federal Regulation (CFR):
 - 40 CFR 59.....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating
- E. Commercial Item Description (CID):
 - A-A-1272A.....Plaster Gypsum (Spackling Compound)
- F. Federal Specifications (Fed Spec):
 - TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For Waterproofing Concrete and Masonry Walls) (CEP)
- G. Master Painters Institute (MPI):
 - 1.....Aluminum Paint
 - 5.....Exterior Alkyd Wood Primer

- 7.....Exterior Oil Wood Primer
- 9.....Exterior Alkyd Enamel MPI Gloss Level 6
- 11.....Exterior Latex, Semi-Gloss
- 18.....Organic Zinc Rich Primer

- 31.....Polyurethane, Moisture Cured, Clear Gloss
- 36.....Knot Sealer
- 45.....Interior Primer Sealer
- 47.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5
- 57.....Varnish, Interior, Polyurethane, Oil Modified,
Satin
- 59.....Interior/Exterior Alkyd Porch & Floor Enamel, Low
Gloss
- 68.....Interior/ Exterior Latex Porch & Floor Paint,
Gloss
- 90.....Interior Wood Stain, Semi-Transparent
- 91.....Wood Filler Paste
- 94.....Exterior Alkyd, Semi-Gloss
- 95.....Fast Drying Metal Primer
- 134.....Galvanized Water Based Primer
- 135.....Non-Cementitious Galvanized Primer
- 146.....Latex, Interior, Institutional Low Odor/VOC, (MPI
Gloss Level 4)
- 149.....Primer Sealer Interior Institutional Low Odor/VOC
- 153.....Light Industrial Coating, Interior, Water-based,
(MPI Gloss Level 5)

- H. Society for Protective Coatings (SSPC):
 - SSPC SP 1-82(R2004).....Solvent Cleaning
 - SSPC SP 2-82(R2004).....Hand Tool Cleaning
 - SSPC SP 3-28(R2004).....Power Tool Cleaning
 - SSPC SP 10/NACE No.2.....Near-White Blast Cleaning
 - SSPC PA Guide 10.....Guide to Safety and Health Requirements
- I. U.S. National Archives and Records Administration (NARA):
 - 29 CFR 1910.1000.....Air Contaminants
- J. Underwriter's Laboratory (UL)

PART 2 - PRODUCTS**2.1 MATERIALS:**

- A. Conform to the coating specifications and standards referenced in PART 3. Submit manufacturer's technical data sheets for specified coatings and solvents.

2.2 PAINT PROPERTIES:

- A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.
- B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.
- C. Provide undercoat paint produced by the same manufacturer as the finish coats. Use only thinners approved by the paint manufacturer and use only to recommended limits.
- D. VOC Content: For field applications that are inside the weatherproofing system, paints and coating to comply with VOC content limits of authorities having jurisdiction and the following VOC content limits:
 - 1. Flat Paints and Coatings: 50 gram/liter.
 - 2. Non-flat Paints and Coatings: 150 gram/liter.
 - 3. Primers, Sealers, and Undercoaters: 200 gram/liter.
 - 4. Anticorrosive and Antirust Paints applied to Ferrous Metals: 250 gram/liter.
 - 5. Zinc-Rich Industrial Maintenance Primers: 340 gram/liter.
 - 6. Shellacs, Clear: 730 gram/liter.
 - 7. Shellacs, Pigmented: 550 gram/liter.
- E. VOC test method for paints and coatings is to be in accordance with 40 CFR 59 (EPA Method 24). Part 60, Appendix A with the exempt compounds' content determined by Method 303 (Determination of Exempt Compounds) in the South Coast Air Quality Management District's (SCAQMD) "Laboratory Methods of Analysis for Enforcement Samples" manual.

2.3 PLASTIC TAPE:

- A. Pigmented vinyl plastic film in colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES or specified.
- B. Pressure sensitive adhesive back.
- C. Widths as shown on construction documents.

2.4 BIOBASED CONTENT

- A. Paint products shall comply with following bio-based standards for biobased materials:

Material Type	Percent by Weight
Interior Paint	20 percent biobased material
Interior Paint- Oil Based and Solvent Alkyd	67 percent biobased material
Exterior Paint	20 percent biobased material
Wood & Concrete Stain	39 percent biobased content
Polyurethane Coatings	25 percent biobased content
Wood & Concrete Sealer- Penetrating Liquid	79 percent biobased content

- B. The minimum-content standards are based on the weight (not the volume) of the material.

PART 3 - EXECUTION**3.1 JOB CONDITIONS:**

- A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.
1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
 2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each day's work.
- B. Atmospheric and Surface Conditions:
1. Do not apply coating when air or substrate conditions are:
 - a. Less than 3 degrees C (5 degrees F) above dew point.
 - b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the COR and the product manufacturer. Under no circumstances are application conditions to exceed manufacturer recommendations.
 - c. When the relative humidity exceeds 85 percent; or to damp or wet surfaces; unless otherwise permitted by the paint manufacturer's printed instructions.
 2. Maintain interior temperatures until paint dries hard.
 3. Do no exterior painting when it is windy and dusty.
 4. Do not paint in direct sunlight or on surfaces that the sun will warm.

5. Apply only on clean, dry and frost-free surfaces except as follows:
 - a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces only when allowed by manufacturer's printed instructions.
 - b. Concrete and masonry when permitted by manufacturer's recommendations, dampen surfaces to which water thinned acrylic and cementitious paints are applied with a fine mist of water on hot dry days to prevent excessive suction and to cool surface.
6. Varnishing:
 - a. Apply in clean areas and in still air.
 - b. Before varnishing vacuum and dust area.
 - c. Immediately before varnishing wipe down surfaces with a tack rag.

3.2 INSPECTION:

- A. Examine the areas and conditions where painting and finishing are to be applied and correct any conditions detrimental to the proper and timely completion of the work. Do not proceed with the work until unsatisfactory conditions are corrected to permit proper installation of the work.

3.3 GENERAL WORKMANSHIP REQUIREMENTS:

- A. Application may be by brush or roller. Spray application only upon acceptance from the COR in writing.
- B. Furnish to the COR a painting schedule indicating when the respective coats of paint for the various areas and surfaces will be completed. This schedule is to be kept current as the job progresses.
- C. Protect work at all times. Protect all adjacent work and materials by suitable covering or other method during progress of work. Upon completion of the work, remove all paint and varnish spots from floors, glass and other surfaces. Remove from the premises all rubbish and accumulated materials of whatever nature not caused by others and leave work in a clean condition.
- D. Remove and protect hardware, accessories, device plates, lighting fixtures, and factory finished work, and similar items, or provide in place protection. Upon completion of each space, carefully replace all removed items by workmen skilled in the trades involved.
- E. When indicated to be painted, remove electrical panel box covers and doors before painting walls. Paint separately and re-install after all paint is dry.

- F. Materials are to be applied under adequate illumination, evenly spread and flowed on smoothly to avoid runs, sags, holidays, brush marks, air bubbles and excessive roller stipple.
- G. Apply materials with a coverage to hide substrate completely. When color, stain, dirt or undercoats show through final coat of paint, the surface is to be covered by additional coats until the paint film is of uniform finish, color, appearance and coverage, at no additional cost to the Government.
- H. All coats are to be dry to manufacturer's recommendations before applying succeeding coats.

3.4 SURFACE PREPARATION:

A. General:

1. The Contractor shall be held wholly responsible for the finished appearance and satisfactory completion of painting work. Properly prepare all surfaces to receive paint, which includes cleaning, sanding, and touching-up of all prime coats applied under other Sections of the work. Broom clean all spaces before painting is started. All surfaces to be painted or finished are to be completely dry, clean and smooth.
2. See other sections of specifications for specified surface conditions and prime coat.
3. Perform preparation and cleaning procedures in strict accordance with the paint manufacturer's instructions and as herein specified, for each particular substrate condition.
4. Clean surfaces before applying paint or surface treatments with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry. Schedule the cleaning and painting so that dust and other contaminants from the cleaning process will not fall in wet, newly painted surfaces.
5. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
 - a. Wood: 15 percent.
 - b. Gypsum Board: 12 percent.

B. Wood:

1. Includes existing exterior and interior wood doors, windows, and trim to be repainted or refinished.
2. Sand to a smooth even surface and then dust off.

3. Sand surfaces showing raised grain smooth between each coat.
4. Wipe surface with a tack rag prior to applying finish.
5. Surface painted with an opaque finish (exterior wood to be painted):
 - a. Coat knots, sap and pitch streaks with MPI 36 (Knot Sealer) before applying paint.
 - b. Apply two coats of MPI 36 (Knot Sealer) over large knots.
6. After application of prime or first coat of stain, fill cracks, nail and screw holes, depressions and similar defects with wood filler paste. Sand the surface to make smooth and finish flush with adjacent surface.
7. Before applying finish coat, reapply wood filler paste if required, and sand surface to remove surface blemishes. Finish flush with adjacent surfaces.
8. Fill open grained wood such as oak, walnut, ash and mahogany with MPI 91 (Wood Filler Paste), colored to match wood color.
 - a. Thin filler in accordance with manufacturer's instructions for application.
 - b. Remove excess filler, wipe as clean as possible, dry, and sand as specified.

C. Ferrous Metals:

1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 (Hand Tool Cleaning) and SSPC-SP 3 (Power Tool Cleaning).
3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with TT-F-322D (Filler, Two-Component Type, For Dents, Small Holes and Blow-Holes). Finish flush with adjacent surfaces.
 - a. Fill flat head countersunk screws used for permanent anchors.
 - b. Do not fill screws of item intended for removal such as glazing beads.
4. Spot prime abraded and damaged areas in shop prime coat which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.

5. Spot prime abraded and damaged areas which expose bare metal of factory finished items with paint as recommended by manufacturer of item.
- D. Zinc-Coated (Galvanized) Metal, Aluminum, Copper and Copper Alloys
Surfaces Specified Painted:
 1. Clean surfaces to remove grease, oil and other deterrents to paint adhesion in accordance with SSPC-SP 1 (Solvent Cleaning).
 2. Spot coat abraded and damaged areas of zinc-coating which expose base metal on hot-dip zinc-coated items with MPI 18 (Organic Zinc Rich Coating). Prime or spot prime with MPI 134 (Waterborne Galvanized Primer) or MPI 135 (Non-Cementitious Galvanized Primer) depending on finish coat compatibility.
- E. Gypsum Board:
 1. Remove efflorescence, loose and chalking plaster or finishing materials.
 2. Remove dust, dirt, and other deterrents to paint adhesion.
 3. Fill holes, cracks, and other depressions with CID-A-A-1272A finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

3.5 PAINT PREPARATION:

- A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
- B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.
- C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.
- D. Mix two (2) component and two (2) part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.
- E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

3.6 APPLICATION:

- A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.
- B. Unless otherwise specified, apply paint in three (3) coats; prime, body, and finish. When two (2) coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.

- C. Apply each coat evenly and cover substrate completely.
- D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by COR.
- E. Apply by brush or roller. Spray application for new or existing occupied spaces only upon approval by acceptance from COR in writing.
 - 1. Apply painting materials specifically required by manufacturer to be applied by spraying.
 - 2. In new construction and in existing occupied spaces, where paint is applied by spray, mask or enclose with polyethylene, or similar air tight material with edges and seams continuously sealed including items specified in "Building and Structural Work Field Painting"; "Work not Painted"; motors, controls, telephone, and electrical equipment, fronts of sterilizes and other recessed equipment and similar prefinished items.
- F. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

3.7 PRIME PAINTING:

- A. After surface preparation, prime surfaces before application of body and finish coats, except as otherwise specified.
- B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.
- C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.
- D. Prime rabbets for stop and face glazing of wood, and for face glazing of steel.
- E. Wood:
 - 1. Includes existing exterior wood balconies, balcony floors, doors, windows, and trim to be repainted/refinished.
 - 2. Use same kind of primer specified for exposed face surface.
 - a. Exterior wood: MPI 7 (Exterior Oil Wood Primer) for new construction and MPI 5 (Exterior Alkyd Wood Primer) for repainting bare wood primer.
 - b. Transparent finishes as specified under "Transparent Finishes on Wood Except Floors Article".

3. Apply one (1) coat of primer MPI 7 (Exterior Oil Wood Primer) or MPI 5 (Exterior Alkyd Wood Primer) as soon as delivered to site to surfaces of unfinished woodwork, except concealed surfaces of shop fabricated or assembled millwork and surfaces specified to have varnish, stain or natural finish.
 4. Back prime and seal ends of exterior woodwork, and edges of exterior plywood specified to be finished.
- F. Metals except boilers, incinerator stacks, and engine exhaust pipes:
1. Steel and iron: MPI 95 (Fast Drying Metal Primer).
 2. Zinc-coated steel and iron: MPI 134 (Waterborne Galvanized Primer) or MPI 135 (Non-Cementitious Galvanized Primer).
 3. Aluminum scheduled to be painted: MPI 95 (Fast Drying Metal Primer).
 4. Copper and copper alloys scheduled to be painted: MPI 95 (Fast Drying Metal Primer).
 5. Machinery not factory finished: MPI 9 (Exterior Alkyd Enamel).
 6. Asphalt coated metal: MPI 1 (Aluminum Paint).
- G. Gypsum Board:
1. Use MPI 149 Primer Sealer Interior Institutional Low Odor/VOC.
 2. Use MPI 45 (Interior Primer Sealer) shower and bathrooms.

3.8 EXTERIOR FINISHES:

- A. Apply following finish coats where specified in Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Wood:
1. Includes existing exterior wood balconies, balcony floors, doors, windows, and trim to be repainted.
 2. Do not apply finish coats on surfaces concealed after installation, top and bottom edges of wood doors and sash, or on edges of wood framed insect screens.
 3. Two (2) coats of MPI 11 (Exterior Latex, Semi-Gloss) on exposed surfaces.
 4. Two (2) coats of MPI 59 Interior/Exterior Alkyd Porch & Floor Enamel, Low Gloss on balcony wood floors.
- C. Steel and Ferrous Metal:
1. Two (2) coats of MPI 9 (Exterior Alkyd Enamel, Gloss) on exposed surfaces, except on surfaces over 94 degrees C (201 degrees F).
- D. Machinery without factory finish except for primer: One (1) coat MPI 9 (Exterior Alkyd Enamel).

3.9 INTERIOR FINISHES:

- A. Apply following finish coats over prime coats in spaces or on surfaces identified below or on Drawings..
 - B. Metal Work:
 - 1. Apply to exposed surfaces.
 - 2. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.
 - 3. Ferrous Metal, Galvanized Metal, and Other Metals Scheduled:
 - a. Apply two (2) coats of MPI 153 Light Industrial Coating, Interior, Water-Based, Semi-Gloss, MPI Gloss Level 5 unless specified otherwise.
 - b. Machinery: One (1) coat MPI 9 (Exterior Alkyd Enamel).
 - c. Asphalt Coated Metal: One (1) coat MPI 1 (Aluminum Paint).
 - C. Gypsum Board:
 - 1. Two (2) coats of MPI 146 (Latex, Interior, Institutional Low Odor/VOC, MPI Gloss Level 4).
 - D. Wood:
 - 1. Includes existing interior painted wood doors, windows, and trim to be stripped and refinished.
 - 2. Sanding:
 - a. Use 220-grit sandpaper.
 - b. Sand sealers and varnish between coats.
 - c. Sand enough to scarify surface to assure good adhesion of subsequent coats, to level roughly applied sealer and varnish, and to knock off "whiskers" of any raised grain as well as dust particles.
 - 3. Sealers:
 - a. MPI 31 (gloss) thinned as recommended by manufacturer at rate of one (1) part of thinner to four (4) parts of varnish.
 - b. Apply sealers specified except sealer may be omitted where pigmented, penetrating, or wiping stains containing resins are used.
 - c. Allow manufacturer's recommended drying time before sanding, but not less than 24 hours or 36 hours in damp or muggy weather.
 - d. Sand as specified.
 - 4. Transparent Finishes on Wood Except Floors.
 - a. Stain Finish:
 - One (1) coat of MPI 90 (Interior Wood Stain, Semi-Transparent).
 - Use wood stain of type and color required to achieve finish specified. Do not use varnish type stains.

Two (2) coats of MPI 57 (Varnish, Interior, Polyurethane, Oil Modified, Satin).

3.10 REFINISHING EXISTING PAINTED SURFACES:

- A. Includes existing exterior wood balconies, balcony floors, doors, windows, and trim to be repainted; and existing interior wood doors, windows, and trim to be stripped and stained.
- B. Clean, patch and repair existing surfaces as specified under "Surface Preparation". No "telegraphing" of lines, ridges, flakes, etc., through new surfacing is permitted. Where this occurs, sand smooth and re-finish until surface meets with COR's approval.
- C. Remove and reinstall items as specified under "General Workmanship Requirements".
- D. Remove existing finishes or apply separation coats to prevent non compatible coatings from having contact.
- E. Patched or Replaced Areas in Surfaces and Components: Apply spot prime and body coats as specified for new work to repaired areas or replaced components.
- F. Except where scheduled for complete painting apply finish coat over plane surface to nearest break in plane, such as corner, reveal, or frame.
- G. In existing rooms and areas where alterations occur, strip and prep existing stained and natural finished wood, and then give entire surface one (1) coat of one (1) coat of MPI 90 (Interior Wood Stain, Semi-Transparent) and two (2) coats of MPI 57 (Varnish, Interior, Polyurethane, Oil Modified, Satin).
- H. Refinish areas as specified for new work to match adjoining work unless specified or scheduled otherwise.
- I. Coat knots and pitch streaks showing through old finish with MPI 36 (Knot Sealer) before refinishing.
- J. Sand or dull glossy surfaces prior to painting.
- K. Sand existing coatings to a feather edge so that transition between new and existing finish will not show in finished work.

3.11 PAINT COLOR:

- A. Color and gloss of finish coats is specified on Drawings.
- B. For additional requirements regarding color see Articles, "REFINISHING EXISTING PAINTED SURFACE" and "MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE".
- C. Coat Colors:
 - 1. Color of priming coat: Lighter than body coat.

2. Color of body coat: Lighter than finish coat.

3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.

D. Painting, Caulking, Closures, and Fillers Adjacent to Casework:

1. Paint to match color of casework where casework has a paint finish.

2. Paint to match color of wall where casework is stainless steel, plastic laminate, or varnished wood.

3.12 MECHANICAL AND ELECTRICAL WORK FIELD PAINTING SCHEDULE:

A. Field painting of mechanical and electrical consists of cleaning, touching-up abraded shop prime coats, and applying prime, body and finish coats to materials and equipment if not factory finished in space scheduled to be finished.

B. In spaces not scheduled to be finish painted in Section 09 06 00, SCHEDULE FOR FINISHES paint as specified below.

C. Paint various systems specified in Division 02 - EXISTING CONDITIONS, Division 21 - FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 - HEATING, VENTILATION AND AIR-CONDITIONING, Division 26 - ELECTRICAL, Division 27 - COMMUNICATIONS, and Division 28 - ELECTRONIC SAFETY AND SECURITY.

D. Paint after tests have been completed.

E. Omit prime coat from factory prime-coated items.

F. Finish painting of mechanical and electrical equipment is not required when located in interstitial spaces, above suspended ceilings, in concealed areas such as pipe and electric closets, pipe basements, pipe tunnels, trenches, attics, roof spaces, shafts and furred spaces except on electrical conduit containing feeders 600 volts or more.

G. Omit field painting of items specified in "BUILDING AND STRUCTURAL WORK FIELD PAINTING"; "Building and Structural Work not Painted".

H. Color:

1. Paint items having no color specified to match surrounding surfaces.

2. Paint colors as follows:

a. White: Exterior unfinished surfaces of enameled plumbing fixtures. Insulation coverings on breeching and uptake inside boiler house, drums and drum-heads, oil heaters, condensate tanks and condensate piping.

b. Gray: Heating, ventilating, air conditioning and refrigeration equipment (except as required to match surrounding surfaces), and water and sewage treatment equipment and sewage ejection equipment.

- c. Aluminum Color: Ferrous metal on outside of boilers and in connection with boiler settings including supporting doors and door frames and fuel oil burning equipment, and steam generation system (bare piping, fittings, hangers, supports, valves, traps and miscellaneous iron work in contact with pipe).
 - d. Federal Safety Red: Exposed fire protection piping, hydrants, post indicators, electrical conducts containing fire alarm control wiring, and fire alarm equipment.
 - e. Federal Safety Orange: Entire lengths of electrical conduits containing feeders 600 volts or more.
- I. Apply paint systems on properly prepared and primed surface as follows:
- 1. Exterior Locations:
 - a. Apply two (2) coats of MPI 9 (Exterior Alkyd Enamel) to the following ferrous metal items:

Vent and exhaust pipes with temperatures under 94 degrees C (201 degrees F), roof drains, fire hydrants, post indicators, yard hydrants, exposed piping and similar items.
 - b. Apply two (2) coats of MPI 11 (Exterior Latex, Semi-Gloss) to galvanized and zinc-copper alloy metal.
 - 2. Interior Locations:
 - a. Apply two (2) coats of MPI 47 (Interior Alkyd, Semi-Gloss) to following items:
 - 1) Metal under 94 degrees C (201 degrees F) of items such as bare piping, fittings, hangers and supports.
 - 2) Equipment and systems such as hinged covers and frames for control cabinets and boxes, cast-iron radiators, electric conduits and panel boards.
 - 3) Heating, ventilating, air conditioning, plumbing equipment, and machinery having shop prime coat and not factory finished.
 - b. Paint electrical conduits containing cables rated 600 volts or more using two (2) coats of MPI 94 (Exterior Alkyd, Semi-gloss) in the Federal Safety Orange color in exposed and concealed spaces full length of conduit.
 - 3. Other exposed locations:
 - a. Metal surfaces, except aluminum, of cooling towers exposed to view, including connected pipes, rails, and ladders: Two (2) coats of MPI 1 (Aluminum Paint).

- b. Cloth jackets of insulation of ducts and pipes in connection with plumbing, air conditioning, ventilating refrigeration and heating systems: One (1) coat of MPI 50 (Interior Latex Primer Sealer) and one (1) coat of MPI 10 (Exterior Latex, Flat).

3.13 BUILDING AND STRUCTURAL WORK FIELD PAINTING:

- A. Painting and finishing of interior and exterior work except as specified here-in-after.
 - 1. Painting and finishing of new and existing work including colors and gloss of finish selected is specified on Drawings.
 - 2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.
 - 3. Painting of ferrous metal and galvanized metal.
 - 4. Painting of wood with fire retardant paint exposed in attics, when used as mechanical equipment space (except shingles).
 - 5. Identity painting and safety painting.
- B. Building and Structural Work not Painted:
 - 1. Prefinished items:
 - a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.
 - b. Factory finished equipment and pre-engineered metal building components such as metal roof and wall panels.
 - 2. Finished surfaces:
 - a. Hardware except ferrous metal.
 - b. Anodized aluminum, stainless steel, chromium plating, copper, and brass, except as otherwise specified.
 - c. Signs, fixtures, and other similar items integrally finished.
 - 3. Concealed surfaces:
 - a. Inside dumbwaiter, elevator and duct shafts, interstitial spaces, pipe basements, crawl spaces, pipe tunnels, above ceilings, attics, except as otherwise specified.
 - b. Inside walls or other spaces behind access doors or panels.
 - c. Surfaces concealed behind permanently installed casework and equipment.
 - 4. Moving and operating parts:
 - a. Shafts, chains, gears, mechanical and electrical operators, linkages, and sprinkler heads, and sensing devices.
 - b. Tracks for overhead or coiling doors, shutters, and grilles.

5. Labels:
 - a. Code required label, such as Underwriters Laboratories Inc., Intertek Testing Service or Factory Mutual Research Corporation.
 - b. Identification plates, instruction plates, performance rating, and nomenclature.
6. Galvanized metal:
 - a. Exterior chain link fence and gates, corrugated metal areaways, and gratings.
 - b. Gas Storage Racks.
 - c. Except where specifically specified to be painted.
7. Metal safety treads and nosings.
8. Gaskets.
9. Concrete curbs, gutters, pavements, retaining walls, exterior exposed foundations walls and interior walls in pipe basements.
10. Face brick.
11. Structural steel encased in concrete, masonry, or other enclosure.
12. Structural steel to receive sprayed-on fire proofing.
13. Ceilings, walls, columns in interstitial spaces.
14. Ceilings, walls, and columns in pipe basements.
15. Wood Shingles.

3.14 IDENTITY PAINTING SCHEDULE:

- A. Identify designated service in new buildings or projects with extensive remodeling in accordance with ASME A13.1, unless specified otherwise, on exposed piping, piping above removable ceilings, piping in accessible pipe spaces, interstitial spaces, and piping behind access panels. For existing spaces where work is minor match existing.
 1. Legend may be identified using snap-on coil plastic markers or by paint stencil applications.
 2. Apply legends adjacent to changes in direction, on branches, where pipes pass through walls or floors, adjacent to operating accessories such as valves, regulators, strainers and cleanouts a minimum of 12.2 M (40 feet) apart on straight runs of piping. Identification next to plumbing fixtures is not required.
 3. Locate Legends clearly visible from operating position.
 4. Use arrow to indicate direction of flow using black stencil paint.
 5. Identify pipe contents with sufficient additional details such as temperature, pressure, and contents to identify possible hazard. Insert

working pressure shown on construction documents where asterisk appears for High, Medium, and Low Pressure designations as follows:

- a. High Pressure - 414 kPa (60 psig) and above.
- b. Medium Pressure - 104 to 413 kPa (15 to 59 psig).
- c. Low Pressure - 103 kPa (14 psig) and below.
- d. Add Fuel oil grade numbers.

6. Legend name in full or in abbreviated form as follows:

PIPING	COLOR OF EXPOSED PIPING	COLOR OF BACKGROUND	COLOR OF LETTERS	LEGEND ABBREVIATIONS
Blow-off		Green	White	Blow-off
Boiler Feedwater		Green	White	Blr Feed
A/C Condenser Water Supply		Green	White	A/C Cond Wtr Sup
A/C Condenser Water Return		Green	White	A/C Cond Wtr Ret
Chilled Water Supply		Green	White	Ch. Wtr Sup
Chilled Water Return		Green	White	Ch. Wtr Ret
Shop Compressed Air		Blue	White	Shop Air
Air-Instrument Controls		Green	White	Air-Inst Cont
Drain Line		Green	White	Drain
Emergency Shower		Green	White	Emg Shower
High Pressure Steam		Green	White	H.P. _____*
High Pressure Condensate Return		Green	White	H.P. Ret _____*
Medium Pressure Steam		Green	White	M. P. Stm _____*
Medium Pressure Condensate Return		Green	White	M.P. Ret _____*
Low Pressure Steam		Green	White	L.P. Stm _____*
Low Pressure Condensate Return		Green	White	L.P. Ret _____*
High Temperature Water Supply		Green	White	H. Temp Wtr Sup
High Temperature Water Return		Green	White	H. Temp Wtr Ret
Hot Water Heating Supply		Green	White	H. W. Htg Sup
Hot Water Heating Return		Green	White	H. W. Htg Ret
Gravity Condensate Return		Green	White	Gravity Cond Ret
Pumped Condensate Return		Green	White	Pumped Cond Ret
Vacuum Condensate Return		Green	White	Vac Cond Ret
Fuel Oil - Grade _____ (Diesel Fuel included under Fuel Oil)	Brown	White		Fuel Oil-Grade
Boiler Water Sampling		Green	White	Sample

Chemical Feed		Green	White	Chem Feed
Continuous Blow-Down		Green	White	Cont. B D
Pumped Condensate		Green	White	Pump Cond
Pump Recirculating		Green	White	Pump-Recirc.
Vent Line		Green	White	Vent
Alkali		Orange	Black	Alk
Bleach		Orange	Black	Bleach
Detergent		Yellow	Black	Det
Liquid Supply		Yellow	Black	Liq Sup
Reuse Water		Yellow	Black	Reuse Wtr
Cold Water (Domestic)	White	Green	White	C.W. Dom
Hot Water (Domestic)				
Supply	White	Yellow	Black	H.W. Dom
Return	White	Yellow	Black	H.W. Dom Ret
Tempered Water	White	Yellow	Black	Temp. Wtr
Ice Water				
Supply	White	Green	White	Ice Wtr
Return	White	Green	White	Ice Wtr Ret
Reagent Grade Water		Green	White	RG
Reverse Osmosis		Green	White	RO
Sanitary Waste		Green	White	San Waste
Sanitary Vent		Green	White	San Vent
Storm Drainage		Green	White	St Drain
Pump Drainage		Green	White	Pump Disch
Chemical Resistant Pipe				
Waste		Orange	Black	Acid Waste
Vent		Orange	Black	Acid Vent
Atmospheric Vent		Green	White	ATV
Silver Recovery		Green	White	Silver Rec
Oral Evacuation		Green	White	Oral Evac
Fuel Gas		Yellow	Black	Gas
Fire Protection Water				
Sprinkler	Red	Red	White	Auto Spr
Standpipe	Red	Red	White	Stand
Sprinkler	Red	Red	White	Drain

7. Electrical Conduits containing feeders over 600 volts, paint legends using 50 mm (2 inch) high black numbers and letters, showing the voltage class rating. Provide legends where conduits pass through walls and floors and at maximum 6096 mm (20 foot) intervals in between. Use labels with yellow background with black border and words Danger High Voltage Class, 5000, 15000, 25000.

8. See Sections for methods of identification, legends, and abbreviations of the following:

- a. Conduits containing high voltage feeders over 600 volts:

Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS.

B. Fire and Smoke Partitions:

1. Identify partitions above ceilings on both sides of partitions except within shafts in letters not less than 64 mm (2 1/2 inches) high.
2. Stenciled message: "SMOKE BARRIER" or, "FIRE BARRIER" as applicable.
3. Locate not more than 6096 mm (20 feet) on center on corridor sides of partitions, and with a least one (1) message per room on room side of partition.
4. Use semi-gloss paint of color that contrasts with color of substrate.

C. Identify columns in pipe basements and interstitial space:

1. Apply stenciled number and letters to correspond with grid numbering and lettering indicated on construction documents.
2. Paint numbers and letters 101 mm (4 inches) high, locate 45 mm (18 inches) below overhead structural slab.
3. Apply on four (4) sides of interior columns and on inside face only of exterior wall columns.
4. Color:
 - a. Use black on concrete columns.
 - b. Use white or contrasting color on steel columns.

3.15 PROTECTION CLEAN UP, AND TOUCH-UP:

- A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
- B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.
- C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

**SECTION 09 96 59
SPECIALTY GLAZED COATINGS**

PART 1 - GENERAL**1.1 DESCRIPTION**

A. Section includes surface preparation and application of high-performance, 2-component, seamless glazed wall coating on new surfaces including wall board substrates.

1. Interior substrates:

a. Wall board substrates.

1.2 RELATED WORK

A. Drawings: Color and room finish schedule.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product to be provided.

2. Application and installation instructions.

3. Maintenance Instructions: Submit manufacturer's written instructions for recommended maintenance practices.

C. Qualification Data: For Installer.

D. Sustainable Submittal:

1. Product data for field applied, interior, paints, coatings, and primers, include printed statement of VOC content indicating compliance with environmental requirements.

E. Samples:

1. Each color and texture.

2. Samples for verification: 6 inches (152 mm) square, applied to a rigid backing by installer for this project.

F. Certification and Approval:

1. Manufacturer's approval of installer.

G. Warranty: As specified in this section.

1.4 QUALITY ASSURANCE

A. Manufacture Certificate: Manufacture shall certify that a particular resinous coating for wall/ceiling system has been in use for a minimum of five years.

B. Installer Qualifications: Engage an installer who is certified in writing by resinous product manufacturer, who is experienced in applying resinous coatings similar in material, design, and extent to

those indicated for this project for a minimum period of 5 years, whose work has resulted in applications with a record of successful in-service performance, and who is acceptable to resinous coating manufacturer.

C. Source Limitations:

1. Obtain coating materials including primers, resins, hardening agents, grouting coats and finish or sealing coats from a single manufacturer.

D. Pre-Installation Conference

1. Convene a meeting not less than thirty days prior to starting work.
2. Attendance:
 - a. Contractor
 - b. VA COR
 - c. Manufacturer and Installer's Representative
3. Review the following:
 - a. Environmental requirements
 - 1) Air and surface temperature
 - 2) Relative humidity
 - 3) Ventilation
 - 4) Dust and contaminants
 - b. Protection of surfaces not scheduled to be coated
 - c. Inspect and discuss condition of substrate and other preparatory work performed
 - d. Review and verify availability of material; installer's personnel, equipment needed
 - e. Performance of the coating with chemicals anticipated in the area receiving the resinous coating system
 - f. Application and repair
 - g. Field quality control
 - h. Cleaning
 - i. Protection of coating systems
 - j. One-year inspection and maintenance
 - k. Coordination with other work

1.5 MATERIAL PACKAGING DELIVERY AND STORAGE

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number, date of manufacture and mixing/thinning instructions.

- B. Protect materials from damage and contamination in storage or delivery, including moisture, heat, cold, direct sunlight, etc.
- C. Maintain temperature of storage area between 60 and 80 degrees F (15 and 26 degrees C).
- D. Keep containers sealed until ready for use.
- E. Do not use materials beyond manufacturer's shelf life limits.
- F. Package materials in factory pre-weighed and in single, easy to manage batches sized for ease of handling and mixing proportions from entire package or packages.

1.6 PROJECT CONDITIONS

- A. Environmental Limitations: Comply with manufacturer's written instructions for substrate temperature, ambient temperature, moisture, ventilation, and other conditions affecting applications.
 - 1. Maintain material and substrate temperature between 65 and 85 degrees F (18 and 30 degrees C) during application and for not less than 24 hours after application.
- B. Lighting: Provide permanent lighting or, if permanent lighting is not in place, simulate permanent lighting conditions during application.
- C. Close spaces to traffic during application and for not less than 24 hours after application unless manufacturer recommends a longer period.

1.7 WARRANTY

- A. Warranty: Manufacture shall furnish a single, written warranty covering the full assembly (including substrata) for both material and workmanship for an extended period of (3) full years from date of installation, or provide a joint and several warranty signed on a single document by manufacturer and applicator jointly and severally warranting the materials and workmanship for a period of (3) full years from date of installation. A sample warranty letter must be included with bid package or bid may be disqualified.

1.8 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. ASTM International (ASTM):
 - D4060-19.....Abrasion Resistance of Organic Coatings by the Taber Abrader
- C. Master Painters Institute (MPI):

115.....Epoxy-Modified Latex, Interior Gloss (MPI gloss level 6)

PART 2 - PRODUCTS

2.1 PRODUCTS - GENERAL

A. Basis of Design: See Drawings. Architect approval required.

2.2 SPECIALTY GLAZED COATING

A. High performance, gloss finish, pigmented wall system consisting of two-component epoxy.

B. System Characteristics.

1. Water Based Epoxy MPI No. 115.
2. Wearing Surface: Smooth
3. Overall System Thickness: 10 mils.

C. System Components: Manufactures standard components that are compatible with each other as standard with manufacture of resinous system and as follows:

1. Body Coat:
 - a. Resin: Epoxy.
 - b. Formulation Description: Two-component 100% solids.
 - c. Application Method: Dip and roll.
 - d. Coats: Two (2).

D. VOC Content: Products shall comply with VOC limits of authorities having jurisdiction.

1. Nonflat Paints and Coatings: 150 g/L.

2.3 ACCESSORY MATERIALS

A. Patching and Fill Material: Product of or approved by manufacturer for application indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. General: Prepare and clean substrates according to manufacturer's written instructions for substrate indicated. Provide clean, dry, and neutral Ph substrate for wall coating application.
- B. Clean sub-surface of all contaminants.
- C. Examine surfaces for defects that cannot be corrected by procedures specified herein.
- D. Any wall board application must have a (1) one, (2) two, or (3) three finish level. With an appropriate spackle compound. Finish Level (4) four, or (5) five is not acceptable and result in wall system failures, due to gypsum mud poor cohesive strengths.

E. Commencement of application implies acceptance of surface conditions.

3.2 PROJECT CONDITIONS

- A. Maintain temperature of materials above 21 degrees C (70 degrees F), for 48 hours before installation.
- B. Maintain temperature of rooms where work occurs, between 21 and 32 degrees C (70 and 90 degrees F) for at least 48 hours, before, during, and 24 hours after installation. Maintain temperature at least 21 degrees C (70 degrees F) thereafter.
- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.
- D. Area free of other trades during and for a period of 24 hours after installation.

3.3 INSTALLATION REQUIREMENTS

- A. The respective manufacturer's instructions for application and installation will be considered for use when approved by the COR.
- B. Submit proposed installation deviation from this specification to the COR indicating the differences in the method of installation.

3.4 PREPARATION

- A. General: Prepare and clean substrates according to manufacturer's written instructions for substrate indicated. Provide clean, dry, and neutral Ph substrate for application.
- B. Substrates: Provide sound surfaces free of laitance, glaze, efflorescence, curing compounds, form-release agents, dust, dirt, grease, oil, and other contaminants incompatible.
 - 1. Prepare substrates as follows:
 - a. Comply requirements of manufacturer's written instructions.
 - 2. Repair damaged and deteriorated substrate according to manufacturer's written recommendations.
 - 3. Verify that substrates are dry.
- B. Materials: Mix components and prepare materials according to manufacturer's written instructions.
- C. Use patching and fill material to fill holes and depressions in substrates according to manufacturer's written instructions.

3.5 APPLICATION

- A. General: Apply glazed coating according to manufacturer's written instructions to produce a uniform, monolithic surface of thickness indicated.
 - 1. Coordinate application to provide optimum adhesion to substrate.

2. Cure according to manufacturer's written instructions. Prevent contamination during application and curing processes.

3.6 CURING, PROTECTION AND CLEANING

- A. Cure materials in compliance with manufacturer's directions, taking care to prevent contamination during stages of application and prior to completion of curing process.
- B. Close area of application for a minimum of 24 hours.
- C. Protect materials from damage and wear during construction operation.

- - - E N D - - -

**SECTION 10 14 00
SIGNAGE**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies interior signage for room numbers, directional signs, code required signs and temporary signs.

1.2 RELATED WORK

- A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Sustainable Design Requirements.
- B. Division 26, ELECTRICAL Lighted EXIT signs for egress purposes are specified under and Electrical Work.

1.3 QUALITY ASSURANCE

- A. Manufacturer's Qualifications: Provide signage that is the product of one manufacturer, who has provided signage as specified for a minimum of three (3) years. Submit manufacturer's qualifications.
- B. Installer's Qualifications: Minimum three (3) years' experience in the installation of signage of the type as specified in this Section. Submit installer's qualifications.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 00, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Sustainable Design Submittals, as described below:
1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS
- C. Interior Sign Samples: Sign panels and frames, with letters and symbols, for each sign type.
1. Sign Panel, 203 x 254 mm (8 x 10 inches), with letters.
 2. Color samples of each color, 152 x 152 mm (6 x 6 inches. Show anticipated range of color and texture.
 3. Sample of typeface, arrow and symbols in a typical full size layout.
- D. Manufacturer's Literature:
1. Showing the methods and procedures proposed for the anchorage of the signage system to each surface type.
 2. Manufacturer's printed specifications and maintenance instructions.
- E. Sign Message Schedule and Location Plan, showing location, type and total number of signs required.

- F. Shop Drawings: Scaled for manufacture and fabrication of sign types. Identify materials, show joints, welds, anchorage, accessory items, mounting and finishes.

1.5 DELIVERY AND STORAGE

- A. Deliver materials to job in manufacturer's original sealed containers with brand name marked thereon. Protect materials from damage.
- B. Package to prevent damage or deterioration during shipment, handling, storage and installation. Maintain protective covering in place and in good repair until removal is necessary.
- C. Deliver signs only when the site and mounting services are ready for installation work to proceed.
- D. Store products in dry condition inside enclosed facilities.

1.6 WARRANTY

- A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".

1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Architectural Manufacturers Association (AAMA):
- 611-14.....Anodized Architectural Aluminum
- 2603-13.....Voluntary Specification, Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels
- C. American National Standards Institute (ANSI):
- A117.1-09.....Accessible and Usable Buildings and Facilities
- D. ASTM International (ASTM):
- A36/A36M-19.....Carbon Structural Steel
- A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
- A666-15.....Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate and Flat Bar
- A1011/A1011M-18a.....Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength

- B36/B36M-18.....Brass Plate, Sheet, Strip, and Rolled Bar
- B152/B152M-19.....Copper Sheet, Strip, Plate, and Rolled Bar
- B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate
- B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate
(Metric)
- B221-14.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Shapes, and Tubes
- B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Shapes, and Tubes (Metric)
- C1036-16.....Flat Glass
- C1048-18.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated
and Uncoated Glass
- C1349-17.....Architectural Flat Glass Clad Polycarbonate
- D1003-13.....Test Method for Haze and Luminous Transmittance
of Transparent Plastics
- D4802-16.....Poly(Methyl Methacrylate) Acrylic Plastic Sheet
- E. Code of Federal Regulation (CFR):
- 40 CFR 59.....Determination of Volatile Matter Content, Water
Content, Density Volume Solids, and Weight
Solids of Surface Coating
- F. Federal Specifications (Fed Spec):
- MIL-PRF-8184F.....Plastic Sheet, Acrylic, Modified.
- MIL-P-46144C.....Plastic Sheet, Polycarbonate
- G. National Fire Protection Association (NFPA):
- 70-14.....National Electrical Code

PART 2 - PRODUCTS

2.1 SIGNAGE GENERAL

- A. Provide signs of type, size and design to match existing Hot Springs VA facility sign program as manufactured by Creative Signage Systems..
- B. Provide signs complete with lettering, framing and related components for a complete installation.
- C. Provide graphics items as completed units produced by a single manufacturer, including necessary mounting accessories, fittings and fastenings.
- D. Do not scale construction documents for dimensions. Verify dimensions and coordinate with field conditions. Notify Contracting Officer

Representative (COR) of discrepancies or changes needed to satisfy the requirements of the construction documents.

2.2 INTERIOR SIGN MATERIALS

- A. Interior signage to be equal to signs as manufactured by Creative Signage Systems for the Hot Springs VA signage program.
- B. Aluminum:
 - 1. Sheet and Plate: ASTM B209M (B209).
 - 2. Extrusions and Tubing: ASTM B221M (B221).
- C. Cast Acrylic Sheet: MIL-PRF-8184F; Type II, class 1, Water white non-glare optically clear. Matt finish water white clear acrylic shall not be acceptable.
- D. Polycarbonate: MIL-P-46144C; Type I, class 1.
- E. Vinyl: Premium grade 0.1 mm (0.004 inch) thick machine cut, having a pressure sensitive adhesive and integral colors.
- F. Adhesives:
 - 1. Adhesives for Field Application: Mildew-resistant, nonstaining adhesive for use with specific type of panels, sheets, or assemblies; and for substrate application; as recommended in writing by signage manufacturer.
 - 2. Adhesives to have VOC content of 50 g/L or less when calculated according to 40 CFR 59, (EPA Method 24).
- G. Typography: Comply with VA Signage Design Manual and Hot Springs VA signage program.
 - 1. Type Style: Match existing used for signs as manufactured by Creative Signage Systems for the Hot Springs VA signage program.
 - 2. Arrow: Comply with graphic standards of Hot Springs VA signage program.
 - 3. Letter spacing: Comply with graphic standards of Hot Springs VA signage program.
 - 4. Letter spacing: Comply with graphic standards of Hot Springs VA signage program.
 - 5. Provide text, arrows, and symbols in size, colors, typefaces and letter spacing shown in construction documents. Text shall be a true, clean, accurate reproduction of typeface(s). Text shown in construction documents is for layout purposes only; text for signs is listed in Sign Message Schedule; and is to be reviewed and approved by COR prior to fabrication.

2.3 INTERIOR SIGN TYPES

- A. Conform to the VA Signage Design Manual.
- B. Match existing Hot Springs VA facility sign system as manufactured by Creative Signage Systems.
- C. The interior sign system is comprised of sign type families.
- D. Sign types, quantities, and locations as indicated in the construction documents.
- E. Conform to the Hot Springs VA signage program as manufactured by Creative Signage Systems or approved equal.
- F. Tactile Sign:
 - 1. Tactile sign made from a material that provides for letters, numbers and Braille to be integral with sign. Photopolymer etched metal, sandblasted phenolic or embossed material. Do not apply letters, numbers and Braille with adhesive.
 - 2. Numbers, letters and Braille to be raised 0.8 mm (1/32 inches) from the background surface. The draft of the letters, numbers and Braille to be tapered, vertical and clean.
 - 3. Braille Dots: Conform with ANSI A117.1 for Braille position and layout; (a) Dot base diameter: 1.5 mm (.059 inches) (b) Inter-dot spacing: 2.3 mm (.090 inches) (c) Horizontal separation between cells: 6.0 mm (.241 inches) (d) Vertical separation between cells: 10.0 mm (.395 inches)
 - 4. Paint assembly specified color. After painting, apply white or other specified color to surface of the numbers and letters. Apply protective clear coat sealant to entire sign.
 - 5. Finish: Eggshell, 11 to 19 degree on a 60 degree glossmeter.
- G. Provide cork or felt on bottom or mounting bracket when sign is mounted on counter or desk.
- H. For ceiling mounted signs, provide mounting hardware on the sign that allows for sign disconnection, removal, reinstallation, and reconnection.
- I. Glass Door and Side Light Graphics:
 - 1. Provide text and graphics as first surface applied stylus cut vinyl.
 - 2. Provide typeface, color, and spacing, with each message or message group on a single quick release backing sheet.
- J. Temporary Interior Signs:
 - 1. Fabricated from 50 kg (110 pound) matte finished white paper cut to 101 mm (4 inch) wide by 305 mm (12 inch) long.

- a. Punched 3.2 mm (.125 inch) hole with edge of hole spaced 13 mm (.5 inch) in from edge and centered on 101 mm (4 inch) side.
 - b. Reinforce hole on both sides with suitable material that prevents tie from pulling through hole.
 - c. Ties: Steel wire 0.3 mm (0.120 inch) thick attached to tag with twist leaving 152 mm (6 inch) long free ends.
2. Mark architectural room number on sign, with broad felt marker in clearly legible numbers or letters that identify room, corridor or space as shown on construction documents.
 3. Install temporary signs to rooms that have a room, corridor or space number. Attach to door frame, door knob or door pull.
 - a. Doors that do not require signs are: corridor doors in corridor with same number, folding doors or partitions, toilet doors, bathroom doors within and between rooms, closet doors within rooms, communicating doors in partitions between rooms with corridor entrance doors.
 - b. Replace and missing, damaged or illegible signs.

2.4 FABRICATION

- A. Design interior signage components to allow for expansion and contraction for a minimum material temperature range of 38 degrees C (100 degrees F), without causing buckling, excessive opening of joints or over stressing of adhesives, welds and fasteners.
- B. Form work to required shapes and sizes, with true curve lines and angles. Provide necessary rebates, lugs and brackets for assembly of units. Provide concealed fasteners wherever possible.
- C. Shop fabricate so far as practicable. Fasten joints flush to conceal reinforcement, or weld joints, where thickness or section permits.
- D. Level and assemble contract surfaces of connected members so joints will be tight and practically unnoticeable, without applying filling compound.
- E. Signs: Fabricate with fine, even texture to be flat and sound.
 1. Maintain lines and miters sharp, arises unbroken, profiles accurate and ornament true to pattern.
 2. Plane surfaces to be smooth, flat and without oil-canning, free of rack and twist.
 3. Maximum variation from plane of surface plus or minus 0.3 mm (0.015 inches). Restore texture to filed or cut areas.

- F. Finish extruded members to be free from extrusion marks. Fabricate square turns, sharp corners, and true curves.
- G. Finish hollow signs with matching material on all faces, tops, bottoms and ends. Miter edge joints to give appearance of solid material.
- H. Do not manufacture signs until final sign message schedule and location review has been completed by the COR and forwarded to contractor.
- I. Drill holes for bolts and screws. Mill smooth exposed ends and edges with corners slightly rounded.
- J. Form joints exposed to weather to exclude water.
- K. Movable Parts, Including Hardware: Cleaned and adjusted to operate as designed without binding or deformation of members. Center doors and covers in opening or frame.
 - 1. Align contact surfaces fit tight and even without forcing or warping components.
- L. Pre-assemble items in shop to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations. Clearly mark units for re-assembly and coordinated installation.
- M. Prime painted surfaces as required. Apply finish coating of paint for complete coverage with no light or thin applications allowing substrate or primer to show.
 - 1. Finish surface smooth, free of scratches, gouges, drips, bubbles, thickness variations, foreign matter and other imperfections.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Locate signs as shown on the construction document Sign Location Plans.
- B. Where not otherwise indicated conform to the VA Signage Design Manual for installation requirements.
- C. At each sign location there are no utility lines behind each sign location that will be affected by installation of signs.
 - 1. Correct and repair damage done to utilities during installation of signs at no additional cost to Government.
- D. Provide inserts and anchoring devices which must be set in concrete or other material for installation of signs. Submit setting drawings, templates, instructions and directions for installation of anchorage devices, which may involve other trades.
- E. Refer to Sign Message Schedule for mounting method. Mount signs in proper alignment, level and plumb according to the Sign Location Plan

and the dimensions given on elevation and Sign Location Plans. When exact position, angle, height or location is not clear, contact COR for resolution.

- F. When signs are installed on glass, provide blank glass back up to be placed on opposite side of glass exactly behind sign being installed. Provide blank glass back that is the same size as sign being installed.
- G. Touch up exposed fasteners and connecting hardware to match color and finish of surrounding surface.
- H. At completion of sign installation, clean exposed sign surfaces. Clean and repair adjoining or adjacent surfaces that became soiled or damaged as a result of installation of signs.

- - - END - - -

INTERIOR SIGN MESSAGE SCHEDULE

FLOOR	SIGN NO.	SIGN TYPE	MESSAGE	SYMBOL	INSTALLATION NOTES
0	B01	Room	B01 Storage		Wall Mount
0	B02	Room	B02 TR		Wall Mount
0	B03	Room	B03 Electrical		Wall Mount
0	B04	Room	B04 (TBD, Blank insert)		Wall Mount
0	B05	Room	B05 Gym		Wall Mount
0	B05A	Room	B05A Elevator Equipment		Wall Mount
0	B06	Room	B06 (TBD, Blank insert)		Wall Mount
0	B06A	Room	B06A Fire Service		Wall Mount
0	B07	Room	B07 Group Room		Wall Mount
0	B08	Room	B08 (TBD, Blank insert)		Wall Mount
0	B09	Room	B09 Housekeeping		Wall Mount
0	B10	Room	B10 Mechanical		Wall Mount
0	B11	Room	B11 (TBD, Blank insert)		Wall Mount
0	B12	Room	B12 (TBD, Blank insert)		Wall Mount
0	B13	Room	B13 (TBD, Blank insert)		Wall Mount
0	B14	Room	B14 Staff Lounge		Wall Mount
0	B15	Room	B15 Group Room		Wall Mount
0	B16	Toilet	(symbol) WOMEN (symbol)	Women Accessible	Wall Mount
0	B17	Room	B17 (TBD, Blank insert)		Wall Mount
0	B18	Room	B18 (TBD, Blank insert)		Wall Mount
0	B19	Room	B19 (TBD, Blank insert)		Wall Mount
0	B20	Toilet	(symbol) MEN (symbol)	Men Accessible	Wall Mount

10 14 00 - 10

INTERIOR SIGN MESSAGE SCHEDULE

FLOOR	SIGN NO.	SIGN TYPE	MESSAGE	SYMBOL	INSTALLATION NOTES
1	109	Elevator	ELEVATOR		Wall Mount; centered above elevator door.
1	109A	Elevator - Fire	ELEVATOR (symbol) In Case of Fire Do Not Use Elevator USE STAIRS	Fire Stairs	Wall Mount
1	110	Room	110 Bedroom		Wall Mount
1	110A	Number	110A		Wall Mount
1	111	Room	111 Bedroom		Wall Mount
1	111A	Number	111A		Wall Mount
1	112	Room	112 Bedroom		Wall Mount
1	112A	Number	112A		Wall Mount
1	113	Room	113 Bedroom		Wall Mount
1	113A	Number	113A		Wall Mount
1	114	Room	114 Bedroom		Wall Mount
1	114A	Number	114A		Wall Mount
1	115	Room	115 Bedroom		Wall Mount
1	115A	Number	115A		Wall Mount
1	116	Room	116 Bedroom		Wall Mount
1	116A	Number	116A		Wall Mount
1	117	Room	117 Storage		Wall Mount
1	118	Room	118 Lounge		Wall Mount
1	119	Room	119 Soiled Utility Staff Only Keep Door Closed		Wall Mount
1	120	Unit	Building 8 Domiciliary		Wall Mount
1	121	Exit	EXIT		Door Mount
1	122	Exit	EXIT		Door Mount
1	123	Fire Door	Fire Door Keep Closed At All Times		Door Mount

INTERIOR SIGN MESSAGE SCHEDULE

FLOOR	SIGN NO.	SIGN TYPE	MESSAGE	SYMBOL	INSTALLATION NOTES
1	123A	No Exit	NO EXIT		Door Mount
1	124	Exit	EXIT		Door Mount
1	125	Stairwell	STAIRS (symbol) FLOOR 1 Serves Floors B - 1 No Roof Access Exit To Link Between Floor 1 & Arcade (symbol)	Stairs Right Arrow	Wall Mount
1	126	Exit	EXIT		Door Mount
1	127	Fire Door	Fire Door Keep Closed At All Times		Door Mount
1	128	Stair Entrance	Stair Keep Door Closed EXIT		Wall Mount
1	129	No Exit	NO EXIT		Door Mount
1	130	No Exit	NO EXIT		Door Mount
1	131	Exit	EXIT		Door Mount
1	132	Fire Extinguisher	(symbol) EXTINGUISHER	Fire Extinguisher	Wall Mount; perpendicular to wall face; minimum 80" AFF to bottom.
1	133	No Exit	NO EXIT		Door Mount
1	134	No Exit	NO EXIT		Door Mount
2	200A	Number	200A		Wall Mount
2	201	Room	201 TR		Wall Mount
2	202	Room	202 Storage		Wall Mount
2	203	Room	203 Electrical		Wall Mount
2	204	Fire Extinguisher	(symbol) EXTINGUISHER	Fire Extinguisher	Wall Mount; perpendicular to wall face; minimum 80" AFF to bottom.
2	205	Room	205 Laundry		Wall Mount

INTERIOR SIGN MESSAGE SCHEDULE

FLOOR	SIGN NO.	SIGN TYPE	MESSAGE	SYMBOL	INSTALLATION NOTES
2	205A	Room	205A Linen		Wall Mount
2	206	Toilet	(symbol) RESTROOM (symbol)	Uni-Sex Accessible	Wall Mount
2	207	Room	207 Housekeeping		Wall Mount
2	208	Room	208 Attic Access		Wall Mount
2	209	Elevator	ELEVATOR		Wall Mount; centered above elevator door.
2	209A	Elevator - Fire	ELEVATOR (symbol) In Case of Fire Do Not Use Elevator USE STAIRS	Fire Stairs	Wall Mount
2	210	Room	210 Bedroom		Wall Mount
2	210A	Number	210A		Wall Mount
2	211	Room	211 Bedroom		Wall Mount
2	211A	Number	211A		Wall Mount
2	212	Room	212 Bedroom		Wall Mount
2	212A	Number	212A		Wall Mount
2	213	Room	213 Bedroom		Wall Mount
2	213A	Number	213A		Wall Mount
2	214	Room	214 Bedroom		Wall Mount
2	214A	Number	214A		Wall Mount
2	215	Room	215 Bedroom		Wall Mount
2	215A	Number	215A		Wall Mount
2	216	Room	216 Bedroom		Wall Mount
2	216A	Number	216A		Wall Mount
2	217	Room	217 Storage		Wall Mount
2	218	Room	218 Lounge		Wall Mount
2	219	Room	219 Soiled Utility Staff Only Keep Door Closed		Wall Mount

INTERIOR SIGN MESSAGE SCHEDULE

FLOOR	SIGN NO.	SIGN TYPE	MESSAGE	SYMBOL	INSTALLATION NOTES
2	220	Unit	Building 8 Domiciliary		Wall Mount
2	221	Exit	EXIT		Door Mount
2	222	Exit	EXIT		Door Mount
2	223	Exit	EXIT		Door Mount
2	224	Fire Door	Fire Door Keep Closed At All Times		Door Mount
2	225	Stair Entrance	Stair Keep Door Closed EXIT		Wall Mount
2	226	No Exit	NO EXIT		Door Mount
2	227	No Exit	NO EXIT		Door Mount
2	228	Exit	EXIT		Door Mount
2	229	Fire Extinguisher	(symbol) EXTINGUISHER	Fire Extinguisher	Wall Mount; perpendicular to wall face; minimum 80" AFF to bottom.
2	230	No Exit	NO EXIT		Door Mount
2	231	No Exit	NO EXIT		Door Mount

**SECTION 10 26 00
WALL AND DOOR PROTECTION**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies handrail/wall guard combinations, corner guards and high impact wall covering.

1.2 RELATED WORK

- A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Sustainable Design Requirements.
- B. Section 08 71 00, DOOR HARDWARE: Armor plates and kick plates not specified in this section.
- C. See Drawings: Color and texture of materials.

1.3 QUALITY ASSURANCE

- A. Manufacturer's Qualifications: Manufacturer with a minimum of three (3) years' experience in providing items of type specified.
 - 1. Obtain wall and door protection from single manufacturer.
- B. Installer's Qualifications: Installers are to have a minimum of three (3) years' experience in the installation of units required for this project.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals, as described below:
 - 1. 1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
 - 2. For composite wood products, submit documentation indicating product contains no added urea formaldehyde.
- C. Shop Drawings: show design and installation details.
- D. Manufacturer's Literature and Data (including installation and maintenance):
 - 1. Handrail/Wall Guard Combinations.
 - 2. Corner Guards.
 - 3. High Impact Wall Covering.
- E. Test Report: Showing that resilient material complies with specified fire and safety code requirements.
- F. Finish Verification Samples (each type and color indicated):
 - 1. Handrail/Wall Guard Combinations.
 - 2. Corner Guards.

- 3. High Impact Wall Covering.
- 4. Hygienic Wall Cladding.
- G. Manufacturer's qualifications.
- H. Installer's qualifications.
- I. Manufacturer's warranty.

1.5 DELIVERY AND STORAGE

- A. Deliver materials to the site in original sealed packages or containers marked with the name and brand, or trademark of the manufacturer.
- B. Protect from damage from handling and construction operations before, during and after installation.
- C. Store in a dry environment of approximately 21 degrees C (70 degrees F) for at least 48 hours prior to installation.

1.6 WARRANTY

- A. Construction Warranty: Comply with FAR clause 52.246-21 "Warranty of Construction".
- B. Manufacturer Warranty: Manufacturer shall warranty their wall protection for a minimum of five (5) years from date of installation and final acceptance by the Government. Submit manufacturer warranty.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. publications are referenced in text by basic designation only.
- B. ASTM International (ASTM):
 - A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and For General Applications
 - B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
 - B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric)
 - D256-10(2018).....Determining the Izod Pendulum Impact Resistance of Plastics
 - D635-18.....Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position
 - E84-20.....Surface Burning Characteristics of Building Materials
- C. Aluminum Association (AA):
 - DAF 45-09.....Designation System for Aluminum Finishes

- D. American Architectural Manufacturers Association (AAMA):
611-14.....Voluntary Specification for Anodized
Architectural Aluminum
- E. Code of Federal Regulation (CFR):
40 CFR 59(2020) Subpart D National Volatile Organic Compound
Emission Standards for Architectural Coatings
- F. The National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual
- G. National Fire Protection Association (NFPA):
80-2019.....Standard for Fire Doors and Other Opening
Protectives
- H. SAE International (SAE):
J 1545-2014-10.....Instrumental Color Difference Measurement for
Exterior Finishes, Textiles and Colored Trim.
- I. Underwriters Laboratories Inc. (UL):
Annual Issue.....Building Materials Directory

PART 2 - PRODUCTS

2.1 BASIS OF DESIGN:

- A. See Drawings. Architect approval required.

2.2 MATERIALS

- A. Aluminum Extruded: ASTM B221M (B221), Alloy 6063, Temper T5 or T6.
- B. Resilient Material:
1. Provide resilient material consisting of high impact resistant polyvinyl chloride and PETG conforming to the following:
 - a. Minimum impact resistance of 960.8 N-m/m (18 feet-pounds/square inch) when tested in accordance with ASTM D256 (Izod impact, feet-pounds per inch notched).
 - b. Class 1 fire rating when tested in accordance with ASTM E84, having a maximum flame spread of 25 and a smoke developed rating of 450 or less.
 - c. Rated self-extinguishing when tested in accordance with ASTM D635.
 - d. Provide material labeled and tested by Underwriters Laboratories or other approved independent testing laboratory.
 - e. Provide integral color with colored components matched in accordance with SAE J 1545 to within plus or minus 1.0 on the CIE-LCH scales.

2.3 CORNER GUARDS

A. Resilient, High Impact Shock-Absorbing Corner Guards: Surface- mounted type.

1. Snap-on corner guard formed from resilient material, minimum 2 mm (0.080-inch) thick, free floating on a continuous 1.8 mm (0.070-inch) thick extruded aluminum retainer. Provide appropriate mounting hardware, cushions and base plates as required.
2. Profile: Minimum 3 inch long legs. Provide with 90 degree and 45 degree profiles.
3. Height: 2.43 m (8 feet).
4. Retainer Clips: Provide manufacturer's standard impact-absorbing clips.
5. Provide factory fabricated end closure caps at top and bottom of surface mounted corner guards.

2.4 END GUARDS

A. Resilient, High Impact Shock-Absorbing End Guards: Surface- mounted type.

1. Snap-on corner guard formed from resilient material, minimum 2 mm (0.080-inch) thick, free floating on a continuous 1.8 mm (0.070-inch) thick extruded aluminum retainer. Provide appropriate mounting hardware, cushions and base plates as required.
2. Profile: Minimum 2 inch long legs.
3. Height: 2.43 m (8 feet).
4. Retainer Clips: Provide manufacturer's standard impact-absorbing clips.
5. Provide factory fabricated end closure caps at top and bottom of surface mounted corner guards.

2.5 HANDRAIL/WALL GUARD COMBINATION

- A. Round handrail system with integrated wall guard with reveals at molded corners and returns; 200 mm (7-7/8-inch) overall height; 38 mm (1-1/2-inch) gripping diameter with 127 mm (5-inch) high wall guard; 82 mm (3-1/4-inch) distance from wall.
- B. Snap-on covers of resilient material, minimum 2 mm (0.080-inch) thick.
- C. Free-floating on a continuous, extruded aluminum retainer, minimum 2 mm (0.078-inch) thick.
- D. Brackets shall be stainless steel Type 201SS and have a vinyl base.
- E. Anchor to wall at maximum 762 mm (30 inches) on center.

- F. Provide handrails/wall guard combination with prefabricated end closure caps, inside and outside corners, concealed splices, cushions, mounting hardware and other accessories as required. End caps and corners to be field adjustable to assure close alignment with handrails and wall guards. Screw or bolt closure caps to aluminum retainer in a concealed manner.

2.6 HIGH IMPACT WALL COVERING

- A. Provide sheets consisting of high impact rigid acrylic vinyl or polyvinyl chloride resilient material.
- B. Sheet sizes to be 1.22 x 2.44 m (4ft x 8ft).
- C. Submit fire rating and extinguishing test results for resilient material.
- D. Submit statements attesting that the items comply with specified fire and safety code requirements.
- E. Rigid Sheet: Sheet thickness to be 1.52 mm (0.060 inch).
- F. Provide adhesive as recommended by the wall covering manufacturer. Provide adhesive with VOC content of 250 g/L or less when calculated according to 40 CFR 59, (EPA Method 24).

2.7 FASTENERS AND ANCHORS

- A. Provide fasteners and anchors as required for each specific type of installation.
- B. Where type, size, spacing or method of fastening is not shown or specified in construction documents, submit shop drawings showing proposed installation details.

2.8 FINISH

- A. Aluminum: In accordance with AA DAF-45.
 - 1. Concealed aluminum: Mill finish as fabricated, uniform in color and free from surface blemishes.
- B. Resilient Material: Embossed textures and color in accordance with SAE J1545.

PART 3 - INSTALLATION

3.1 RESILIENT CORNER GUARDS

- A. Install corner guards on walls in accordance with manufacturer's instructions.

3.2 RESILIENT END GUARDS

- A. Install end guards on walls in accordance with manufacturer's instructions.

3.3 RESILIENT WALL GUARD HANDRAIL COMBINATION

- A. Secure to walls with in accordance with manufacturer's details and instructions.

3.4 HIGH IMPACT WALL COVERING

- A. Surfaces to receive protection to be clean, smooth and free of obstructions.
- B. Apply with adhesive in controlled environment according to manufacturer's recommendations.
- C. Butt joints 1/16" with color-match, pick-resistant caulk. Pick-resistant caulk also at top and any exposed edges at outside corners. NO trim pieces.
- D. Install Height: 48" AFF, unless otherwise noted.

3.5 CLEANING

- A. Clean surfaces after installation and before final acceptance per manufacturer's recommendations.

- - - E N D - - -

SECTION 10 28 00
TOILET, BATH, AND LAUNDRY ACCESSORIES

PART 1 - GENERAL**1.1 DESCRIPTION****A. SUMMARY:**

1. Section Includes: Toilet and bath accessories at toilets, baths and other areas indicated on drawings.

1.2 APPLICABLE PUBLICATIONS**A. Comply with references to extent specified in this section.****B. American Society of Mechanical Engineers (ASME):**

1. B18.6.4-98(R2005) Thread Forming and Thread Cutting Tapping Screws and Metallic Drive Screws inch.

C. American Welding Society (AWS):

- D10.4-86(2000).....Welding Austenitic Chromium-Nickle Stainless Steel Piping and Tubing.

D. ASTM International (ASTM):

- A269/A269M-15a(2019)....Seamless and Welded Austenitic Stainless Steel Tubing for General Service.
 - A312/A312M-19.....Seamless, Welded, and Heavily Cold Worked Austenitic Stainless Steel Pipes.
 - A653/A653M-20.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
 - A666-15.....Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.
 - A1011/A1011M-18a.....Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength.
 - B456-17.....Electrodeposited Coatings of Copper Plus Nickel Plus Chromium and Nickel Plus Chromium.
 - C1036-16.....Flat Glass.
 - C1048-18.....Heat-Strengthened and Fully Tempered Flat Glass.
 - F446-19.....Grab Bars and Accessories Installed in the Bathing Area.
- E. Federal Specifications (Fed. Spec.):**
- A-A-3002.....Mirror, Glass.

FF-S-107C(2).....Screws, Tapping and Drive.

WW-P-541/8B(1).....Plumbing Fixtures (Accessories, Land Use).

F. National Architectural Metal Manufacturers (NAAMM):

AMP 500-06.....Metal Finishes Manual.

1.3 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication, anchorage and installation details.

2. Show mounting locations and heights.

C. Manufacturer's Literature and Data:

1. Description of each product.

2. Installation instructions.

D. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

1.4 QUALITY ASSURANCE

A. Manufacturer Qualifications:

1. Regularly manufactures specified products.

1.5 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility.

B. Protect products from damage during handling and construction operations.

1.7 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Stainless Steel:

1. Plate or Sheet: ASTM A666, Type 304, 0.8 mm (0.031 inch) thick unless otherwise specified.

2. Tubing: ASTM A269/A269M, Grade TP 304, seamless or welded.

- 3. Pipe: ASTM A312/A312M; Grade TP 304.
- B. Steel Sheet: ASTM A653/A653M, zinc-coated (galvanized) coating designation G90.
- C. Chrome Plating (Service Condition Number SC 2): ASTM B456.
- D. Brass Castings: ASTM B30.
- E. Glass:
 - 1. ASTM C1048, Kind FT, Condition A, Type 1, Class 1 for glass and mirrors in Mental Health and Behavior Patient Care Units, and Security Examination Rooms.

2.2 PRODUCTS - GENERAL

- A. Provide each product from one manufacturer.
- B. Products Used Within Mental Health and Behavioral Patient Care Units:
 - 1. Provide accessories free of anchor points.
 - 2. Design accessories for attachment with tamper resistant hardware.

2.3 GRAB BARS

- A. Fed. Spec. WW-P-541/8B, Type IV, bars, surface mounted, Class 2, grab bars and complying with ASTM F446.
- B. Fabricate from stainless steel use one type throughout project:
 - 1. Stainless steel: Grab bars, flanges, mounting plates, supports, screws, bolts, and exposed nuts and washers.
- C. Mounting:
 - 1. Swing Up Grab Bars: Exposed type.
 - 2. Other Types and Locations: Concealed type.
- D. Bars:
 - 1. Fabricate to 38 mm (1-1/2 inch) outside diameter.
 - a. Stainless steel, minimum 1.2 mm (0.05 inch) thick.
 - 2. Fabricate in one continuous piece with ends turned toward walls.
 - a. Swing up grab bars and grab bars continuous around three sides of showers may be fabricated in two sections, with concealed slip joint between.
 - 3. Continuously weld intermediate support to grab bar.
 - 4. Swing Up Bars: Manually operated; designed to prevent bar from falling when in raised position.
- E. Flange for Concealed Mounting:
 - 1. Minimum 2.65 mm (0.1 inch) thick, maximum 79 mm (3-1/8 inch) diameter by 13 mm (1/2 inch) deep, with minimum three set screws for securing flange to back plate.

2. Insert grab bar through center of flange and continuously weld perimeter of grab bar flush to back side of flange.
3. In lieu of providing flange for concealed mounting, and back plate as specified, grab bar may be welded to back plate covered with flange.

F. Flange for Exposed Mounting:

1. Minimum 5 mm (3/16 inch) thick, maximum 79 mm (3-1/8 inch) diameter.
2. Insert grab bar through flange and continuously weld perimeter of grab bar flush to backside of flange.

G. Back Plates:

1. Minimum 2.65 mm (0.1046 inch) thick metal.
2. Fabricate in one piece, maximum 6 mm (1/4 inch) deep, with diameter sized to fit flange. Provide slotted holes to accommodate anchor bolts.
3. Provide spreaders, through bolt fasteners, and cap nuts, where grab bars are mounted on partitions.

2.4 SHOWER CURTAIN RODS

A. Shower curtain rods in Mental Health and Behavioral Nursing Units:

1. Chrome plated plastic rods capable of supporting 22.6 kg (50 pounds) before pulling free of wall flanges.

2.5 CLOTHES HOOKS, ROBE OR COAT

- A.** Fabricate hook units from chromium plated brass with satin finish, or stainless steel, using 6 mm (1/4 inch) minimum thick stock, with edges and corners rounded smooth to thickness of metal, or 3 mm (1/8 inch) minimum radius.
- B.** Fabricate each unit as a double hook on a single shaft, integral with or permanently fastened to wall flange, provided with concealed fastenings.

2.6 METAL FRAMED MIRRORS

- A.** Fed. Spec. A-A-3002 metal frame; stainless steel.
- B. Mirror Glass:**
1. Minimum 6 mm (1/4 inch) thick.
 2. Set mirror in a protective vinyl glazing tape.
- C. ADA Frames:**
1. Frame holds mirror in a tilted position for accessibility and compliance with ADA requirements. Mirror has a galvanized steel back secured to frame with concealed screws with integral horizontal hanging brackets.

2. Metal Thickness 0.9 mm (0.035 inch).

3. Filler:

a. Where mirrors are mounted on walls having ceramic tile wainscots not flush with wall above, provide fillers contoured to conceal void between back of mirror and wall surface.

b. Fabricate fillers from same material and finish as mirror frame.

D. Mounting Bracket:

1. Designed to support mirror tight to wall.

2. Designed to retain mirror with concealed set screw fastenings.

E. Metal Framed Mirrors used in Mental Health and Behavioral Patient Care Units: Provide shatter proof glass or polished stainless steel units.

2.7 MOP RACKS

A. Minimum 1016 mm (40 inches) long with five holders.

B. Clamps:

1. Minimum of 1.3 mm (0.05 inch) thick stainless steel bracket retaining channel with hard rubber serrated cam; pivot mounted to channel.

2. Clamps to hold handles from 13 mm (1/2 inch) minimum to 32 mm (1-1/4 inch) maximum diameter.

C. Support:

1. Minimum 1 mm (0.04 inch) thick stainless steel hat shape channel to hold clamps away from wall as indicated.

2. Drill wall flange for 3 mm (1/8 inch) fasteners above and below clamp locations.

D. Secure clamps to support with oval head machine screws or rivets into continuous reinforcing back of clamps.

2.8 STAINLESS STEEL SHELVES AT WHEELCHAIR LAVATORY

A. Wall mounted:

1. Fabricate to size and shape indicated of 1.2 mm (0.05 inch) thick sheet.

2. Turn up edges and weld corners closed.

3. Fabricate brackets and weld to shelf. Drill brackets for 6 mm (1/4 inch) anchor bolts.

2.9 DIAPER CHANGING TABLE:

A. Wall mounted diaper changing table for use in public restrooms. Unit is a fold down system that folds upward when not in use for minimal intrusion into the room. Changing surface is contoured and has safety

belt to ensure that an infant will not fall from the table. Table is designed to hold no less than 250 pounds static weight. Closed dimensions are approximately 21" H x 36" W x 5" D. Open dimensions vary according to style. One system's open dimensions are 15" high, 32" wide and 19" deep.

2.10 FOLDING SHOWER SEAT:

- A. ADA-compliant, L-Shaped, double-folding shower seat with legs, standard and bariatric (support load of 1,000 lbs.).
- B. Frame Material: Type 304 stainless steel.
- C. Seat Material: Phenolic.
- D. Seat Color: White.

2.11 SANITARY WASTE RECEPTACLES

- A. Basis of Design: Broderick matrix series, Model B-5270.
- B. Surface mount.
- C. Durable, high impact Grey ABS with high gloss finish.

2.12 FABRICATION - GENERAL

- A. Welding, AWS D10.4.
- B. Grind, dress, and finish welded joints to match finish of adjacent surface.
- C. Form exposed surfaces from one sheet of stock, free of joints.
- D. Provide steel anchors and components required for secure installation.
- E. Form flat surfaces without distortion. Keep exposed surfaces free from scratches and dents. Reinforce doors to prevent warp or twist.
- F. Isolate aluminum from dissimilar metals and from contact with building materials as required to prevent electrolysis and corrosion.
- G. Hot-dip galvanized steel or stainless steel, anchors and fastening devices.
- H. Shop assemble accessories and package with components, anchors, fittings, fasteners and keys.
- I. Key items alike.
- J. Provide templates and rough-in measurements.
- K. Round and deburr edges of sheets to remove sharp edges.

2.13 FINISH

- A. Stainless Steel: NAAMM AMP 500; No. 4 polished finish.
- B. Chromium Plating: ASTM B456, satin or bright as specified, Service Condition No. SC2.

2.14 ACCESSORIES

- A. Fasteners:

1. Fasteners in Mental Health and Behavioral Patient Care Units: Tamper resistant hot-dipped galvanized or stainless steel.
2. Exposed Fasteners: Stainless steel or chromium plated brass, finish to match adjacent surface.
3. Concealed Fasteners:
 - a. Shower, Bathtubs, and High Moisture Areas: Stainless steel.
 - b. Other Locations: Steel, hot-dipped galvanized.
4. Toggle Bolts: For use in hollow masonry or frame construction.
5. Sex bolts: For through bolting on thin panels.
6. Expansion Shields: Lead or plastic for solid masonry and concrete substrate as recommended by accessory manufacturer to suit application.
7. Screws:
 - a. ASME B18.6.4.
 - b. Fed. Spec. FF-S-107, Stainless steel Type A.

B. Adhesive: As recommended by manufacturer to suit application.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
 1. Verify blocking to support accessories is installed and located correctly.
- B. Verify location of accessories with Contracting Officer's Representative.
- C. Provide labor or prep as required for VA-furnished and contractor installed or VA-furnished and installed components.

3.2 INSTALLATION

- A. Install products according to manufacturer's instructions.
 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Install grab bars according to ASTM F446.
- C. Set work accurately, in alignment and where indicated, parallel or perpendicular as required to line and plane of surface. Install accessories plumb, level, free of rack and twist.
- D. Toggle bolt to steel anchorage plates in frame partitions.
- E. Install accessories to function as designed. Perform maintenance service without interference with performance of other devices.

- F. Position and install dispensers, and other devices in countertops, clear of drawers, permitting ample clearance below countertop between devices, and ready access for maintenance.
- G. Align mirrors, dispensers and other accessories even and level, when installed in battery.
- H. Install accessories to prevent striking by other moving, items or interference with accessibility.
- I. Install accessories in Mental Health and Behavioral Units with tamper resistant screws that are flush mounted so that they will not support a rope or material for hanging.

3.3 CLEANING

- A. After installation, clean toilet accessories according to manufacturer's instructions.

3.4 PROTECTION

- A. Protect accessories from damage until project completion.

- - - E N D - - -

SECTION 10 44 13
FIRE EXTINGUISHER CABINETS

PART 1 - GENERAL**1.1 DESCRIPTION**

A. This section covers recessed fire extinguisher cabinets.

1.2 RELATED WORK

A. Acrylic glazing: Section 08 80 00, GLAZING.

B. Field Painting: Section 09 91 00, PAINTING.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data: Fire extinguisher cabinet including installation instruction and rough opening required.

1.4 APPLICATION PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Testing and Materials (ASTM):

D4802-15.....Poly (Methyl Methacrylate) Acrylic Plastic
Sheet

PART 2 - PRODUCTS**2.1 FIRE EXTINGUISHER CABINET**

A. Semi-recessed type with flat trim of size and design shown.

2.2 FABRICATION

A. Form body of cabinet from 0.9 mm (0.0359 inch) thick sheet steel.

B. Fabricate door and trim from 1.2 mm (0.0478 inch) thick sheet steel with all face joints fully welded and ground smooth.

1. Glaze doors with 6 mm (1/4 inch) thick ASTM D4802, clear acrylic sheet, Category B-1, Finish 1.

2. Design doors to open 180 degrees.

3. Provide continuous hinge, pull handle, and adjustable roller catch.

2.3 FINISH

A. Finish interior of cabinet body with baked-on semigloss white enamel.

B. Finish door, frame with manufacturer's standard baked-on prime coat suitable for field painting.

PART 3 - EXECUTION

- A. Install fire extinguisher cabinets in prepared openings and secure in accordance with manufacturer's instructions.
- B. Install cabinet so that the extinguisher height within meets the requirements of NFPA 10.

- - - E N D - - -

SECTION 10 51 16
LOCKERS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section covers lockers.

1.2 SUBMITTALS

- A. Submit in accordance with Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's literature and data:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements and recommendations.
 - 3. Installation methods.
- C. Shop Drawings: Drawings shall be submitted showing individual locker size and overall dimensions.
- D. Samples for Selection: Manufacturer's full line of standard options, minimum size 3 inches square, representing actual product, color, and patterns.

1.3 QUALITY ASSURANCE

- A. Manufacturer Qualifications: A company regularly engaged in manufacture of products specified in this section, and whose products have been in satisfactory use under similar service conditions for not less than 5 years.
- B. Installer Qualifications: A company regularly engaged in installation of products specified in this Section, with a minimum of 5 years' experience.

1.4 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Locker components shall be stored flat until assembly. All finishes shall be protected from soiling and damage during handling.

1.5 PROJECT CONDITIONS

- A. Maintain environmental conditions (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimum results. Do not install products under environmental conditions outside manufacturer's recommended limits.

1.6 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Warranty: Manufacturer guarantees its plastic against breakage, corrosion, and delamination under normal conditions for 25 years from the date of receipt by the customer. If materials are found to be defective during that period for reasons listed above, the materials will be replaced free of charge. (Labor not included in warranty.)

PART 2 - PRODUCTS

2.1 LOCKERS

- A. Basis of Design: Scranton Products, TuffTec, Z-Locker. Architect approval required.
 - 1. Style: Specialty, 2-locker, 'Z' configuration.
 - 2. Size: 12"W x 18"D x 76"H, including 4" base.
 - 3. Hardware:
 - a. Padlock hasp.
 - b. One top-mounted, two-pronged plastic coat hook
 - c. Horizontal venting.
 - d. Continuous hinge.
 - e. Continuous security latch.
- B. Construction:
 - 1. Locker doors and frames shall be made from high impact, high density polyethylene (HDPE) formed under high pressure into solid plastic components 1/2 inch (13 mm) thick with homogeneous color throughout.
 - 2. Sides, tops, bottoms, backs, and shelves shall be made from high impact, high density, polyethylene (HDPE) formed under pressure into solid plastic components 3/8 inch (9.5 mm) thick with homogenous natural color throughout. Out sides, insides, tops, bottoms, backs, dividers and shelves shall be natural in color.
 - 3. Provide end panels and filler panels of plastic material in color of locker unless noted otherwise as an accent color.
 - 4. Continuous latch shall be made from high impact HDPE plastic and capable of accepting various locking mechanisms. The spring-loaded latch shall be securely fastened to the entire length of the door providing a quiet positive latching function.
 - 5. Door hinge shall be made from heavy duty extruded aluminum with a powder coating in black or silver. Door hinge shall be full length assembled onto the door and front.

6. Assembly profile shall be full height of the lockers. Profile shall be made from PVC plastic and snapfit assemble onto locker sides.
7. Coat hooks shall be two-prong and made from high impact plastic. Hooks shall be mounted to bottom of the shelf or divider, one each per door opening.
8. Sloped top.
9. Bases shall be supplied 4 inches (102 mm) high, black unless otherwise specified. Locker bases shall be fabricated from 1 inch (25 mm) or 3/4 inch (19mm) black plastic. Bases are assembled in the field.

C. Materials:

1. Lockers shall be constructed from High Density Polyethylene (HDPE) resins. Material shall be fabricated from polymer resins compounded under high pressure, forming a single component which is waterproof, nonabsorbent and has a self-lubricating surface that resists marks from pens, pencils, markers and other writing instruments.
2. Plastic components shall resist deterioration and discoloration when subjected to any of the following: acetic acid 80%, acetone, ammonia 12%, ammonium phosphate, bleach 12%, borax, brine, caustic soda, chlorine water, citric acid, copper chloride, core oils, hydrochloric acid 40%, hydrogen peroxide 30%, isopropyl alcohol, lactic acid 25%, lime sulfur, nicotine, potassium bromide; soaps, sodium bicarbonate, trisodium phosphate, urea, urine and vinegar. (Testing in accordance with corrosion testing procedure established by the United States Plastic Corporation.)
3. HDPE components shall have a smooth "orange peel" finish. Locker doors and door frames shall be the same color.

D. Fabrication:

1. Locker components shall be fabricated square and rigid with a finish free of scratches and chips.
2. Solid plastic locker components shall snap together at profile connections for easy assembly and shall provide a solid and secure anti-racking bookcase component construction for clean lines and precise reveals. Adjacent lockers shall share a common side panel. Locker units shall be manufactured for assembly in a group of no more than three adjacent lockers.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- C. Report discrepancies to the Architect.

3.3 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install lockers at the location shown in accordance with the manufacturers' instructions for plumb, level, rigid and flush installations.
- C. Anchor the units to the wall studs through the locker back and to the floor using 1-1/2 inches (38 mm) screws.
- D. Lockers shall be floor-mounted as scheduled or indicated. Floor shall be level for proper installation.
- E. Lockers shall be installed on a 4 inch (102 mm) high base as scheduled or indicated. Base shall be level for proper installation.

3.4 PROTECTION

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.

- - - E N D - - -

SECTION 11 05 12
GENERAL MOTOR REQUIREMENTS FOR EQUIPMENT

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies the furnishing, installation and connection of motors.

1.2 RELATED WORK:

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one Section of Division 26.
- B. Section 26 29 11, MOTOR CONTROLLERS: Starters, control and protection for motors.
- C. Section 26 24 19, MOTOR-CONTROL CENTERS: Multiple motor control assemblies, which include motor starters.
- D. Divisions 11 and 14: Other sections specifying motor driven equipment in.

1.3 SUBMITTALS:

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Shop Drawings:
1. Sufficient information, clearly presented, shall be included to determine compliance with drawings and specifications.
 2. Include electrical ratings, dimensions, mounting details, materials, horsepower, RPM, enclosure, starting characteristics, torque characteristics, code letter, full load and locked rotor current, service factor, and lubrication method.
- C. Manuals:
1. Submit simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals, including technical data sheets and application data.
- D. Certification: Two weeks prior to final inspection, unless otherwise noted, submit four copies of the following certification to the Resident Engineer:
1. Certification that the motors have been properly applied, installed, adjusted, lubricated, and tested.

1.4 APPLICABLE PUBLICATIONS:

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent

referenced. Publications are referenced in the text by designation only.

B. National Electrical Manufacturers Association (NEMA):

MG 1-2016.....Motors and Generators

MG 2-2014.....Safety Standard and Guide for Selection,
Installation and Use of Electric Motors and
Generators

C. National Fire Protection Association (NFPA):

70-2020.....National Electrical Code (NEC)

PART 2 - PRODUCTS

2.1 MOTORS:

A. For alternating current, fractional and integral horsepower motors, NEMA Publications MG 1 and MG 2 shall apply.

B. Minimum voltage ratings shall be as follows:

1. Single phase:

- a. Motors connected to 120-volt systems: 115 volts.
- b. Motors connected to 208-volt systems: 200 volts.
- c. Motors connected to 240 volt or 480-volt systems: 230/460 volts, dual connection.

2. Three phase:

- a. Motors connected to 208-volt systems: 200 volts.
- b. Motors, less than 74.6 kW (100 HP), connected to 240 volt or 480-volt systems: 230/460 volts, dual connection.
- c. Motors, 74.6 kW (100 HP) or larger, connected to 240-volt systems: 230 volts.
- d. Motors, 74.6 kW (100 HP) or larger, connected to 480-volt systems: 460 volts.
- e. Motors connected to high voltage systems: Shall conform to NEMA Standards for connection to the nominal system voltage shown on the drawings.

C. Number of phases shall be as follows:

- 1. Motors, less than 373 W (1/2 HP): Single phase.
- 2. Motors, 373 W (1/2 HP) and larger: Three phase.
- 3. Exceptions:
 - a. Hermetically sealed motors.
 - b. Motors for equipment assemblies, less than 746 W (one HP), may be single phase provided the manufacturer of the proposed assemblies cannot supply the assemblies with three phase motors.

- D. Horsepower ratings shall be adequate for operating the connected loads continuously in the prevailing ambient temperatures in areas where the motors are installed, without exceeding the NEMA standard temperature rises for the motor insulation.
- E. Motor designs, as indicated by the NEMA code letters, shall be coordinated with the connected loads to assure adequate starting and running torque.
- F. Motor Enclosures:
1. Shall be the NEMA types shown on the drawings for the motors.
 2. Where the types of motor enclosures are not shown on the drawings, they shall be the NEMA types, which are most suitable for the environmental conditions where the motors are being installed.
 3. Enclosures shall be primed and finish coated at the factory with manufacturer's prime coat and standard finish.
- G. Additional requirements for specific motors, as indicated in other sections, shall also apply.
- H. Energy-Efficient Motors (Motor Efficiencies): All permanently wired polyphase motors of 746 Watts or more shall meet the minimum full-load efficiencies as indicated in the following table, and as specified in this specification. Motors of 746 Watts or more with open, drip-proof or totally enclosed fan-cooled enclosures shall be NEMA premium efficiency type, unless otherwise indicated. Motors provided as an integral part of motor driven equipment are excluded from this requirement if a minimum seasonal or overall efficiency requirement is indicated for that equipment by the provisions of another section.

Minimum Efficiencies Open Drip-Proof				Minimum Efficiencies Totally Enclosed Fan-Cooled			
Rating kW (HP)	1200 RPM	1800 RPM	3600 RPM	Rating kW (HP)	1200 RPM	1800 RPM	3600 RPM
0.746 (1)	82.5%	85.5%	77.0%	0.746 (1)	82.5%	85.5%	77.0%
1.12 (1.5)	86.5%	86.5%	84.0%	1.12 (1.5)	87.5%	86.5%	84.0%
1.49 (2)	87.5%	86.5%	85.5%	1.49 (2)	88.5%	86.5%	85.5%
2.24 (3)	88.5%	89.5%	85.5%	2.24 (3)	89.5%	89.5%	86.5%
3.73 (5)	89.5%	89.5%	86.5%	3.73 (5)	89.5%	89.5%	88.5%
5.60 (7.5)	90.2%	91.0%	88.5%	5.60 (7.5)	91.0%	91.7%	89.5%
7.46 (10)	91.7%	91.7%	89.5%	7.46 (10)	91.0%	91.7%	90.2%

Minimum Efficiencies Open Drip-Proof				Minimum Efficiencies Totally Enclosed Fan-Cooled			
11.2 (15)	91.7%	93.0%	90.2%	11.2 (15)	91.7%	92.4%	91.0%
14.9 (20)	92.4%	93.0%	91.0%	14.9 (20)	91.7%	93.0%	91.0%
18.7 (25)	93.0%	93.6%	91.7%	18.7 (25)	93.0%	93.6%	91.7%
22.4 (30)	93.6%	94.1%	91.7%	22.4 (30)	93.0%	93.6%	91.7%
29.8 (40)	94.1%	94.1%	92.4%	29.8 (40)	94.1%	94.1%	92.4%
37.3 (50)	94.1%	94.5%	93.0%	37.3 (50)	94.1%	94.5%	93.0%
44.8 (60)	94.5%	95.0%	93.6%	44.8 (60)	94.5%	95.0%	93.6%
56.9 (75)	94.5%	95.0%	93.6%	56.9 (75)	94.5%	95.4%	93.6%
74.6 (100)	95.0%	95.4%	93.6%	74.6 (100)	95.0%	95.4%	94.1%
93.3 (125)	95.0%	95.4%	94.1%	93.3 (125)	95.0%	95.4%	95.0%
112 (150)	95.4%	95.8%	94.1%	112 (150)	95.8%	95.8%	95.0%
149.2 (200)	95.4%	95.8%	95.0%	149.2 (200)	95.8%	96.2%	95.4%

I. Minimum Power Factor at Full Load and Rated Voltage: 90 percent at 1200 RPM, 1800 RPM and 3600 RPM.

J. Premium efficiency motors shall be used where energy cost/kW x (hours use/year) > 50.

PART 3 - EXECUTION

3.1 INSTALLATION:

A. Install motors in accordance with manufacturer's recommendations, the NEC, NEMA, as shown on the drawings and/or as required by other sections of these specifications.

3.2 FIELD TESTS

A. Conductor insulation resistance testing shall be performed using a megohmmeter (megger) for all motors after installation and before start-up. Results of tests shall be published for engineer and authority having jurisdiction review. All motor conductor tests shall show ungrounded.

- - - E N D - - -

**SECTION 12 24 00
WINDOW SHADES**

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section includes cloth shades. Provide window shades complete, including brackets, fittings and hardware.

1.2 RELATED WORK:

- A. Lightproof Shades: Section 12 24 21, LIGHTPROOF SHADES.

1.3 QUALITY ASSURANCE:

- A. Manufacturer's Qualification: Submit evidence that the manufacture has a minimum of three (3) years' experience in providing item of type specified, and that the blinds have performed satisfactorily on similar installations. Submit qualifications.
- B. Submit qualifications for installers who are trained and approved by manufacturer for installation of units provided.

1.4 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples for Selection:
 - 1. Shade cloth, Manufacturer's full line, each type, 101 mm (4 inch) square, showing color, finish and texture.
- C. Manufacturer's literature and data; showing details of construction and hardware for:
Cloth and window shades
- D. Shop Drawings: Provide fabrication and installation details for cloth shades, including shade cloth materials, their orientation to rollers, and their seam and batten locations.
- E. Fire Testing: Submit report of flame spread and smoke developed during product material tests by independent testing laboratory.
- F. Manufacturer's warranty.

1.5 WARRANTY:

- A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".
- B. Manufacturer Warranty: Manufacturer shall warranty their window shades for a minimum of five (5) years from date of installation and final acceptance by the Government. Submit manufacturer's warranty.

1.6 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced to in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):
AA-V-00200B.....Venetian Blinds, Shade, Roller, Window, Roller,
Slat, Cord, and Accessories
- C. ASTM International (ASTM):
A240/A240M-14.....Chromium and Chromium-Nickel Stainless Steel
Plate, Sheet, and Strip for Pressure Vessels
and for General Applications
B221-14.....Aluminum-Alloy Extruded Bars, Rods, Wire,
Shapes, and Tubes
B221M-13.....Aluminum-Alloy Extruded Bars, Rods, Wire,
Shapes, and Tubes (Metric)
G21-13.....Determining Resistance of Synthetic Polymeric
Materials to Fungi
- D. National Fire Protection Association (NFPA):
701-15.....Fire Tests for Flame Propagation of Textiles
and Films
- E. Underwriters Laboratories Inc. (UL):
325-06(R2013).....Door, Drapery, Gate, Louver, and Window
Operators and Systems

PART 2 - PRODUCTS**2.1 CLOTH SHADES:**

- A. Light-Filtering Shade Cloth: Woven fabric, stain and fade resistant.
1. Type: Cordless, spring-operated.
 2. Weave: Basketweave.
 3. Thickness: 0.026 inches.
 4. Weight: 14.70ounces per square yard.
 5. Orientation on Shadeband: Up the bolt.
 6. Openness Factor: 1 percent.
 7. Color: Selected from Manufacturer's standard colors.
 8. Fire-Test-Response Characteristics: Passes NFPA 701 small and large-scale vertical burn. Submit report for testing of shade cloth materials identical to products provided.
 9. Drive-End Location: Right side of inside face of shade .

10. Rollers: Extruded aluminum tubes of diameters and wall thicknesses required to accommodate operating mechanisms and weights and widths of fabric panels indicated without deflection. Utilize extruded channel in tube to accept vinyl spline welded to fabric edge. Shade band to be removable and replaceable without removing roller tube from brackets or inserting spline from the side of the roller tube.
11. Shade Cloth Anti-Microbial Characteristics: 'No Growth' per ASTM G21 results for fungi AATCC 30 Part III.
12. Cordless Shades: Provide roller containing spring operating mechanism sized to accommodate shade size indicated in construction documents. Provide with positive locking mechanism that can stop shade movement at each half-turn of roller and with manufacturer's standard pull.
 - a. Pole: Manufacturer's standard type in length required to make operation convenient from floor level and with hook for engaging pull.

2.2 SHADES FOR MENTAL HEALTH AND BEHAVIORAL CARE UNITS:

- A. Operating cords or ropes are not acceptable.
- B. Provide tamperproof hardware.

2.3 MATERIALS:

- A. Stainless Steel: ASTM A240/A240M.
- B. Extruded Aluminum: ASTM B221M (B221).

2.4 FASTENINGS:

- A. Zinc-coated or cadmium plated steel or stainless steel fastenings of length and type recommended by manufacturer. Except as otherwise specified, provide fastenings for installation with various structural materials as follows:

Type of Fastening	Structural Material
Wood screw	Wood
Tap screw	Metal
Case-hardened, self-tapping screw in pre-drilled hole	Solid masonry, concrete
Screw or bolt in expansion shields	Solid masonry, concrete
Toggle bolts	Hollow blocks, gypsum wallboard, plaster

2.5 FABRICATION:

- A. Fabricate cloth shades to fit measurements of finished openings obtained at site.
- B. Cloth Shades: Rolling type, constructed of shade cloth mounted on rollers. Provide shade cloth with plain sides, and with hem at bottom to accommodate weight bar.
 - 1. Provide separate shades for each individual opening. Provide shade length that exceeds height of window by 305 mm (12 inches) measured from head to sill, in addition to material required to make-up hem:
 - a. Provide rollers with spindles, nylon bearings, tempered steel springs, and other related accessories required for positive action.
 - b. Provide rollers of diameter and wall thicknesses required to accommodate operating mechanisms, weights, and widths of shadebands indicated without deflection.
 - c. Provide rollers with permanently lubricated drive-end assemblies and idle-end assemblies designed to facilitate removal of shadebands for service.
 - d. Secure shade cloth to rollers to prevent wrinkling or folding, and on line parallel to axis of rollers so that shade hangs plumb.
 - e. Secure shade cloth with zinc-coated steel or stainless steel machine screws spaced not over 228 mm (9 inches) on centers.
 - f. Do not attach shade cloth to rollers with tacks.
 - g. Provide enclosed hem bar of extruded aluminum for entire width of shade band. Heat seal hem bar on all sides to prevent removal.
 - h. Provide eyelets with clear openings large enough to accommodate cords, without cutting into cloth when set.
- B. Fixed Transom Shades: Fixed shades constructed of shade cloth mounted on custom frame to be secured within transom window casing/trim. See Drawings for transom shapes and locations.

PART 3 - EXECUTION**3.1 INSTALLATION:**

- A. Measure openings before fabrication. Do not scale construction documents.
- B. Roller Cloth Shades: Inside-Mount window shades between jambs of window opening. Provide extension face brackets where necessary at mullions.

1. Locate rollers in level position as high as practicable at heads of windows.
 2. Install shades to prevent infiltration of light over rollers.
 3. Where extension brackets are necessary for alignment of shades, provide metal lugs, and rigidly anchor lugs and brackets.
 4. Place brackets and rollers so that shades do not interfere with window and screen hardware.
 5. Shade installation methods not specifically described, are subject to approval of Contracting Officer Representative (COR).
- C. Fixed Cloth Shades: Mount fixed shades within transom window casing as per manufacturer's recommended method.
1. Install shades to prevent infiltration of light around custom shade frame.
 2. Shade installation methods not specifically described, are subject to approval of Contracting Officer Representative (COR).

3.2 ADJUSTING:

- A. Adjust and shades to operate smoothly, free from binding or malfunction throughout entire operational range.

3.3 CLEANING AND PROTECTION:

- A. Clean shade surfaces after installation, according to manufacturer's written instructions.
- B. Provide final protection and maintain conditions that ensure that shades are without damage or deterioration at time of Substantial Completion.
- C. Replace damaged shades that cannot be repaired, in a manner approved by COR before time of Substantial Completion.

- - - E N D - - -

SECTION 12 24 21

LIGHTPROOF SHADES

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section includes lightproof shades. Provide lightproof shades complete including brackets, light traps, fittings, and hardware.

1.2 RELATED WORK

- A. Section 12 24 00, WINDOW SHADES.

1.3 QUALITY ASSURANCE

- A. Manufacturer's Qualification: Has a minimum of three (3) years' experience in providing item of type specified, and that the shades have performed satisfactorily on similar installations.
- B. Installers who are trained and approved by manufacturer for installation of units provided.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data: Showing details of construction and hardware for Lightproof Shades.
- C. Samples for Selection:
 - 1. Shade cloth, Manufacturer's full line, each type, 101 mm (4 inch) square, showing color, finish and texture.
- D. Shop Drawings: Provide fabrication and installation details for lightproof shades.
- E. Fire Testing: Submit report of flame spread and smoke development during product material tests by independent testing laboratory.
- F. Manufacturer's warranty.

1.5 WARRANTY

- A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".
- B. Manufacturer Warranty: Manufacturer shall warranty their lightproof shades for a minimum of five (5) years from date of installation and final acceptance by the Government. Submit manufacturer's warranty.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. ASTM International (ASTM):

G21-15.....Determining Resistance of Synthetic Polymeric
Materials to Fungi

C. National Fire Protection Association (NFPA):

701-2019.....Fire Tests for Flame Propagation of Textiles
and Films

PART 2 - PRODUCTS**2.1 MATERIALS**

- A. Room Darkening, PVC Free Shade Cloth with Opaque Acrylic Backing: Not less than 0.19 mm (.008 inches) thick blackout material and weighing 580 grams per square meter (17.1 ounces per square yard), plus or minus 5 percent comprised of fiberglass, acrylic, polyester finish materials.
1. Color: Selected from Manufacturer's standard colors.
 2. Fire-Test-Response Characteristics: Passes NFPA 701 small and large-scale vertical burn. Submit report for testing of shade cloth materials identical to products provide.
 3. Shade Cloth Anti-Microbial Characteristics: 'No Growth' in accordance with ASTM G21 results for fungi ATCC9642, ATCC9644, and ATCC9645.
- B. Cordless Shades: Provide roller containing spring operating mechanism sized to accommodate shade size. Provide with positive locking mechanism that can stop shade movement at each half-turn of roller and with manufacturer's standard pull.
1. Pole: Manufacturer's standard type in length required to make operation convenient from floor level and with hook for engaging pull.
- C. Fastenings: Zinc-coated or cadmium plated steel or stainless steel fastenings of proper length and type. Except as otherwise specified, fastenings for use with various structural materials are to be as follows:

Type of Fastening	Structural Material
Wood screw	Wood
Tap Screw	Metal
Case-hardened, self-tapping screw in pre-drilled hole	Sheet metal or solid masonry or concrete
Screw or bolt-in expansion shield	Solid masonry or concrete
Toggle bolts	Hollow blocks, gypsum wallboard, plaster

2.2 SHADES FOR MENTAL HEALTH AND BEHAVIORAL CARE UNITS

- A. Operating cords or ropes are not acceptable.
- B. Provide hardware flush with walls.
- C. Provide tamper proof hardware.

2.3 FABRICATION

- A. Measure openings before fabrication. Do not scale construction documents.
- B. Fabricate lightproof shades with metal head housing, deep side guides, sill light lock members, continuous metal jamb and head anchor section, operating bars, and complete with roller assembly, one (1) piece lightproof shade cloth, and two (2) metal disappearing type horizontal braces for each shade.
- C. Shop fabricate light traps consisting of head box to house shade roller, and steel channels U-shape in cross section to serve as guides for shade along sides, and to receive bottom edge of shade along sill.
 - 1. Fabricate light trap of sheet steel having a minimum thickness of 0.38 mm (0.015 inches). Provide legs of the U-shaped channels not less than 45 mm (1-3/4 inches) long and separated by minimum distance that will permit free operation of the shade.
 - 2. Round or bead edges of light trap coming into contact with shade cloth.
 - 3. Provide hinged or removable exposed face of head box for access to shade roller.
 - 4. Fabricate entire assembly to prevent light from entering the room when the shade is drawn.
 - 5. Finish interior or concealed surfaces of light trap with coat of flat black enamel.

- D. Fabricate rollers of aluminum or stainless steel of sufficient diameter and thickness to support the shade, and provided with spindles, bearings and coil springs.
- E. Provide rollers with groove and metal spline with steel, or stainless steel machine screws spaced not over 228 mm (9 inches) on centers, for attaching the shade cloth.
- F. For shades not finished with a selvage, bind or hem vertical edges.
 - 1. Sewn Edges: Double or triple stitched, using a heavy-duty thread. Make needle holes lightproof by applying a suitable filler.
 - 2. Sealed Edges: Continuously hot seal without curling or raveling.
- G. Stiffen shade by transverse steel bars of size and weight sufficient to hold shade in channel guides.
 - 1. Space bars approximately 457 mm (18 inches) on centers and conceal in pockets in the shade.
 - 2. Fit bottom edge of shade with steel operating bar designed to engage sill channel of light trap.
- H. Fixed Transom Shades: Fixed lightproof shades constructed of shade cloth mounted on custom frame to be secured within transom window casing/trim. See Drawings for transom shapes and locations.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install lightproof roller shades level at a height that will permit proper operation of the shades, and prevent outside light from infiltrating into the room.
- B. Fit light traps to adjacent construction, with rigid and light-tight connections.
- C. Locate so shade is no closer than 51 mm (2 inches) to interior face of glass.
- D. Do not install shades until after room painting and finishing operations are complete.
- E. Fixed Lightproof Shades: Mount fixed shades within transom window casing as per manufacturer's recommended method.
 - 1. Install shades to prevent infiltration of light around custom shade frame.
 - 2. Shade installation methods not specifically described, are subject to approval of Contracting Officer Representative (COR).

3.2 ADJUSTING

- A. Adjust and balance roller shades to operate smoothly, easily, safely, and free from binding or malfunction throughout entire operational range.

3.3 CLEANING AND PROTECTION

- A. Clean lightproof surfaces after installation, according to manufacturer's written instructions.
- B. Provide final protection and maintain conditions that ensure that lightproof shades are without damage or deterioration at time of Substantial Completion.
- C. Replace damaged lightproof shades that cannot be repaired, in a manner approved by Contracting Officer Representative (COR) before time of Substantial Completion.

- - - E N D - - -

SECTION 14 24 00
HYDRAULIC ELEVATOR - NEW

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the engineering, furnishing and installation of the complete hydraulic elevator system as described herein and as indicated on the contract drawings.
- B. Items listed in the singular apply to each elevator in this specification except where noted.
- C. Passenger Elevator P__ must be oil hydraulic, microprocessor control system and power-operated car and hoistway doors. Elevator must be Class "A" loading rated as a minimum.

ELEVATOR SCHEDULE	
Elevator Number	B8-P1
Overall Platform Size	9'-4" Deep x 6'-0" Wide
Clear Inside Platform	7'-8 ½" Deep x 5'-8" Wide
Rated Load - kg (lb)	1814 kg (4000H lb)
Contract Speed - m/s (fpm)	0.33 m/s (65 fpm)
Total Travel - m (ft)	25'-0"
Floors Served	3
Number of Openings	5
Entrance Type & Size	Two Speed (Left Hand, Right Hand)
Plunger Size	By Manufacture

1.2 RELATED WORK

- A. Section 01 33 23 SPECIFICATIONS AND DRAWINGS FOR CONSTRUCTION (FAR 52.236-21) and, SPECIAL NOTES (VAAR 852.236-91), in GENERAL CONDITIONS.
- B. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire-rated construction.
- D. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Requirements for seismic restraint of non-structural components.
- E. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section.

- F. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Low Voltage power and lighting wiring.
- G. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- H. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for cables and wiring.
- I. Section 26 05 73, OVERCURRENT PROTECTIVE DEVICE COORDINATION STUDY: Requirements for installing the over-current protective devices to ensure proper equipment and personnel protection.
- J. Section 26 22 00, LOW-VOLTAGE TRANSFORMERS: Low voltage transformers.
- K. Section 26 24 16, PANELBOARDS: Low voltage panelboards.
- L. Section 26 43 13, TRANSIENT-VOLTAGE SURGE SUPPRESSION: Surge suppressors installed in panelboards.
- M. Section 26 51 00, INTERIOR LIGHTING: Fixture and ballast type for interior lighting.

1.3 QUALIFICATIONS

- A. Approval by the Contracting Officer is required for products and services of proposed manufacturers, suppliers, installers and must be contingent upon submission of certificates by the Contractor stating the following:
 - 1. Elevator contractor is currently and regularly engaged in the installation of elevator equipment as one of his principal products.
 - 2. Elevator contractor must have five (5) years of successful experience, trained supervisory personnel and facilities to install elevator equipment specified herein.
 - 3. Elevator Mechanic (Installer) must have passed a Mechanic Examination approved by the U.S. Department of Labor and have technical qualifications of at least five years of experience in the elevator industry or 10,000 hours of field experience working in the elevator industry with technical update training. Apprentices must be actively pursuing Certified Elevator Mechanic status. Certification must be submitted for all workers employed in this capacity.
- B. Welding at the project site must be performed by certified welders who have previously qualified by test as prescribed in American Welding Society Publications AWS D1.1 to perform the type of work required. Certificates must be submitted for all workers employed in this

capacity. A welding or hot work permit is required for each day and must be obtained from the VAMC safety department. Request permit one day in advance.

- C. Electrical work must be performed by a Licensed Master Electrician and Licensed Journeymen Electricians as requirements by NEC. Certificates must be submitted for all workers employed in this capacity.
- D. Approval must not be given to elevator contractors and manufacturers who have established on prior projects, either government, municipal, or commercial, a record of unsatisfactory elevator installations, have failed to complete awarded contracts within the contract period and do not have the requisite record of satisfactory performing elevator installations of similar type and magnitude.
- E. Approval of Elevator Contractor's equipment must be contingent upon their providing factory training, engineering and technical support, including all manuals, wiring diagrams and tools necessary for adjusting, maintenance, repair and testing of equipment to the VA for use by the VA's designated Elevator Maintenance Service Provider.
- F. Identifying an elevator maintenance service provider that must render services within two hours of receipt of notification, together with certification that the quantity and quality of replacement parts stock is sufficient to warranty continued operation of the elevator installation.
- G. Equipment within a group of hydraulic elevators must be the product of the same manufacturer.
- H. The Contractor must provide and install safety devices that have been subjected to tests witnessed and certified by an independent professional testing laboratory that is not a subsidiary of the firm that manufactures supplies or installs the equipment.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification.
Elevator installation , meet the requirements of the latest editions published and adopted by the United States Department of Veterans Affairs on the date contract is signed.
- B. Federal Specifications (Fed. Spec.):
 - J-C-30B - Cable and Wire, Electrical (Power, Fixed Installation)
 - J-C-580 - Cord, Flexible and Wire, Fixture
 - W-S-610 - Splice Connectors

- W-C-596F - Connector, Plug, Electrical; Connector, Receptacle, Electrical
- W-F-406E - Fittings for Cable, Power, Electrical and Conduit, Metal, Flexible
- HH-I-558C - Insulation, Blankets, Thermal (Mineral Fiber, Industrial Type)
- W-F-408E - Fittings for Conduit, Metal, Rigid (Thick-Wall and Thin-wall EMT Type)
- RR-W-410 - Wire Rope and Strand
- TT-E-489J - Enamel, Alkyd, Gloss, Low VOC Content
- QQ-S-766 - Steel, Stainless and Heat Resisting, Alloys, Plate, Sheet and Strip
- C. American Society of Mechanical Engineers (ASME):
 - A17.1 - Safety Code for Elevators and Escalators
 - A17.2 - Inspectors Manual for Electric Elevators and Escalators
- D. National Fire Protection Association:
 - NFPA 13 - Standard for the Installation of Sprinkler Systems
 - NFPA 70 - National Electrical Code (NEC)
 - NFPA 72 - National Fire Alarm and Signaling Code
 - NFPA 101 - Life Safety Code
 - NFPA 252 - Fire Test of Door Assemblies
- E. International Building Code (IBC)
- F. American Society for Testing and Materials (ASTM):
 - A1008/A1008M-09 - Steel, Sheet, Cold Rolled, Carbon, Structural, High-Strength Low-Alloy and High Strength Low-Alloy with Improved Formability
 - E1042-02 - Acoustically Absorptive Materials Applied by Trowel or Spray
- G. Manufacturer's Standardization Society of the Valve and Fittings Industry (MSS):
 - SP-58 - Pipe Hangers and Supports
- H. Society of Automotive Engineers, Inc. (SAE):
 - J517-91 - Hydraulic Hose, Standard
- I. Gages:
 - For Sheet and Plate: U.S. Standard (USS)
 - For Wires: American Wire Gauge (AWG)
- J. American Welding Society (AWS):
 - D1.1 - Structured Welding Code - Steel
- K. National Electrical Manufacturers Association (NEMA):

LD-3 - High-Pressure Decorative Laminates

L. Underwriter's Laboratories (UL):

486A - Safety Wire Connectors for Copper Conductors

797 - Safety Electrical Metallic Tubing

M. Institute of Electrical and Electronic Engineers (IEEE)

N. Regulatory Standards:

VA Barrier Free Design Handbook H-18-13

VA Seismic Design Manual H-18-8

Uniform Federal Accessibility Standards

O. National Elevator Industry, Inc.

NEII-1 Building Transportation Standards and Guidelines

1.5 SUBMITTALS

A. Submit in accordance with Specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA and SAMPLES.

B. Before execution of work, furnish information to evidence full compliance with contract requirements for proposed items. Such information must include, as required: Manufacturer's Name, Trade Names, Model or Catalog Number, Nameplate Data (size, capacity and rating) and corresponding specification reference (Federal or project specification number and paragraph). All submitted drawings and related elevator material must be forwarded to the Contracting Officer.

C. Shop Drawings:

1. Complete scaled and dimensioned layout in plan and section view showing the arrangement of equipment and all details of each elevator unit specified including:

a. Complete layout showing location of storage tank/pump assembly, controller, piping layout, outside diameter of cylinder/plunger assembly, size of car platform, car frame members and support assembly.

b. Car, guide rails, brackets, buffers and other components located in hoistway.

c. Rail bracket spacing and maximum vertical forces on guide rails in accordance with H-18-8 for Seismic Risk Zone 2 or greater.

d. Reaction at points of support and buffer impact loads.

e. Weight of principal parts.

f. Top and bottom clearances and over travel of the car.

- g. Location of main line switch/shunt trip circuit breaker, switchboard panel, light switch and feeder extension points in the machine room.
- 2. Drawings of hoistway entrances and doors showing details of construction and method of fastening to the structural members of the building.
 - a. If drywall construction is used to enclose hoistway, submit details of interface fastenings between entrance frames and drywall.
 - b. Sill details including sill support.
- D. Samples:
 - 1. One each of stainless steel, 76 mm x 127 mm (3 in. x 5 in.).
 - 2. One each of baked enamel, 76 mm x 127 mm (3 in. x 5 in.).
 - 3. One each of color floor covering.
 - 4. One each of protection pads, 76 mm x 127 mm (3 in. x 5 in.) if used.
 - 5. One each car and hoistway Braille plate sample.
 - 6. One each car and hall button sample.
 - 7. One each car and hall lantern/position indicator sample.
 - 8. One each wall and ceiling material finish sample.
 - 9. One each car lighting sample.
- E. Name of manufacturer, type or style designation and applicable data of the following equipment must be shown on the elevator layouts:
 - 1. Storage tank/pump assembly.
 - 2. Pump and motor, HP and RPM rating, Voltage, Starting and Full Load Ampere, Number of phases and Gallons per minute.
 - 3. Controller.
 - 4. Starters and Overload Current Protection Devices.
 - 5. Car Safety Device; Rupture Valve and Manual Shut Off Valves.
 - 6. Electric Door Operator; HP, RPM, Voltage and Ampere rating of motor.
 - 7. Hoistway Door Interlocks.
 - 8. Car Buffers; maximum and minimum rated load, maximum rated striking speed and stroke.
 - 9. Cab Ventilation Unit; HP rating and CFM rating.
- F. Complete construction drawings of elevator car enclosure, showing dimensioned details of construction, fastenings to platform, car lighting, ventilation, ceiling framing, top exits and location of car equipment.

- G. Complete dimensioned detail of vibration isolating foundations for storage tank/pump assembly.
- H. Dimensioned drawings showing details of:
 - 1. All signal and operating fixtures.
 - 2. Car slide guides/roller guides.
 - 3. Hoistway door tracks, hangers and sills.
 - 4. Door operator, infrared curtain units.
- I. Cut sheets or drawings showing details of controllers and supervisory panels.
- J. Furnish certificates as required under: Paragraph "QUALIFICATIONS".

1.6 WIRING DIAGRAMS

- A. Provide three complete sets of paper and one electronic set of field wiring and straight-line wiring diagrams showing all electrical circuits in the hoistway, machine room and fixtures. Install one set coated with an approved plastic sealer and mounted in the elevator machine room as directed by the Resident Engineer/Contracting Officer or authorized representative.
- B. In the event field modifications are necessary during installation, diagrams must be revised to include all corrections made prior to and during the final inspection. Corrected diagrams must be delivered to the Resident Engineer/Contracting Officer within thirty (30) days of final acceptance.
- C. Provide the following information relating to the specific type of microprocessor controls installed:
 - 1. Owner's information manual, containing job specific data on major components, maintenance and adjustment.
 - 2. System logic description.
 - 3. Complete wiring diagrams needed for field troubleshooting, adjustment, repair and replacement of components. Diagrams must be base diagrams, containing all changes and additions made to the equipment during the design and construction period.
 - 4. Changes made during the construction and warranty period must be noted on the drawings in adequate time to have the finalized drawings reproduced for mounting in the machine room no later than six months prior to the expiration of the warranty period.

1.7 PERFORMANCE STANDARDS

- A. The elevators must meet the highest standards of the industry and specifically the following:

1. Contract speed is high speed in either direction of travel with rated capacity load in the elevator. Speed variation under all load conditions, regardless of direction of travel, must not vary more than three (3) percent.
 2. The controlled rate of change of acceleration and retardation of the car must not exceed 0.1G per ft/s/s and the maximum acceleration and retardation must not exceed 0.2G per ft/s/s.
 3. Starting, stopping and leveling must be smooth and comfortable without appreciable steps of acceleration and deceleration.
- B. Passenger/Service door operators must open the car door and hoistway door at 76.2 cm (2.5 ft) per second and close at 30.5 cm (1 ft) per second.
- C. Pressure: Fluid system components must be designed and factory tested for 500 psi operating pressure.
- D. Floor level stopping accuracy must be within 3 mm (.125 in.) above or below the floor, regardless of load condition.
- E. Noise and Vibration Isolation: All elevator equipment including their supports and fastenings to the building, must be mechanically and electrically isolated from the building structure to minimize objectionable noise and vibration transmission to car, building structure, or adjacent occupied areas of building.
- F. Sound Isolation: Noise level relating to elevator equipment operation in machine room must not exceed 80 decibels. All db readings must be taken three (3) feet off the floor and three (3) feet from equipment.
- G. Airborne Noise: Measured noise level of elevator equipment during operation must not exceed 50 decibels in elevator lobbies and 60 decibels inside car under any condition including door operation and car ventilation exhaust blower on its highest speed.

1.8 WARRANTY

- A. Submit all labor and materials furnished regarding elevator system and installation to terms of "Warranty of Construction" articles of FAR clause 52.246-21. The One-Year Warranty and Guarantee Period of Service must commence and run concurrent after final inspection, completion of performance test and upon acceptance of each elevator.
- B. During warranty period if a device is not functioning properly in accordance with specification requirements, more maintenance than the contract requires keeping device operational, device must be removed and a new device meeting all requirements must be installed as part of

work until satisfactory operation of installation is obtained. Period of warranty must start anew for such parts from date of completion of each new installation performed, in accordance with foregoing requirements.

1.9 POWER SUPPLY

- A. Power supply requirements in each machine room, see Specification 26 05 19, Electrical specifications and Electrical drawings.
- B. Main Line Fused Disconnect Switch/Shunt Trip Circuit Breaker for each controller must be located inside the machine room at the strike jamb side of the machine room door and lockable in the "Off" position.
- C. Provide Surge Suppressors to protect the elevator equipment.

1.10 EMERGENCY POWER SUPPLY

- A. Emergency power supply, its starting means, transfer switch for transfer of elevator supply from normal to emergency power, two pair of conductors in a conduit from an auxiliary contact on the transfer switch (open or close contacts as required by Elevator Controller Manufacturer) to terminals in the group elevator controller and other related work must be provided by the Electrical Contractor.
- B. Upon loss of normal power supply there must be a delay before transferring to emergency power of 10 seconds minimum to 45 seconds maximum, the delay must be accomplished through an adjustable timing device.
- C. Prior to the return of normal power an adjustable timed circuit must be activated that will cause all cars to remain at a floor if already there or stop and remain at the next floor if in flight. Actual transfer of power from emergency power to normal building power must take place after all cars are stopped at a floor with their doors open.
- D. Car lighting circuits must be connected to the emergency power panel.

1.11 ELEVATOR MACHINE ROOM

- A. Provide a machine room that meets the requirements of ASME A17.1, NEC, NFPA and IBC. The elevator drive machine and elevator controller must be in the same code approved machine room.
- B. Provide stairs and landing for access to the machine room. The landing must be large enough to accommodate full opening of the door plus 61 cm (24 in.).
- C. Locate the shunt trip breaker/main line disconnect and machine room light switch on the lock side of the door inside the machine room.

- D. Locate sprinkler pipes to provide 213.3 cm (7 ft) head clearance. Do not locate sprinkler heads, heat detectors and smoke detectors directly over elevator equipment.

1.12 HOISTWAY LIGHTING

- A. Provide lighting throughout the entire hoistway with 3-way switches at the top and bottom of the hoistway accessible from elevator hoistway entrance prior to entering the pit or stepping onto the car top.
- B. Lighting must illuminate top of elevator cab when it is at the top floor and the pit when at the bottom floor.

1.13 TOOL CABINET

- A. Provide a metal parts/tool cabinet, having two shelves and hinged doors. Cabinet must be 1219 mm (48 in.) high, 762 mm (30 in.) wide and 457 mm (18 in.) deep.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Where stainless steel is specified, it must be corrosion resisting steel complying with Fed. Spec. QQ-S-766, Class 302 or 304, Condition A with Number 4 finish on exposed surfaces. Stainless steel must have the grain of belting in the direction of the longest dimension and surfaces must be smooth and without waves. During installation stainless steel surfaces must be protected with a suitable material.
- B. Where cold rolled steel is specified it must be low-carbon steel rolled to stretcher level standard flatness, complying with ASTM A109.

2.2 MANUFACTURED PRODUCTS

- A. Materials, devices and equipment furnished must be of current production by manufacturers regularly engaged in the manufacture of such items. The elevator equipment, including controllers, door operators and supervisory system must be the product of manufacturers of established reputation, provided such items are capably engineered and produced under coordinated specifications to ensure compatibility with the total operating system.
- B. Manufacturers of equipment assemblies which include components made by others must assume complete responsibility for the final assembled unit. Components must be compatible with each other and with the total assembly for the intended service.
- C. Mixing of manufactures related to a single system or group of components must be identified in the submittals.

- D. Key operated switches provided for this elevator installation must be provided with four (4) keys for each individual switch or lock. Provide different key tumblers for different switch and lock functions. Each key must have a tag bearing a stamped or etched legend identifying its purpose.

2.3 CONDUIT AND WIREWAY

- A. Provide new conduit and wireway. Install electrical conductors, except traveling cables, in rigid zinc-coated steel or aluminum conduit, electrical metallic tubing or metal wireways. Rigid conduit smaller than 19 mm (.75 in.) or electrical metallic tubing smaller than 12.5 mm (.50 in.) electrical trade size must not be used. All raceways completely embedded in concrete slabs, walls, or floor fill must be rigid steel conduit. Wireway (duct) must be installed in the hoistway and to the controller and between similar apparatus in the elevator machine room. Fully protect self-supporting connections, where approved, from abrasion or other mechanical injury. Flexible metal conduit not less than 9.375 mm (.375 in.) electrical trade size may be used, not exceeding 45.7 cm (18 in.) in length unsupported, for short connections between risers and limit switches, interlocks and for other applications permitted by NEC.
- B. All conduits terminating in steel cabinets, junction boxes, wireways, switch boxes, outlet boxes and similar locations must have approved insulation bushings. Install a steel lock nut under the bushings if they are constructed completely of insulating materials. Protect the conductors at ends of conduits not terminating in steel cabinets or boxes by terminal fittings having an insulated opening for the conductors.
- C. Rigid conduit and EMT fittings using set screws or indentations as a means of attachment must not be used.
- D. Connect motors or other items subject to movement, vibration, or removal to the conduit or EMT systems with flexible, steel conduits.

2.4 CONDUCTORS

- A. Conductors must be stranded or solid coated annealed copper in accordance with Federal Specification J-C-30B for Type RHW or THW. Where 16 and 18 AWG are permitted by NEC, single conductors, or multiple conductor cables in accordance with Federal Specification J-C-580 for Type TF may be used provided the insulation of single conductor cable and outer jacket of multiple conductor cable is flame retardant

and moisture resistant. Multiple conductor cable must have color or number coding for each conductor. Conductors for control boards must be in accordance with NEC. Joints or splices are not permitted in wiring except at outlets. Tap connectors may be used in wireways provided they meet all UL requirements.

- B. Provide all conduit and wiring between machine room, hoistway and fixtures.
- C. All wiring must test free from short circuits or ground faults. Insulation resistance between individual external conductors and between conductors and ground must be a minimum of one megohm.
- D. Where size of conductors is not given, voltage and amperes must not exceed limits set by NEC.
- E. Provide equipment grounding. Ground the conduits, supports, controller enclosure, motor, platform and car frame and all other non-current conducting metal enclosures for electrical equipment in accordance with NEC. The ground wires must be copper, green insulated and sized as required by NEC. Bond the grounding wires to all junction boxes, cabinets and wire raceways.
- F. Terminal connections for all conductors used for external wiring between various items of elevator equipment must be solderless pressure wire connectors in accordance with Federal Specification W-S-610. The Elevator Contractor may, at his option, make these terminal connections on #10 gauge or smaller conductors with approved terminal eyelets set on the conductor with a special setting tool, or with an approved pressure type terminal block. Terminal blocks using pierce-through serrated washers are not acceptable.

2.5 TRAVELING CABLES

- A. All conductors to the car must consist of new flexible traveling cables conforming to the requirements of NEC. Traveling cables must run from the junction box on the car directly to the controller in the machine room. Junction boxes on the car must be equipped with terminal blocks. Terminal blocks having pressure wire connectors of the clamp type that meet UL 486A requirements for stranded wire may be used in lieu of terminal eyelet connections. Terminal blocks must have permanent indelible identifying numbers for each connection. Cables must be securely anchored to avoid strain on individual terminal connections. Flame and moisture resistant outer covering must remain intact between

junction boxes. Abrupt bending, twisting and distortion of the cables must not be permitted.

- B. Provide spare conductors equal to 10 percent of the total number of conductors furnished, but not less than 5 spare conductors in each traveling cable.
- C. Provide shielded wires for the auto dial telephone system within the traveling cable, five (5) pair shielded wires for card reader, Ethernet (cables required for Wi-Fi and other systems, two (2) pair 14-gauge wires for 110 Volt power supply and wire for video display monitor if specified.
- D. Traveling cables that contact the hoistway or elevator due to sway or change in position, provide shields or pads to the elevator and hoistway to prevent damage to the traveling cables.
- E. Hardware cloth may be installed from the hoistway suspension point to the elevator pit to prevent traveling cables from rubbing or chafing and securely fastened and tensioned to prevent buckling. Hardware cloth is not required when traveling cable is hung against a flat wall.

2.6 CONTROLLER AND SUPERVISORY PANEL

- A. UL/CSA Labeled Controller: Mount all assemblies, power supplies, chassis switches and relays on a steel frame in a NEMA Type 1 General Purpose Enclosure. Cabinet must be securely attached to the building structure.
- B. Properly identify each device on all panels by name, letter, or standard symbol which must be neatly stencil painted or decaled in an indelible and legible manner. Identification markings must be coordinated with identical markings used on wiring diagrams. The ampere rating must be marked adjacent to all fuse holders. All spare conductors to controller and supervisory panel must be neatly formed, laced and identified.
- C. Controller must be provided with wiring and components for additional future travel if required.

2.7 MICROPROCESSOR CONTROL SYSTEM

- A. Provide a microprocessor control system with absolute position/speed feedback to control dispatching, signal functions, door operation, pump motor and hydraulic valve control. Complete details of the components and printed circuit boards, together with a complete operational description, must be submitted for approval. Provide closed transition SCR soft start.

- B. Controller manufacturer must provide factory training, engineering and technical support, including all manuals, wiring diagrams and tools necessary for adjusting, maintenance, repair and testing of equipment to the VA for use by the VA's designated Elevator Maintenance Service Provider.
- C. Microprocessor dispatching system must evaluate building traffic demand including number of elevators in service, hall calls, car calls, elevator position, direction of travel, load in elevator, door status and select an elevator to answer hall calls for least possible passenger wait times.
- D. Provide low oil and hot oil shutdown features that must shut off the motor and pump and return the elevator to the lowest landing. Upon reaching the lowest landing, doors will open automatically allowing passengers to leave the elevator and then doors must close. All control buttons, except the door open button, alarm bell button and the call for help button must be made ineffective.

2.8 MACHINE ROOM MONITOR

- A. Provide a monitor in each machine room, separate monitors for each passenger elevator group and each service elevator group. Provide a separate keyboard for each monitor.
- B. The monitor must contain indicators to provide the following information:
 - 1. The floor where each elevator is currently located.
 - 2. The direction that each elevator is currently traveling or is scheduled to travel.
 - 3. The location and direction of currently registered hall calls.
 - 4. Elevators that are currently out of service.
 - 5. Elevators that are currently bypassing hall calls.
 - 6. Elevators that are currently engaged in passenger transfers.
 - 7. Operations program under which entire group is currently operating.
 - 8. Zone divisions of the entire group.
 - 9. Door positions.
 - 10. Status indication for elevators on independent service, car top inspection, fire service, earthquake protection and activated stop switch and alarm bell.
- C. The maintenance terminal must be suitable for all troubleshooting procedures related to the specific type of microprocessor installed on this project.

2.9 EMERGENCY POWER OPERATION

- A. The control system for Elevator(s) must provide for the operation of at least one car per elevator group on emergency power upon failure of the normal power supply.
- B. Auxiliary equipment on elevator controllers, wiring between associated elevator controllers and wiring between elevator controllers and remote selector panel as required to permit the elevators to operate as detailed, must be provided by the Elevator Contractor.
- C. Upon loss of normal power supply there must be a delay before transferring to emergency power of 10 seconds minimum to 45 seconds maximum, the delay must be accomplished through an adjustable timing device. After adjusting delay, the associated elevators must function the same as on normal power or as follows:
- D. Prior to the return of normal power an adjustable timer circuit must activate that will cause all cars to remain at a floor if already there or stop and remain at the next floor if in flight. Actual transfer of power from auxiliary power to normal building power must take place after all cars are stopped at a floor with their doors open.
- E. Emergency Rescue Operation:
Provide a power source to send the elevator to the lowest landing. After the elevator has leveled at the lowest landing, provide power to open the car and hoistway doors automatically. After a predetermined time, the doors must close. Power must stay applied to the door open button to reopen the doors from the inside of the elevator. The elevator must remain shut down at the bottom landing until normal power is restored. Install a sign on the controller indicating that power is applied to emergency rescue operator and door operator during loss of normal power.

2.10 FIREFIGHTER'S SERVICE

- A. Provide Firefighter's Service. Key switches must be barrel-key FEO-K1.
 - 1. Main Floor: Basement
 - 2. Alternate Floor: Lower Level Arcade
 - 3. Verify main and alternate floors with RE/CO or authorized representative.

2.11 INDEPENDENT SERVICE

- A. Provide an INDEPENDENT SERVICE key switch on the face of the main car operating panel that must have its positions marked "ON" and "OFF". When the switch is in the "ON" position, the car must respond only to

calls registered on its car dispatch buttons and must bypass all calls registered on landing push buttons. The car must start when a car call is registered, car call button or door close button is pressed, car and hoistway doors are closed and interlock circuits are made. When switch is returned to "OFF" position, normal service must be resumed.

2.12 MEDICAL EMERGENCY SERVICE - PATIENT CARE FACILITIES ONLY

- A. Provisions must be made for calling elevator(s) to floor served by the elevator on an emergency basis, operating independently from the dispatch signals and landing call signals.
- B. Install key switches in the floor landing push button fixtures above the push buttons.
- C. Provide a call registered light indicator adjacent to key switch. The key switch at the landings and in the car, must only be operable by authorized personnel with a key.
- D. When key switch is activated at any floor, the call register light indicator must illuminate at the call floor and inside the elevator. The elevator control system must instantly select an elevator to respond to the medical emergency call. Immediately upon selection, all car calls must be cancelled. If car is traveling away from the medical emergency call, it must slow down and stop at the nearest floor, maintain closed doors, reverse direction and proceed nonstop to the medical emergency call floor. If the car is traveling toward the medical emergency call floor, it must proceed to that floor nonstop. If at the time of selection, it is slowing down for a stop, the car must stop, maintain doors closed and start immediately toward the medical emergency floor.
- E. Arriving at the medical emergency floor, the car must remain with doors open for 30 seconds. After this interval has expired and the car has not been placed on medical emergency operation inside the car, the car must automatically return to normal service.
- F. Provide an LED illuminated indicator light next to the Medical Emergency key switch the same size as the Fire Service indicator.
 - 1. Locate a "Medical Emergency" key switch above call buttons in the main car operating panel for selecting medical emergency service. Activation of the key switch will allow the car to accept a car call for any floor, close doors and proceed nonstop to the floor desired.
 - 2. After medical emergency call has been completed the elevator must return to normal operation after the key is removed.

- G. In the center of the rear cab panel provide a back lighted "MEDICAL EMERGENCY" LED illuminated display that must flash on and off continuously when the car is assigned to this operation and until it is restored to normal service. "MEDICAL EMERGENCY" indicator must be a photographic negative type 1828 mm (72 in.) to center above the floor, 152 mm (6 in.) wide X 76 mm (3 in.) high, with 12.5 mm (.50 in.) high letters legible only when illuminated.
- H. If the car being operated on "Independent Service", the medical emergency service indicator lights in the car operating panel and rear wall must be illuminated, buzzer must sound and the "Audio Voice" system must direct the attendant to return the car to automatic operation.
- I. If the car is out of service and unable to answer medical emergency calls, the call register light must not illuminate.
- J. Each key switch must have its identity legible and indelible engraved in faceplates. All lettering must be 6 mm (.25 in.) high, filled with black paint.
- K. When Phase I firefighter's recall is activated, it must over-ride elevators on medical emergency service and return them to the main or alternate fire service recall floor. When the fire emergency floor has been identified the attendants may complete their medical emergency run on Phase II firefighter's operation if life safety is not affected.

2.13 SEISMIC REQUIREMENTS

- A. Meet the requirements of VA Seismic Design Manual H-18-8.

2.14 PUMP, MOTOR AND VALVE ASSEMBLY

- A. Provide new pump assembly for the control of the elevator self-contained in a unit fabricated of structural steel. The unit must consist of a hydraulic fluid pump, AC motor, oil control valves with down speed regulator, muffler, piping and fittings.
- B. Submersible pump with the motor and oil control valve mounted above the tank are preferred to eliminate heat from the motor being transferred to the oil. Submersible motor and pump power units are acceptable but are best suited for lower traffic areas. Enclose V-belt power unit on four open sides with not less than 16-gauge steel removable panel sections. Provide a 50 mm (2 in.) minimum, 100mm (4 in.) maximum air space between the top of the panels and bottom of tank. Line panels on the interior side with one-inch rigid acoustical insulation board.

Install metal belt guard that can be removed with hand tools for servicing and inspection.

- C. Control valves must be electronically controlled. Hydraulic fluid flow must be controlled to ensure speed variation of not more than three (3) percent under all load conditions in either direction of travel. Locate the manual lowering valve, easily accessible, properly identified and not concealed within the storage tank. Mark the operating handle in red.
- D. Pump must be designed for hydraulic elevator service, having a steady discharge without pulsation to give smooth and quiet operation. Pump output must be capable of lifting and lowering the elevator car with rated capacity, with a speed variation of no more than three (3) percent between no load and full load. Hydraulic fluid by-pass must discharge directly into storage tank.
- E. Provide motor specifically designed for elevator service, synchronous speed of 1800 RPM, not to exceed nameplate full load current by more than 10% and rated 120 starts per hour without exceeding a rise of 40 degrees C.
- F. Provide isolation pads to prevent transmission of pump and motor vibration to the building.
- G. Install blowout-proof, non-hammering, oil-hydraulic muffler in the hydraulic fluid supply pressure line near power unit in machine room. Design muffler to reduce to a minimum any pulsation or noises that may be transmitted through the hydraulic fluid into the hoistway.

2.15 HYDRAULIC SYSTEM

- A. Construct the storage tank of sheet steel, welded construction and a steel cover with means for filling, a minimum one-inch protected vent opening and a valve drain connection. Tank must be sized to pass through machine room door as shown on drawings. Provide marked sight gauges to monitor hydraulic fluid level. Tank must be sized to hold volume of hydraulic fluid required to lift elevator to stop ring, plus a reserve of not less than ten gallons. Provide a baffle in the bottom of the tank to prevent entry of any sediment or foreign particles into hydraulic system. Baffle must also minimize aeration of hydraulic fluid. Permissible minimum hydraulic fluid level must be clearly indicated. Hydraulic fluid must be of good grade to ensure free flow when cool and have minimum flash point of 380-400 degrees F. Provide initial supply of hydraulic fluid for operation of elevator.

1. Provide a means to maintain the fluid viscosity in the reservoir, pump and control valve at the manufacturer's recommended operating temperature.
 2. Provide a data plate on the tank frame indicating the characteristics of the hydraulic fluid used.
- B. Provide and install connections between the storage tank, pump, muffler, operating valves and cylinder complete with necessary valves, pipe supports and fittings. Pipe must be minimum schedule 40 steel with threaded, flanged, or welded mechanical couplings. Size of pipe and couplings between cylinder and pumping unit must be such that fluid pressure loss is limited to 10 percent.
- C. Hydraulic system working pressure must not exceed 500 psi under any load condition. Do not subject valves, piping and fittings to working pressure greater than those recommended by the manufacturer.
- D. Support all horizontal piping. Place hangers or supports within 305 mm (12 in.) on each side of every change of direction of pipeline and space supports not over 304.8 cm (10 ft) apart. Secure vertical runs properly with iron clamps at sufficiently close intervals to carry weight of pipe and contents. Provide supports under pipe to floor.
1. Provide all piping from machine room to hoistway, including necessary supports or hangers. If remote piping is underground or in damp inaccessible areas, install hydraulic piping thru PVC sleeve.
- E. Install pipe sleeves where pipes pass through walls or floors. Set sleeves during construction. After installation of piping, equip the sleeves with snug fitting inner liner of fire rated insulation.
- F. Provide an automatic shut-off valve in the oil supply line at the cylinder inlet. Weld inlet pipe to cylinder, threaded to receive shut-off valve. Activate the automatic shut-off valve when there is more than a ten percent increase in high speed in the down direction. When activated, this device must immediately stop the descent of the elevator and hold the elevator. The exposed adjustments of the automatic shut-off valve must have their means of adjustment sealed after being set to their correct position.
- G. Provide external tank shut-off valve to isolate hydraulic fluid during maintenance operations.
- H. Provide shut-off valves in the pit near the cylinder and in the machine room capable of withstanding 150 percent of design operating pressure. Each manual valve must have an attached handle.

- I. Provide oil-tight drip pan for assembled pumping unit, including storage tank. Pan must be not less than 16-gauge sheet steel, with one-inch sides.
- J. Components of the hydraulic system must be factory certified to withstand pressure equal to twice the calculated working pressure.

2.16 HYDRAULIC PLUNGER ASSEMBLY

- A. Provide new cylinder and plunger sized to lift gross load the height specified. Factory test the plunger assembly at a pressure equal to twice the calculated working pressure, for strength and to ensure freedom from leakage. Provide bottom of cylinder head with internal guide bearing and top of cylinder head with removable packing gland. Victaulic type packing gland head must not be permitted.
 - 1. Provide a bleeder valve located below the cylinder flange to release air or other gases from the system.
 - 2. Equip cylinder with drip ring below the packing gland to collect leakage of hydraulic fluid.
 - 3. Bolt the cylinder mounting brackets to footing channels that support the buffers.
- B. Install a flexible tubing scavenger line with an electrically operated pump between the piston drip ring and oil storage tank. Scavenger line, pump and strainers must operate independently of hydraulic fluid pressure. Equip scavenger pump with a water float designed to prevent operation of the pump should the pit flood and designed to be manually reset. Secure pump and reservoir to the pit channels.
- C. Plunger must be seamless steel tubing, turned smooth and true to within plus or minus .38 mm (0.015 in.) tolerance and no diameter change greater than .07 mm (0.003 in.) per-inch of length. Where plunger is multi-piece construction, machine the joints to assure perfectly matching surfaces.
 - 1. Secure plunger to underside of platform supporting beams with fastenings capable of supporting four times the weight of the plunger. The platen plate must incorporate piston to car vibration isolation.
 - 2. Provide a stop ring welded or screwed to the bottom of plunger that must prevent the plunger from leaving its cylinder.
 - a. Plunger units that include future travel, locate the stop ring to permit only the actual travel and required runby.

3. Isolate plunger head from the platen plate to prevent corrosion or electrolysis.
4. Protect plunger, repair, or replace if gouged, nicked, or scored.

2.17 HYDRAULIC CYLINDER CASING AND WELL HOLE

- A. The casing must be iron or steel not less than 9.375 mm (.375-in.) thick, at least 152 mm (6 in.) larger in diameter than the cylinder.
- B. Provide PVC casing liner to fit inside steel casing. Fabricate liner with watertight bottom and a top flange gasket to seal plunger flange and form a complete, watertight, electrically non-conductive encasement of the entire unit.
- C. Provide suitable well hole to accommodate casing. Coordinate the drilling of well hole and setting of the cylinder with construction of concrete pit. Provide watertight joint between the casing and the pit floor at bottom of pit.
- D. Base bid on drilling hole in dirt, sand, rock, gravel, loam, boulders, hardpan, water, or other obstacles. Include the removal of all dirt and debris.

2.18 CAR BUFFERS

- A. Provide two new spring buffers for each elevator. Securely fasten buffers and supports to the pit channels and in the alignment with striker plates on elevator. Buffers must have a permanently attached metal plate indicating its stroke and load rating. Buffer anchorage must not puncture pit waterproofing.
- B. Provide pipe stanchions and struts as required to properly support the buffer.

2.19 GUIDE RAILS, SUPPORTS AND FASTENINGS

- A. Guide rails for car must be planed steel T-sections and weigh 27.5 kg/m (18.5 lb/ft).
- B. Securely fasten guide rails to the brackets or other supports by heavy duty steel rail clips.
- C. Provide car rail brackets of sufficient size and design to ensure substantial rigidity to prevent spreading or distortion of rails under any condition.
- D. Guide rails must extend from channels on pit floor to within 76 mm (3 in.) of the underside of the concrete slab or grating at top of hoistway with a maximum deviation of 3.2 mm (.125 in.) from plumb in all directions. Provide a minimum of 19 mm (.75 in.) clearance between bottom of rails and top of pit channels.

- E. Guide rail anchorages in pit must be made in a manner that will not reduce effectiveness of the pit waterproofing.
- F. In the event inserts or bond blocks are required for the attachment of guide rails, the Contractor must furnish such inserts or bond blocks and must install them in the forms before the concrete is poured. Use inserts or bond blocks only in concrete or block work where steel framing is not available for support of guide rails. Expansion-type bolting for guide rail brackets will not be permitted.
- G. Guide rails must be clean and free of any signs of rust, grease, or abrasion before final inspection. Paint the shank and base of the T-section with two field coats of manufacturer's standard enamel.

2.20 NORMAL AND FINAL TERMINAL STOPPING DEVICES

- A. Mount new terminal slowdown switches and direction limit switches on the elevator or in hoistway to reduce speed and bring car to an automatic stop at the terminal landings.
 - 1. Switches must function with any load up to and including 100 percent of rated elevator capacity at any speed obtained in normal operation.
 - 2. Switches, when opened, must permit operation of elevator in reverse direction of travel.
- B. Mount final terminal stopping switches in the hoistway.
 - 1. Switches must be positively opened should the car travel beyond the terminal direction limit switches.
 - 2. Switches must be independent of other stopping devices.
 - 3. Switches, when opened, must remove power from pump motor and control valves preventing operation of car in either direction.

2.21 CROSSHEAD DATA PLATE AND CODE DATA PLATE

- A. Permanently attach a non-corrosive metal Data Plate to car crosshead.
- B. Permanently attach a Code Data Plate, in plain view, to the controller.

2.22 WORKMAN'S LIGHTS AND OUTLETS

- A. Provide duplex GFCI protected type receptacles and lamp, with guards on top of elevator car and beneath platform.
- B. The receptacles must be in accordance with Fed. Spec. W-C-596 for Type D7, 2-pole, 3-wire grounded type rated for 15 amperes and 125 volts.

2.23 CARTOP OPERATING DEVICE

- A. Provide a cartop operating device.
- B. The device must be activated by a toggle switch mounted in the device. The switch must be clearly marked "INSPECTION" and "NORMAL" on the

faceplate, with 6 mm (.25 in.) letters.

- C. Movement of the elevator must be accomplished by the continuous pressure on a direction button and a safety button.
- D. Provide an emergency stop switch, push to stop/pull to run.
- E. Provide permanent identification for the operation of all components in the device.
- F. The device must be permanently attached to the elevator crosshead on the side of the elevator nearest the hoistway doors used for accessing the top of the car.

2.24 LEVELING DEVICE

- A. Elevator must be equipped with a new two-way leveling device to automatically bring the car to within 3 mm (.125 in.) of exact level with the landing for which a stop is initiated regardless of load in car or direction of travel.
- B. If the car stops short or travels beyond the floor, the leveling device, within its zone must automatically correct this condition and maintain the car within 3 mm (.125 in.) of level with the floor landing regardless of the load carried.

2.25 EMERGENCY STOP SWITCHES

- A. Provide an emergency stop switch, push to stop/pull to run, for each top-of-car device, pit, machine spaces, service panel and firefighter's control panel inside the elevator. Mount stop switches in the pit adjacent to pit access door, at top of the pit ladder 1219 mm (48 in.) above the bottom landing sill and 1219 mm (48 in.) above the pit floor adjacent to the pit ladder.
- B. Each stop switch must be red in color and must have "STOP" and "RUN" positions legibly and indelibly identified.

2.26 MAIN CAR OPERATING PANEL

- A. Provide new main car operating panel in the car enclosure on the front return panel for passenger/service elevators. The top floor car call push button must not be more than 1219 mm (48 in.) above the finished floor. "Vandal Resistant" car push buttons and indicator lights must be LED illuminated, round with a minimum diameter of 25 mm (1 in.). Each button must contain an integral registration LED light which must illuminate upon registration of a call and must extinguish when that call is answered.
- B. One-piece hinged front faceplate with edges beveled 15 degrees must have the firefighter's service panel recessed into the upper section

and the service operation panel recessed into the lower section fitted with hinged doors. Doors must have concealed hinges, be in the same front plane as the faceplate and fitted with key operated locks. Secure the faceplate with stainless steel tamperproof screws.

- C. All terminology and tactile symbols on the faceplate must be on square or rectangular plates recessed into the faceplate with its surface flush with the surface of the faceplate. Use 6 mm (.25 in.) letters to identify all devices in the faceplate. The handicapped markings with contrasting background must be 12.5 mm (.50 in.) high raised .075 mm (.030 in.) on the plate. Surface mounted plates are not acceptable.
- D. The upper section must contain the following items in order listed from top to bottom:
 - 1. Elevator number, 12.5 mm (.50 in.) high with black paint for contrast.
 - 2. Capacity plate information with black paint for contrast with freight loading class and number of passengers allowed.
 - 3. LED illuminated digital car position indicator with direction arrows.
 - 4. Emergency car lighting system consisting of a rechargeable battery, charger, controls and LED illuminated light fixture. The system must automatically provide emergency light in the car upon failure or interruption of the normal car lighting service and function irrespective of the position of the light control switch in the car. The system must maintain a minimum illumination of 1.0 foot-candle when measured 1219 mm (48 in.) above the car floor and approximately 305 mm (12 in.) in front of the car operating panel, for not less than four (4) hours.
 - 5. Firefighter's Emergency Operation Panel must be 1676 mm (66 in.) minimum to 1828 mm (72 in.) maximum to the top of the panel above finished floor.
 - 6. Firefighter's Emergency Indicator Light must be round with a minimum diameter of 25 mm (1 in.).
 - 7. Medical Emergency key switch marked "MEDICAL EMERGENCY" with two positions labeled "ON" and "OFF" and Medical Emergency Indicator Light located next to the key switch must be round with a minimum diameter of 25 mm (1 in.). Instruction for Medical Emergency operation must be adjacent to the key switch and light.
 - 8. Key operated Independent Service Switch on the face of panel.

(Delete if inside service panel.)

9. Provide a Door Hold Button on the faceplate above the call buttons. It must have "DOOR HOLD" indelibly marked on the button. Button must light when activated. When activated, the door must stay open for a maximum of one minute. To override hold timer, push a car call button or door close button.
 10. Provide round "Vandal Resistant" car push buttons and indicator lights, minimum diameter of 25 mm (1 in.) and LED illuminated, corresponding to the floors served. Car call buttons must be legibly and indelibly identified by a floor number, letter or symbol not less than 12.5 mm (.50 in.) high in the face of the button or indicator.
 11. Door Open and Door Close buttons must be located below the car call buttons. They must have "OPEN" and "CLOSE" legibly and indelibly identified by letters in the face of the respective button. The Door Open button must be located closest to the door jamb.
 - a. Rear Door Open and Rear Door Close buttons must be located below the Front Door Open and Front Door Close buttons. They must have "REAR OPEN" and "REAR CLOSE" legibly and indelibly identified by letters in the face of the respective button.
 12. Red Emergency Alarm button that must be located below the car operating buttons. Mount the emergency alarm button not lower than 875 mm (35 in.) above the finished floor. It must be connected to audible signaling devices. Provide audible signaling devices including the necessary wiring.
 13. Emergency Help push button must activate two-way communications by Auto Dial telephone system that is compatible with the VAMC's telephone system. Help button must be LED illuminated and flash when call is acknowledged. Legibly and indelibly label the button "HELP" in the face of the button with 12.5 mm (.50 in.) high letters.
- E. The service operation panel, in the lower section must contain the following items:
1. Light switch labeled "LIGHTS" for controlling interior car lighting with its two positions marked "ON" and "OFF".
 2. Inspection switch that will disconnect normal operation and activate hoistway access switches at terminal landings. Switch must be labeled "ACCESS ENABLE" with its two positions marked "ON" and "OFF".

3. Three position switch labeled "FAN" with its positions marked "HIGH", "LOW" and "OFF" for controlling car ventilating blower.
4. Two position, spring return, toggle switch or push button to test the emergency light and alarm device. It must be labeled "TEST EMERGENCY LIGHT AND ALARM".
5. Independent Service switch labeled "ON" and "OFF". (Delete if key switch on face of panel).
6. Two-position emergency stop switch, when operated, must interrupt power supply and stop the elevator independently of regular operating devices. Emergency stop switch must be marked "PUSH TO STOP" and "PULL TO RUN".

2.27 AUXILIARY CAR OPERATING PANEL

- A. Provide an auxiliary car operating panel in the side wall of the elevator between the handrails immediately adjacent to the front entrance column strike jamb. The auxiliary car operating panel must contain only those controls essential to passenger (public) operation. The auxiliary car operating panel faceplate must match the main car operating panel faceplate in material and general design. Secure the faceplate with stainless steel tamperproof screws.
 1. Provide round "Vandal Resistant" car push buttons and indicator lights, minimum diameter 25 mm (1 in.) and LED illuminated corresponding to the floors served. Car buttons and indicator lights must be legibly and indelibly identified by a floor number, letter, or symbol not less than 12.5 mm (.50 in.) high in the face of the button or indicator light corresponding to the main car operating panel buttons or indicator light.
 2. Door "OPEN" and door "CLOSE" buttons must be closest to the door jamb and the alarm button must be 889 mm (35 in.) above the finished floor. The Door Open button must be located closest to the door.
 3. Cross-connect all buttons in the auxiliary car operating panels to their corresponding buttons in the main car operating panel. Registration of a car call must cause the corresponding button to illuminate in the main and auxiliary car operating panel.
 4. Emergency Help push button must activate two-way communications by auto dial telephone that is compatible with the VAMC's telephone system. Help button must be LED illuminated and flash when call is acknowledged. Legibly and indelibly label the button "HELP" in the face of the button with 12.5 mm (.50 in.) high letters.

- B. All terminology and tactile symbols on the faceplate must be on square or rectangular plates recessed into the faceplate with its surface flush with the surface of the faceplate. Use 6 mm (.25 in.) letters to identify all devices in the faceplate. The tactile symbols with contrasting background must be 12.5 mm (0.5 in.) high raised .075 mm (.030 in.) on the plate. Surface mounted plates are not acceptable.

2.28 CAR POSITION INDICATOR

- A. Provide an alpha-numeric digital car position indicator in the main car operating panel, consisting of numerals and arrows 63 mm (2.5 in.) high, to indicate position of car and direction of car travel. Locate position indicator at the top of the main car operating panel, illuminated by light emitting diodes.

2.29 AUDIO VOICE SYSTEM

- A. Provide digitized audio voice system. Audio voice must announce floor designations, direction of travel and special announcements. The voice announcement system must be a natural sounding human voice that receives messages and must comply with ADA requirements for audible car position indicators. The voice announcer must have two separate volume controls, one for the floor designations and direction of travel and another for special announcements. The voice announcer must have a full range loudspeaker, located on top of the cab. The audio voice unit must contain the number of ports necessary to accommodate the number of floors, direction messages and special announcements. Install voice announcer per manufacturer's recommendations and instructions. The voice system must be the product of a manufacturer of established reputation. Provide manufacturer literature and list of voice messages.
 - 1. Fire Service Message.
 - 2. "Please do not blockdoors".
 - 3. Provide special messages as directed by COR.

2.30 AUTO DIAL TELEPHONE SYSTEM

- A. Provide a complete, ADA compliant, auto dial communication system that is compatible with the VAMC's telephone system.
- B. Two-way communication device shall be in full compliance with ASME A17.1 Rule 2.27.1.1 (2019) or later editions.

2.31 CORRIDOR OPERATING DEVICES

- A. Provide new corridor operating device faceplates from not less than 3 mm (.125 in.) thick flat stainless steel with all edges beveled 15 degrees.

- B. Corridor push button faceplates must be sized to accommodate corridor pictograph on faceplate. The centerline of the landing push buttons must be 1067 mm (42 in.) above the corridor floor.
- C. Elevator Corridor Call Station Pictograph must be engraved in the faceplate.
- D. Fasten corridor operating devices and signal device faceplates with stainless steel tamperproof screws.
- E. All terminology and tactile symbols on the faceplate must be raised .030 inch with contrasting background, on square or rectangular plates recessed into the faceplate with its surface flush with the surface of the faceplate. The handicapped markings with contrasting background must be 12.5 mm (.50 in.) high raised .075 mm (.030 in.) on the plate, square or rectangular. Use 6 mm (.25 in.) letters to identify all other devices in the faceplate. Surface mounted plates are not acceptable.
- F. Provide one riser of landing call buttons for each elevator or group of elevators as shown on contract drawings.
- G. "Vandal Resistant" hall buttons and indicator lights must be LED illuminated upon registration of a call and shall extinguish when that call is answered.
- H. The direction of each button must be legibly and indelibly identified by arrows not less than 12.5 mm (.50 in.) high in the face of each button. Provide a corresponding Braille plate on the left side of each button.
- I. Hall call buttons must not re-open the doors while the car and hoistway doors are closing at that floor, the call must be registered for the next available elevator. Calls registered must be canceled if closing doors are re-opened by means of "DOOR OPEN" button or infrared curtain unit.
- J. Provide emergency power indicator light, medical emergency key switch and indicator light, fire service recall key switch and indicator light, firefighter's recall instruction, communication failure light, audible enunciator and reset key switch in the fixture at the designated main floor.
- K. Submit design of hall pushbutton fixtures for approval.

2.32 CORRIDOR ARRIVAL LANTERN/POSITION INDICATOR

- A. Provide new combination corridor lantern/position indicator digital display mounted above hoistway entrances at each floor in healthcare facilities. For non-healthcare facilities provide combination fixtures

only at main and alternate fire recall floors unless specified for all floors. Provide each terminal landing with "UP" or "DOWN", minimum 63 mm (2.5 in.) high arrow lanterns and each intermediate landing with "UP" and "DOWN" arrow lanterns. Each lens must be LED illuminated of proper intensity, so shielded to illuminate individual lens only. The lenses in each lantern must be illuminated green to indicate "UP" travel and red to indicate "DOWN" travel. Lanterns must signal in advance of car arrival at the landing indicating the direction of travel. Corridor lanterns must not be illuminated when a car passes a floor without stopping. Each lantern must be equipped with an audible electronic chime which must sound once for "UPWARD" bound car and twice for "DOWNWARD" bound car. Audible signal must not sound when a car passes the floor without stopping. Provide adjustable sound level on audible signal. Car riding lanterns are not acceptable.

- B. Install alpha-numeric digital position indicator between the arrival lanterns. Indicator faceplate must be stainless steel. Numerals must be not less than 63 mm (2.5 in.) high with direction arrows. Cover plates must be readily removable for re-lamping. The appropriate direction arrow must be illuminated during entire travel of car in corresponding direction.

2.33 HOISTWAY ACCESS

- A. Provide new hoistway access switches for elevator at top terminal landing to permit access to top of car and at bottom terminal landing to permit access to pit. Elevators with side slide doors, mount the access key switch 182.8 cm (6 ft) above the corridor floor in the wall next to the strike jamb.
- B. Exposed portion of each access switch or its faceplate must have legible, indelible legends to indicate "UP", "DOWN" and "OFF" positions.
- C. Each access switch must be a constant pressure cylinder type lock having not less than five pins or five stainless steel disc combination with key removable only when switch is in the "OFF" position.
- D. Lock must not be operable by any other key which will operate any other lock or device used for any other purpose at the VA Medical Center.
- E. Arrange the hoistway switch to initiate and maintain movement of the car. When the elevator is operated in the down direction from the top terminal landing, limit the zone of travel to a distance not greater

than the top of the car crosshead level with the top floor. Submit design and location of access switches for approval.

- F. Provide emergency access for all hoistway entrances, keyways for passenger and service elevators.

2.34 HOISTWAY ENTRANCES: PASSENGER/SERVICE ELEVATORS

- A. Provide complete entrances with sills, sill supports, hangers, hanger supports, tracks, angle struts, unit frames, door panels, fascia plates, toe guards, hardware, bumpers, sight guards and wall anchors.
- B. Provide new one-piece stainless-steel sills grooved for door guides and recessed for fascia plates. Sills must have overall height of not less than 19 mm (.75 in.) set true, straight and level, with hoistway edges plumb over each other and top surfaces flush with finished floor. Hoistway entrance frames and sills must be grouted solid full length after installation.
- C. Construct hanger supports of not less than 9.375 mm (.375 in.) thick steel plate and bolted to strut angles.
- D. Structural steel angles 76 mm x 76 mm x 9.375 mm (3 in. x 3 in. x .375 in.) must extend from top of sill to bottom of floor beam above and must be securely fastened at maximum 457 mm (18 in.) on center and at each end with two bolts.
- E. Provide jambs and head soffits, of not less than 14-gauge stainless steel. Jambs and head soffits must be bolted/welded construction and provided with three anchors each side. Side jambs must be curved. Radius of curvature must be 89 mm (3.5 in.). Head jamb must be square and must overhang corridor face of side jambs by 6 mm (.25 in.). Rigidly fasten jambs and head soffits to building structure and grouted solid. After installation, protect jambs and head soffits to prevent damage to finish during construction.
- F. Provide raised numerals or letters on cast, rear mounted plates for all openings. Numerals must be a minimum of 51 mm (2 in.) high, located on each side of entrance frame, with centerline of 1523 mm (5 ft) above the landing sill. The number plates must contain Braille.
- G. Provide unique car number on every elevator entrance at designated main fire service floor level, minimum 76 mm (3 in.) in height.
- H. Provide new stainless steel hoistway doors. Door panels must be flush hollow metal construction, not less than 32 mm (1.25 in.) thick, consisting of one continuous piece 16-gauge stainless steel on corridor side wrapped around the leading edge. Separate two plates by a sound-

deadenning material and reinforce by steel shapes welded to the plates at frequent intervals. Reinforce panels as required for installation of hangers, power-operating and door-opening devices. Top and bottom of door panels must have continuous stiffener channels welded in place. Reinforcement of the door panels must be a minimum of 1.0 mm (0.04 in.) in thickness and of the hat section type.

- I. Hang doors on two-point suspension hangers having sealed ball-bearing sheaves not less than 76 mm (3 in.) in diameter, with non-metallic sound-reducing tires. Equip hangers with adjustable ball-bearing rollers to take upward thrust of panels. Provide two removable non-metallic door gibs of approved material and a separate fire gib at the bottom of each door panel. Gibs must be replaceable without removing of door panel. One door panel for each entrance must bear a BOCA label, Underwriters' label, or other labels may be furnished provided they are based on fire test reports and factory inspection procedures acceptable to the COR. Fasten stainless steel sight guard of 14-gauge metal, extending full height of panel, to leading edge of fast speed panel of two-speed doors.
- J. Door panels for each entrance must bear a BOCA label, Underwriters' label or labels from other accredited test laboratories may be furnished provided they are based on fire test reports and factory inspection procedures acceptable to the RE/CO or authorized representative.
- K. Provide 14-gauge sheet steel fascia plates in hoistway to extend vertically from head of hanger support housing to sill above. Plates must be 76 mm (3 in.) wider than door opening of elevator and reinforced to prevent waves and buckles. Below bottom terminal landing and over upper terminal landing provide shear guards beveled back to and fastened to the wall.
- L. Equip each hoistway entrance with new electrical/mechanical interlock, functioning as hoistway unit system, to prevent operation of elevator until all hoistway doors are locked in the closed position unless car is operating in the leveling zone or hoistway access switch is used.
- M. Wiring installed from the hoistway riser to each door interlock must be NEC type SF-2 or equivalent.

2.35 CAR GUIDES

- A. Provide new adjustable roller guides each assembled on a substantial metal base, to permit individual alignment to the guide rails.

- B. Each guide must consist of not less than three (3) wheels, each with durable, resilient oil-resistant material tires rotating on ball bearings having sealed-in lubrication. Assemble rollers on a substantial metal base and mount to provide continuous spring pressure contact of all wheels with the corresponding rail surfaces under all conditions of loading and operation. Secure the roller guides at top and bottom on each side of car frame and counterweight frame. All mounting bolts must be fitted with nuts, flat washers, split lock washers and if required, beveled washers.
- C. Provide sheet metal guards to protect rollers on top of car.
- D. Minimum diameter of car rollers must be 152 mm (6 in.). The entire elevator car must be properly balanced to equalize pressure on all guide rollers. Cars must be balanced in post-wise and front-to-back directions. Test for this balanced condition must be witnessed at time of final inspection.
- E. Equip car with an auxiliary guiding device for each roller guide that must prevent the car from leaving the rails if the normal guides fail. These auxiliary guides must not, during normal operation, touch the guiding surfaces of the rails. Fabricate the auxiliary guides from hot rolled steel plate and mount between the normal guide shoes and the car frames. The auxiliary guides may be an extension of the normal guide shoe mounting plate if that plate is fabricated from hot rolled steel. The portion of the auxiliary guide which must contact the rail guiding surfaces in the event of loss of the normal guide must be lined with an approved bearing material to minimize damage to the rail guiding surfaces.
- F. Alternate Guide Shoes for service and freight elevators:
 - 1. Provide each shoe with renewable non-metallic gibs of durable material having low coefficient of friction and long-wearing qualities, when operated on guide rails receiving infrequent, light applications of surfaces in the event of loss of the normal guides must be lined with an approved bearing material to minimize damage to the rail guiding rail lubricant. Gibs containing graphite or other solid lubricants are not acceptable.
 - 2. Flexible guide shoes of approved design, other than swivel type, may be used provided they are self-aligning on all three faces of the guide rails.

3. Provide spring take-up in car guide shoes for side play between rails.

2.36 CAR FRAME: PASSENGER/SERVICE ELEVATORS

- A. Car frame must be constructed of channel stiles, crosshead, gussets and braces securely bolted and/or welded. The entire assembly must be constructed to withstand unequal loading of platform. Car frame members must be constructed to relieve the car enclosure of all strains.

2.37 CAR PLATFORM: PASSENGER/SERVICE ELEVATORS

- A. The platform must be designed to withstand the forces developed under the loading conditions specified. Provide car entrances with stainless steel sill with machined or extruded door guide and recessed for platform guard. Cover underside and all exposed edges of wood filled platform with sheet metal of not less than 27-gauge, with all exposed joints and edges folded under. Fire resistant paint is not acceptable. Platform must have flexible composition flooring not less than 3 mm (.125 in.) thick. For color, see Section 09 06 00, SCHEDULE FOR FINISHES. Adhesive material must be type recommended by manufacturer of flooring. Lay flooring flush with threshold plate and base.
- B. Provide a platform guard (toe guard) of not less than 12-gauge sheet-steel on the entrance side, extend 76 mm (3 in.) beyond each side of entrance jamb. Securely brace platform guard to car platform and bevel bottom edge at a 60-75-degree angle from horizontal. Install platform in the hoistway, so that the clearance between front edge and landing threshold must not exceed 32 mm (1.25 in.).
- C. Provide new isolation pads between the platform and platform frame. Use approved rubber pads or other approved material.
- D. Provide adjustable diagonal brace rods to hold platform firmly within car suspension frame.
- E. Balance car front to back and side to side. Provide balancing frame and weights, properly located, to achieve the required true balance.
- F. Provide a bonding wire between frame and platform.

2.38 CAR ENCLOSURE: PASSENGER/SERVICE ELEVATORS

- A. Car enclosure must have a dome height inside the cab of 244 cm (8 ft).
- B. Securely fasten car enclosure to platform by through bolts located at intervals of not more than 457 mm (18 in.) running through an angle at the base of panels to underside of platform.
- C. Front return wall panel, entrance columns, entrance head-jamb and transom must be 14-gauge stainless steel. Transom must be full width of

cab. Side and rear walls must be constructed of 14-gauge cold rolled steel. Coat exterior of walls with mastic sound insulation material approximately 2.5 mm (.09375 in.) thick followed by a prime coat of paint.

- D. Side and rear walls of passenger elevators may have raised panels covered in fire rated materials approved for use in elevator interior.
- E. Refer to Drawings for Cab Enclosure interior finishes.
- F. Construct canopy of not less than 12-gauge steel.
- G. Provide car top railings.
- H. Provide a hinged top emergency exit cover. Exit must be unobstructed when open and must have mechanical stops on the cover. Provide an exit switch to prevent operation of the elevator when the emergency exit is open.
- I. Provide duplex, GFCI protected receptacle in car. Locate flush-mounted receptacle on the centerline of the main car operating panel, 150 mm (6 in.) above the car floor.
- J. Lighting for passenger/service elevators:
 - 1. Provide stainless steel hanging ceiling frame. Construct frame of 3.125 mm (.125 in.) thick x 38 mm (1.50 in.) wide x 38 mm (1.50 in.) high "T" and "L" sections divide ceiling into six panels.
 - 2. Provide LED illuminated car light fixtures above the ceiling panels. Maintain a minimum light level of 50-foot candles at 914 mm (36 in.) above the finished floor.
- K. Optional lighting for service elevators:
 - 1. Provide car with indirect LED lamps mounted front to rear in lighting coves along each side of the cab ceiling, no hanging ceiling.
 - 2. Equip the lighting cove with asymmetrical reflectors having specular finish. Maintain a minimum light level of 50-foot candles 914 mm (36 in.) above finished floor at the car operating panels.
 - 3. Enclose the entire vertical space between the light trough outer edge and the cab canopy with approved opaque white or clear lumicite sheeting. Lumicite sheeting must be removable for cleaning and re-lamping.
- L. Provide a blower unit arranged to exhaust through an opening in the canopy. Provide a stainless or chrome plated fan grill around the opening. Provide 2-speed fan with rated air displacement of 250 cfm and 400 cfm at respective speeds. Mount fan on top of car with rubber

isolation to prevent transmission of vibration to car structure.

Provide screening over intake and exhaust end of blower. Provide a 3-position switch to control the unit in the service panel.

- M. Provide car enclosure with two sets of handrails with centerlines 762 mm and 1067 mm (30 in. and 42 in.) above the car floor, circumference not to exceed 152 mm (6 in.).
 - 1. Locate handrails 38 mm (1.50 in.) from cab wall. Install handrails on side walls only for front and rear openings. Conceal all handrail fastenings. Handrails must be removable from inside the car enclosure.
 - 2. Provide service elevators with flat stock handrails with the ends at the entrance turned back to the wall.
- N. Provide passenger car with center opening horizontal sliding doors and service car with center or side opening horizontal sliding doors constructed the same as hoistway doors. Door panels must be not less than 16-gauge sheet steel and not less than 32 mm (1.25 in.) thick flush type construction with the car side and leading edge wrapped in one continuous piece of 16-gauge stainless steel. Top and bottom of door panels must have continuous stiffener channels welded in place. Reinforcement of the door panels must be approximately 1.0 mm (0.04 in.) in thickness and of the hat section type. Reinforce each door panel for hangers, interlock mechanism, opening and closing devices. Do not use hangers that are constructed integrally with the door panels.
- O. Hang doors on two-point suspension hangers having sealed ball-bearing sheaves not less than 76 mm (3 in.) in diameter, with non-metallic sound-reducing tires. Equip hangers with adjustable ball-bearing rollers to take upward thrust of panels. Provide two non-metallic door gibs on each door panel and a separate fire gib. Gibs must be replaceable without removing of door panel. One door panel for each entrance must bear a BOCA label, Underwriters' label, or other labels may be furnished provided they are based on fire test reports and factory inspection procedures acceptable to the COR. Fasten stainless steel sight guard of 14-gauge metal, extending full height of panel, to leading edge of fast speed panel of two-speed doors.
- P. Provide new hardware, tracks, gibs, separate fire gibs, gate switch, door drive clutch assemblies and door restrictor.
- Q. Provide one set of protective pads for service elevator of sufficient length to completely cover two sides, rear walls and front return of

cab interior. Pads must consist of a minimum of 6 mm (.25 in.) thick glass fiber insulation securely sewn between flame resistant vinyl coated coverings. Color of the covering must be approved by the RE/CO or their representative. Provide stainless steel pad buttons or hooks, spaced at intervals of not more than 457 mm (18 in.) to adequately support pads.

2.39 POWER DOOR OPERATORS: PASSENGER/SERVICE ELEVATORS

- A. Provide a new high-speed heavy-duty door operator to automatically open the car and hoistway doors simultaneously when the car is level with the floor and automatically close the doors simultaneously at the expiration of the door-open time. Provide microprocessor door control with circuitry to constantly monitor and automatically adjust door operation based upon velocity, position and motor current. Motor must be of the high-internal resistance type, capable of withstanding high currents resulting from stall without damage to door operator/motor. The door operator must open the car door and hoistway door simultaneously, at a speed of 76.2 cm (2.5 ft) per second. Closing speed of the doors must be 30.5 cm (1 ft) per second. Reversal of direction of the doors from the closing to opening operation, whether initiated by obstruction of the infrared curtain or the door "OPEN" button, must be accomplished within 38 mm (1.5 in.) maximum of door movement. Emphasis is placed on obtaining quiet interlock and door operation; smooth, fast, dynamic braking for door reversals and stopping of the doors at extremes of travel.
- B. Equip car doors with electric contact that prevents operation of car until doors are closed unless car is operating in leveling zone or hoistway access switch is used. Locate door contact to prevent its being tampered with from inside of car.
- C. Car and hoistway doors must be manually operable in an emergency without disconnecting the power door operating equipment unless the car is outside the unlocking zone.
 - 1. Doors to open by power unless the elevator is in the leveling zone.
 - 2. Provide infrared curtain unit. The device must cause the car and hoistway doors to reverse automatically to the fully open position should the unit be actuated while the doors are closing. Unit must function when the doors are not closed, except during firefighter's operation.

- D. Should the doors be prevented from closing for more than a predetermined adjustable interval of 20 to 60 seconds by operation of the curtain unit, the doors must stay open, the audio voice message and a buzzer located on the car must sound only on automatic operation. **Do not provide door nudging.**
1. If an obstruction of the doors does not activate the photo-electric door control device and prevent the doors from closing for more than a predetermined adjustable interval of 15 to 30 seconds, the doors must reverse to the fully open position and remain open until the "Door Close" button re-establishes the closing cycle.
- E. Provide door "OPEN" and "CLOSE" buttons. When the door "OPEN" button is pressed and held, the doors, if in the open position, must remain open and if the doors are closing, they must stop, reverse and re-open. Momentary pressure of the door "CLOSE" button must initiate the closing of the doors prior to the expiration of the normal door open time.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine work of other trades on which the work of this Specification depends. Report defects to the RECO or authorized representative in writing that may affect the work of elevator contractor.
- B. Examine elevator hoistway openings for plumb, level, in line and that elevator pit is proper size, waterproofed and drained with necessary access door and ladder.
- C. Examine machine room for proper illumination, heating, ventilation, electrical equipment and beams are correctly located complete with access stairs and door.
- D. If the Elevator Contractor requires changes in size or location of trolley beams, beam supports and trap doors, etc., to accomplish their work, changes must be justified, subject to approval of the Contracting Officer and include additional cost in their bid.
- E. Work required prior to the completion of the elevator installation:
1. Supply of electric feeder wires to the terminals of the elevator control panel, including circuit breaker.
 2. Provide light and GFCI outlets in the elevator pit and machine room.
 3. Furnish electric power for testing and adjusting elevator equipment.
 4. Furnish circuit breaker panel in machine room for car and hoistway lights and receptacles.

5. Supply power for cab lighting and ventilation from an emergency power panel specified in Division 26, ELECTRICAL.
 6. Machine room enclosed and protected from moisture, with self-closing, self-locking door and access stairs.
 7. Provide fire extinguisher in machine room.
- F. Provide to General Contractor for installation; inserts, anchors, bearing plates, brackets, supports and bracing including all setting templates and diagrams for placement.

3.2 ARRANGEMENT OF EQUIPMENT

- A. Arrange equipment in machine room so that major equipment components can be removed for repair or replacement without dismantling or removing other equipment in the same machine room. Locate controller near and visible to its respective hoisting machine.

3.3 WORKMANSHIP, INSTALLATION AND PROTECTION

- A. Installations must be performed by Certified Elevator Mechanics and Apprentices to best possible industry standards. Details of the installation must be mechanically and electrically correct. Materials and equipment must be new and without imperfections.
- B. Recesses, cutouts, slots, holes, patching, grouting, refinishing to accommodate installation of equipment must be included in the Contractor's work. All new holes in concrete must be core drilled.
- C. Structural members must not be cut or altered. Work in place that is damaged or defaced must be restored equal to original new condition.
- D. Finished work must be straight, plumb, level and square with smooth surfaces and lines. All machinery and equipment must be protected against dirt, water, or mechanical injury. At completion, all work must be thoroughly cleaned and delivered in perfect unblemished condition.
- E. Sleeves for conduit and other small holes must project 51 mm (2 in.) above concrete slabs.
- F. Exposed gears, sprockets and sheaves must be guarded from accidental contact.

3.4 CLEANING

- A. After completion of installation and prior to final inspection, all equipment must be thoroughly cleaned of grease, oil, cement, plaster, dust and other debris.
- B. Clean machine room and equipment.
- C. Perform hoistway clean down.

- D. Prior to final acceptance remove protective coverings from finished or ornamental surfaces. Clean and polish as required for type of material.

3.5 PAINTING AND FINISHING

- A. All equipment, except specified as architectural finish, must be painted one coat of approved color, conforming to manufacturer's standard.
- B. Hydraulic Pump Assembly must be painted with manufacturer's standard finish and color.
- C. Controller, sheave, car frame and platform, counterweight, beams, rails and buffers except their machined surfaces, cams, brackets and all other uncoated ferrous metal items must be painted one factory primer coat or approved equal.
- D. Stencil or apply decal floor designations not less than 101 mm (4 in.) high on hoistway doors, fascia, or walls within door restrictor areas. The color of paint used must contrast with the color of the surfaces to which it is applied.
- E. Elevator pump/motor machine, controller, main line switch/shunt trip circuit breaker, bolster channel and cross head of car must be identified by 101 mm (4 in.) high numerals and letters located as directed. Numerals must contrast with surrounding color and must be stenciled or decaled.
- F. Hoistway Entrances of Passenger and Service Elevators:
 - 1. Door panels must be given rust resistant treatment and a factory finish of one coat of baked-on primer and one factory finish coat of baked-on enamel.
 - 2. Fascia plates, top and bottom shear guards, dust covers, hanger covers and other metalwork, including built-in or hidden work and structural metal, (except stainless steel entrance frames and surfaces to receive baked enamel finish) must be given one approved prime coat in the shop and one field coat of paint of approved color.
- G. Hoistway Entrances of Freight Elevators:
 - 1. Metal surfaces of doors and frames must receive shop prime coat.
 - 2. Finish painting, after installation, must be one coat of paint of approved color.
- H. Elevator Cabs for Passenger and Service Elevators:
 - 1. Interior and exterior steel surfaces must be given rust resistant treatment before finish is applied.

2. Interior steel surfaces must be factory finished with one coat of paint of approved color.
3. Give exterior faces of car doors one finish coat of paint of approved color.

3.6 PRE-TESTS AND TESTS

- A. Pre-test the elevators and related equipment in the presence of the Resident Engineer/Contracting Officer or authorized representative for proper operation before requesting final inspection. Conduct final inspection at other than normal working hours, if required by Resident Engineer.
 1. The VA must obtain the services of an Independent Qualified Elevator Inspector, ANSI/ASME QEI-1 Certified, that must witness all tests. The QEI must utilize an Elevator Acceptance Inspection Form to record the results of inspection and all testing and to identify safety code and contract deficiencies. Specific values must be provided for all tests required by ASME A17.1, ASME A17.2 and contract documents. After completion of inspection and testing, the QEI must sign a copy of the completed form and provide it to the Contracting Officer. Within 14 days of the inspection, the QEI must also prepare a formal inspection report, including all test results and deficiencies. After successful completion of inspection and testing, the QEI will complete, sign and provide a certificate of compliance provide by the VA.
 2. Government must provide electric power including necessary current for starting, testing and operating machinery of each elevator.
 3. Contractor must furnish the following test instruments and materials on-site and at the designated time of inspection: properly marked certified test weights, voltmeter, amp probe, thermometers, direct reading tachometer, megohm meter, vibration meter, sound meter, light meter, stopwatch and a means of two-way communication.
- B. Inspection of workmanship, equipment furnished and installation for compliance with specification.
- C. Full-Load Run Test: Elevators must be tested for a period of one-hour continuous run with full contract load in the car. The test run must consist of the elevator stopping at every floor, in either direction of travel, for not less than five or more than ten seconds per floor.
- D. Speed Test: The actual speed of the elevator must be determined in both directions of travel with full contract load and no load in the

elevator. Speed must be determined by certified tachometer. The actual measured speed of the elevator with all loads in either direction must be within three (3) percent of specified rated speed. Full speed runs must be quiet and free from vibration and sway.

- E. Temperature Rise Test: The temperature rise of the pump motor must be determined during the full load test run. Temperatures must be measured using thermometers. Under these conditions, the temperature rise of the equipment must not exceed 50 degrees Centigrade above ambient temperature. Test must start when all machine room equipment is within five (5) degrees Centigrade of the ambient temperature. Other tests for heat run on motors must be performed as prescribed by the Institute of Electrical and Electronic Engineers.
- F. Car Leveling Test: Elevator car leveling devices must be tested for accuracy of leveling at all floors with no load in car and with contract load in car in both directions of travel. Accuracy of floor level must be within plus or minus 3 mm (.125 in.) of level with landing floor for which the stop has been initiated regardless of load in car or direction of travel. The car leveling device must automatically correct over travel as well as under travel and must maintain the car floor within plus or minus 3 mm (.125 in.) of level with the landing floor regardless of change in load.
- G. Insulation Resistance Test: The elevator's complete wiring system must be free from short circuits and ground faults and the insulation resistance of the system must be determined by use of megohm meter, at the discretion of the Elevator Inspector conducting the test.
- H. Overload Devices: Test all overload current protection devices in the system at final inspection.
- I. Limit Stops:
 - 1. The position of the car when stopped by each of the normal limit switches with no load and with contract load in the car must be accurately measured.
 - 2. Final position of the elevator relative to the terminal landings must be determined when the elevator has been stopped by the final limits. The lower limit stop must be made with contract load in the elevator. Elevator must be operated at inspection speed for both tests. Normal limit stopping devices must be inoperative for the tests.

- J. Working Pressure: Verify working pressure of the hydraulic system by pressure gauge placed in the system line. Take readings with no load and full load in car.
- K. Test automatic shut-off valve for proper operation.
- L. Operating and Signal System: The elevator must be operated by the operating devices provided and the operation signals and automatic floor leveling must function in accordance with requirements specified. Starting, stopping and leveling must be smooth and comfortable without appreciable steps of acceleration or deceleration.
- M. Performance of the Elevator supervisory system must be witnessed and approved by the elevator inspector and a representative of the Resident Engineer.
- N. Evidence of malfunction in any tested system or parts of equipment that occurs during the testing must be corrected, repaired, or replaced at no additional cost to the Government and the test repeated.
- O. If equipment fails test requirements and a re-inspection is required, the Contractor must be responsible for the cost of re-inspection; salaries, transportation expenses and per-diem expenses incurred by the Elevator Inspector and RE/CO or authorized representative.

3.7 INSTRUCTION OF VA PERSONNEL

- A. Provide competent instruction to VA personnel regarding the operation of equipment and accessories installed under this contract, for a period equal to one eight-hour workday. Instruction must commence after completion of all work and at the time and place directed by the Resident Engineer/Contracting Officer or authorized representative.
- B. Written instructions in triplicate relative to care, adjustments and operation of all equipment and accessories must be furnished and delivered to the RE/CO or authorized representative in independently bound folders. DVD recordings will also be acceptable. Written instructions must include correct and legible wiring diagrams, nomenclature sheet of all electrical apparatus including location of each device, complete and comprehensive sequence of operation, complete replacement parts list with descriptive literature and identification and diagrams of equipment and parts. Information must also include electrical operation characteristics of all circuits, relays, timers, electronic devices and related characteristics for all rotating equipment.

- C. Provide supplementary instruction for any new equipment that may become necessary because of changes, modifications or replacement of equipment or operation under requirements of paragraph entitled "Warranty of Construction".

3.8 GUARANTEE PERIOD OF SERVICE: ELEVATOR MAINTENANCE SERVICE AND INSPECTIONS

- A. Provide complete maintenance service and inspections on each elevator installation for a period of one (1) year after completion and acceptance of each elevator in this specification by the Resident Engineer. This maintenance service must run concurrently with the warranty. Maintenance work must be performed by Certified Elevator Mechanics and Apprentices.
- B. This contract cover full maintenance including emergency call back service, inspections and servicing the elevators listed in the schedule of elevator. The Elevator Contractor must be required to perform the following:
 - 1. Monthly systematic examination of equipment.
 - 2. During each maintenance visit the Elevator Contractor must clean, lubricate, adjust, repair and replace all parts as necessary to keep the equipment in like new condition and proper working order.
 - 3. Furnishing all lubricant, cleaning materials, parts and tools necessary to perform the work required. Lubricants must be only those products recommended by the manufacturer of the equipment.
 - 4. As required, motors, controllers, selectors, leveling devices, operating devices, switches on cars and in hoistways, hoistway doors and car doors or gate operating device, interlock contacts, guide shoes, guide rails, car door sills, hangers for doors, car doors or gates and signal system must be cleaned, lubricated and adjusted.
 - 5. Guide rails and bottom of platforms must be cleaned every three months. Car tops and machine room floors must be cleaned monthly. Accumulated rubbish must be removed from the pits monthly. A general cleaning of the entire installation including all machine room equipment and hoistway equipment must be accomplished quarterly. Cleaning supplies and vacuum cleaner must be furnished by the Contractor.
 - 6. Maintain the performance standards set forth in this specification.
 - 7. The operational system must be maintained to the standards specified hereinafter including any changes or adjustments required to meet varying conditions of hospital occupancy.

8. Maintain smooth starting, stopping, running and accurate leveling.
- C. Maintenance service must not include the performance of work required because if improper use, accidents and negligence for which the Elevator Contractor is not directly responsible.
- D. Provide 24-hour emergency call-back service that must consist of promptly responding to calls within two hours for emergency service should a shutdown or emergency develop between regular examinations. Overtime emergency call-back service must be limited to minor adjustments and repairs required to protect the immediate safety of the equipment and persons in and about the elevator.
- E. Service and emergency personnel must report to the Resident Engineer or his authorized representative upon arrival at the hospital and again upon completion of the required work. A copy of the work ticket containing a complete description of the work performed must be given to the RE, CO, or authorized representative.
- F. The Elevator Contractor must maintain a logbook in the machine room. The log must list the date and time of all bi-weekly examinations and all trouble calls. Each trouble call must be fully described including the nature of the call, necessary correction performed, or parts replaced.
- G. Written "Maintenance Control Program" must be in place to maintain the equipment in compliance with ASME A17.1 Section 8.6.

- - - E N D - - -

VA Black Hills Health Care System

DOM Renovation Building 8

Hot Springs, South Dakota

VA Project # 568A4-21-208

VA



**U.S. Department
of Veterans Affairs**

Specifications - Volume 2

Divisions 21 through 32

Final Construction Documents

March 28, 2025



STONE GROUP
ARCHITECTS

**VA Black Hills Health Care System
Renovate and Consolidate Inpatient Services
Fort Meade, South Dakota**

VA PROJECT #568-14-110

ARCHITECT OF RECORD

Stone Group Architects, Inc.
600 East 7th Street
Sioux Falls, SD 57103
(605) 271-1144

STRUCTURAL ENGINEER

Albertson Engineering, Inc.
3202 W. Main St. | Suite C
Rapid City, SD 57702
(314) 645-1132

MECHANICAL ENGINEER

West Plains Engineering, Inc.
1750 Rand Road
Rapid City, SD 57702
(605) 348-7455

ELECTRICAL ENGINEER

West Plains Engineering, Inc.
1750 Rand Road
Rapid City, SD 57702
(605) 348-7455

FIRE PROTECTION

West Plains Engineering, Inc.
1750 Rand Road
Rapid City, SD 57702
(605) 348-7455

VA Project #568-14-110

**DEPARTMENT OF VETERANS AFFAIRS
VHA MASTER SPECIFICATIONS**

**TABLE OF CONTENTS
Section 00 01 10**

SECTION NO.	DIVISION AND SECTION TITLES	DATE
	DIVISION 00 - SPECIAL SECTIONS	
00 01 15	List of Drawing Sheets	05-20
	DIVISION 01 - GENERAL REQUIREMENTS	
01 00 00	General Requirements	05-21
01 32 16.15	Project Schedules (Small Projects - Design/Bid/Build	03-20
01 33 23	Shop Drawings, Product Data, and Samples	06-21
01 35 26	Safety Requirements	07-20
01 42 19	Reference Standards	11-20
01 45 00	Quality Control	02-21
01 45 29	Testing Laboratory Services	11-18
01 45 35	Special Inspections	06-21
01 57 19	Temporary Environmental Controls	01-21
01 58 16	Temporary Interior Signage	07-15
01 74 19	Construction Waste Management	01-21
01 81 13	Sustainable Construction Requirements	10-17
01 91 00	General Commissioning Requirements	10-15
	DIVISION 02 - EXISTING CONDITIONS	
02 41 00	Demolition	08-17
02 82 11	Traditional Asbestos Abatement	01-21
02 83 33.13	Lead-Based Paint Removal and Disposal	01-21
02 84 16	Handling of Fluorescent Tubes, Ballasts, Thermostats, And Batteries	
	DIVISION 03 - CONCRETE	
03 30 00	Cast-in-Place Concrete	01-21
	DIVISION 04 - MASONRY	
04 01 00	Maintenance of Masonry	01-21
04 05 13	Masonry Mortaring	10-17
04 05 16	Masonry Grouting	01-21
04 20 00	Unit Masonry	08-17
04 72 00	Cast Stone Masonry	01-21
	DIVISION 05 - METALS	
05 12 00	Structural Steel Framing	11-18
05 36 00	Composite Metal Decking	01-21
05 40 00	Cold-Formed Metal Framing	01-21

SECTION NO.	DIVISION AND SECTION TITLES	DATE
05 50 00	Metal Fabrications	08-18
05 51 00	Metal Stairs	01-21
05 51 33.23	Alternating Tread Steel Stairs	
	DIVISION 06 - WOOD, PLASTICS AND COMPOSITES	
06 10 00	Rough Carpentry	10-17
06 20 00	Finish Carpentry	01-21
	DIVISION 07 - THERMAL AND MOISTURE PROTECTION	
07 01 50.19	Preparation for Re-Roofing	01-21
07 13 52	Modified Bituminous Sheet Waterproofing	01-21
07 21 13	Thermal Insulation	01-21
07 32 13	Clay Roof Tiles	01-21
07 60 00	Flashing and Sheet Metal	01-21
07 81 00	Applied Fireproofing	10-17
07 84 00	Firestopping	01-21
07 92 00	Joint Sealants	10-17
	DIVISION 08 - OPENINGS	
08 11 13	Hollow Metal Doors and Frames	01-21
08 14 00	Interior Wood Doors	01-21
08 17 10	Integrated Door Assemblies	01-21
08 31 13	Access Doors and Frames	01-21
08 33 43	Overhead Coiling Smoke Curtains for Elevator Doors	
08 71 00	Door Hardware	01-21
08 71 13	Automatic Door Operators	01-21
08 80 00	Glazing	01-21
08 88 16	Integrated Blinds Glazing	01-21
08 90 00	Louvers and Vents	01-21
	DIVISION 09 - FINISHES	
09 05 16	Subsurface Preparation for Floor Finishes	01-21
09 22 16	Non-Structural Metal Framing	06-18
09 29 00	Gypsum Board	04-20
09 30 13	Ceramic/Porcelain Tiling	01-21
09 51 00	Acoustical Ceilings	12-18
09 65 13	Resilient Base and Accessories	01-21
09 65 16	Resilient Sheet Flooring	05-18
09 65 19	Resilient Tile Flooring	05-18
09 67 23.20	Resinous Epoxy Base with Vinyl Chip Broadcast	01-21
09 68 00	Carpeting	01-21
09 91 00	Painting	01-21
09 96 59	Specialty Glazed Coatings Systems	01-21
	DIVISION 10 - SPECIALTIES	
10 14 00	Signage	01-21

SECTION NO.	DIVISION AND SECTION TITLES	DATE
01 14 01	Signage Schedule	
10 26 00	Wall and Door Protection	01-21
10 28 00	Toilet, Bath, and Laundry Accessories	01-21
10 44 13	Fire Extinguisher Cabinets	08-18
10 51 16	Lockers	
	DIVISION 11 - EQUIPMENT	
11 05 12	General Motor Requirements for Equipment	01-21
	DIVISION 12 - FURNISHINGS	
12 24 00	Window Shades	08-17
12 24 21	Lightproof Shades	05-15
	DIVISION 14- CONVEYING EQUIPEMENT	
14 24 00	New Hydraulic Elevator	08-20
	DIVISION 21- FIRE SUPPRESSION	
21 08 00	Commissioning of Fire Suppression System	11-16
21 13 13	Wet-Pipe Sprinkler Systems	06-15
	DIVISION 22 - PLUMBING	
22 05 11	Common Work Results for Plumbing	09-20
22 05 12	General Motor Requirements for Plumbing Equipment	09-20
22 05 19	Meters and Gages for Plumbing Piping	09-20
22 05 23	General-Duty Valves for Plumbing Piping	09-20
22 07 11	Plumbing Insulation	09-19
22 08 00	Commissioning of Plumbing Systems	11-16
22 11 00	Facility Water Distribution	05-21
22 13 00	Facility Sanitary and Vent Piping	09-20
22 40 00	Plumbing Fixtures	09-15
	DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)	
23 05 11	Common Work Results for HVAC	02-20
23 05 12	General Motor Requirements for HVAC and Steam Generation Equipment	02-20
23 05 41	Noise and Vibration Control for HVAC Piping and Equipment	02-20
23 05 93	Testing, Adjusting, and Balancing for HVAC	02-20
23 08 00	Commissioning of HVAC Systems	02-20
23 09 23	Direct-Digital Control System for HVAC	09-11
23 21 13	Hydronic Piping	02-20
23 21 23	Hydronic Pumps	02-20
23 25 00	HVAC Water Treatment	02-20
23 31 00	HVAC Ducts and Casings	02-20

SECTION NO.	DIVISION AND SECTION TITLES	DATE
23 37 00	Air Outlets and Inlets	02-20
23 40 00	HVAC Air Cleaning Devices	03-20
23 64 00	Packaged Water Chillers	03-20
23 72 00	Air-to-Air Energy Recovery Equipment	03-20
	DIVISION 26 - ELECTRICAL	
26 05 11	Requirements for Electrical Installations	01-16
26 05 19	Low-Voltage Electrical Power Conductors and Cables	01-17
26 05 26	Grounding and Bonding for Electrical Systems	01-17
26 05 33	Raceway and Boxes for Electrical Systems	01-18
26 05 73	Overcurrent Protective Device Coordination Study	01-18
26 08 00	Commissioning of Electrical Systems	11-16
26 09 23	Lighting Controls	01-18
26 24 16	Panelboards	01-18
26 27 26	Wiring Devices	01-18
26 29 11	Motor Controllers	01-18
26 29 21	Enclosed Switches and Circuit Breakers	01-17
26 36 23	Automatic Transfer Switches	01-17
26 43 13	Surge Protective Devices	01-17
26 51 00	Interior Lighting	01-18
	DIVISION 31 - EARTHWORK	
31 63 20	Micropiles	
	DIVISION 32 - EXTERIOR IMPROVEMENTS	
32 05 23	Cement and Concrete for Exterior Improvements	08-16
32 31 13	Chain Link Fences and Gates	06-18

SECTION 21 08 00
COMMISSIONING OF FIRE SUPPRESSION SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. The requirements of this Section apply to all sections of Division 21.
- B. This project will have selected building systems commissioned. The complete list of equipment and systems to be commissioned is specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The commissioning process, which the Contractor is responsible to execute, is defined in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. A Commissioning Agent (CxA) appointed by the VA will manage the commissioning process.

1.2 RELATED WORK

- A. Section 01 00 00 GENERAL REQUIREMENTS.
- B. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.
- C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1.3 SUMMARY

- A. This Section includes requirements for commissioning the Fire Suppression systems, subsystems and equipment. This Section supplements the general requirements specified in Section 01 91 00 General Commissioning Requirements.
- B. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for more details regarding processes and procedures as well as roles and responsibilities for all Commissioning Team members.

1.4 DEFINITIONS

- A. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for definitions.

1.5 COMMISSIONED SYSTEMS

- A. Commissioning of a system or systems specified in Division 21 is part of the construction process. Documentation and testing of these systems, as well as training of the VA's Operation and Maintenance personnel in accordance with the requirements of Section 01 91 00 and of Division 21, is required in cooperation with the VA and the Commissioning Agent.
- B. The Fire Suppression systems commissioning will include the systems listed in Section 01 91 00 General Commissioning Requirements:

1.6 SUBMITTALS

- A. The commissioning process requires review of selected Submittals. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.
- B. The commissioning process requires Submittal review simultaneously with engineering review. Specific submittal requirements related to the commissioning process are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

PART 2 - PRODUCTS (NOT USED)**PART 3 - EXECUTION****3.1 CONSTRUCTION INSPECTIONS**

- A. Commissioning of the building fire suppression systems will require inspection of individual elements of the fire suppression construction throughout the construction period. The Contractor shall coordinate with the Commissioning Agent in accordance with Section 01 91 00 and the Commissioning plan to schedule inspections as required to support the Commissioning Process.

3.2 PRE-FUNCTIONAL CHECKLISTS

- A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning Agent will select a broader sample of checklists for review. If the Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the checklists for the type of equipment will be returned to the Contractor for correction and

resubmission. Refer to SECTION 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for submittal requirements for Pre-Functional Checklists, Equipment Startup Reports, and other commissioning documents.

3.3 CONTRACTORS TESTS

- A. Contractor tests as required by other sections of Division 21 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. All testing shall be incorporated into the project schedule. Contractor shall provide no less than 7 calendar days' notice of testing. The Commissioning Agent will witness selected Contractor tests at the sole discretion of the Commissioning Agent. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

3.4 SYSTEMS FUNCTIONAL PERFORMANCE TESTING

- A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the COR. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed. See Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS, for additional details.

3.5 TRAINING OF VA PERSONNEL

- A. Training of the VA operation and maintenance personnel is required in cooperation with the COR and Commissioning Agent. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. Contractor shall submit training agendas and trainer resumes in accordance with the requirements of Section 01 91 00. The instruction shall be scheduled in coordination with the COR after submission and approval of formal training plans. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS and Division 21 Sections for additional Contractor training requirements.

----- END -----

SECTION 21 13 13
WET-PIPE SPRINKLER SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Design, installation, and testing shall be in accordance with NFPA 13.
- B. The design and installation of a hydraulically calculated automatic wet-pipe system complete and ready for operation, for all portions of Building, including the, attic space, elevator pits,.
- C. Modification of the existing sprinkler system as indicated on the drawings and as further required by these specifications.

1.2 RELATED WORK

- A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Section 33 10 00, WATER UTILITIES.
- C. Section 07 84 00, FIRESTOPPING.
- D. Section 09 91 00, PAINTING.
- E. Section 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING.
- F. Section 28 31 00, FIRE DETECTION AND ALARM.

1.3 DESIGN CRITERIA

- A. Design Basis Information: Provide design, materials, equipment, installation, inspection, and testing of the automatic sprinkler system in accordance with the requirements of NFPA 13.
 - 1. Perform hydraulic calculations in accordance with NFPA 13 utilizing the Area/Density method. Do not restrict design area reductions permitted for using quick response sprinklers throughout by the required use of standard response sprinklers in the areas identified in this section.
 - 2. Sprinkler Protection: Sprinkler hazard classifications shall be in accordance with NFPA 13. The hazard classification examples of uses and conditions identified in the Annex of NFPA 13 shall be mandatory for areas not listed below. Request clarification from the Government for any hazard classification not identified. To determining spacing and sizing, apply the following coverage classifications:

- a. Light Hazard Occupancies: Patient care, treatment, and customary access areas.
 - b. Ordinary Hazard Group 1 Occupancies: Laboratories, Mechanical Equipment Rooms, Transformer Rooms, Electrical Switchgear Rooms, Electric Closets, and Repair Shops.
 - c. Ordinary Hazard Group 2 Occupancies: Storage rooms, trash rooms, clean and soiled linen rooms, pharmacy and associated storage, laundry, kitchens, kitchen storage areas, retail stores, retail store storage rooms, storage areas, building management storage, boiler plants, energy centers, warehouse spaces, file storage areas for the entire area of the space up to 140 square meters (1500 square feet) and Supply Processing and Distribution (SPD).
3. Hydraulic Calculations: Calculated demand including hose stream requirements shall fall no less than 10 percent below the available water supply curve.
4. Zoning:
- a. For each sprinkler zone provide a control valve, flow switch, and a test and drain assembly with pressure gauge. For buildings greater than two stories, provide a check valve at each control valve.

1.4 SUBMITTALS

- A. Submit as one package in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Prepare detailed working drawings that are signed by a NICET Level III or Level IV Sprinkler Technician or stamped by a Registered Professional Engineer licensed in the field of Fire Protection Engineering. As the Government review is for technical adequacy only, the installer remains responsible for correcting any conflicts with other trades and building construction that arise during installation. Partial submittals will not be accepted. Material submittals shall be approved prior to the purchase or delivery to the job site. Suitably bind submittals in notebooks or binders and provide an index referencing the appropriate specification section. In addition to the hard copies, provide submittal items in Paragraphs 1.4(A)1 through 1.4(A)5 electronically in pdf format on a compact disc or as directed by the COR. Submittals shall include, but not be limited to, the following:

1. Qualifications:
 - a. Provide a copy of the installing contractors fire sprinkler and state contractor's license.
 - b. Provide a copy of the NICET certification for the NICET Level III or Level IV Sprinkler Technician who prepared and signed the detailed working drawings unless the drawings are stamped by a Registered Professional Engineer licensed in the field of Fire Protection Engineering.
 - c. Provide documentation showing that the installer has been actively and successfully engaged in the installation of commercial automatic sprinkler systems for the past ten years.
2. Drawings: Submit detailed 1:100 (1/8 inch) scale (minimum) working drawings conforming to the Plans and Calculations chapter of NFPA 13. Drawings shall include graphical scales that allow the user to determine lengths when the drawings are reduced in size. Include a plan showing the piping to the water supply test location.
3. Manufacturer's Data Sheets: Provide data sheets for all materials and equipment proposed for use on the system. Include listing information and installation instructions in data sheets. Where data sheets describe items in addition to those proposed to be used for the system, clearly identify the proposed items on the sheet.
4. Calculation Sheets:
 - a. Submit hydraulic calculation sheets in tabular form conforming to the requirements and recommendations of the Plans and Calculations chapter of NFPA 13.
5. Valve Charts: Provide a valve chart that identifies the location of each control valve. Coordinate nomenclature and identification of control valves with COR. Where existing nomenclature does not exist, the chart shall include no less than the following: Tag ID No., Valve Size, Service (control valve, main drain, aux. drain, inspectors test valve, etc.), and Location.
6. Final Document Submittals: Provide as-built drawings, testing and maintenance instructions in accordance with the requirements in Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. In addition, submittals shall include, but not be limited to, the following:
 - a. A complete set of as-built drawings showing the installed system with the specific interconnections between the system switches

and the fire alarm equipment. Provide a complete set in the formats as follows. Submit items 2 and 3 below on a compact disc or as directed by the COR.

- 1) One full size (or size as directed by the COR) printed copy.
 - 2) One complete set-in electronic pdf format.
 - 3) One complete set in AutoCAD format or a format as directed by the COR.
- b. Material and Testing Certificate: Upon completion of the sprinkler system installation or any partial section of the system, including testing and flushing, provide a copy of a completed Material and Testing Certificate as indicated in NFPA 13. Certificates shall be provided to document all parts of the installation.
- c. Operations and Maintenance Manuals that include step-by-step procedures required for system startup, operation, shutdown, and routine maintenance and testing. The manuals shall include the manufacturer's name, model number, parts list, and tools that should be kept in stock by the owner for routine maintenance, including the name of a local supplier, simplified wiring and controls diagrams, troubleshooting guide, and recommended service organization, including address and telephone number, for each item of equipment.
- d. One paper copy of the Material and Testing Certificates and the Operations and Maintenance Manuals above shall be provided in a binder. In addition, these materials shall be provided in pdf format on a compact disc or as directed by the COR.
- e. Provide one additional copy of the Operations and Maintenance Manual covering the system in a flexible protective cover and mount in an accessible location adjacent to the riser or as directed by the COR.

1.5 QUALITY ASSURANCE

- A. Installer Reliability: The installer shall possess a valid State of South Dakota fire sprinkler contractor's license. The installer shall have been actively and successfully engaged in the installation of commercial automatic sprinkler systems for the past ten years.
- B. Materials and Equipment: All equipment and devices shall be of a make and type listed by UL or approved by FM, or other nationally recognized

testing laboratory for the specific purpose for which it is used. All materials, devices, and equipment shall be approved by the VA. All materials and equipment shall be free from defect. All materials and equipment shall be new unless specifically indicated otherwise on the contract drawings.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. National Fire Protection Association (NFPA):
 - 13-13.....Installation of Sprinkler Systems
 - 25-14.....Inspection, Testing, and Maintenance of Water-Based Fire Protection Systems
 - 101-15.....Life Safety Code
 - 170-15.....Fire Safety Symbols
- C. Underwriters Laboratories, Inc. (UL):
 - Fire Protection Equipment Directory (2011)
- D. Factory Mutual Engineering Corporation (FM):
 - Approval Guide

PART 2 - PRODUCTS

2.1 PIPING & FITTINGS

- A. Piping and fittings for private underground water mains shall be in accordance with NFPA 13.
 - 1. Pipe and fittings from inside face of building 300 mm (12 in.) above finished floor to a distance of approximately 1500 mm (5 ft.) outside building: Ductile Iron, flanged fittings and 316 stainless steel bolting.
- B. Piping and fittings for sprinkler systems shall be in accordance with NFPA 13.
 - 1. Plain-end pipe fittings with locking lugs or shear bolts are not permitted.
 - 2. Piping sizes 50 mm (2 inches) and smaller shall be black steel Schedule 40 with threaded end connections.
 - 3. Piping sizes 65 mm (2 ½ inches) and larger shall be black steel Schedule 10 with grooved connections. Grooves in Schedule 10 piping shall be rolled grooved only.
 - 4. Use nonferrous piping in MRI Scanning Rooms.

5. Plastic piping shall not be permitted except for drain piping.
6. Flexible sprinkler hose shall be FM Approved and limited to hose with threaded end fittings with a minimum inside diameter of 1-inch and a maximum length of 6-feet.

2.2 VALVES

A. General:

1. Valves shall be in accordance with NFPA 13.
2. Do not use quarter turn ball valves for 50 mm (2 inch) or larger drain valves.

B. Control Valve: The control valves shall be a listed indicating type. Control valves shall be UL Listed or FM Approved for fire protection installations. System control valve shall be rated for normal system pressure but in no case less than 175 PSI.

C. Check Valve: Shall be of the swing type with a flanged cast iron body and flanged inspection plate.

D. Automatic Ball Drips: Cast brass 20 mm (3/4 inch) in-line automatic ball drip with both ends threaded with iron pipe threads.

E. Alarm Check Valve: Alarm check valve shall be UL Listed and Factory Mutual Approved. The alarm check valve shall be listed for installation in the vertical or horizontal position. The alarm check valve shall be equipped with a removable cover assembly, gauge connections on the system side and supply side of the valve clapper, variable pressure trim, and an external bypass to eliminate false water flow alarms. The alarm check valve trim piping shall be galvanized. Maximum water working pressure to 250 PSI.

F. Backflow Preventer: Provide backflow preventer in accordance with Section 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING. Provide means to forward flow test the backflow preventer in accordance with NFPA 13.

2.3 FIRE DEPARTMENT SIAMESE CONNECTION

A. Brass, flush wall type, exterior fire department connection with brass escutcheon plate, and a minimum of two 65 mm (2-1/2 inch) connections threaded to match those on the local fire protection service, with polished brass caps and chains. Provide escutcheon with integral raised letters "Automatic Sprinkler" Install an automatic ball drip between fire department connection and check valve with drain piping routed to the exterior of the building or a floor drain.

2.4 SPRINKLERS

- A. All sprinklers shall be FM approved quick response except "institutional" type sprinklers shall be permitted to be UL Listed quick response. "Institutional" type sprinklers in Mental Health and Behavior Units shall be UL listed or FM approved quick response type. Maximum break away strength shall be certified by the manufacturer to be no more than 39 kPa (85 pounds). Provide FM approved quick response sprinklers in all areas, except that standard response sprinklers shall be provided in elevator hoistways and elevator machine rooms.
- B. Temperature Ratings: In accordance with NFPA 13 except that sprinklers in elevator shafts and elevator machine rooms shall be no less than intermediate temperature rated and sprinklers in generator rooms shall be no less than high temperature rated.
- C. Provide sprinkler guards in accordance with NFPA 13 and when the elevation of the sprinkler head is less than 7 feet 6 inches above finished floor. The sprinkler guard shall be UL listed or FM approved for use with the corresponding sprinkler.

2.5 SPRINKLER CABINET

- A. Provide sprinkler cabinet with the required number of sprinkler heads of all ratings and types installed, and a sprinkler wrench for each type of sprinkler in accordance with NFPA 13. Locate adjacent to the riser.
- B. Provide a list of sprinklers installed in the property in the cabinet. The list shall include the following:
 - 1. Manufacturer, model, orifice, deflector type, thermal sensitivity, and pressure for each type of sprinkler in the cabinet.
 - 2. General description of where each sprinkler is used.
 - 3. Quantity of each type present in the cabinet.
 - 4. Issue or revision date of list.

2.6 SPRINKLER SYSTEM SIGNAGE

Rigid plastic, steel, or aluminum signs with white lettering on a red background with holes for easy attachment. Sprinkler system signage shall be attached to the valve or piping with chain.

2.7 SWITCHES:

- A. OS&Y Valve Supervisory Switches shall be in a weatherproof die cast/red baked enamel, oil resistant, aluminum housing with tamper resistant screws, 13 mm (1/2 inch) conduit entrance and necessary facilities for

attachment to the valves. Provide two SPDT switches rated at 2.5 amps at 24 VDC.

- B. Water flow Alarm Switches: Mechanical, non-coded, non-accumulative retard and adjustable from 0 to 60 seconds minimum. Set flow switches at an initial setting between 20 and 30 seconds.
- C. Alarm Pressure Switches: Activation by any flow of water equal to or in excess of the discharge from one sprinkler. The alarm pressure switch shall be UL Listed or Factory Mutual Approved for the application in which it is used. Activation of the alarm pressure switch shall cause an alarm on the fire alarm system control unit.
- D. Valve Supervisory Switches for Ball and Butterfly Valves: May be integral with the valve.

2.8 GAUGES

Provide gauges as required by NFPA 13. Provide gauges where the normal pressure of the system is at the midrange of the gauge.

2.9 PIPE HANGERS, SUPPORTS AND RESTRAINT OF SYSTEM PIPING

Pipe hangers, supports, and restraint of system piping shall be in accordance with NFPA 13.

2.10 WALL, FLOOR AND CEILING PLATES

Provide chrome plated steel escutcheon plates.

2.11 VALVE TAGS

Engraved black filled numbers and letters not less than 15 mm (1/2 inch) high for number designation, and not less than 8 mm (1/4 inch) for service designation on 19 gage, 40 mm (1-1/2 inches) round brass disc, attached with brass "S" hook, brass chain, or nylon twist tie.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Installation shall be accomplished by the licensed contractor. Provide a qualified technician, experienced in the installation and operation of the type of system being installed, to supervise the installation and testing of the system.
- B. Installation of Piping: Accurately cut pipe to measurements established by the installer and work into place without springing or forcing. In any situation where bending of the pipe is required, use a standard pipe-bending template. Concealed piping in spaces that have finished ceilings. Where ceiling mounted equipment exists, such as in operating and radiology rooms, install sprinklers so as not to obstruct the movement or operation of the equipment. Sidewall heads may need to be

utilized. In stairways, locate piping as near to the ceiling as possible to prevent tampering by unauthorized personnel and to provide a minimum headroom clearance of 2250 mm (seven feet six inches). Piping shall not obstruct the minimum means of egress clearances required by NFPA 101. Pipe hangers, supports, and restraint of system piping, shall be installed accordance with NFPA 13.

- C. Welding: Conform to the requirements and recommendations of NFPA 13.
- D. Drains: Provide drips and drains, including low point drains, in accordance with NFPA 13. Pipe drains to discharge at safe points outside of the building or to sight cones attached to drains of adequate size to readily carry the full flow from each drain under maximum pressure. Do not provide a direct drain connection to sewer system or discharge into sinks. Install drips and drains where necessary and required by NFPA 13. The drain piping shall not be restricted or reduced and shall be of the same diameter as the drain collector.
- E. Supervisory Switches: Provide supervisory switches for sprinkler control valves.
- F. Waterflow Alarm Switches: Install waterflow alarm switches and valves in stairwells or other easily accessible locations.
- G. Inspector's Test Connection: Install and supply in accordance with NFPA 13, locate in a secured area, and discharge to the exterior of the building.
- H. Affix cutout disks, which are created by cutting holes in the walls of pipe for flow switches and non-threaded pipe connections to the respective waterflow switch or pipe connection near to the pipe from where they were cut.
- I. Provide escutcheon plates for exposed piping passing through walls, floors, or ceilings.
- J. Clearances: For systems requiring seismic protection, piping that passes through floors or walls shall have penetrations sized 50 mm (2 inches) nominally larger than the penetrating pipe for pipe sizes 25 mm (1 inch) to 90 mm (3 ½ inches) and 100 mm (4 inches) nominally larger for penetrating pipe sizes 100 mm (4 inches) and larger.
- K. Sleeves: Provide for pipes passing through masonry or concrete. Provide space between the pipe and the sleeve in accordance with NFPA 13. Seal this space with a UL Listed through penetration fire stop material in accordance with Section 07 84 00, FIRESTOPPING. Where core drilling is

used in lieu of sleeves, also seal space. Seal penetrations of walls, floors, and ceilings of other types of construction, in accordance with Section 07 84 00, FIRESTOPPING.

- L. Provide pressure gauges at each water flow alarm switch location and at each main drain connection.
- M. For each fire department connection, provide the symbolic sign given in NFPA 170 and locate 2400 to 3000 mm (8 to 10 feet) above each connection location. Size the sign to 450 by 450 mm (18 by 18 inches) with the symbol being at least 350 by 350 mm (14 by 14 inches).
- N. Firestopping shall be provided for all penetrations of fire resistance rated construction. Firestopping shall comply with Section 07 84 00, FIRESTOPPING.
- O. Painting of Pipe: In finished areas where walls and ceilings have been painted, paint primed surfaces with two coats of paint to match adjacent surfaces, except paint valves and operating accessories with two coats of gloss red enamel. Exercise care to avoid painting sprinklers. Painting of sprinkler systems above suspended ceilings and in crawl spaces is not required. Painting shall comply with Section 09 91 00, PAINTING. Any painted sprinkler shall be replaced with a new sprinkler.
- P. Sprinkler System Signage: Provide rigid sprinkler system signage in accordance with NFPA 13 and NFPA 25. Sprinkler system signage shall include, but not limited to, the following:
 - 1. Identification Signs:
 - a. Provide signage for each control valve, drain valve, sprinkler cabinet, and inspector's test.
 - b. Provide valve tags for each operable valve. Coordinate nomenclature and identification of operable valves with COR. Where existing nomenclature does not exist, the Tag Identification shall include no less than the following: (FP-B-F/SZ-#) Fire Protection, Building Number, Floor Number/Smoke Zone (if applicable), and Valve Number. (E.g., FP-500-1E-001) Fire Protection, Building 500, First Floor East, Number 001.)
 - 2. Instruction/Information Signs:
 - a. Provide signage for each control valve to indicate valve function and to indicate what system is being controlled.
 - b. Provide signage indicating the number and location of low point drains.

3. Hydraulic Placards:

- a. Provide signage indicating hydraulic design information. The placard shall include location of the design area, discharge densities, required flow and residual pressure at the base of riser, occupancy classification, hose stream allowance, flow test information, and installing contractor. Locate hydraulic placard information signs at each alarm check valve.
- Q. Repairs: Repair damage to the building or equipment resulting from the installation of the sprinkler system by the installer at no additional expense to the Government.
- R. Interruption of Service: There shall be no interruption of the existing sprinkler protection, water, electric, or fire alarm services without prior permission of the Contracting Officer. Contractor shall develop an interim fire protection program where interruptions involve occupied spaces. Request in writing at least one week prior to the planned interruption.

3.2 INSPECTION AND TEST

- A. Preliminary Testing: Flush newly installed systems prior to performing hydrostatic tests in order to remove any debris which may have been left as well as ensuring piping is unobstructed. Hydrostatically test system, including the fire department connections, as specified in NFPA 13, in the presence of the Contracting Officers Representative (COR) or his designated representative. Test and flush underground water line prior to performing these hydrostatic tests.
- B. Final Inspection and Testing: Subject system to tests in accordance with NFPA 13, and when all necessary corrections have been accomplished, advise COR to schedule a final inspection and test. Connection to the fire alarm system shall have been in service for at least ten days prior to the final inspection, with adjustments made to prevent false alarms. Furnish all instruments, labor and materials required for the tests and provide the services of the installation foreman or other competent representative of the installer to perform the tests. Correct deficiencies and retest system as necessary, prior to the final acceptance. Include the operation of all features of the systems under normal operations in test

3.3 INSTRUCTIONS

Furnish the services of a competent instructor for not less than two hours for instructing personnel in the operation and maintenance of the system, on the dates requested by the COR.

- - - E N D - - -

SECTION 22 05 11
COMMON WORK RESULTS FOR PLUMBING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. The requirements of this Section shall apply to all sections of Division 22.
- B. Definitions:
 - 1. Exposed: Piping and equipment exposed to view in finished rooms.
 - 2. Exterior: Piping and equipment exposed to weather be it temperature, humidity, precipitation, wind, or solar radiation.
- C. Abbreviations/Acronyms:
 - 1. ABS: Acrylonitrile Butadiene Styrene
 - 2. AC: Alternating Current
 - 3. ACR: Air Conditioning and Refrigeration
 - 4. A/E: Architect/Engineer
 - 5. AFF: Above Finish Floor
 - 6. AFG: Above Finish Grade
 - 7. AI: Analog Input
 - 8. AISI: American Iron and Steel Institute
 - 9. AO: Analog Output
 - 10. ASHRAE: American Society of Heating Refrigeration, Air Conditioning Engineers
 - 11. ASJ: All Service Jacket
 - 12. ASME: American Society of Mechanical Engineers
 - 13. ASPE: American Society of Plumbing Engineers
 - 14. AWG: American Wire Gauge
 - 15. BACnet: Building Automation and Control Network
 - 16. BAg: Silver-Copper-Zinc Brazing Alloy
 - 17. BAS: Building Automation System
 - 18. BCuP: Silver-Copper-Phosphorus Brazing Alloy
 - 19. bhp: Brake Horsepower
 - 20. Btu: British Thermal Unit
 - 21. Btu/h: British Thermal Unit per Hour
 - 22. BSG: Borosilicate Glass Pipe
 - 23. C: Celsius
 - 24. CD: Compact Disk
 - 25. CDA: Copper Development Association

- 26. CFM: Cubic Feet per Minute
- 27. CI: Cast Iron
- 28. CLR: Color
- 29. CO: Contracting Officer
- 30. COR: Contracting Officer's Representative
- 31. CPVC: Chlorinated Polyvinyl Chloride
- 32. CRS: Corrosion Resistant Steel
- 33. CWP: Cold Working Pressure
- 34. DCW: Domestic Cold Water
- 35. DFU: Drainage Fixture Units
- 36. DHW: Domestic Hot Water
- 37. DHWR: Domestic Hot Water Return
- 38. DHWS: Domestic Hot Water Supply
- 39. DI: Digital Input
- 40. DISS: Diameter Index Safety System
- 41. DN: Diameter Nominal
- 42. DO: Digital Output
- 43. DOE: Department of Energy
- 44. DVD: Digital Video Disc
- 45. DWG: Drawing
- 46. DWH: Domestic Water Heater
- 47. DWS: Domestic Water Supply
- 48. DWV: Drainage, Waste and Vent
- 49. ECC: Engineering Control Center
- 50. EL: Elevation
- 51. EMCS: Energy Monitoring and Control System
- 52. EPA: Environmental Protection Agency
- 53. EPACT: Energy Policy Act
- 54. EPDM: Ethylene Propylene Diene Monomer
- 55. F: Fahrenheit
- 56. FAR: Federal Acquisition Regulations
- 57. FD: Floor Drain
- 58. FDC: Fire Department (Hose) Connection
- 59. FED: Federal
- 60. FG: Fiberglass
- 61. FNPT: Female National Pipe Thread
- 62. FSK: Foil-Scrim-Kraft Facing

- 63. FSS: VA Construction & Facilities Management, Facility Standards Service
- 64. FU: Fixture Units
- 65. GAL: Gallon
- 66. GCO: Grade Cleanouts
- 67. GPH: Gallons per Hour
- 68. GPM: Gallons per Minute
- 69. HDPE: High Density Polyethylene
- 70. HEFP: Healthcare Environment and Facilities Program (replacement for OCAMES)
- 71. HEX: Heat Exchanger
- 72. Hg: Mercury
- 73. HOA: Hands-Off-Automatic
- 74. HP: Horsepower
- 75. HVE: High Volume Evacuation
- 76. Hz: Hertz
- 77. ID: Inside Diameter
- 78. IE: Invert Elevation
- 79. INV: Invert
- 80. IPC: International Plumbing Code
- 81. IPS: Iron Pipe Size
- 82. IW: Indirect Waste
- 83. IWH: Instantaneous Water Heater
- 84. Kg: Kilogram
- 85. kPa: Kilopascal
- 86. KW: Kilowatt
- 87. KWH: Kilowatt Hour
- 88. lb: Pound
- 89. lbs/hr: Pounds per Hour
- 90. L/min: Liters per Minute
- 91. LOX: Liquid Oxygen
- 92. L/s: Liters per Second
- 93. m: Meter
- 94. MAWP: Maximum Allowable Working Pressure
- 95. MAX: Maximum
- 96. MBH: 1000 Btu per Hour
- 97. MED: Medical
- 98. MER: Mechanical Equipment Room

- 99. MFG: Manufacturer
- 100. mg: Milligram
- 101. mg/L: Milligrams per Liter
- 102. ml: Milliliter
- 103. mm: Millimeter
- 104. MIN: Minimum
- 105. NC: Normally Closed
- 106. NG: Natural Gas
- 107. NIC: Not in Contract
- 108. NO: Normally Open
- 109. NOM: Nominal
- 110. NPTF: National Pipe Thread Female
- 111. NPS: Nominal Pipe Size
- 112. NPT: Nominal Pipe Thread
- 113. NTS: Not to Scale
- 114. OC: On Center
- 115. OD: Outside Diameter
- 116. OSD: Open Sight Drain
- 117. OS&Y: Outside Stem and Yoke
- 118. PA: Pascal
- 119. PBPU: Prefabricated Bedside Patient Units
- 120. PD: Pressure Drop or Difference
- 121. PDI: Plumbing and Drainage Institute
- 122. PH: Power of Hydrogen
- 123. PID: Proportional-Integral-Differential
- 124. PLC: Programmable Logic Controllers
- 125. PP: Polypropylene
- 126. ppb: Parts per Billion
- 127. ppm: Parts per Million
- 128. PSI: Pounds per Square Inch
- 129. PSIA: Pounds per Square Inch Atmosphere
- 130. PSIG: Pounds per Square Inch Gauge
- 131. PTFE: Polytetrafluoroethylene
- 132. PVC: Polyvinyl Chloride
- 133. PVDF: Polyvinylidene Fluoride
- 134. RAD: Radians
- 135. RO: Reverse Osmosis
- 136. RPM: Revolutions Per Minute

- 137. RTD: Resistance Temperature Detectors
- 138. RTRP: Reinforced Thermosetting Resin Pipe
- 139. SAN: Sanitary Sewer
- 140. SCFM: Standard Cubic Feet per Minute
- 141. SDI: Silt Density Index
- 142. SMACNA: Sheet Metal and Air Conditioning Contractors National Association
- 143. SPEC: Specification
- 144. SPS: Sterile Processing Services
- 145. SQFT/SF: Square Feet
- 146. SS: Stainless Steel
- 147. STD: Standard
- 148. SUS: Saybolt Universal Second
- 149. SWP: Steam Working Pressure
- 150. TD: Temperature Difference
- 151. TDH: Total Dynamic Head
- 152. TEFC: Totally Enclosed Fan-Cooled
- 153. TEMP: Temperature
- 154. TFE: Tetrafluoroethylene
- 155. THERM: 100,000 Btu
- 156. THHN: Thermoplastic High-Heat Resistant Nylon Coated Wire
- 157. THWN: Thermoplastic Heat & Water-Resistant Nylon Coated Wire
- 158. TIL: Technical Information Library
<http://www.cfm.va.gov/til/indes.asp>
- 159. T/P: Temperature and Pressure
- 160. TYP: Typical
- 161. USDA: U.S. Department of Agriculture
- 162. V: Vent
- 163. V: Volt
- 164. VA: Veterans Administration
- 165. VA CFM: VA Construction & Facilities Management
- 166. VA CFM CSS: VA Construction & Facilities Management, Consulting Support Service
- 167. VAC: Vacuum
- 168. VAC: Voltage in Alternating Current
- 169. VAMC: Veterans Administration Medical Center
- 170. VHA OCAMES: This has been replaced by HEFP.
- 171. VSD: Variable Speed Drive

- 172. VTR: Vent through Roof
- 173. W: Waste
- 174. WAGD: Waste Anesthesia Gas Disposal
- 175. WC: Water Closet
- 176. WG: Water Gauge
- 177. WOG: Water, Oil, Gas
- 178. WPD: Water Pressure Drop
- 179. WSFU: Water Supply Fixture Units

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.
- D. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- E. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.
- F. Section 07 60 00, FLASHING AND SHEET METAL: Flashing for Wall and Roof Penetrations.
- G. Section 07 84 00, FIRESTOPPING.
- H. Section 07 92 00, JOINT SEALANTS.
- I. Section 09 91 00, PAINTING.
- J. Section 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT.
- K. Section 22 07 11, PLUMBING INSULATION.
- L. Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- M. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- N. Section 23 09 24, WATER QUALITY MONITORING.
- O. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- P. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES.
- Q. Section 26 29 11, MOTOR CONTROLLERS.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below shall form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.
- B. American Society of Mechanical Engineers (ASME):
 - B31.1-2013.....Power Piping
 - ASME Boiler and Pressure Vessel Code -
 - BPVC Section IX-2019.... Welding, Brazing, and Fusing Qualifications

C. American Society for Testing and Materials (ASTM):

A36/A36M-2019.....Standard Specification for Carbon Structural
Steel

A575-96(2013)e1.....Standard Specification for Steel Bars, Carbon,
Merchant Quality, M-Grades

E84-2013a.....Standard Test Method for Surface Burning
Characteristics of Building Materials

E119-2012a.....Standard Test Methods for Fire Tests of
Building Construction and Materials

D. International Code Council, (ICC):

IBC-2018.....International Building Code

IPC-2018.....International Plumbing Code

E. Manufacturers Standardization Society (MSS) of the Valve and Fittings Industry, Inc:

SP-58-2018.....Pipe Hangers and Supports - Materials, Design,
Manufacture, Selection, Application and
Installation

F. Military Specifications (MIL):

P-21035B.....Paint High Zinc Dust Content, Galvanizing
Repair (Metric)

G. National Electrical Manufacturers Association (NEMA):

MG 1-2016.....Motors and Generators

H. National Fire Protection Association (NFPA):

51B-2019.....Standard for Fire Prevention During Welding,
Cutting and Other Hot Work

54-2018.....National Fuel Gas Code

70-2020.....National Electrical Code (NEC)

99-2018.....Healthcare Facilities Code

I. NSF International (NSF):

5-2019.....Water Heaters, Hot Water Supply Boilers, and
Heat Recovery Equipment

14-2019.....Plastic Piping System Components and Related
Materials

61-2019.....Drinking Water System Components - Health
Effects

372-2016.....Drinking Water System Components - Lead Content

J. Department of Veterans Affairs (VA):

PG-18-102014(R18).....Plumbing Design Manual

PG-18-13-2017(R18).....Barrier Free Design Guide

1.4 SUBMITTALS

- A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 05 11, COMMON WORK RESULTS FOR PLUMBING", with applicable paragraph identification.
- C. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements, and all equipment that requires regular maintenance, calibration, etc are accessible from the floor or permanent work platform. It is the Contractor's responsibility to ensure all submittals meet the VA specifications and requirements and it is assumed by the VA that all submittals do meet the VA specifications unless the Contractor has requested a variance in writing and approved by COR prior to the submittal. If at any time during the project, it is found that any item does not meet the VA specifications and there was no variance approval the Contractor shall correct at no additional cost or time to the Government even if a submittal was approved.
- D. If equipment is submitted which differs in arrangement from that shown, provide documentation proving equivalent performance, design standards and drawings that show the rearrangement of all associated systems. Additionally, any impacts on ancillary equipment or services such as foundations, piping, and electrical shall be the Contractor's responsibility to design, supply, and install at no additional cost or time to the Government. VA approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.
- E. Prior to submitting shop drawings for approval, Contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed drawings and specifications and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.
- F. Submittals and shop drawings for interdependent items, containing applicable descriptive information, shall be furnished together and complete in a group. Coordinate and properly integrate materials and

equipment in each group to provide a completely compatible and efficient installation. Final review and approvals will be made only by groups.

G. Manufacturer's Literature and Data including Manufacturer's literature shall be submitted under the pertinent section rather than under this section.

1. Electric motor data and variable speed drive data shall be submitted with the driven equipment.
2. Equipment and materials identification.
3. Firestopping materials.
4. Hangers, inserts, supports and bracing. Provide load calculations for variable spring and constant support hangers.
5. Wall, floor, and ceiling plates.

H. Coordination/Shop Drawings:

1. Submit complete consolidated and coordinated shop drawings for all new systems, and for existing systems that are in the same areas.
2. The coordination/shop drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8-inch equal to 1 foot). Clearly identify and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show locations and adequate clearance for all equipment, piping, valves, control panels and other items. Show the access means for all items requiring access for operations and maintenance. Provide detailed coordination/shop drawings of all piping and duct systems. The drawings should include all lockout/tagout points for all energy/hazard sources for each piece of equipment. Coordinate lockout/tagout procedures and practices with local VA requirements.
3. Do not install equipment foundations, equipment or piping until coordination/shop drawings have been approved.
4. In addition, for plumbing systems, provide details of the following:
 - a. Mechanical equipment rooms.
 - b. Interstitial space.
 - c. Hangers, inserts, supports, and bracing.
 - d. Pipe sleeves.
 - e. Duct or equipment penetrations of floors, walls, ceilings, or roofs.

I. Plumbing Maintenance Data and Operating Instructions:

1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.
2. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:
 - a. Include complete list indicating all components of the systems.
 - b. Include complete diagrams of the internal wiring for each item of equipment.
 - c. Diagrams shall have their terminals identified to facilitate installation, operation, and maintenance.
3. Provide a listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment. Include in the listing belts for equipment: Belt manufacturer, model number, size, and style, and distinguished whether of multiple belt sets.

J. Provide copies of approved plumbing equipment submittals to the TAB and Commissioning Subcontractor.

K. Completed System Readiness Checklist provided by the CxA and completed by the Contractor, signed by a qualified technician, and dated on the date of completion, in accordance with the requirements of Section 22 08 00 COMMISSIONING OF PLUMBING SYSTEMS

L. Submit training plans, trainer qualifications and instructor qualifications in accordance with the requirements of Section 22 08 00 COMMISSIONING OF PLUMBING SYSTEMS.

1.5 QUALITY ASSURANCE

A. Mechanical, electrical, and associated systems shall be safe, reliable, efficient, durable, easily, and safely operable and maintainable, easily, and safely accessible, and in compliance with applicable codes as specified. The systems shall be comprised of high quality institutional-class and industrial-class products of manufacturers that are experienced specialists in the required product lines. All construction firms and personnel shall be experienced and qualified specialists in industrial and institutional plumbing.

B. Products Criteria:

1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture, supply, and servicing of the specified products for at least 5

- years. However, digital electronics devices, software, and systems such as controls, instruments, computer workstation, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least 5 years.
2. Equipment Service: There shall be permanent service organizations, authorized and trained by manufacturers of the equipment supplied, located within 160 km (100 miles) of the project. These organizations shall come to the site and provide acceptable service to restore operations within 4 hours of receipt of notification by phone, e-mail, or fax in event of an emergency, such as the shut-down of equipment; or within 24 hours in a non-emergency. Names, mail and e-mail addresses and phone numbers of service organizations providing service under these conditions for (as applicable to the project): pumps, compressors, water heaters, critical instrumentation, computer workstation and programming shall be submitted for project record and inserted into the operations and maintenance manual.
 3. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
 4. The products and execution of work specified in Division 22 shall conform to the referenced codes and standards as required by the specifications. Local codes and amendments enforced by the local code official shall be enforced, if required by local authorities such as the natural gas supplier. If the local codes are more stringent, then the local code shall apply. Any conflicts shall be brought to the attention of the Contracting Officers Representative (COR).
 5. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be of the same manufacturer and model number, or if different models are required, they shall be of the same manufacturer and identical to the greatest extent possible (i.e., same model series).
 6. Assembled Units: Performance and warranty of all components that make up an assembled unit shall be the responsibility of the manufacturer of the completed assembly.
 7. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on

- equipment, or name or trademark cast integrally with equipment, stamped, or otherwise permanently marked on each item of equipment.
8. Asbestos products or equipment or materials containing asbestos is prohibited.
 9. Bio-Based Materials: For products designated by the USDA's bio-based Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit <http://www.biopreferred.gov>.
- C. Welding: Before any welding is performed, Contractor shall submit a certificate certifying that welders comply with the following requirements:
1. Qualify welding processes and operators for piping according to ASME BPVC, Section IX, "Welding and Brazing Qualifications". Provide proof of current certification to CO.
 2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
 3. Certify that each welder and welding operator has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
 4. All welds shall be stamped according to the provisions of the AWS or ASME as required herein and by the association code.
- D. Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the COR prior to installation. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material.
- E. Execution (Installation, Construction) Quality:
1. All items shall be applied and installed in accordance with manufacturer's written instructions. Conflicts between the manufacturer's instructions and the contract documents shall be referred to the COR for resolution. Printed copies or electronic files of manufacturer's installation instructions shall be provided to the COR at least 10 working days prior to commencing installation of any item.

2. All items that require access, such as for operating, cleaning, servicing, maintenance, and calibration, shall be easily and safely accessible by persons standing at floor level, or standing on permanent platforms, without the use of portable ladders. Examples of these items include but are not limited to all types of valves, filters and strainers, transmitters, and control devices. Prior to commencing installation work, refer conflicts between this requirement and contract documents to COR for resolution. Failure of the Contractor to resolve or call attention to any discrepancies or deficiencies to the COR will result in the Contractor correcting at no additional cost or time to the Government.
3. Complete layout drawings shall be required by Paragraph, SUBMITTALS. Construction work shall not start on any system until the layout drawings have been approved by VA.
4. Installer Qualifications: Installer shall be licensed and shall provide evidence of the successful completion of at least five projects of equal or greater size and complexity. Provide tradesmen skilled in the appropriate trade.
5. Workmanship/craftsmanship will be of the highest quality and standards. The VA reserves the right to reject any work based on poor quality of workmanship this work shall be removed and done again at no additional cost or time to the Government.
- F. Upon request by Government, provide lists of previous installations for selected items of equipment. Include contact persons who will serve as references, with current telephone numbers and e-mail addresses.
- G. Guaranty: Warranty of Construction, FAR clause 52.246-21.
- H. Plumbing Systems: IPC, International Plumbing Code. Unless otherwise required herein, perform plumbing work in accordance with the latest version of the IPC. For IPC codes referenced in the contract documents, advisory provisions shall be considered mandatory, the word "should" shall be interpreted as "shall". Reference to the "code official" or "owner" shall be interpreted to mean the COR.
- I. Cleanliness of Piping and Equipment Systems:
 1. Care shall be exercised in the storage and handling of equipment and piping material to be incorporated in the work. Debris arising from cutting, threading, and welding of piping shall be removed.

2. Piping systems shall be flushed, blown, or pigged as necessary to deliver clean systems.
3. The interior of all tanks shall be cleaned prior to delivery and beneficial use by the Government. All piping shall be tested in accordance with the specifications and the International Plumbing Code (IPC). All filters, strainers, fixture faucets shall be flushed of debris prior to final acceptance.
4. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.6 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:

1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage or theft.
2. Damaged equipment shall be replaced with an identical unit as determined and directed by the COR. Such replacement shall be at no additional cost or additional time to the Government.
3. Interiors of new equipment and piping systems shall be protected against entry of foreign matter. Both inside and outside shall be cleaned before painting or placing equipment in operation.
4. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.
5. Protect plastic piping and tanks from ultraviolet light (sunlight) while in pre-construction. Plastic piping and tanks shall not be installed exposed to sunlight without metal jacketing to block ultraviolet rays.

1.7 AS-BUILT DOCUMENTATION

- A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.
- B. Submit operation and maintenance data updated to include submittal review comments, VA approved substitutions and construction revisions shall be in electronic version on CD or DVD inserted into a three ring binder. All aspects of system operation and maintenance procedures, including applicable piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and

sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

- C. The installing Contractor shall maintain as-built drawings of each completed phase for verification; and shall provide the complete set at the time of final systems certification testing. Should the installing Contractor engage the testing company to provide as built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement. Provide record drawings as follows:
 - 1. Red-lined, hand-marked drawings are to be provided, with one paper copy and a scanned PDF version of the hand-marked drawings provided on CD or DVD.
- D. The as-built drawings shall indicate the location and type of all lockout/tagout points for all energy sources for all equipment and pumps to include breaker location and numbers, valve tag numbers, etc. Coordinate lockout/tagout procedures and practices with local VA requirements.
- E. Certification documentation shall be provided to COR 21 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and provide documentation/certification that all results of tests were within limits specified. Test results shall contain written sequence of test procedure with written test results annotated at each step along with the expected outcome or setpoint. The results shall include all readings, including but not limited to data on device (make, model and performance characteristics_), normal pressures, switch ranges, trip points, amp readings, and calibration data to include equipment serial numbers or individual identifications, etc.

1.8 JOB CONDITIONS - WORK IN EXISTING BUILDING

- A. Building Operation: Government employees will be continuously operating and managing all facilities, including temporary facilities that serve the VAMC.
- B. Maintenance of Service: Schedule all work to permit continuous service as required by the VAMC.
- C. Steam and Condensate Service Interruptions: Limited steam and condensate service interruptions, as required for interconnections of new and existing systems, will be permitted by the COR during periods when the demands are not critical to the operation of the VAMC. These non-critical periods are limited to between 8 pm and 5 am in the appropriate off-season (if applicable). Provide at least 10 working days advance notice to the COR. The request shall include a detailed plan on the proposed shutdown and the intended work to be done along with manpower levels. All equipment and materials must be onsite and verified with plan 5 calendar work days prior to the shutdown or it will need to be rescheduled.
- D. Building Working Environment: Maintain the architectural and structural integrity of the building and the working environment at all times. Maintain the interior of building at 18 degrees C (65 degrees F) minimum. Limit the opening of doors, windows, or other access openings to brief periods as necessary for rigging purposes. Storm water or ground water leakage is prohibited. Provide daily clean-up of construction and demolition debris on all floor surfaces and on all equipment being operated by VA. Maintain all egress routes and safety systems/devices.
- E. Acceptance of Work for Government Operation: As new equipment, systems and facilities are made available for operation and these items are deemed of beneficial use to the Government, inspections and tests will be performed. Based on the inspections, a list of contract deficiencies will be issued to the Contractor. After correction of deficiencies as necessary for beneficial use, the Contracting Officer will process necessary acceptance and the equipment will then be under the control and operation of Government personnel.
- F. Temporary Facilities: Refer to Paragraph, TEMPORARY PIPING AND EQUIPMENT in this section.

PART 2 - PRODUCTS**2.1 MATERIALS FOR VARIOUS SERVICES**

- A. Non-pressure PVC pipe shall contain a minimum of 25 percent recycled content. Steel pipe shall contain a minimum of 25 percent recycled content.
- B. Plastic pipe, fittings and solvent cement shall meet NSF 14 and shall bear the NSF seal "NSF-PW". Polypropylene pipe and fittings shall comply with NSF 14 and NSF 61. Solder or flux containing lead shall not be used with copper pipe.
- C. Material or equipment containing a weighted average of greater than 0.25 percent lead shall not be used in any potable water system intended for human consumption and shall be certified in accordance with NSF 61 or NSF 372.
- D. In-line devices such as water meters, building valves, check valves, stops, valves, fittings, tanks, and backflow preventers shall comply with NSF 61 and NSF 372.
- E. End point devices such as drinking fountains, lavatory faucets, kitchen and bar faucets, ice makers supply stops, and end-point control valves used to dispense drinking water must meet requirements of NSF 61 and NSF 372.

2.2 FACTORY-ASSEMBLED PRODUCTS

- A. Standardization of components shall be maximized to reduce spare part requirements.
- B. Manufacturers of equipment assemblies that include components made by others shall assume complete responsibility for final assembled unit.
 - 1. All components of an assembled unit need not be products of same manufacturer.
 - 2. Constituent parts that are alike shall be products of a single manufacturer.
 - 3. Components shall be compatible with each other and with the total assembly for intended service.
 - 4. Contractor shall guarantee performance of assemblies of components and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly at no additional cost or time to the Government.
- C. Components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a name plate

securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.

- D. Major items of equipment, which serve the same function, shall be the same make and model.

2.3 COMPATIBILITY OF RELATED EQUIPMENT

- A. Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational system that conforms to contract requirements.

2.4 SAFETY GUARDS

- A. Pump shafts and couplings shall be fully guarded by a sheet steel guard, covering coupling and shaft but not bearings. Material shall be minimum 16-gauge sheet steel; ends shall be braked and drilled and attached to pump base with minimum of four 8 mm (1/4 inch) bolts. Reinforce guard as necessary to prevent side play forcing guard onto couplings.
- B. All Equipment shall have moving parts protected from personal injury.

2.5 LIFTING ATTACHMENTS

- A. Equipment shall be provided with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.6 ELECTRIC MOTORS, MOTOR CONTROL, CONTROL WIRING

- A. All material and equipment furnished, and installation methods used shall conform to the requirements of Section 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT; Section 26 29 11, MOTOR CONTROLLERS; and, Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES. All electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems shall be provided. Premium efficient motors shall be provided. Unless otherwise specified for a particular application, electric motors shall have the following requirements.
- B. Special Requirements:
1. Where motor power requirements of equipment furnished deviate from power shown on plans, provide electrical service designed under the

- requirements of NFPA 70 at no additional cost or time to the Government.
2. Assemblies of motors, starters, and controls and interlocks on factory assembled and wired devices shall be in accordance with the requirements of this specification.
 3. Wire and cable materials specified in the electrical division of the specifications shall be modified as follows:
 - a. Wiring material located where temperatures can exceed 71° C (160° F) shall be stranded copper with Teflon FEP insulation with jacket. This includes wiring on the boilers and water heaters.
 - b. Other wiring at boilers and water heaters, and to control panels, shall be NFPA 70 designation THWN.
 - c. Shielded conductors or wiring in separate conduits for all instrumentation and control systems shall be provided where recommended by manufacturer of equipment.
 4. Motor sizes shall be selected so that the motors do not operate into the service factor at maximum required loads on the driven equipment. Motors on pumps shall be sized for non-overloading at all points on the pump performance curves.
 5. Motors utilized with variable frequency drives shall be rated "inverter-ready" per NEMA Standard, MG1.
- C. Motor Efficiency and Power Factor: All motors, when specified as "high efficiency or Premium Efficiency" by the project specifications on driven equipment, shall conform to efficiency and power factor requirements in Section 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT, with no consideration of annual service hours. Motor manufacturers generally define these efficiency requirements as "NEMA premium efficient" and the requirements generally exceed those of the Energy Policy Act (EPACT), revised 2005. Motors not specified as "high efficiency or premium efficient" shall comply with EPACT.
- D. Single-phase Motors: Capacitor-start type for hard starting applications. Motors for centrifugal pumps may be split phase or permanent split capacitor (PSC).
- E. Poly-phase Motors: NEMA Design B, Squirrel cage, induction type. Each two-speed motor shall have two separate windings. A time delay (20 seconds minimum) relay shall be provided for switching from high to low speed.

- F. Rating: Rating shall be continuous duty at 100 percent capacity in an ambient temperature of 40° C (104° F); minimum horsepower as shown on drawings; maximum horsepower in normal operation shall not exceed nameplate rating without service factor.
- G. Insulation Resistance: Not less than one-half meg-ohm between stator conductors and frame shall be measured at the time of final inspection.

2.7 VARIABLE SPEED MOTOR CONTROLLERS

- A. Refer to Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS and Section 26 29 11, MOTOR CONTROLLERS for specifications.
- B. The combination of controller and motor shall be provided by the respective pump manufacturer and shall be rated for 100 percent output performance. Multiple units of the same class of equipment, i.e. pumps, shall be product of a single manufacturer.
- C. Motors shall be premium efficient type, "inverter duty", and be approved by the motor controller manufacturer. The controller-motor combination shall be guaranteed to provide full motor nameplate horsepower in variable frequency operation. Both driving and driven motor sheaves shall be fixed pitch.
- D. Controller shall not add any current or voltage transients to the input AC power distribution system, DDC controls, sensitive medical equipment, etc., nor shall be affected from other devices on the AC power system.

2.8 EQUIPMENT AND MATERIALS IDENTIFICATION

- A. Use symbols, nomenclature and equipment numbers specified, shown in the drawings, or shown in the maintenance manuals. Coordinate equipment and valve identification with local VAMC shops. In addition, provide bar code identification nameplate for all equipment which will allow the equipment identification code to be scanned into the system for maintenance and inventory tracking. Identification for piping is specified in Section 09 91 00, PAINTING.
- B. Interior (Indoor) Equipment: Engraved nameplates, with letters not less than 7 mm (3/16 inch) high of brass with black-filled letters, or rigid black plastic with white letters specified in Section 09 91 00, PAINTING shall be permanently fastened to the equipment. Unit components such as water heaters, tanks, coils, filters, etc. shall be identified.

- C. Exterior (Outdoor) Equipment: Brass nameplates, with engraved black filled letters, not less than 7 mm (3/16 inch) high riveted or bolted to the equipment.
- D. Control Items: All temperature, pressure, and controllers shall be labeled, and the component's function identified. Identify and label each item as they appear on the control diagrams.
- E. Valve Tags and Lists:
 - 1. Plumbing: All valves shall be provided with valve tags and listed on a valve list (Fixture stops not included).
 - 2. Valve tags: Engraved black filled numbers and letters not less than 15 mm (1/2 inch) high for number designation, and not less than 8 mm (1/4 inch) for service designation on 19-gauge, 40 mm (1-1/2 inches) round brass disc, attached with brass "S" hook or brass chain.
 - 3. Valve lists: Valve lists shall be created using a word processing program and printed on plastic coated cards. The plastic-coated valve list card(s) sized 215 mm (8-1/2 inches) by 275 mm (11 inches) shall show valve tag number, valve function and area of control for each service or system. The valve list shall be in a punched 3-ring binder notebook. An additional copy of the valve list shall be mounted in picture frames for mounting to a wall. COR shall instruct Contractor where frames shall be mounted.
 - 4. A detailed plan for each floor of the building indicating the location and valve number for each valve shall be provided in the 3-ring binder notebook. Each valve location shall be identified with a color-coded sticker or thumb tack in ceiling or access door.

2.9 FIRESTOPPING

- A. Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke, and gases where penetrations occur for piping. Refer to Section 22 07 11, PLUMBING INSULATION, for pipe insulation.

2.10 GALVANIZED REPAIR COMPOUND

- A. Mil. Spec. DOD-P-21035B, paint.

2.11 PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

- A. In lieu of the paragraph which follows, suspended equipment support and restraints may be designed and installed in accordance with the International Building Code (IBC) and Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS. Submittals based on the International Building Code (IBC) and Section 13 05 41, SEISMIC

RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS requirements, or the following paragraphs of this Section shall be stamped and signed by a professional engineer registered in the state where the project is located. The Support system of suspended equipment over 227 kg (500 pounds) shall be submitted for approval of the COR in all cases. See the above specifications for lateral force design requirements.

- B. Type Numbers Specified: For materials, design, manufacture, selection, application, and installation refer to MSS SP-58. Refer to Section 05 50 00, METAL FABRICATIONS, for miscellaneous metal support materials and prime coat painting.
- C. For Attachment to Concrete Construction:
 - 1. Concrete insert: Type 18, MSS SP-58.
 - 2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 100 mm (4 inches) thick when approved by the COR for each job condition.
 - 3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 100 mm (4 inches) thick when approved by the COR for each job condition.
- D. For Attachment to Steel Construction: MSS SP-58.
 - 1. Welded attachment: Type 22.
 - 2. Beam clamps: Types 20, 21, 28 or 29. Type 23 C-clamp may be used for individual copper tubing up to 23 mm (7/8 inch) outside diameter.
- E. For Attachment to Wood Construction: Wood screws or lag bolts.
- F. Hanger Rods: Hot-rolled steel, ASTM A36/A36M or ASTM A575 for allowable load listed in MSS SP-58. For piping, provide adjustment means for controlling level or slope. Types 13 or 15 turn-buckles shall provide 40 mm (1-1/2 inches) minimum of adjustment and incorporate locknuts. All-thread rods are acceptable.
- G. Multiple (Trapeze) Hangers: Galvanized, cold formed, lipped steel channel horizontal member, not less than 43 mm by 43 mm (1-5/8 inches by 1-5/8 inches), 2.7 mm (No. 12 gauge), designed to accept special spring held, hardened steel nuts.
 - 1. Allowable hanger load: Manufacturers rating less 91kg (200 pounds).
 - 2. Guide individual pipes on the horizontal member of every other trapeze hanger with 8 mm (1/4 inch) U-bolt fabricated from steel rod. Provide Type 40 insulation shield, secured by two 15 mm (1/2 inch) galvanized steel bands, or insulated calcium silicate shield for insulated piping at each hanger.

H. Pipe Hangers and Supports: (MSS SP-58), use hangers sized to encircle insulation on insulated piping. Refer to Section 22 07 11, PLUMBING INSULATION for insulation thickness. To protect insulation, provide Type 39 saddles for roller type supports or insulated calcium silicate shields. Provide Type 40 insulation shield or insulated calcium silicate shield at all other types of supports and hangers including those for insulated piping.

1. General Types (MSS SP-58):

a. Standard clevis hanger: Type 1; provide locknut.

b. Riser clamps: Type 8.

c. Wall brackets: Types 31, 32 or 33.

d. Roller supports: Type 41, 43, 44 and 46.

e. Saddle support: Type 36, 37 or 38.

f. Turnbuckle: Types 13 or 15.

g. U-bolt clamp: Type 24.

h. Copper Tube:

1) Hangers, clamps, and other support material in contact with tubing shall be painted with copper colored epoxy paint, copper-coated, plastic coated or taped with isolation tape to prevent electrolysis.

2) For vertical runs use epoxy painted, copper-coated or plastic-coated riser clamps.

3) For supporting tube to strut: Provide epoxy painted pipe straps for copper tube or plastic inserted vibration isolation clamps.

4) Insulated Lines: Provide pre-insulated calcium silicate shields sized for copper tube.

i. Supports for plastic or glass piping: As recommended by the pipe manufacturer with black rubber tape extending 1 inch beyond steel support or clamp. Spring Supports (Expansion and contraction of vertical piping):

1) Movement up to 20 mm (3/4 inch): Type 51 or 52 variable spring unit with integral turn buckle and load indicator.

2) Movement more than 20 mm (3/4 inch): Type 54 or 55 constant support unit with integral adjusting nut, turn buckle and travel position indicator.

j. Spring hangers are required on all plumbing system pumps one horsepower and greater.

2. Plumbing Piping (Other Than General Types):

- a. Horizontal piping: Type 1, 5, 7, 9, and 10.
- b. Chrome plated piping: Chrome plated supports.
- c. Hangers and supports in pipe chase: Prefabricated system ABS self-extinguishing material, not subject to electrolytic action, to hold piping, prevent vibration and compensate for all static and operational conditions.
- d. Blocking, stays and bracing: Angle iron or preformed metal channel shapes, 1.3 mm (18 gauge) minimum.

I. Pre-insulated Calcium Silicate Shields:

- 1. Provide 360-degree water resistant high density 965 kPa (140 psig) compressive strength calcium silicate shields encased in galvanized metal.
- 2. Pre-insulated calcium silicate shields to be installed at the point of support during erection.
- 3. Shield thickness shall match the pipe insulation.
- 4. The type of shield is selected by the temperature of the pipe, the load it must carry, and the type of support it will be used with.
 - a. Shields for supporting cold water shall have insulation that extends a minimum of 25 mm (1 inch) past the sheet metal.
 - b. The insulated calcium silicate shield shall support the maximum allowable water filled span as indicated in MSS SP-58. To support the load, the shields shall have one or more of the following features: structural inserts 4138 kPa (600 psig) compressive strength, an extra bottom metal shield, or formed structural steel (ASTM A36/A36M) wear plates welded to the bottom sheet metal jacket.
- 5. Shields may be used on steel clevis hanger type supports, trapeze hangers, roller supports or flat surfaces.

J. Seismic Restraint of Piping: Refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

2.12 PIPE PENETRATIONS

- A. Pipe penetration sleeves shall be installed for all pipe other than rectangular blocked out floor openings for risers in mechanical bays.
- B. Pipe penetration sleeve materials shall comply with all firestopping requirements for each penetration.
- C. To prevent accidental liquid spills from passing to a lower level, provide the following:

1. For sleeves: Extend sleeve 25 mm (1 inch) above finished floor and provide sealant for watertight joint.
 2. For blocked out floor openings: Provide 40 mm (1-1/2 inch) angle set in silicone adhesive around opening.
 3. For drilled penetrations: Provide 40 mm (1-1/2 inch) angle ring or square set-in silicone adhesive around penetration.
- D. Penetrations are prohibited through beams or ribs, but may be installed in concrete beam flanges, with structural engineer prior approval. Any deviation from these requirements must receive prior approval of COR.
- E. Sheet metal, plastic, or moisture resistant fiber sleeves shall be provided for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.
- F. Cast iron or zinc coated pipe sleeves shall be provided for pipe passing through exterior walls below grade. The space between the sleeve and pipe shall be made watertight with a modular or link rubber seal. The link seal shall be applied at both ends of the sleeve.
- G. Galvanized steel or an alternate black iron pipe with asphalt coating sleeves shall be for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. A galvanized steel sleeve shall be provided for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, sleeves shall be connected with a floor plate.
- H. Brass Pipe Sleeves shall be provided for pipe passing through quarry tile, terrazzo, or ceramic tile floors. The sleeve shall be connected with a floor plate.
- I. Sleeve clearance through floors, walls, partitions, and beam flanges shall be 25 mm (1 inch) greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation plus 25 mm (1 inch) in diameter. Interior openings shall be caulked tight with firestopping material and sealant to prevent the spread of fire, smoke, water, and gases.
- J. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS. Bio-based materials shall be utilized when possible.
- K. Pipe passing through roof shall be installed through a 4.9 kg per square meter copper flashing with an integral skirt or flange. Skirt or

flange shall extend not less than 200 mm (8 inches) from the pipe and set in a solid coating of bituminous cement. Extend flashing a minimum of 250 mm (10 inches) up the pipe. Pipe passing through a waterproofing membrane shall be provided with a clamping flange. The annular space between the sleeve and pipe shall be sealed watertight.

2.13 TOOLS AND LUBRICANTS

- A. Furnish, and turn over to the COR, special tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.
- B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.
- C. Tool Containers: metal, permanently identified for intended service and mounted, or located, where directed by the COR.
- D. Lubricants: A minimum of 0.95 L (1 quart) of oil, and 0.45 kg (1 pound) of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application. Bio-based materials shall be utilized when possible.

2.14 WALL, FLOOR AND CEILING PLATES

- A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.
- B. Thickness: Not less than 2.4 mm (3/32 inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025 inch) for up to 75 mm (3 inch) pipe, 0.89 mm (0.035 inch) for larger pipe.
- C. Locations: Use where pipe penetrates floors, walls, and ceilings in exposed locations, in finished areas only. Wall plates shall be used where insulation ends on exposed water supply pipe drop from overhead. A watertight joint shall be provided in spaces where brass or steel pipe sleeves are specified.

2.15 ASBESTOS

- A. Materials containing asbestos are prohibited.

PART 3 - EXECUTION

3.1 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING

- A. Location of piping, sleeves, inserts, hangers, and equipment, access provisions shall be coordinated with the work of all trades. Piping, sleeves, inserts, hangers, and equipment shall be located clear of

windows, doors, openings, light outlets, and other services and utilities. Equipment layout drawings shall be prepared to coordinate proper location and personnel access of all facilities. The drawings shall be submitted for review.

- B. Manufacturer's published recommendations shall be followed for installation methods not otherwise specified.
- C. Operating Personnel Access and Observation Provisions: All equipment and systems shall be arranged to provide clear view and easy access, without use of portable ladders, for maintenance, testing and operation of all devices including, but not limited to: all equipment items, valves, backflow preventers, filters, strainers, transmitters, sensors, meters and control devices. All gauges and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Maintenance and operating space and access provisions that are shown in the drawings shall not be changed nor reduced.
- D. Structural systems necessary for pipe and equipment support shall be coordinated to permit proper installation.
- E. Location of pipe sleeves, trenches and chases shall be accurately coordinated with equipment and piping locations.
- F. Cutting Holes:
 - 1. Holes shall be located to avoid interference with structural members such as beams or grade beams. Holes shall be laid out in advance and drilling done only after approval by COR. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to COR for approval.
 - 2. Waterproof membrane shall not be penetrated. Pipe floor penetration block outs shall be provided outside the extents of the waterproof membrane.
 - 3. Holes through concrete and masonry shall be cut by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill will not be allowed, except as permitted by COR where working area space is limited.
- G. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other services are not shown but must be provided.
- H. Protection and Cleaning:
 - 1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during

- installation, in accordance with the manufacturer's recommendations and as approved by the COR. Damaged or defective items in the opinion of the COR, shall be replaced at no additional cost or time to the Government.
2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Pipe openings, equipment, and plumbing fixtures shall be tightly covered against dirt or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials, and equipment.
- I. Concrete and Grout: Concrete and shrink compensating grout 25 MPa (3000 psig) minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE, shall be used for all pad or floor mounted equipment.
- J. Gauges, thermometers, valves, and other devices shall be installed with due regard for ease in reading or operating and maintaining said devices. Thermometers and gauges shall be located and positioned to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.
- K. Interconnection of Controls and Instruments: Electrical interconnection is generally not shown but shall be provided. This includes interconnections of sensors, transmitters, transducers, control devices, control and instrumentation panels, alarms, instruments, and computer workstations. Comply with NFPA 70.
- L. Domestic cold and hot water systems interface with the HVAC control system for the temperature, pressure, and flow monitoring requirements to mitigate legionella. See the HVAC control points list and Section 23 09 23, DIRECT DIGITAL CONTROL SYSTEM FOR HVAC and Section 23 09 24, WATER QUALITY MONITORING.
- M. Work in Existing Building:
1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations, and restoration of existing building(s).
 2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service

piping at times that will cause the least interfere with normal operation of the facility.

- N. Work in Animal Research Areas: Seal all pipe penetrations with silicone sealant to prevent entrance of insects.
- O. Work in bathrooms, restrooms, housekeeping closets: All pipe penetrations behind escutcheons shall be sealed with plumbers' putty.
- P. Switchgear Drip Protection: Every effort shall be made to eliminate the installation of pipe above data equipment, and electrical and telephone switchgear. If this is not possible, encase pipe in a second pipe with a minimum of joints. Drain valve shall be provided in low point of casement pipe.
- Q. Inaccessible Equipment:
 - 1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, equipment shall be removed, and reinstalled or remedial action performed as directed at no additional cost or additional time to the Government.
 - 2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as electrical conduit, motors, fans, pumps, belt guards, transformers, high voltage lines, piping, and ductwork.

3.2 TEMPORARY PIPING AND EQUIPMENT

- A. Continuity of operation of existing facilities may require temporary installation or relocation of equipment and piping. Temporary equipment or pipe installation or relocation shall be provided to maintain continuity of operation of existing facilities.
- B. The Contractor shall provide all required facilities in accordance with the requirements of phased construction and maintenance of service. All piping and equipment shall be properly supported, sloped to drain, operate without excessive stress, and shall be insulated where injury can occur to personnel by contact with operating facilities. The requirements of paragraph 3.1 shall apply.
- C. Temporary facilities and piping shall be completely removed back to the nearest active distribution branch or main pipeline and any openings in structures sealed. Dead legs are prohibited in potable water systems. Necessary blind flanges and caps shall be provided to seal open piping remaining in service.

3.3 RIGGING

- A. Openings in building structures shall be planned to accommodate design scheme.
- B. Alternative methods of equipment delivery may be offered and will be considered by Government under specified restrictions of phasing and service requirements as well as structural integrity of the building.
- C. All openings in the building shall be closed when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.
- D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures shall be Contractor's full responsibility.
- E. Contractor shall check all clearances, weight limitations and shall provide a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time and responsibility.
- F. Rigging plan and methods shall be referred to COR for evaluation prior to actual work.

3.4 PIPE AND EQUIPMENT SUPPORTS

- A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Holes shall be drilled or burned in structural steel ONLY with the prior written approval of the COR.
- B. The use of chain pipe supports, wire or strap hangers; wood for blocking, stays and bracing, or hangers suspended from piping above shall not be permitted. Rusty products shall be replaced.
- C. Hanger rods shall be used that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. A minimum of 15 mm (1/2 inch) clearance between pipe or piping covering and adjacent work shall be provided.
- D. For horizontal and vertical plumbing pipe supports, refer to the International Plumbing Code (IPC) and these specifications.
- E. Overhead Supports:
 - 1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.

2. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.
3. Tubing and capillary systems shall be supported in channel troughs.

F. Floor Supports:

1. Provide concrete bases, concrete anchor blocks and pedestals, and structural steel systems for support of equipment and piping. Concrete bases and structural systems shall be anchored and doweled to resist forces under operating and seismic conditions (if applicable) without excessive displacement or structural failure.
2. Bases and supports shall not be located and installed until equipment mounted thereon has been approved. Bases shall be sized to match equipment mounted thereon plus 50 mm (2 inch) excess on all edges. Structural drawings shall be reviewed for additional requirements. Bases shall be neatly finished and smoothed, shall have chamfered edges at the top, and shall be suitable for painting.
3. All equipment shall be shimmed, leveled, firmly anchored, and grouted with epoxy grout. Anchor bolts shall be placed in sleeves, anchored to the bases. Fill the annular space between sleeves and bolts with a grout material to permit alignment and realignment.
4. For seismic anchoring, refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

3.5 LUBRICATION

- A. All equipment and devices requiring lubrication shall be lubricated prior to initial operation. All devices and equipment shall be field checked for proper lubrication.
- B. All devices and equipment shall be equipped with required lubrication fittings. A minimum of 1 liter (1 quart) of oil and 0.45 kg (1 pound) of grease of manufacturer's recommended grade and type for each different application shall be provided. All materials shall be delivered to COR in unopened containers that are properly identified as to application.
- C. A separate grease gun with attachments for applicable fittings shall be provided for each type of grease applied.
- D. All lubrication points shall be accessible without disassembling equipment, except to remove access plates.
- E. All lubrication points shall be extended to one side of the equipment.

3.6 PLUMBING SYSTEMS DEMOLITION

- A. Rigging access, other than indicated in the drawings, shall be provided after approval for structural integrity by the COR. Such access shall be provided at no additional cost or time to the Government. Where work is in an operating plant, approved protection from dust and debris shall be provided at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.
- B. In an operating plant, cleanliness and safety shall be maintained. The plant shall be kept in an operating condition. Government personnel will be carrying on their normal duties of operating, cleaning, and maintaining equipment and plant operation. Work shall be confined to the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Dust and debris shall not be permitted to accumulate in the area to the detriment of plant operation. All flame cutting shall be performed to maintain the fire safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times. All work shall be performed in accordance with recognized fire protection standards including NFPA 51B. Inspections will be made by personnel of the VAMC, and the Contractor shall follow all directives of the COR with regard to rigging, safety, fire safety, and maintenance of operations.
- C. Unless specified otherwise, all piping, wiring, conduit, and other devices associated with the equipment not re-used in the new work shall be completely removed from Government property per Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT. This includes all concrete equipment pads, pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. All openings shall be sealed after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with plans and specifications where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the drawings and specifications of the other disciplines in the project for additional facilities to be demolished or handled.
- D. All valves including gate, globe, ball, butterfly and check, all pressure gauges and thermometers with wells shall remain Government property and shall be removed and delivered to COR and stored as directed. The Contractor shall remove all other material and equipment,

devices and demolition debris under these plans and specifications. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate. Coordinate with the COR and Infection Control.

3.7 CLEANING AND PAINTING

- A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment, and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.
- B. In addition, the following special conditions apply:
 - 1. Cleaning shall be thorough. Solvents, cleaning materials and methods recommended by the manufacturers shall be used for the specific tasks. All rust shall be removed prior to painting and from surfaces to remain unpainted. Scratches, scuffs, and abrasions shall be repaired prior to applying prime and finish coats.
 - 2. The following Material and Equipment shall NOT be painted:
 - a. Motors, controllers, control switches, and safety switches.
 - b. Control and interlock devices.
 - c. Regulators.
 - d. Pressure reducing valves.
 - e. Control valves and thermostatic elements.
 - f. Lubrication devices and grease fittings.
 - g. Copper, brass, aluminum, stainless steel and bronze surfaces.
 - h. Valve stems and rotating shafts.
 - i. Pressure gauges and thermometers.
 - j. Glass.
 - k. Name plates.
 - 3. Control and instrument panels shall be cleaned, and damaged surfaces repaired. Touch-up painting shall be made with matching paint type and color obtained from manufacturer or computer matched.
 - 4. Pumps, motors, steel, and cast-iron bases, and coupling guards shall be cleaned, and shall be touched-up with the same paint type and color as utilized by the pump manufacturer.
 - 5. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats per Section 09 91 00, Painting.
 - 6. The final result shall be a smooth, even-colored, even-textured factory finish on all items. The entire piece of equipment shall be

repainted, if necessary, to achieve this. Lead based paints shall not be used.

3.8 IDENTIFICATION SIGNS

- A. Laminated plastic signs, with engraved lettering not less than 7 mm (3/16 inch) high, shall be provided that designates equipment function, for all equipment, switches, motor controllers, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.
- B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, and performance data shall be placed on factory-built equipment.
- C. Pipe Identification: Refer to Section 09 91 00, PAINTING.

3.9 STARTUP AND TEMPORARY OPERATION

- A. Startup of equipment shall be performed as described in the equipment specifications. Vibration within specified tolerance shall be verified prior to extended operation. Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

3.10 OPERATING AND PERFORMANCE TESTS

- A. Prior to the final inspection, all required tests shall be performed as specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TESTS and submit the test reports and records to the COR.
- B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs, or replacements, and repeat tests at no additional cost to the Government.
- C. When completion of certain work or systems occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then conduct such performance tests and finalize control settings during the first actual seasonal use of the respective systems following completion of work. Rescheduling of these tests shall be requested in writing to COR for approval.
- D. Perform tests as required for commissioning provisions in accordance with Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS and Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.

3.11 OPERATION AND MAINTENANCE MANUALS

- A. All new and temporary equipment and all elements of each assembly shall be included.
- B. Data sheet on each device listing model, size, capacity, pressure, speed, horsepower, impeller size, and other information shall be included.
- C. Manufacturer's installation, maintenance, repair, and operation instructions for each device shall be included. Assembly drawings and parts lists shall also be included. A summary of operating precautions and reasons for precautions shall be included in the Operations and Maintenance Manual.
- D. Lubrication instructions, type and quantity of lubricant shall be included.
- E. Schematic diagrams and wiring diagrams of all control systems corrected to include all field modifications shall be included.
- F. Set points of all interlock devices shall be listed.
- G. Trouble-shooting guide for the control system troubleshooting shall be inserted into the Operations and Maintenance Manual.
- H. The control system sequence of operation corrected with submittal review comments shall be inserted into the Operations and Maintenance Manual.
- I. Emergency procedures for shutdown and startup of equipment and systems.

3.12 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- B. Components provided under this section of the specification will be tested as part of a larger system.

3.13 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for 8 hours to instruct each VA personnel responsible in operation and maintenance of the system.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

- - - E N D - - -

SECTION 22 05 12
GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section describes the general motor requirements for plumbing equipment and applies to all sections of Division 22.
- B. A complete listing of common acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.
- E. Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- F. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- G. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- H. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES.
- I. Section 26 24 19, MOTOR-CONTROL CENTERS: Motor Control Centers.
- J. Section 26 29 11, MOTOR CONTROLLERS: Starters, control and protection of motors.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and VHA standard will govern.
- B. American Bearing Manufacturers Association (ABMA):
ABMA 9-2015.....Load Ratings and Fatigue Life for Ball Bearings
- C. Institute of Electrical and Electronics Engineers, Inc. (IEEE):
112-2017.....IEEE Standard Test Procedure for Polyphase Induction Motors and Generators
841-2018.....IEEE Standard for Petroleum and Chemical Industry-Premium-Efficiency, Severe-Duty, Totally Enclosed Fan-Cooled (TEFC) Squirrel Cage Induction Motors--Up to and Including 370 kW (500 HP)

D. International Code Council (ICC):

IPC-2018.....International Plumbing Code

E. National Electrical Manufacturers Association (NEMA):

MG 1-2016.....Motors and Generators

MG 2-2014.....Safety Standard for Construction and Guide for
Selection, Installation and Use of Electric
Motors and Generators

250-2018.....Enclosures for Electrical Equipment (1000 Volts
Maximum)

F. National Fire Protection Association (NFPA):

70-2020.....National Electrical Code (NEC)

1.4 SUBMITTALS

- A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT", with applicable paragraph identification.
- C. Submit motor submittals with drive equipment.
- D. Shop Drawings:
 - 1. Provide documentation to demonstrate compliance with contract documents.
 - 2. Motor nameplate information shall be submitted including electrical ratings, efficiency, bearing data, power factor, frame size, dimensions, mounting details, materials, horsepower, voltage, phase, speed (RPM), enclosure, starting characteristics, torque characteristics, code letter, full load and locked rotor current, service factor, and lubrication method.
 - 3. Motor parameters required for the determination of the Reed Critical Frequency of vertical hollow shaft motors shall be submitted.
- E. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

- F. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replaceable parts and troubleshooting guide:
 - 1. Include complete list indicating all components of the systems.
 - 2. Include complete diagrams of the internal wiring for each item of equipment.
 - 3. Diagrams shall have their terminals identified to facilitate installation, operation, and maintenance.
 - G. Certification: Two weeks prior to final inspection, unless otherwise noted, the following certification shall be submitted to the Contracting Officer's Representative (COR).
 - 1. Certification shall be submitted stating that the motors have been properly applied, installed, adjusted, lubricated, and tested.
 - H. Completed System Readiness Checklist provided by the CxA and completed by the contractor, signed by a qualified technician, and dated on the date of completion, in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
 - I. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- 1.5 QUALITY ASSURANCE**
- A. Bio-Based Materials: For products designated by the USDA's bio-based Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit <http://www.biopreferred.gov>.
 - B. Refer to Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for additional sustainable design requirements.
- 1.6 AS-BUILT DOCUMENTATION**
- A. Comply with requirements in Paragraph "AS-BUILT DOCUMENTATION" of Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

PART 2 - PRODUCTS (NOT USED)**2.1 MOTORS**

- A. All material and equipment furnished and installation methods shall conform to the requirements of Section 26 29 11, MOTOR CONTROLLERS; and Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES. Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide premium efficiency type motors. Unless otherwise specified for a particular application, use electric motors with the following requirements.
- B. For alternating current, fractional and integral horsepower motors, NEMA MG 1 and NEMA MG 2 shall apply.
- C. For severe duty totally enclosed motors, IEEE 841 shall apply. For severe duty totally enclosed motors, IEEE 841 shall apply.
- D. Single-phase Motors: Motors for centrifugal fans and pumps may be split phase or permanent split capacitor (PSC) type. Provide capacitor-start type for hard starting applications.
- E. Poly-phase Motors: NEMA Design B, Squirrel cage, induction type.
 - 1. Two Speed Motors: Each two-speed motor shall have two separate windings. Provide a time- delay (20 seconds minimum) relay for switching from high to low speed.
- F. Voltage ratings shall be as follows:
 - 1. Single phase:
 - a. Motors connected to 120-volt systems: 115 volts.
 - b. Motors connected to 208-volt systems: 200 volts.
 - c. Motors connected to 240-volt or 480-volt systems: 230/460 volts, dual connection.
 - 2. Three phase:
 - a. Motors connected to 208-volt systems: 200 volts.
 - b. Motors, less than 74.6 kW (100 HP), connected to 240-volt or 480-volt systems: 230/460 volts, dual connection.
 - c. Motors, 74.6 kW (100 HP) or greater, connected to 240-volt systems: 230 volts.
 - d. Motors, 74.6 kW (100 HP) or greater, connected to 480-volt systems: 460 volts.
 - e. Motors connected to high voltage systems (Over 600V): Shall conform to NEMA MG 1 for connection to the nominal system voltage shown in the drawings.

G. Number of phases shall be as follows:

1. Motors, less than 373 W (1/2 HP): Single phase.
2. Motors, 373 W (1/2 HP) and greater: 3 phase.
3. Exceptions:
 - a. Hermetically sealed motors.
 - b. Motors for equipment assemblies, less than 746 W (1 HP), may be single phase provided the manufacturer of the proposed assemblies cannot supply the assemblies with three phase motors.

H. Horsepower ratings shall be adequate for operating the connected loads continuously in the prevailing ambient temperatures in areas where the motors are installed, without exceeding the NEMA standard temperature rises for the motor insulation.

I. Motor designs, as indicated by the NEMA code letters, shall be coordinated with the connected loads to assure adequate starting, acceleration and running torque without exceeding nameplate ratings or considering service factor.

J. Motor Enclosures:

1. Shall be the NEMA types as specified and/or shown in the Contract Documents.
2. Where the types of motor enclosures are not shown in the drawings, they shall be the NEMA types per NEMA 250, which are most suitable for the environmental conditions where the motors are being installed. Enclosure requirements for certain conditions are as follows:
 - a. Motors located outdoors, indoors in wet or high humidity locations, or in unfiltered airstreams shall be totally enclosed type.
 - b. Where motors are located in an NEC 511 classified area, provide TEFC explosion proof motor enclosures.
 - c. Where motors are located in a corrosive environment, provide TEFC enclosures with corrosion resistant finish.
3. Enclosures shall be primed and finish coated at the factory with manufacturer's prime coat and standard finish.

K. Electrical Design Requirements:

1. Motors shall be continuous duty.
2. The insulation system shall be rated minimum of Class B, 130 degrees C (266 degrees F).

3. The maximum temperature rise by resistance at rated power shall not exceed Class B limits, 80 degrees C (144 degrees F).
4. The speed/torque and speed/current characteristics shall comply with NEMA Design A or B, as specified.
5. Motors shall be suitable for full voltage starting, unless otherwise noted. Coordinate motor features with applicable motor controllers.
6. Motors for variable frequency drive applications shall adhere to NEMA MG 1, Part 30, Application Considerations for Constant Speed Motors Used on a Sinusoidal Bus with Harmonic Content and General Purpose Motors Used with Adjustable Voltage or Adjustable Frequency Controls, or both, or NEMA MG 1, Part 31, Definite Purpose Inverter Fed Polyphase Motors.

L. Mechanical Design Requirements:

1. Bearings shall be rated for a minimum fatigue life of 26,280 hours for belt-driven loads and 100,000 hours for direct-drive loads based on L10 (Basic Rating Life) at full load direct coupled, except vertical high thrust motors which require a 40,000 hour rating. A minimum fatigue life of 40,000 hours is required for VFD drives.
2. Vertical motors shall be capable of withstanding a momentary up thrust of at least 30 percent of normal down thrust.
3. Grease lubricated bearings shall be designed for electric motor use. Grease shall be capable of the temperatures associated with electric motors and shall be compatible with Polyurea based greases.
4. Grease fittings, if provided, shall be Alemite type or equivalent.
5. Oil lubricated bearings, when specified, shall have an externally visible sight glass to view oil level.
6. Vibration shall not exceed 3.8 mm (0.15 inch) per second, unfiltered peak.
7. Noise level shall meet the requirements of the application.
8. Motors on 180 frames and larger shall have provisions for lifting eyes or lugs capable of a safety factor of 5.
9. All external fasteners shall be corrosion resistant.
10. Condensation heaters, when specified, shall keep motor windings at least 5 degrees C (9 degrees F) above ambient temperature.

11. Winding thermostats, when specified shall be normally closed, connected in series.

12. Grounding provisions shall be in the main terminal box.

M. Special Requirements:

1. Where motor power requirements of equipment furnished deviate from power shown on plans, provide electrical service designed under the requirements of NFPA 70 without additional cost or time to the Government.
2. Assemblies of motors, starters, controls and interlocks on factory assembled and wired devices shall be in accordance with the requirements of this specification.
3. Wire and cable materials specified in the electrical division of the specifications shall be modified as follows:
 - a. Wiring material located where temperatures can exceed 71 degrees C (160 degrees F) shall be stranded copper with Teflon FEP insulation with jacket. This includes wiring on the boilers.
 - b. Other wiring at boilers and to control panels shall be NFPA 70 designation THWN.
 - c. Provide shielded conductors or wiring in separate conduits for all instrumentation and control systems where recommended by manufacturer of equipment.
4. Select motor sizes so that the motors do not operate into the service factor at maximum required loads on the driven equipment. Motors on pumps shall be sized for non-overloading at all points on the pump performance curves.
5. Motors utilized with variable frequency drives shall be rated "inverter-duty" per NEMA MG 1, Part 31, Definite-Purpose Inverter-Fed Polyphase Motors. Provide motor shaft grounding apparatus that will protect bearings from damage from stray currents.

N. Additional requirements for specific motors, as indicated in other sections, shall also apply.

O. NEMA Premium Efficiency Electric Motors, Motor Efficiencies: All permanently wired polyphase motors of 746 W (1 HP) or greater shall meet the minimum full-load efficiencies as indicated in the following table, and as specified in this specification. Motors of 746 W (1 HP) or greater with open, drip-proof or totally

enclosed fan-cooled enclosures shall be NEMA premium efficiency type, unless otherwise indicated. Motors provided as an integral part of motor driven equipment are excluded from this requirement if a minimum seasonal or overall efficiency requirement is indicated for that equipment by the provisions of another section.

Minimum Efficiencies Open Drip-Proof				Minimum Efficiencies Totally Enclosed Fan-Cooled			
Rating kW (HP)	1200 RPM	1800 RPM	3600 RPM	Rating kW (HP)	1200 RPM	1800 RPM	3600 RPM
0.746 (1)	82.5%	85.5%	77.0%	0.746 (1)	82.5%	85.5%	77.0%
1.12 (1.5)	86.5%	86.5%	84.0%	1.12 (1.5)	87.5%	86.5%	84.0%
1.49 (2)	87.5%	86.5%	85.5%	1.49 (2)	88.5%	86.5%	85.5%
2.24 (3)	88.5%	89.5%	85.5%	2.24 (3)	89.5%	89.5%	86.5%
3.73 (5)	89.5%	89.5%	86.5%	3.73 (5)	89.5%	89.5%	88.5%
5.60 (7.5)	90.2%	91.0%	88.5%	5.60 (7.5)	91.0%	91.7%	89.5%
7.46 (10)	91.7%	91.7%	89.5%	7.46 (10)	91.0%	91.7%	90.2%

P. Minimum Power Factor at Full Load and Rated Voltage: 90 percent at 1200 RPM, 1800 RPM and 3600 RPM. Power factor correction capacitors shall be provided unless the motor meets the 0.9 requirement without it or if the motor is controlled by a variable frequency drive. The power factor correction capacitors shall be able to withstand high voltage transients and power line variations without breakdown.

Q. Energy Efficiency of Small Motors (Motor Efficiencies): All motors under 746 W (1 hp) shall meet the requirements of the DOE Small Motor Regulation.

Polyphase Open Motors Average full load efficiency				Capacitor-start capacitor-run and capacitor-start induction run open motors Average full load efficiency			
Rating kW (hp)	6 poles	4 poles	2 poles	Rating kW (hp)	6 poles	4 poles	2 poles
0.18 (0.25)	67.5	69.5	65.6	0.18 (0.25)	62.2	68.5	66.6
0.25 (0.33)	71.4	73.4	69.5	0.25 (0.33)	66.6	72.4	70.5
0.37 (0.5)	75.3	78.2	73.4	0.37 (0.5)	76.2	76.2	72.4
0.55 (0.75)	81.7	81.1	76.8	0.55 (0.75)	80.2	81.8	76.2

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install motors in accordance with manufacturer's recommendations, the NEC, NEMA, as shown in the drawings and/or as required by other sections of these specifications.

- B. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

3.2 FIELD TESTS

- A. All tests shall be witnessed by the CxA or by the COR.
- B. Perform an electric insulation resistance Test using a megohmmeter on all motors after installation before startup. All shall test free from grounds.
- C. Perform Load test in accordance with IEEE 112, Test Method B, to determine freedom from electrical or mechanical defects and compliance with performance data.
- D. Insulation Resistance: Not less than 1/2 meg-ohm between stator conductors and frame, to be determined at the time of final inspection.
- E. All test data shall be compiled into a report form for each motor and provided to the contracting officer or their representative.

3.3 STARTUP AND TESTING

- A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.
- B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.
- C. The CxA will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with COR and CxA. Provide a minimum notice of 10 working days prior to startup and testing.

3.4 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- B. Components provided under this section of the specification shall be tested as part of a larger system.

3.5 **DEMONSTRATION AND TRAINING**

- A. Provide services of manufacturer's technical representative for 8 hours to instruct each VA personnel responsible in operation and maintenance of the system.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

- - - E N D - - -

SECTION 22 05 19
METERS AND GAUGES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section describes the requirements for water meters and gauges primarily used for troubleshooting the system and to indicate system performance.
- B. A complete listing of common acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- C. Components intended to be connected to BAS shall be furnished under Section 23 09 23 DIRECT DIGITAL CONTROL SYSTEMS FOR HVAC for installation under this section.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.
- E. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- F. Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS. Requirements for commissioning, systems readiness checklist, and training.
- G. Section 23 09 23, DIRECT DIGITAL CONTROL SYSTEMS FOR HVAC.
- H. Section 25 10 10, ADVANCED UTILITY METERING SYSTEM.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.
- B. American Society of Mechanical Engineers (ASME):
 - B40.100-2013.....Pressure Gauges and Gauge Attachments
 - B40.200-2008.....Thermometers, Direct Reading, and Remote Reading
- C. American Water Works Association (AWWA):
 - C700-2015.....Cold Water Meters, Displacement Type, Bronze Main Case

C701-2015.....Cold Water Meters-Turbine Type, for Customer
Service

C702-20115.....Cold Water Meters - Compound Type

C707-2010 (R2016).....Encoder-Type Remote-Registration Systems for
Cold-Water Meters

D. Institute of Electrical and Electronics Engineers (IEEE):

C2-2017.....National Electrical Safety Code (NESC)

E. International Code Council (ICC):

IPC-2018.....International Plumbing Code

F. National Fire Protection Association (NFPA):

70-2020.....National Electrical Code (NEC)

G. NSF International (NSF):

61-2019.....Drinking Water System Components - Health
Effects

372-2016.....Drinking Water System Components - Lead Content

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 05 19, METERS AND GAUGES FOR PLUMBING PIPING", with applicable paragraph identification.

C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

1. Water Meter.

2. Pressure Gauges.

3. Thermometers.

4. Product certificates for each type of meter and gauge.

5. BACnet communication protocol.

D. Complete operating and maintenance manual shall including wiring diagrams, technical data sheets, information for ordering replaceable parts, and troubleshooting guide:

1. Include complete list indicating all components of the system.

2. Include complete diagrams of the internal wiring for each item of equipment.

3. Diagrams shall have their terminals identified to facilitate installation, operation, and maintenance.

E. Completed System Readiness Checklist provided by the CxA and completed by the contractor, signed by a qualified technician, and dated on the date of completion, in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

F. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.5 AS-BUILT DOCUMENTATION

A. Comply with requirements in Paragraph "AS-BUILT DOCUMENTATION" of Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING PRODUCTS

1.6 DISPLACEMENT WATER METER

A. For pipe sizes 50 mm (2 inches) and smaller, the water meter shall be displacement type, full size nutating disc, magnetic drive, sealed register, and fully conform to AWWA C700. Peak domestic flow shall be 2.2 L/s (34 gpm). The meter register shall indicate flow in liters (U.S. gallons).

B. The water meter shall be rated for use at temperatures ranging from -40 degrees C (-40 degrees F) and 70 degrees C (158 degrees F) and operate at a working pressure of 1035 kPa (150 psig).

C. The meter case, bottom caps, and register box lids shall be constructed from cast bronze.

D. The meter shall register plus or minus 3 percent of the water actually passing through it at any rate of flow within the normal test flow limits specified in AWWA 700.

E. The water meter shall conform to NSF 61 and NSF 372.

1.7 WATER METER STRAINER

A. All meters shall be fitted with a factory installed integral strainer or bronze inlet strainer with top access. The strainer shall conform to AWWA C702.

B. The water meter strainer shall conform to NSF 61 and NSF 372.

1.8 WATER METER PROGRAMMING

A. All meters 50 mm or DN 50 (2 inches) and greater shall be programmable with software supplied by the meter manufacturer.

B. The software shall have a Microsoft based interface and operate on the latest Windows operating system. The software shall allow the user to

configure the meter, troubleshoot the meter, query and display meter parameters, and configure data and stored values.

- C. The meter firmware shall be upgradeable through one of the communication ports without removing the unit from service.
- D. The meter shall include output for analog 4-20 milliamp signals and binary output.
- E. The meter shall have two dry contact relays outputs for alarm or control functions.

1.9 WATER METER COMMUNICATION PROTOCOL

- A. The meter shall use a native BACnet Ethernet communication protocol supporting . The communications shall be protected against surges induced on its communications channels.

1.10 REMOTE READOUT REGISTER

- A. All meters shall be equipped with a remote readout register in accordance with AWWA C707.

1.11 PRESSURE GAUGES FOR WATER AND SEWAGE USAGE

- A. ASME B40.100 all metal case 115 mm (4-1/2 inches) diameter, bottom connected throughout, graduated as required for service, and identity labeled. Range shall be 0 to 1380 kPa (0 to 200 psig) gauge.
- B. The pressure element assembly shall be bourdon tube. The mechanical movement shall be lined to pressure element and connected to pointer.
- C. The dial shall be non-reflective aluminum with permanently etched scale markings graduated in kPa and psig.
- D. The pointer shall be dark colored metal.
- E. The window shall be glass.
- F. The ring shall be brass or stainless steel.
- G. The accuracy shall be grade A, plus or minus 1 percent of middle half of scale range.
- H. The pressure gauge for water domestic use shall conform to NSF 61 and NSF 372.

1.12 THERMOMETERS

- A. Thermometers shall be straight stem, metal case, red liquid-filled thermometer, approximately 175 mm (7 inches) high, 4 degrees C to 100 degrees C (40 degrees F to 212 degrees F). Thermometers shall comply with ASME B40.200.

PART 2 - EXECUTION**2.1 INSTALLATION**

- A. Direct mounted pressure gauges shall be installed in piping tees with pressure gauge located on pipe at the most readable position.
- B. Valves and snubbers shall be installed in piping for each pressure gauge.
- C. Test plugs shall be installed on the inlet and outlet pipes of all heat exchangers or water heaters serving more than one plumbing fixture.
- D. Pressure gauges shall be installed where indicated in the drawings and at the following locations:
 - 1. Building water service entrance into building.
 - 2. Inlet and outlet of each pressure reducing valve.
 - 3. Suction and discharge of each domestic water pump or re-circulating hot water return pump.
- E. Water meter installation shall conform to AWWA C700, AWWA C701, and AWWA C702. Electrical installations shall conform to IEEE C2, NFPA 70, and to the requirements specified herein. New materials shall be provided.
- F. Remote readout register shall be mounted at the location indicated in the drawings or as directed by the COR.
- G. Thermometers shall be installed on the water heater inlet and outlet piping, thermostatic mixing valve outlet piping, and the hot water circulation pump inlet piping.
- H. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.
- I. Install portable water temperature, pressure and flow meters provided under Section 23 09 23 DIRECT DIGITAL CONTROL SYSTEMS FOR HVAC.

2.2 FIELD QUALITY CONTROL

- A. The meter assembly shall be visually inspected and operationally tested. The correct multiplier placement on the face of the meter shall be verified.

2.3 STARTUP AND TESTING

- A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.

- B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.
- C. The CxA will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COR and CxA. Provide a minimum notice of 10 working days prior to startup and testing.

2.4 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- B. Components provided under this section of the specification will be tested as part of a larger system.

2.5 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for 4 hours to instruct each VA personnel responsible in operation and maintenance of the system.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

- - - E N D - - -

SECTION 22 05 23
GENERAL-DUTY VALVES FOR PLUMBING PIPING

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section describes the requirements for general-duty valves for domestic water and sewer systems.
- B. A complete listing of common acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.
- E. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- F. Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.
- B. American Society of Mechanical Engineers (ASME):
A112.14.1-2003.....Backwater Valves
- C. American Society of Sanitary Engineering (ASSE):
1001-2017.....Performance Requirements for Atmospheric Type
Vacuum Breakers
1003-2009.....Performance Requirements for Water Pressure
Reducing Valves for Domestic Water Distribution
Systems
1011-2017.....Performance Requirements for Hose Connection
Vacuum Breakers
1013-2011.....Performance Requirements for Reduced Pressure
Principle Backflow Preventers and Reduced
Pressure Principle Fire Protection Backflow
Preventers

- 1015-2011.....Performance Requirements for Double Check
Backflow Prevention Assemblies and Double Check
Fire Protection Backflow Prevention Assemblies
- 1017-2009.....Performance Requirements for Temperature
Actuated Mixing Valves for Hot Water
Distribution Systems
- 1020-2004.....Performance Requirements for Pressure Vacuum
Breaker Assembly
- 1035-2008.....Performance Requirements for Laboratory Faucet
Backflow Preventers
- 1069-2005.....Performance Requirements for Automatic
Temperature Control Mixing Valves
- 1070-2015.....Performance Requirements for Water Temperature
Limiting Devices
- 1071-2012.....Performance Requirements for Temperature
Actuated Mixing Valves for Plumbed Emergency
Equipment
- D. American Society for Testing and Materials (ASTM):
- A126-2004 (R2019).....Standard Specification for Gray Iron Castings
for Valves, Flanges, and Pipe Fittings
- A276/A276M-2017.....Standard Specification for Stainless Steel Bars
and Shapes
- A536-1984 (R2019e).....Standard Specification for Ductile Iron
Castings
- B62-2017.....Standard Specification for Composition Bronze
or Ounce Metal Castings
- B584-2014.....Standard Specification for Copper Alloy Sand
Castings for General Applications
- E. International Code Council (ICC):
- IPC-2018.....International Plumbing Code
- F. Manufacturers Standardization Society of the Valve and Fittings
Industry, Inc. (MSS):
- SP-25-2018.....Standard Marking Systems for Valves, Fittings,
Flanges and Unions
- SP-67-2017.....Butterfly Valves
- SP-70-2011.....Gray Iron Gate Valves, Flanged and Threaded
Ends

SP-71-2018.....Gray Iron Swing Check Valves, Flanged and
Threaded Ends

SP-80-2019.....Bronze Gate, Globe, Angle, and Check Valves

SP-85-2011.....Gray Iron Globe & Angle Valves, Flanged and
Threaded Ends

SP-110-2010.....Ball Valves Threaded, Socket-Welding, Solder
Joint, Grooved and Flared Ends

G. National Environmental Balancing Bureau (NEBB):

8th Edition 2015 Procedural Standards for Testing, Adjusting,
Balancing of Environmental Systems

H. NSF International (NSF):

61-2019.....Drinking Water System Components - Health
Effects

372-2016.....Drinking Water System Components - Lead Content

I. University of Southern California Foundation for Cross Connection

Control and Hydraulic Research (USC FCCCHR):

10th Edition.....Manual of Cross-Connection Control

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in
accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and
SAMPLES.

B. Information and material submitted under this section shall be marked
"SUBMITTED UNDER SECTION 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING
PIPING", with applicable paragraph identification.

C. Manufacturer's Literature and Data including: Full item description and
optional features and accessories. Include dimensions, weights,
materials, applications, standard compliance, model numbers, size, and
capacity.

1. Ball Valves.

2. Gate Valves.

3. Butterfly Valves.

4. Balancing Valves.

5. Check Valves.

6. Globe Valves.

7. Water Pressure Reducing Valves and Connections.

8. Backflow Preventers.

9. Thermostatic Mixing Valves.

- D. Test and Balance reports for balancing valves.
- E. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replaceable parts and troubleshooting guide:
 - 1. Include complete list indicating all components of the systems.
 - 2. Include complete diagrams of the internal wiring for each item of equipment.
 - 3. Diagrams shall have their terminals identified to facilitate installation, operation, and maintenance.
 - 4. Piping diagrams of thermostatic mixing valves to be installed.
- F. Completed System Readiness Checklist provided by the CxA and completed by the Contractor, signed by a qualified technician, and dated on the date of completion, in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- G. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Valves shall be prepared for shipping as follows:
 - 1. Protect internal parts against rust and corrosion.
 - 2. Protect threads, flange faces, grooves, and weld ends.
 - 3. Set angle, gate, and globe valves closed to prevent rattling.
 - 4. Set ball and plug valves open to minimize exposure of functional surfaces.
 - 5. Set butterfly valves closed or slightly open.
 - 6. Block check valves in either closed or open position.
- B. Valves shall be prepared for storage as follows:
 - 1. Maintain valve end protection.
 - 2. Store valves indoors and maintain at higher than ambient dew point temperature.
- C. A sling shall be used for large valves. The sling shall be rigged to avoid damage to exposed parts. Hand wheels or stems shall not be used as lifting or rigging points.

1.6 AS BUILT DOCUMENTATION

- A. Comply with requirements in Paragraph "AS-BUILT DOCUMENTATION" of Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

PART 2 - PRODUCTS**2.1 VALVES, GENERAL**

- A. Asbestos packing and gaskets are prohibited.
- B. Bronze valves shall be made with dezincification resistant materials.
Bronze valves made with copper alloy (brass) containing greater than 15 percent zinc shall not be permitted.
- C. Valves in insulated piping shall have 50 mm or DN50 (2 inch) stem extensions and extended handles of non-thermal conductive material that allows operating the valve without breaking the vapor seal or disturbing the insulation. Memory stops shall be fully adjustable after insulation is applied.
- D. Exposed Valves over 65 mm or DN65 (2-1/2 inches) installed at an elevation over 3.6 m (12 feet) shall have a chain-wheel attachment to valve hand-wheel, stem, or other actuator.
- E. All valves used to supply potable water shall meet the requirements of NSF 61 and NSF 372.
- F. Bio-Based Materials: For products designated by the USDA's bio-based Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit <http://www.biopreferred.gov>.
- G. Refer to Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for additional sustainable design requirements.

2.2 SHUT-OFF VALVES

- A. Cold, Hot and Re-circulating Hot Water:
 - 1. 50 mm or DN50 (2 inches) and smaller: Ball, MSS SP-110, Ball valve shall be full port three piece or two piece with a union design with adjustable stem package. Threaded stem designs are not allowed. The ball valve shall have a SWP rating of 1035 kPa (150 psig) and a CWP rating of 4138 kPa (600 psig). The body material shall be Bronze ASTM B584, Alloy C844. The ends shall be non-lead solder.
 - 2. Less than 100 mm DN100 (4 inches): Butterfly shall have an iron body with EPDM seal and aluminum bronze disc. The butterfly valve shall meet MSS SP-67, type I standard. The butterfly valve shall have a SWP rating of 1380 kPa (200 psig). The valve design shall be lug type suitable for bidirectional dead-end service at rated pressure. The body material shall meet ASTM A536, ductile iron.

3. 100 mm DN100 (4 inches) and greater:

- a. Class 125, OS&Y, Cast Iron Gate Valve. The gate valve shall meet MSS SP-70 type I standard. The gate valve shall have a CWP rating of 1380 kPa (200 psig). The valve materials shall meet ASTM A126, grey iron with bolted bonnet, flanged ends, bronze trim, and positive-seal resilient solid wedge disc. The gate valve shall be gear operated for sizes under 200 mm or DN200 (8 inches) and crank operated for sizes 200 mm or DN200 (8 inches) and greater.
 - b. Single flange, ductile iron butterfly valves: The single flanged butterfly valve shall meet the MSS SP-67 standard. The butterfly valve shall have a CWP rating of 1380 kPa (200 psig). The butterfly valve shall be lug type, suitable for bidirectional dead-end service at rated pressure without use of downstream flange. The body material shall comply with ASTM A536 ductile iron. The seat shall be EPDM with stainless steel disc and stem.
 - c. Grooved end, ductile iron butterfly valves. The grooved butterfly valve shall meet the MSS SP-67 standard. The grooved butterfly valve shall have a CWP rating of 1380 kPa (200 psig). The valve materials shall be epoxy coated ductile iron conforming to ASTM A536 with two-piece stainless-steel stem, Buna-N encapsulated ductile iron disc, and EPDM seal. The butterfly valve shall be gear operated.
- B. Reagent Grade Water: Valves for reagent grade, reverse osmosis, or deionized water service shall be ball type of same material as used for pipe.

2.3 MANUAL BALANCING VALVES

- A. Hot Water Re-circulating, 75 mm or DN75 (3 inches) and smaller manual balancing valve shall be of bronze body, brass ball construction with glass and carbon filled TFE seat rings and designed for positive shutoff. The manual balancing valve shall have differential pressure read-out ports across the valve seat area. The read-out ports shall be fitted with internal EPT inserts and check valves. The valve body shall have 8 mm or DN8 NPT (1/4-inch NPT) tapped drain and purge port. The valves shall have memory stops that allow the valve to close for service and then reopened to set point without disturbing the balance position. All valves shall have calibrated nameplates to assure specific valve settings.

- B. Greater than 75 mm or DN75 (3 inches): Manual balancing valves shall be of heavy duty cast iron flanged construction with 861 kPa (125 psig) flange connections. The flanged manual balancing valves shall have either a brass ball with glass and carbon filled TFE seal rings or fitted with a bronze seat, replaceable bronze disc with EPDM seal insert and stainless-steel stem. The design pressure shall be 1200 kPa (175 psig) at 121 degrees C (250 degrees F).

2.4 THERMOSTATIC BALANCING VALVES

- A. Thermostatic recirculation balancing valves for domestic hot water and domestic cold-water application. Thermostatically controlled, spring actuated automatic balancing valve to vary recirculation flow to maintain constant return temperatures. Stainless steel body, spring, and brass or stainless-steel thermal actuator and actuator carrier. Provide with threaded inlet, integral outlet union and stainless-steel check valve. Direct acting to maintain return hot water temperature at 43.3 degrees C (110 degrees F). PTFE seat seal ring and EPDM body seal.

2.5 CHECK VALVES

- A. 75 mm or DN75 (3 inches) and smaller shall be Class 125, bronze swing check valves with non-metallic disc suitable for type of service. The check valve shall meet MSS SP-80 Type 4 standard. The check valve shall have a CWP rating of 1380 kPa (200 psig). The check valve shall have a Y pattern horizontal body design with bronze body material conforming to ASTM B62, solder joints, and PTFE or TFE disc.
- B. 100 mm or DN100 (4 inches) and greater:
1. Check valves shall be Class 125, iron swing check valve with lever and weight closure control. The check valve shall meet MSS SP-71 Type I standard. The check valve shall have a CWP rating of 1380 kPa (200 psig). The check valve shall have a clear or full waterway body design with gray iron body material conforming to ASTM A126, bolted bonnet, flanged ends, bronze trim.
 2. All check valves on the discharge side of submersible sump pumps shall have factory installed exterior level and weight with sufficient weight to prevent the check valve from hammering against the seat when the sump pump stops.

2.6 GLOBE VALVES

- A. 75 mm or DN75 (3 inches) or smaller: Class 150, bronze globe valve with non-metallic disc. The globe valve shall meet MSS SP-80, Type 2

standard. The globe valve shall have a CWP rating of 2070 kPa (300 psig). The valve material shall be bronze with integral seal and union ring bonnet conforming to ASTM B62 with solder ends, copper-silicon bronze stem, PTFE or TFE disc, and malleable iron hand wheel.

- B. Greater than 75 mm or DN75 (3 inches): Similar to above, except with cast iron body and bronze trim, Class 125, iron globe valve. The globe valve shall meet MSS SP-85, Type 1 standard. The globe valve shall have a CWP rating of 1380 kPa (200 psig). The valve material shall be gray iron with bolted bonnet conforming to ASTM A126 with flanged ends, bronze trim, and malleable iron handwheel.

2.7 WATER PRESSURE REDUCING VALVE AND CONNECTIONS

- A. 75 mm or DN75 (3 inches) or smaller: The pressure reducing valve shall consist of a bronze body and bell housing, a separate access cover for the plunger, and a bolt to adjust the downstream pressure. The pressure reducing valve shall meet ASSE 1003. The bronze bell housing and access cap shall be threaded to the body and shall not require the use of ferrous screws. The assembly shall be of the balanced piston design and shall reduce pressure in both flow and no flow conditions. The assembly shall be accessible for maintenance without having to remove the body from the line.
- B. 100 mm or DN100 (4 inches) and greater: The pressure reducing valve shall consist of a flanged cast iron body and rated to 1380 kPa (200 psig). The valve shall have a large elastomer diaphragm for sensitive response. The pressure reducing valve shall meet ASSE 1003.
- C. The regulator shall have a tap for pressure gauge.
- D. The regulator shall have a temperature rating of 100 degrees C (212 degrees F) for hot water or hot water return service. Pressure regulators shall have accurate pressure regulation to 6.9 kPa (+/- 1 psig).
- E. Setting: Entering water pressure, discharge pressure, capacity, size, and related measurements shall be as shown on the drawings.
- F. Connections Valves and Strainers: Shut off valves shall be installed on each side of reducing valve and a bypass line equal in size to the regulator inlet pipe shall be installed with a normally closed globe valve. A strainer shall be installed on inlet side of, and same size as pressure reducing valve. A pressure gauge shall be installed on the inlet and outlet of the valve.

2.8 BACKFLOW PREVENTERS

- A. A backflow prevention assembly shall be installed at any point in the plumbing system where the potable water supply comes in contact with a potential source of contamination. The backflow prevention assembly shall be approved by the University of Southern California Foundation for Cross Connection Control and Hydraulic Research (USCFCCC).
- B. The reduced pressure principle backflow prevention assembly shall be ASSE listed 1013 with full port OS&Y positive-seal resilient gate valves and an integral relief monitor switch. The main body and access cover shall be epoxy coated ductile iron conforming to ASTM A536 grade 4. The seat ring and check valve shall be the thermoplastic type suited for water service. The stem shall be stainless steel conforming to ASTM A276/A276M. The seat disc shall be the elastomer type suited for water service. The checks and the relief valve shall be accessible for maintenance without removing the device from the line. An epoxy coated wye type strainer with flanged connections shall be installed on the inlet. Reduced pressure backflow preventers shall be installed in the following applications.
 - 1. Sterilizers.
 - 2. Water make up to heating systems, cooling tower, chilled water system, generators, and similar equipment consuming water.
 - 3. Water service entrance from loop system.
- C. The pipe applied or integral atmospheric vacuum breaker shall be ASSE listed 1001. The main body shall be cast bronze. The seat disc shall be the elastomer type suited for water service. The device shall be accessible for maintenance without removing the device from the service line. The installation shall not be in a concealed or inaccessible location or where the venting of water from the device during normal operation is deemed objectionable. Atmospheric vacuum breakers shall be installed in the following applications.
 - 1. Hose bibs and sinks with threaded outlets.
 - 2. Disposers.
 - 3. Showers (telephone/handheld type).
 - 4. All kitchen equipment, if not protected by air gap.
 - 5. Service sinks (integral with faucet only).
 - 6. Laundry tubs (integral with faucet only).
- D. The hose connection vacuum breaker shall be ASSE listed 1011. The main body shall be cast brass with stainless steel working parts. The

diaphragm and disc shall be the elastomer type suited for water service. The device shall permit the attachment of portable hoses to hose thread outlets. Hose connection vacuum breakers shall be installed in the following locations requiring non-continuous pressure:

1. Hose bibbs and wall hydrants.

E. The pressure vacuum breaker shall be ASSE listed 1020. The main body shall be brass. The disc and O-ring seal shall be the elastomer type. The valve seat and disc float shall be the thermoplastic type. Tee handle or lever handle shut-off ball valves. Test cocks for testing and draining where freezing conditions occur. All materials shall be suitable for water service. The device shall be accessible for maintenance without removing the device from the service line. The installation shall not be in a concealed or inaccessible location or where the venting of water from the device during normal operation is deemed objectionable. Pressure vacuum breakers shall be installed in the following locations requiring continuous pressure and no backpressure including equipment with submerged inlet connections:

1. 1. Lawn Irrigation.

F. The double check backflow prevention assembly shall be ASSE listed 1015 and supply with full port, OS&Y, positive-seal, resilient gate valves. The main body and access cover shall be epoxy coated ductile iron conforming to ASTM A536 grade. The seat ring and check valve shall be the thermoplastic type suited for water service. The stem shall be stainless steel conforming to ASTM A276/A276M. The seat disc shall be the elastomer type suited for water service. The first and second check valve shall be accessible for maintenance without removing the device from the line. Double check valves shall be installed in the following location requiring continuous pressure subject to backpressure and back siphonage conditions.

1. Lawn Irrigation.
2. Food Processing Equipment.
3. Laundry equipment.

2.9 THERMOSTATIC MIXING VALVES

A. Thermostatic Mixing Valves shall comply with the following general performance requirements:

1. Shall meet ASSE requirements for water temperature control.

2. The body shall be cast bronze or brass with corrosion resistant internal parts preventing scale and biofilm build-up. Provide chrome-plated finish in exposed areas.
 3. No special tool shall be required for temperature adjustment, maintenance, replacing parts and disinfecting operations.
 4. Valve shall be able to be placed in various positions without making temperature adjustment or reading difficult.
 5. Valve finish shall be chrome plated in exposed areas.
 6. Valve shall allow easy temperature adjustments to allow hot water circulation. Internal parts shall be able to withstand disinfecting operations of chemical and thermal treatment of water temperatures up to 82°C (180°F) for 30 minutes or 50 mg/L (50 ppm) chlorine residual concentration for 24 hours.
 7. Parts shall be easily removed or replaced without dismantling the valves, for easy scale removal and disinfecting of parts.
 8. Valve shall have a manual adjustable temperature control with locking mechanism to prevent tampering by end user. Outlet temperature shall be visible to ensure outlet temperature does not exceed specified limits, particularly after thermal eradication procedures.
 9. Provide mixing valves with integral check valves with screens and stop valves.
- B. Automatic Water Temperature Control Mixing Valves:
1. Application: Gang plumbing fixtures point-of-use when no other mixing at fixtures occurs.
 2. Standard: ASSE 1069.
 3. Pressure Rating: 861 kPa (125 psig).
 4. Type: Thermostatically controlled water mixing valve set at 43 degrees C (110 degrees F).
 5. Connections: Threaded union or soldered inlets and outlet.
 6. Thermometers shall be provided to indicate mixed water temperature.
 7. Upon cold water supply failure, the hot water flow shall automatically be reduced to 0.5 gpm maximum.
 8. Provide a high temperature alarm device to detect mixing valve failure.

C. Water Temperature Limiting Devices:

1. Application: Single plumbing fixture point-of-use such as sinks or lavatories.
2. Standard: ASSE 1070.
3. Pressure Rating: 861 kPa (125 psig).
4. Type: Thermostatically controlled water mixing valve set at 43 degrees C (110 degrees F).
5. Connections: Threaded union, compression or soldered inlets and outlet.
6. Upon cold water supply failure, the hot water flow shall automatically be reduced to 0.2 gpm maximum.

D. Temperature Activated Mixing Valves:

1. Application: Emergency eye/face/drench shower equipment.
2. Standard: ASSE 1071.
3. Pressure Rating: 861 kPa (125 psig).
4. Type: Thermostatically controlled water mixing valve set at 24-30 degrees C (75-85 degrees F).
5. Connections: Soldered or threaded union inlets and outlet.
6. Cabinet: Factory-fabricated, stainless steel, for recessed or surface mounting and with hinged, stainless-steel door.
7. Thermometers shall be provided to indicate mixed water temperature.
8. Upon cold water supply failure, the hot water flow shall automatically be reduced to 0.5 gpm maximum.

PART 3 - EXECUTION**3.1 EXAMINATION**

- A. Valve interior shall be examined for cleanliness, freedom from foreign matter, and corrosion. Special packing materials shall be removed, such as blocks, used to prevent disc movement during shipping and handling.
- B. Valves shall be operated in positions from fully open to fully closed. Guides and seats shall be examined and made accessible by such operations.
- C. Threads on valve and mating pipe shall be examined for form and cleanliness.
- D. Mating flange faces shall be examined for conditions that might cause leakage. Bolting shall be checked for proper size, length, and material. Gaskets shall be verified for proper size and that its material composition is suitable for service and free from defects and damage.

E. Do not attempt to repair defective valves; replace with new valves.

3.2 INSTALLATION

A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.

B. Valves shall be located for easy access and shall be provide with separate support. Valves shall be accessible with access doors when installed inside partitions or above hard ceilings.

C. Valves shall be installed in horizontal piping with stem at or above center of pipe.

D. Valves shall be installed in a position to allow full stem movement.

E. Check valves shall be installed for proper direction of flow and as follows:

1. Swing Check Valves: In horizontal position with hinge pin level and on top of valve.

F. Install backflow preventers in each water supply to mechanical equipment and systems and to other equipment and water systems that shall be sources of contamination. Comply with authorities having jurisdiction. Locate backflow preventers in same room as connected equipment or system.

1. Install drain for backflow preventers with atmospheric-vent drain connection with air-gap fitting, fixed air-gap fitting, or equivalent positive pipe separation of at least two pipe diameters in drain piping and pipe to floor drain. Locate air-gap device attached to or under backflow preventer. Simple air breaks are prohibited for this application.

G. Install pressure gauges on outlet of backflow preventers.

H. Do not install bypass piping around backflow preventers.

I. Install temperature-actuated water mixing valves with check stops or shutoff valves on inlets.

1. Install thermometers if specified.
2. Install cabinet-type units recessed in or surface mounted on wall as specified.

J. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

K. Install thermostatic balancing valves with inlet strainer and inlet and outlet isolation valves.

3.3 LABELING AND IDENTIFYING

- A. Equipment Nameplates and Signs: Install engraved plastic-laminate equipment nameplate or sign on or near each of the following:
 - 1. Calibrated balancing valves.
 - 2. Master, thermostatic, water mixing valves.
 - 3. Manifold, thermostatic, water-mixing-valve assemblies.
- B. Distinguish among multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations, in addition to identifying unit.

3.4 ADJUSTING

- A. Valve packing shall be adjusted or replaced after piping systems have been tested and put into service but before final adjusting and balancing. Valves shall be replaced if persistent leaking occurs.
- B. Set field-adjustable flow set points of balancing valves and record data. Ensure recorded data represents actual measured or observed conditions. Permanently mark settings of valves and other adjustment devices allowing settings to be restored. Set and lock memory stops. After adjustment, take measurements to verify balance has not been disrupted or that such disruption has been rectified.
- C. Set field-adjustable temperature set points of temperature-actuated water mixing valves.
- D. Testing and adjusting of balancing valves shall be performed by an independent NEBB Accredited Test and Balance Contractor. A final settings and flow report shall be submitted to the VA Contracting Officer's Representative (COR).

3.5 STARTUP AND TESTING

- A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.
- B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.
- C. The CxA will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COR and CxA. Provide a minimum notice of 10 working days prior to startup and testing.

3.6 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- B. Components provided under this section of the specification will be tested as part of a larger system.

3.7 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for 4 hours to instruct each VA personnel responsible in operation and maintenance of the system.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

- - E N D - - -

**SECTION 22 07 11
PLUMBING INSULATION**

PART 1 - GENERAL

1.1 DESCRIPTION

A. Field applied insulation for thermal efficiency and condensation control for the following:

1. Plumbing piping and equipment.

B. Definitions:

1. ASJ: All Service Jacket, Kraft paper, white finish facing or jacket.
2. Air conditioned space: Space having air temperature and/or humidity controlled by mechanical equipment.
3. All insulation systems installed within supply, return, exhaust, relief and ventilation air plenums shall be limited to uninhabited crawl spaces, areas above a ceiling or below the floor, attic spaces, interiors of air conditioned or heating ducts, and mechanical equipment rooms shall be noncombustible or shall be listed and labeled as having a flame spread indexes of not more than 25 and a smoke-developed index of not more than 50 when tested in accordance with ASTM E84 or UL 723. Note: ICC IMC, Section 602.2.1.
4. Cold: Equipment or piping handling media at design temperature of 15 degrees C (60 degrees F) or below.
5. Concealed: Piping above ceilings and in chases, interstitial space, and pipe spaces.
6. Exposed: Piping and equipment exposed to view in finished areas including mechanical equipment rooms or exposed to outdoor weather. Shafts, chases, interstitial spaces, unfinished attics, crawl spaces and pipe basements are not considered finished areas.
7. FSK: Foil-scrim-Kraft facing.
8. Hot: Plumbing equipment or piping handling media above 40 degrees C (104 degrees F).
9. Density: kg/m^3 - kilograms per cubic meter (Pcf - pounds per cubic foot).
10. Thermal conductance: Heat flow rate through materials.
 - a. Flat surface: Watts per square meter (BTU per hour per square foot).
 - b. Pipe or Cylinder: Watts per linear meter (BTU per hour per linear foot) for a given outside diameter.

11. Thermal Conductivity (k): Watts per meter, per degree K (BTU - inch thickness, per hour, per square foot, per degree F temperature difference).
12. Vapor Retarder (Vapor Barrier): A material which retards the transmission (migration) of water vapor. Performance of the vapor retarder is rated in terms of permeance (perms). For the purpose of this specification, vapor retarders/vapor barriers shall have a maximum published permeance of .02 perms.
13. HWR: Hot water recirculating.
14. CW: Cold water.
15. SW: Soft water.
16. HW: Hot water.
17. PVDC: Polyvinylidene chloride vapor retarder jacketing, white.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Insulation material and insulation production method.
- D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.
- E. Section 07 84 00, FIRESTOPPING: Mineral fiber and bond breaker behind sealant.
- F. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING: General mechanical requirements and items, which are common to more than one section of Division 22.
- G. Section 22 05 19, METERS AND GAGES FOR PLUMBING PIPING: Hot and cold water piping.
- H. Section 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING: Hot and cold water piping.
- I. Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- J. Section 23 21 13, HYDRONIC PIPING: electrical heat tracing systems.
- K. Section 26 32 13, ENGINE GENERATORS: Exhaust stacks and muffler.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.

B. American Society for Testing and Materials (ASTM):

B209-2014.....Standard Specification for Aluminum and
Aluminum-Alloy Sheet and Plate

C411-2011.....Standard Test Method for Hot-Surface
Performance of High-Temperature Thermal
Insulation

C449-2007 (R2013).....Standard Specification for Mineral Fiber
Hydraulic-Setting Thermal Insulating and
Finishing Cement

C450-2008 (R2014).....Standard Practice for Fabrication of Thermal
Insulating Fitting Covers for NPS Piping, and
Vessel Lagging

Adjunct to C450.....Compilation of Tables that Provide Recommended
Dimensions for Prefab and Field Thermal
Insulating Covers, etc.

C533-2013.....Standard Specification for Calcium Silicate
Block and Pipe Thermal Insulation

C534/C534M-2014.....Standard Specification for Preformed Flexible
Elastomeric Cellular Thermal Insulation in
Sheet and Tubular Form

C547-2015.....Standard Specification for Mineral Fiber Pipe
Insulation

C552-2014.....Standard Specification for Cellular Glass
Thermal Insulation

C553-2013.....Standard Specification for Mineral Fiber
Blanket Thermal Insulation for Commercial and
Industrial Applications

C591-2013.....Standard Specification for Unfaced Preformed
Rigid Cellular Polyisocyanurate Thermal
Insulation

C680-2014.....Standard Practice for Estimate of the Heat Gain
or Loss and the Surface Temperatures of
Insulated Flat, Cylindrical, and Spherical
Systems by Use of Computer Programs

C612-2014.....Standard Specification for Mineral Fiber Block
and Board Thermal Insulation

C1126-2014.....Standard Specification for Faced or Unfaced
Rigid Cellular Phenolic Thermal Insulation

- C1136-2012.....Standard Specification for Flexible, Low
Permeance Vapor Retarders for Thermal
Insulation
- C1710-2011.....Standard Guide for Installation of Flexible
Closed Cell Preformed Insulation in Tube and
Sheet Form
- D1668/D1668M-1997a (2014)e1 Standard Specification for Glass Fabrics
(Woven and Treated) for Roofing and
Waterproofing
- E84-2015a.....Standard Test Method for Surface Burning
Characteristics of Building Materials
- E2231-2015.....Standard Practice for Specimen Preparation and
Mounting of Pipe and Duct Insulation to Assess
Surface Burning Characteristics
- C. Federal Specifications (Fed. Spec.):
- L-P-535E-1979.....Plastic Sheet (Sheeting): Plastic Strip; Poly
(Vinyl Chloride) and Poly (Vinyl Chloride -
Vinyl Acetate), Rigid.
- D. International Code Council, (ICC):
- IMC-2012.....International Mechanical Code
- E. Military Specifications (Mil. Spec.):
- MIL-A-3316C (2)-1990....Adhesives, Fire-Resistant, Thermal Insulation
- MIL-A-24179A (2)-1987...Adhesive, Flexible Unicellular-Plastic Thermal
Insulation
- MIL-PRF-19565C (1)-1988.Coating Compounds, Thermal Insulation, Fire-and
Water-Resistant, Vapor-Barrier
- MIL-C-20079H-1987.....Cloth, Glass; Tape, Textile Glass; and Thread,
Glass and Wire-Reinforced Glass
- F. National Fire Protection Association (NFPA):
- 90A-2015.....Standard for the Installation of Air-
Conditioning and Ventilating Systems
- G. Underwriters Laboratories, Inc (UL):
- 723-2008 (R2013).....Standard for Test for Surface Burning
Characteristics of Building Materials
- 1887-2004 (R2013).....Standard for Fire Test of Plastic Sprinkler
Pipe for Visible Flame and Smoke
Characteristics

- H. 3E Plus® version 4.1 Insulation Thickness Computer Program: Available from NAIMA with free download; <https://insulationinstitute.org/tools-resources/>

1.4 SUBMITTALS

- A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 07 11, PLUMBING INSULATION", with applicable paragraph identification.
- C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.
- D. Shop Drawings:
1. All information, clearly presented, shall be included to determine compliance with drawings and specifications and ASTM Designation, Federal and Military specifications.
 - a. Insulation materials: Specify each type used and state surface burning characteristics.
 - b. Insulation facings and jackets: Each type used and state surface burning characteristics.
 - c. Insulation accessory materials: Each type used.
 - d. Manufacturer's installation and fitting fabrication instructions for flexible unicellular insulation shall follow the guidelines in accordance with ASTM C1710.
 - e. Make reference to applicable specification paragraph numbers for coordination.
 - f. All insulation fittings (exception flexible unicellular insulation) shall be fabricated in accordance with ASTM C450 and the referenced Adjunct to ASTM C450.
- E. Completed System Readiness Checklist provided by the CxA and completed by the contractor, signed by a qualified technician, and dated on the date of completion, in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.5 QUALITY ASSURANCE

- A. Refer to article QUALITY ASSURANCE, in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

B. Criteria:

1. Comply with NFPA 90A, particularly paragraphs 4.3.3.1 through 4.3.3.6, 4.3.11.2.6, parts of which are quoted as follows:

4.3.3.1 Pipe and duct insulation and coverings, duct linings, vapor retarder facings, adhesives, fasteners, tapes, and supplementary materials added to air ducts, plenums, panels and duct silencers used in duct systems shall have, in the form in which they are used, a maximum flame spread index of 25 without evidence of continued progressive combustion and a maximum smoke developed index of 50 when tested in accordance with ASTM E84 and appropriate mounting practice, e.g. ASTM E2231.

4.3.3.3 Coverings and linings for air ducts, pipes, plenums, and panels including all pipe and duct insulation materials shall not flame, glow, smolder, or smoke when tested in accordance with a similar test for pipe covering, ASTM C411, Standard Test Method for Hot-Surface Performance of High-Temperature Thermal Insulation, at the temperature to which they are exposed in service. In no case shall the test temperature be below 121 degrees C (250 degrees F).

4.3.11.2.6.3 Nonferrous fire sprinkler piping shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with UL 1887, Standard for Safety Fire Test of Plastic Sprinkler Pipe for Visible Flame and Smoke Characteristics.

4.3.11.2.6.8 Smoke detectors shall not be required to meet the provisions of Section 4.3.

2. Test methods: ASTM E84, UL 723, and ASTM E2231.
3. Specified k factors are at 24 degrees C (75 degrees F) mean temperature unless stated otherwise. Where optional thermal insulation material is used, select thickness to provide thermal conductance no greater than that for the specified material. For pipe, use insulation manufacturer's published heat flow tables. For domestic hot water supply and return, run out insulation and condensation control insulation, no thickness adjustment need be made.
4. All materials shall be compatible and suitable for service temperature and shall not contribute to corrosion or otherwise attack surface to which applied in either the wet or dry state.

- C. Bio-Based Materials: For products designated by the USDA's Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit <http://www.biopreferred.gov>.

1.6 AS-BUILT DOCUMENTATION

- A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.
- B. Submit operation and maintenance data updated to include submittal review comments, substitutions and construction revisions shall be in electronic version on compact disc or DVD inserted into a three-ring binder. All aspects of system operation and maintenance procedures, including piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices such as damper and door closure interlocks shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.
- C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and shall provide the complete set at the time of final systems certification testing. As-built drawings are to be provided, and a copy of them in Auto-CAD version 2020 provided on compact disk or DVD. Should the installing contractor engage the testing company to provide as built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement.
- D. Certification documentation shall be provided prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and certification that all results of tests were within limits specified.

1.7 STORAGE AND HANDLING OF MATERIAL

- A. Store materials in clean and dry environment, pipe insulation jackets shall be clean and unmarred. Place adhesives in original containers. Maintain ambient temperatures and conditions as required by printed instructions of manufacturers of adhesives, mastics and finishing cements.

PART 2 - PRODUCTS**2.1 MINERAL FIBER OR FIBER GLASS**

- A. ASTM C612 (Board, Block), Class 1 or 2, density 48 kg/m³ (nominal 3 pcf), k = 0.037 (.26) at 24 degrees C (75 degrees F), external insulation for temperatures up to 204 degrees C (400 degrees F).
- B. ASTM C553 (Blanket, Flexible) Type I, Class B-3, Density 16 kg/m³ (nominal 1 pcf), k = 0.045 (0.31) at 24 degrees C (75 degrees F), for use at temperatures up to 204 degrees C (400 degrees F).
- C. ASTM C547 (Pipe Fitting Insulation and Preformed Pipe Insulation), Class 1, k = 0.037 (0.26) at 24 degrees C (75 degrees F), for use at temperatures up to 230 degrees C (446 degrees F) with an all-service vapor retarder jacket (ASJ) and with polyvinyl chloride (PVC) premolded fitting covering.

2.2 MINERAL WOOL OR REFRACTORY FIBER

- A. Comply with Standard ASTM C612, Class 3, 450 degrees C (842 degrees F).

2.3 CALCIUM SILICATE

- A. Preformed pipe Insulation: ASTM C533, Type I and Type II with indicator denoting asbestos-free material.
- B. Premolded Pipe Fitting Insulation: ASTM C533, Type I and Type II with indicator denoting asbestos-free material.
- C. Equipment Insulation: ASTM C533, Type I and Type II.
- D. Characteristics:

Insulation Characteristics		
ITEMS	TYPE I	TYPE II
Surface Temperature, maximum degrees C (degrees F)	649 (1200)	927 (1700)
Density (dry), Kg/m ³ (lb/ ft ³)	240 (15)	352 (22)
Thermal conductivity: Min W/ m K (Btu in/h ft ² degrees F)@ mean temperature of 93 degrees C (199 degrees F)	0.065 (0.45)	0.078 (0.540)
Surface burning characteristics: Flame spread Index, Maximum	0	0
Smoke Density index, Maximum	0	0

2.4 INSULATION FACINGS AND JACKETS

- A. Vapor Retarder, higher strength with low water permeance = 0.02 or less perm rating, Beach puncture 50 units for insulation facing on pipe insulation jackets. Facings and jackets shall be ASJ or PVDC Vapor Retarder jacketing.
- B. ASJ shall be white finish (kraft paper) bonded to 0.025 mm (1 mil) thick aluminum foil, fiberglass reinforced, with pressure sensitive adhesive closure. Comply with ASTM C1136. Beach puncture is 50 units, suitable for painting without sizing. Jackets shall have minimum 40 mm (1-1/2 inch) lap on longitudinal joints and minimum 75 mm (3 inch) butt strip on end joints. Butt strip material shall be same as the jacket. Lap and butt strips shall be self-sealing type with factory-applied pressure sensitive adhesive.
- C. Vapor Retarder medium strength with low water vapor permeance of 0.02 or less perm rating), Beach puncture 25 units: FSK or PVDC type for concealed ductwork and equipment.
- D. Except for flexible elastomeric cellular thermal insulation (not for high humidity exposures), field applied vapor barrier jackets shall be provided, in addition to the specified facings and jackets, on all exterior piping as well as on interior piping exposed to outdoor air (i.e.; in ventilated attics, piping in ventilated (not air conditioned) spaces, etc.) in high humidity locations conveying fluids below ambient temperature. The vapor barrier jacket shall consist of a multi-layer laminated cladding with a maximum water vapor permeance of 0.001 perms. The minimum puncture resistance shall be 35 cm-kg (30 inch-pounds) for interior locations and 92 cm-kg (80 inch-pounds) for exterior or exposed locations or where the insulation is subject to damage.
- E. Except for cellular glass thermal insulation, when all longitudinal and circumferential joints are vapor sealed with a vapor barrier mastic or caulking, vapor barrier jackets may not be provided. For aesthetic and physical abuse applications, exterior jacketing is recommended. Otherwise field applied vapor barrier jackets shall be provided, in addition to the applicable specified facings and jackets, on all exterior piping as well as on interior piping /exposed to outdoor air (i.e.; in ventilated attics, piping in ventilated (not air conditioned) spaces, etc.) in high humidity locations conveying fluids below ambient temperature. The vapor barrier jacket shall consist of a multi-layer laminated cladding with a maximum water vapor permeance of 0.001 perms.

The minimum puncture resistance shall be 35 cm-kg (30 inch-pounds) for interior locations and 92 cm-kg (80 inch-pounds) for exterior or exposed locations or where the insulation is subject to damage.

- F. Glass Cloth Jackets: Presized, minimum 0.18 kg per square meter (7.8 ounces per square yard), 2070 kPa (300 psig) bursting strength with integral vapor retarder where required or specified. Weatherproof if utilized for outside service.
- G. Pipe fitting insulation covering (jackets): Fitting covering shall be premolded to match shape of fitting and shall be PVC conforming to Fed Spec L-P-535E, composition A, Type II Grade GU, and Type III, minimum thickness 0.7 mm (0.03 inches). Provide color matching vapor retarder pressure sensitive tape. Staples, tacks, or any other attachment that penetrates the PVC covering is not allowed on any form of a vapor barrier system in below ambient process temperature applications.
- H. Aluminum Jacket-Piping systems and circular breeching and stacks: ASTM B209, 3003 alloy, H-14 temper, 0.6 mm (0.023 inch) minimum thickness with locking longitudinal joints. Jackets for elbows, tees and other fittings shall be factory-fabricated or with cut aluminum gores to match shape of fitting and of 0.6 mm (0.024 inch) minimum thickness aluminum. Aluminum fittings shall be of same construction with an internal moisture barrier as straight run jackets but need not be of the same alloy. Factory-fabricated stainless-steel bands with wing seals shall be installed on all circumferential joints. Bands shall be 15 mm (0.5 inch) wide on 450 mm (18 inch) centers. System shall be weatherproof if utilized for outside service.
- I. Aluminum jacket-rectangular breeching: ASTM B209, 3003 alloy, H-14 temper, 0.5 mm (0.020 inches) thick with 32 mm (1-1/4 inch) corrugations or 0.8 mm (0.032 inches) thick with no corrugations. System shall be weatherproof if used for outside service.

2.8 PIPE COVERING PROTECTION SADDLES

- A. Cold pipe support: Premolded pipe insulation 180 degrees (half-shells) on bottom half of pipe at supports. Material shall be cellular glass or high density Polyisocyanurate insulation of the same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m³ (3.0 pcf).

Nominal Pipe Size and Accessories Material (Insert Blocks)	
Nominal Pipe Size mm (inches)	Insert Blocks mm (inches)
Up through 125 (5)	150 (6) long
150 (6)	150 (6) long
200 (8), 250 (10), 300 (12)	225 (9) long
350 (14), 400 (16)	300 (12) long
450 through 600 (18 through 24)	350 (14) long

- B. Warm or hot pipe supports: Premolded pipe insulation (180-degree half-shells) on bottom half of pipe at supports. Material shall be high density Polyisocyanurate (for temperatures up to 149 degrees C (300 degrees F)), cellular glass or calcium silicate. Insulation at supports shall have same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m³ (3.0 pcf).

2.9 ADHESIVE, MASTIC, CEMENT

- A. Mil. Spec. MIL-A-3316, Class 1: Jacket and lap adhesive and protective finish coating for insulation.
- B. Mil. Spec. MIL-A-3316, Class 2: Adhesive for laps and for adhering insulation to metal surfaces.
- C. Mil. Spec. MIL-A-24179A, Type II Class 1: Adhesive for installing flexible unicellular insulation and for laps and general use.
- D. Mil. Spec. MIL-PRF-19565C, Type I: Protective finish for outdoor use.
- E. Mil. Spec. MIL-PRFC-19565C, Type I or Type II: Vapor barrier compound for indoor use.
- F. ASTM C449: Mineral fiber hydraulic-setting thermal insulating and finishing cement.
- G. Other: Insulation manufacturers' published recommendations.

2.10 MECHANICAL FASTENERS

- A. Pins, anchors: Welded pins, or metal or nylon anchors with galvanized steel or fiber washer, or clips. Pin diameter shall be as recommended by the insulation manufacturer.
- B. Staples: Outward clinching galvanized steel. Staples are not allowed for below ambient vapor barrier applications.
- C. Wire: 1.3 mm thick (18 gage) soft annealed galvanized or 1.9 mm (14 gage) copper clad steel or nickel copper alloy or stainless steel.

- D. Bands: 13 mm (1/2 inch) nominal width, brass, galvanized steel, aluminum, or stainless steel.
- E. Tacks, rivets, screws, or any other attachment device capable of penetrating the vapor retarder shall NOT be used to attach/close the any type of vapor retarder jacketing. Thumb tacks sometimes used on PVC jacketing and preformed fitting covers closures are not allowed for below ambient vapor barrier applications.

2.11 REINFORCEMENT AND FINISHES

- A. Glass fabric, open weave: ASTM D1668/D1668M, Type III (resin treated) and Type I (asphalt or white resin treated).
- B. Glass fiber fitting tape: Mil. Spec MIL-C-20079H, Type II, Class 1.
- C. Tape for Flexible Elastomeric Cellular Insulation: As recommended by the insulation manufacturer.
- D. Hexagonal wire netting: 25 mm (one inch) mesh, 0.85 mm thick (22 gage) galvanized steel.
- E. Corner beads: 50 mm (2 inch) by 50 mm (2 inch), 0.55 mm thick (26 gage) galvanized steel; or 25 mm (1 inch) by 25 mm (1 inch), 0.47 mm thick (28 gage) aluminum angle adhered to 50 mm (2 inch) by 50 mm (2 inch) Kraft paper.
- F. PVC fitting cover: Fed. Spec L-P-535E, Composition A, 11-86 Type II, Grade GU, with Form B Mineral Fiber insert, for media temperature 10 to 121 degrees C (50 to 250 degrees F). Below 10 degrees C (50 degrees F) and above 121 degrees C (250 degrees F) provide mitered pipe insulation of the same type as insulating straight pipe. Provide double layer insert. Provide vapor barrier pressure sensitive tape matching the color of the PVC jacket.

2.12 FIRESTOPPING MATERIAL

- A. Other than pipe insulation, refer to Section 07 84 00, FIRESTOPPING.

2.13 FLAME AND SMOKE

- A. Unless shown otherwise all assembled systems shall meet flame spread 25 and smoke developed 50 rating as developed under ASTM and UL standards and specifications. See paragraph "Quality Assurance".

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

- A. Required pressure tests of piping joints and connections shall be completed and the work approved by the Contracting Officer's Representative (COR) for application of insulation. Surface shall be

clean and dry with all foreign materials, such as dirt, oil, loose scale, and rust removed.

- B. Except for specific exceptions or as noted, insulate all specified equipment, and piping (pipe, fittings, valves, accessories). Insulate each pipe individually. Do not use scrap pieces of insulation where a full-length section will fit.
- C. Insulation materials shall be installed with smooth and even surfaces, with jackets and facings drawn tight and smoothly cemented down and sealed at all laps. Insulation shall be continuous through all sleeves and openings, except at fire dampers and duct heaters (NFPA 90A).
- D. Vapor retarders shall be continuous and uninterrupted throughout systems with operating temperature 15 degrees C (60 degrees F) and below. Lap and seal vapor barrier over ends and exposed edges of insulation. Anchors, supports and other metal projections through insulation on cold surfaces shall be insulated and vapor sealed for a minimum length of 150 mm (6 inches).
- E. Install vapor stops with operating temperature 15 degrees C (60 degrees F) and below at all insulation terminations on either side of valves, pumps, fittings, and equipment and particularly in straight lengths every 4.6 to 6.1 meters (approx. 15 to 20 feet) of pipe insulation. The annular space between the pipe and pipe insulation of approx. 25 mm (1 inch) in length at every vapor stop shall be sealed with appropriate vapor barrier sealant. Bio-based materials shall be utilized when possible.
- F. Construct insulation on parts of equipment such as cold-water pumps and heat exchangers that must be opened periodically for maintenance or repair, so insulation can be removed and replaced without damage. Install insulation with bolted 1 mm thick (20 gage) galvanized steel or aluminum covers as complete units, or in sections, with all necessary supports, and split to coincide with flange/split of the equipment. Do not insulate over equipment nameplate data.
- G. Insulation on hot piping and equipment shall be terminated square at items not to be insulated, access openings and nameplates. Cover all exposed raw insulation with white sealer coating (caution about coating's maximum temperature limit) or jacket material.
- H. Protect all insulations outside of buildings with aluminum jacket using lock joint or other approved system for a continuous weather tight

system. Access doors and other items requiring maintenance or access shall be removable and sealable.

- I. Plumbing work not to be insulated unless otherwise noted:
 - 1. Piping and valves of fire protection system.
 - 2. Chromium plated brass piping.
 - 3. Water piping in contact with earth.
 - 4. Distilled water piping.
- J. Apply insulation materials subject to the manufacturer's recommended temperature limits. Apply adhesives, mastic, and coatings at the manufacturer's recommended minimum wet or dry film thickness. Bio-based materials shall be utilized when possible.
- K. Elbows, flanges, and other fittings shall be insulated with the same material as is used on the pipe straights. Use of polyurethane or polyisocyanurate spray-foam to fill a PVC elbow jacket is prohibited on cold applications.
- L. Firestop Pipe insulation:
 - 1. Provide firestopping insulation at fire and smoke barriers through penetrations. Firestopping insulation shall be UL listed as defined in Section 07 84 00, FIRESTOPPING.
 - 2. Pipe penetrations requiring fire stop insulation including, but not limited to the following:
 - a. Pipe risers through floors
 - b. Pipe chase walls and floors
 - c. Smoke partitions
 - d. Fire partitions
 - e. Hourly rated walls
- M. Provide vapor barrier systems as follows:
 - 1. All piping exposed to outdoor weather.
 - 2. All interior piping conveying fluids exposed to outdoor air (i.e. in attics, ventilated (not air conditioned) spaces, etc.) below ambient air temperature.
- N. Provide metal jackets over insulation as follows:
 - 1. All plumbing piping exposed to outdoor weather.
 - 2. Piping exposed in building, within 1829 mm (6 feet) of the floor, that connects to sterilizers, kitchen, and laundry equipment. Jackets may be applied with pop rivets except for cold pipe or tubing applications. Provide aluminum angle ring escutcheons at wall, ceiling, or floor penetrations.

3. A 50 mm (2 inch) jacket overlap is required at longitudinal and circumferential joints with the overlap at the bottom.
- O. Provide PVC jackets over insulation as follows:
 1. Piping exposed in building, within 1829 mm (6 feet) of the floor, on piping that is not precluded in previous sections.
 2. A 50 mm (2 inch) jacket overlap is required at longitudinal and circumferential joints with the overlap at the bottom.

3.2 INSULATION INSTALLATION

A. Mineral Fiber Board:

1. Vapor retarder faced board: Apply board on pins spaced not more than 300 mm (12 inches) on center each way, and not less than 75 mm (3 inches) from each edge of board. In addition to pins, apply insulation bonding adhesive to entire underside of horizontal metal surfaces. (Bio-based materials shall be utilized when possible.) Butt insulation edges tightly and seal all joints with laps and butt strips. After applying speed clips cut pins off flush and apply vapor seal patches over clips.
2. Plain unfaced board:
 - a. Insulation shall be scored, beveled, or mitered to provide tight joints and be secured to equipment with bands spaced 225 mm (9 inches) on center for irregular surfaces or with pins and clips on flat surfaces. Use corner beads to protect edges of insulation.
 - b. For hot equipment: Stretch 25 mm (1 inch) mesh wire, with edges wire laced together, over insulation and finish with insulating and finishing cement applied in one coat, 6 mm (1/4 inch) thick, troweled to a smooth finish.
 - c. For cold equipment: Apply meshed glass fabric in a tack coat 1.5 to 1.7 square meter per liter (60 to 70 square feet per gallon) of vapor mastic and finish with mastic at 0.3 to 0.4 square meter per liter (12 to 15 square feet per gallon) over the entire fabric surface.
3. Cold equipment: 40 mm (1-1/2inch) thick insulation faced with vapor retarder ASJ or FSK. Seal all facings, laps, and termination points and do not use staples or other attachments that may puncture ASJ or FSK.
 - a. Water filter, chemical feeder pot or tank.
 - b. Pneumatic, cold storage water and surge tanks.

4. Hot equipment: 40 mm (1-1/2 inch) thick insulation faced with unsealed ASJ or FSK.
 - a. Domestic water heaters and hot water storage tanks (not factory insulated).
 - b. Booster water heaters for dietetics dish and pot washers and for washdown grease-extracting hoods.

B. Molded Mineral Fiber Pipe and Tubing Covering:

1. Fit insulation to pipe, aligning all longitudinal joints. Seal longitudinal joint laps and circumferential butt strips by rubbing hard with a nylon sealing tool to assure a positive seal. Staples may be used to assist in securing insulation except for cold piping. Seal all vapor retarder penetrations on cold piping with a generous application of vapor barrier mastic. Provide cellar glass inserts and install with metal insulation shields at outside pipe supports. Install freeze protection insulation over heating cable.
2. Contractor's options for fitting, flange and valve insulation:
 - a. Insulating and finishing cement for sizes less than 100 mm (4 inches) operating at surface temperature of 15 degrees C (60 degrees F) or more.
 - b. Factory premolded, one piece PVC covers with mineral fiber, (Form B), inserts surface temperature of above 4 degrees C (40 degrees F) to 121 degrees C (250 degrees F). Provide mitered preformed insulation of the same type as the installed straight pipe insulation for pipe temperatures below 4 degrees C (40 degrees F). Secure first layer of mineral fiber insulation with twine. Seal seam edges with vapor barrier mastic and secure with fitting tape.
 - c. Factory preformed, ASTM C547 or fabricated mitered sections, joined with adhesive or (hot only) wired in place. (Bio-based materials shall be utilized when possible.) For hot piping finish with a smoothing coat of finishing cement. For cold fittings, 15 degrees C (60 degrees F) or less, vapor seal with a layer of glass fitting tape imbedded between two 2 mm (1/16 inch) coats of vapor barrier mastic.
 - d. Fitting tape shall extend over the adjacent pipe insulation and overlap on itself at least 50 mm (2 inches).
3. Nominal thickness in millimeters and inches specified in the schedule at the end of this section.

C. Cellular Glass Insulation:

1. Pipe and tubing, covering nominal thickness in millimeters and inches as specified in the schedule at the end of this section.
2. Underground piping other than or in lieu of that specified in Section 22 11 00, FACILITY WATER DISTRIBUTION: Type II, factory jacketed with a 3 mm laminate jacketing consisting of 3000 mm x 3000 mm (10 ft x 10 ft) asphalt impreganted glass fabric, bituminous mastic, and outside protective plastic film.
 - a. 75 mm (3 inches) thick for hot water piping.
 - b. As scheduled at the end of this section for chilled water piping.
 - c. Underground piping: Apply insulation with joints tightly butted. Seal longitudinal self-sealing lap. Use field fabricated or factory-made fittings. Seal butt joints and fitting with jacketing as recommended by the insulation manufacturer. Use 100 mm (4 inch) wide strips to seal butt joints.
 - d. Provide expansion chambers for pipe loops, anchors and wall penetrations as recommended by the insulation manufacturer.
 - e. Underground insulation shall be inspected and approved by the COR as follows:
 - 1) Insulation in place before coating.
 - 2) After coating.
 - f. Sand bed and backfill: Minimum 75 mm (3 inches) all around insulated pipe or tank, applied after coating has dried.
 - g. All piping up to 482 degrees C (900 degrees F) requiring protection from physical heavy contact/abuse including in mechanical rooms and exposures to the public.

D. Calcium Silicate:

1. Minimum thickness in millimeter (inches) specified below for piping other than in boiler plant.

Nominal Thickness Of Calcium Silicate Insulation (Non-Boiler Plant)				
Nominal Pipe Size Millimeters (Inches)	Thru 25 (1)	32 to 75 (1-1/4 to 3)	100-200 (4 to 8)	Greater than 200 (8)
93-260 degrees C (199-500 degrees F) (HPS, HPR)	100 (4)	125 (5)	150 (6)	Greater than 150 (6)

2. MRI Quench Vent Insulation: Type I, class D, 150 mm (6 inch) nominal thickness.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- B. Components provided under this section of the specification will be tested as part of a larger system.

3.4 PIPE INSULATION SCHEDULE

- A. Provide insulation for piping systems as scheduled below:

Insulation Thickness Millimeters (Inches)					
		Nominal Pipe Size Millimeters (Inches)			
Operating Temperature Range/Service	Insulation Material	Less than 25 (1)	25 - 32 (1 - 1¼)	38 - 75 (1½ - 3)	100 (4) and Greater
38-60 degrees C (100-140 degrees F) (Domestic Hot Water Supply and Return)	Mineral Fiber (Above ground piping only)	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)
38-60 degrees C (100-140 degrees F) (Domestic Hot Water Supply and Return)	Rigid Cellular Phenolic Foam (Above ground piping only) (exterior locations only)	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)
38-60 degrees C (100-140 degrees F) (Domestic Hot Water Supply and Return)	Cellular Glass Thermal	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)
4-15 degrees C (40-60 degrees F) (Ice water piping)	Cellular Glass Thermal	38 (1.5)	38 (1.5)	38 (1.5)	38 (1.5)

- - - E N D - - -

SECTION 22 08 00**COMMISSIONING OF PLUMBING SYSTEMS****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. The requirements of this Section apply to all sections of Division 22.
- B. This project will have selected building systems commissioned. The complete list of equipment and systems to be commissioned are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The commissioning process, which the Contractor is responsible to execute, is defined in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. A Commissioning Agent (CxA) appointed by the Department of Veterans Affairs will manage the commissioning process.

1.2 RELATED WORK

- A. Section 01 00 00 GENERAL REQUIREMENTS.
- B. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.
- C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1.3 SUMMARY

- A. This Section includes requirements for commissioning plumbing systems, subsystems, and equipment. This Section supplements the general requirements specified in Section 01 91 00 General Commissioning Requirements.
- B. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for more specifics regarding processes and procedures as well as roles and responsibilities for all Commissioning Team members.

1.4 DEFINITIONS

- A. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for definitions.

1.5 COMMISSIONED SYSTEMS

- A. Commissioning of a system or systems specified in Division 22 is part of the construction process. Documentation and testing of these systems, as well as training of the VA's Operation and Maintenance personnel in accordance with the requirements of Section 01 91 00 and of Division 22, is required in cooperation with the VA and the Commissioning Agent.
- B. The Plumbing systems commissioning will include the systems listed in Section 01 91 00 General Commissioning Requirements:

1.6 SUBMITTALS

- A. The commissioning process requires review of selected Submittals. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.
- B. The commissioning process requires Submittal review simultaneously with engineering review. Specific submittal requirements related to the commissioning process are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

PART 2 - PRODUCTS (NOT USED)**PART 3 - EXECUTION****3.1 CONSTRUCTION INSPECTIONS**

- A. Commissioning of the Building Plumbing Systems will require inspection of individual elements of the Plumbing construction throughout the construction period. The Contractor shall coordinate with the Commissioning Agent in accordance with Section 01 91 00 and the Commissioning Plan to schedule inspections as required to support the commissioning process.

3.2 PRE-FUNCTIONAL CHECKLISTS

- A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning Agent will select a broader sample of checklists for review. If the Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the checklists for the type of equipment will be returned to the Contractor for correction and

resubmission. Refer to SECTION 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for submittal requirements for Pre-Functional Checklists, Equipment Startup Reports, and other commissioning documents.

3.3 CONTRACTORS TESTS

- A. Contractor tests as required by other sections of Division 22 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. All testing shall be incorporated into the project schedule. Contractor shall provide no less than 7 calendar days' notice of testing. The Commissioning Agent will witness selected Contractor tests at the sole discretion of the Commissioning Agent. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

3.4 SYSTEMS FUNCTIONAL PERFORMANCE TESTING:

- A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the Resident Engineer. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed. See Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS, for additional details.

3.5 TRAINING OF VA PERSONNEL

- A. Training of the VA operation and maintenance personnel is required in cooperation with the Resident Engineer and Commissioning Agent. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. Contractor shall submit training agendas and trainer resumes in accordance with the requirements of Section 01 91 00. The instruction shall be scheduled in coordination with the Resident Engineer after submission and approval of formal training plans. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS and Division 22 Sections for additional Contractor training requirements.

----- END -----

**SECTION 22 11 00
FACILITY WATER DISTRIBUTION**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Domestic water systems, including piping, equipment and all necessary accessories as designated in this section.
- B. A complete listing of all acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.
- E. Section 07 84 00, FIRESTOPPING.
- F. Section 07 92 00, JOINT SEALANTS.
- G. Section 09 91 00, PAINTING.
- I. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- J. Section 22 07 11, PLUMBING INSULATION.
- K. SECTION 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):
 - A13.1-2007 (R2013).....Scheme for Identification of Piping Systems
 - B16.3-2011.....Malleable Iron Threaded Fittings: Classes 150 and 300
 - B16.9-2012.....Factory-Made Wrought Buttwelding Fittings
 - B16.11-2011.....Forged Fittings, Socket-Welding and Threaded
 - B16.12-2009 (R2014).....Cast Iron Threaded Drainage Fittings
 - B16.15-2013 Cast Copper Alloy Threaded Fittings: Classes 125 and 250
 - B16.18-2012.....Cast Copper Alloy Solder Joint Pressure Fittings
 - B16.22-2013.....Wrought Copper and Copper Alloy Solder-Joint Pressure Fittings

- B16.24-2011.....Cast Copper Alloy Pipe Flanges and Flanged
Fittings: Classes 150, 300, 600, 900, 1500, and
2500
- ASME Boiler and Pressure Vessel Code -
BPVC Section IX-2015....Welding, Brazing, and Fusing Qualifications
- C. American Society of Sanitary Engineers (ASSE):
1010-2004.....Performance Requirements for Water Hammer
Arresters
- D. American Society for Testing and Materials (ASTM):
A47/A47M-1999 (R2014)...Standard Specification for Ferritic Malleable
Iron Castings
- A53/A53M-2012.....Standard Specification for Pipe, Steel, Black
and Hot-Dipped, Zinc-Coated, Welded and
Seamless
- A183-2014.....Standard Specification for Carbon Steel Track
Bolts and Nuts
- A269/A269M-2014e1.....Standard Specification for Seamless and Welded
Austenitic Stainless-Steel Tubing for General
Service
- A312/A312M-2015.....Standard Specification for Seamless, Welded,
and Heavily Cold Worked Austenitic Stainless-
Steel Pipes
- A403/A403M-2014.....Standard Specification for Wrought Austenitic
Stainless Steel Piping Fittings
- A536-1984 (R2014).....Standard Specification for Ductile Iron
Castings
- A733-2013.....Standard Specification for Welded and Seamless
Carbon Steel and Austenitic Stainless Steel
Pipe Nipples
- B32-2008 (R2014).....Standard Specification for Solder Metal
- B43-2014.....Standard Specification for Seamless Red Brass
Pipe, Standard Sizes
- B61-2008 (R2013).....Standard Specification for Steam or Valve
Bronze Castings
- B62-2009.....Standard Specification for Composition Bronze
or Ounce Metal Castings
- B75/B75M-2011.....Standard Specification for Seamless Copper Tube

- B88-2014.....Standard Specification for Seamless Copper
Water Tube
- B584-2014.....Standard Specification for Copper Alloy Sand
Castings for General Applications
- B687-1999 (R2011).....Standard Specification for Brass, Copper, and
Chromium-Plated Pipe Nipples
- C919-2012.....Standard Practice for Use of Sealants in
Acoustical Applications
- D1785-2012.....Standard Specification for Poly (Vinyl
Chloride) (PVC) Plastic Pipe, Schedules 40, 80,
and 120
- D2000-2012.....Standard Classification System for Rubber
Products in Automotive Applications
- D2564-2012.....Standard Specification for Solvent Cements for
Poly (Vinyl Chloride) (PVC) Plastic Piping
Systems
- D2657-2007.....Standard Practice for Heat Fusion Joining of
Polyolefin Pipe and Fittings
- D2855-1996 (R2010).....Standard Practice for Making Solvent-Cemented
Joints with Poly (Vinyl Chloride) (PVC) Pipe
and Fittings
- D4101-2014.....Standard Specification for Polypropylene
Injection and Extrusion Materials
- E1120-2008.....Standard Specification for Liquid Chlorine
- E1229-2008.....Standard Specification for Calcium Hypochlorite
- F2389-2010.....Standard Specification for Pressure-rated
Polypropylene (PP) Piping Systems
- F2620-2013.....Standard Practice for Heat Fusion Joining of
Polyethylene Pipe and Fittings
- F2769-2014.....Standard Specification for Polyethylene of
Raised Temperature (PE-RT) Plastic Hot and
Cold-Water Tubing and Distribution Systems
- E. American Water Works Association (AWWA):
- C110-2012.....Ductile-Iron and Gray-Iron Fittings
- C151-2009.....Ductile Iron Pipe, Centrifugally Cast
- C153-2011.....Ductile-Iron Compact Fittings

- C203-2008.....Coal-Tar Protective Coatings and Linings for
Steel Water Pipelines - Enamel and Tape - Hot
Applied
- C213-2007.....Fusion-Bonded Epoxy Coating for the Interior
and Exterior of Steel Water Pipelines
- C651-2014.....Disinfecting Water Mains
- F. American Welding Society (AWS):
- A5.8M/A5.8-2011-AMD1....Specification for Filler Metals for Brazing and
Braze Welding
- G. International Code Council (ICC):
- IPC-2012.....International Plumbing Code
- H. Manufacturers Specification Society (MSS):
- SP-58-2009.....Pipe Hangers and Supports - Materials, Design,
Manufacture, Selection, Application, and
Installation
- SP-72-2010a.....Ball Valves with Flanged or Butt-Welding Ends
for General Service
- SP-110-2010.....Ball Valves Threaded, Socket-Welding, Solder
Joint, Grooved and Flared Ends
- I. NSF International (NSF):
- 14-2015.....Plastics Piping System Components and Related
Materials
- 61-2014a.....Drinking Water System Components - Health
Effects
- 372-2011.....Drinking Water System Components - Lead Content
- J. Plumbing and Drainage Institute (PDI):
- PDI-WH 201-2010.....Water Hammer Arrestors
- K. Department of Veterans Affairs:
- H-18-8-2013.....Seismic Design Handbook
- H-18-10.....Plumbing Design Manual

1.4 SUBMITTALS

- A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 11 00, FACILITY WATER DISTRIBUTIONS", with applicable paragraph identification.

- C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.
1. All items listed in Part 2 - Products.
- D. Complete operating and maintenance manuals including wiring diagrams, technical data sheets and information for ordering replacement parts:
1. Include complete list indicating all components of the systems.
 2. Include complete diagrams of the internal wiring for each item of equipment.
 3. Diagrams shall have their terminals identified to facilitate installation, operation, and maintenance.
- E. Completed System Readiness Checklist provided by the CxA and completed by the Contractor, signed by a qualified technician, and dated on the date of completion, in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- F. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.5 QUALITY ASSURANCE

- A. A certificate shall be submitted prior to welding of steel piping showing the Welder's certification. The certificate shall be current and no more than one year old. Welder's qualifications shall be in accordance with ASME BPVC Section IX.
- B. All grooved joint couplings, fittings, valves, and specialties shall be the products of a single manufacturer. Grooving tools shall be by the same manufacturer as the groove components.
- C. All pipe, couplings, fittings, and specialties shall bear the identification of the manufacturer and any markings required by the applicable referenced standards.
- D. Bio-Based Materials: For products designated by the USDA's Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit <http://www.biopreferred.gov>.

1.6 AS-BUILT DOCUMENTATION

- A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.
- B. Submit operation and maintenance data updated to include submittal review comments, substitutions and construction revisions shall be in electronic version on compact disc or DVD inserted into a three-ring binder. All aspects of system operation and maintenance procedures, including piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A list of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.
- C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and shall provide the complete set at the time of final systems certification testing. As-built drawings are to be provided, and a copy of them in Auto-CAD version 2020 provided on compact disc or DVD. Should the installing contractor engage the testing company to provide as built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement.
- D. Certification documentation shall be provided to COR 10 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and certificate if applicable that all results of tests were within limits specified. If a certificate is not available, all documentation shall be on the Certifier's letterhead.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Material or equipment containing a weighted average of greater than 0.25 percent lead are prohibited in any potable water system intended for human consumption and shall be certified in accordance with NSF 61

or NSF 372. Endpoint devices used to dispense water for drinking shall meet the requirements of NSF 61, Section 9.

- B. Plastic pipe, fittings, and solvent cement shall meet NSF 14 and shall be NSF listed for the service intended.

2.2 UNDERGROUND WATER SERVICE CONNECTIONS TO BUILDINGS

- A. From inside face of exterior wall to approximately 1500 mm (5 feet) outside of building and underground inside building, material to be the same for the size specified inside the building.
- B. 75 mm (3 inch) Diameter and Greater: Ductile iron, AWWA C151, 2413 kPa (350 psig) pressure class, exterior bituminous coating, and cement lined. Bio-based materials shall be utilized when possible. Provide flanged and anchored connection to interior piping.
- C. Under 75 mm (3 inch) Diameter: Copper tubing, ASTM B88, Type K, seamless, annealed. Fittings are as specified in paragraph "Above Ground (Interior) Water Piping". Use brazing alloys, AWS A5.8M/A5.8, Classification BCuP.
- D. Flexible Expansion Joint: Ductile iron with ball joints rated for 1725 kPa (250 psig) working pressure conforming to AWWA C153, capable of deflecting a minimum of 20 degrees in each direction. Flexible expansion joint size shall match the pipe size it is connected to and shall have the expansion capability designed as an integral part of the ductile iron ball castings. Pressure containing parts shall be lined with a minimum of 15 mils of fusion bonded epoxy conforming to the applicable requirements of AWWA C213 and shall be factory tested with a 1500-volt spark test. Flexible expansion joint shall have flanged connections conforming to AWWA C110. Bolts and nuts shall be 316 stainless steel and gaskets shall be neoprene. The flexible expansion fitting shall not expand or exert an axial thrust under internal water pressure. Provide piping joint restraints at each mechanical joint end connection and piping restraints at the penetration of the building wall. The restraints shall be provided to address the developed thrust at the change of piping direction.

2.3 ABOVE GROUND (INTERIOR) WATER PIPING

- A. Pipe: Copper tube, ASTM B88, Type K or L, drawn. For pipe 150 mm (6 inches) and larger, stainless steel, ASTM A312, schedule 40 shall be used.
- B. Fittings for Copper Tube:

1. Wrought copper or bronze castings conforming to ASME B16.18 and B16.22. Unions shall be bronze, MSS SP-72, MSS SP-110, solder or braze joints. Use 95/5 tin and antimony for all soldered joints.
 2. Grooved fittings, 50 to 150 mm (2 to 6 inch) wrought copper ASTM B75/B75M C12200, 125 to 150 mm (5 to 6 inch) bronze casting ASTM B584, C84400. Mechanical grooved couplings, 2070 kPa (300 psig) minimum ductile iron, ASTM A536 Grade 448-310-12 (Grade 65-45-12), or malleable iron, ASTM A47/A47M Grade 22410 (Grade 32510) housing, with EPDM gasket, steel track head bolts, ASTM A183, coated with copper colored alkyd enamel.
 3. Mechanical press-connect fittings for copper pipe and tube **are prohibited**. See Plumbing Design Manual for additional information.
 4. Mechanically formed tee connection: Form mechanically extracted collars in a continuous operation by drilling pilot hole and drawing out tube surface to form collar, having a height of not less than three times the thickness of tube wall. Adjustable collaring device shall ensure proper tolerance and complete uniformity of the joint. Notch and dimple joining branch tube in a single process to provide free flow where the branch tube penetrates the fitting. Braze joints.
 5. Flanged fittings, bronze, class 150, solder-joint ends conforming to ASME B16.24.
- C. Fittings for Stainless Steel:
1. Stainless steel butt-welded fittings, Type 316, Schedule 10, conforming to ASME B16.9.
 2. Grooved fittings, stainless steel, Type 316, Schedule 40, conforming to ASTM A403/A403M. Segmentally fabricated fittings are not allowed. Mechanical grooved couplings, ductile iron, 4138 kPa (600 psig), ASTM A536 Grade 448-310-12 (Grade 65-45-12), or malleable iron, ASTM A47/A47M Grade 22410 (Grade 32510) housing, with EPDM gasket, steel track head bolts, ASTM A183, coated with copper colored alkyd enamel.
- D. Adapters: Provide adapters for joining pipe or tubing with dissimilar end connections.
- E. Solder: ASTM B32 alloy type Sb5, HA or HB. Provide non-corrosive flux.
- F. Brazing alloy: AWS A5.8M/A5.8, brazing filler metals shall be BCuP series for copper-to-copper joints and BAg series for copper to steel joints.

G. Re-agent Grade Water Piping and Dialysis Water Piping:

1. Polypropylene, ASTM F2389, Schedule 80 pressure pipe without additions of modifiers, plasticizers, colorants, stabilizers, or lubricants. Bio-based materials shall be utilized when possible. This virgin un-plasticized pipe and fittings shall transport 10 megohm water with no loss of purity. Provide socket or butt end fittings with ASTM D2657 heat fusion joints.
2. Polyethylene, ASTM F2769, Schedule 80, food, and medical grade, capable of transporting 10 megohm water with no loss of purity. Processed by continuous compression molding without the addition of fillers, polymer modifiers or processing aids. Uniform color with no cracks, flaws, blisters, or other imperfections in appearance. Provide ASTM D2657 or ASTM F2620 heat fusion butt welded joints. In accordance with manufacturer's recommendations, provide continuous channel support under all horizontal piping.
3. Reverse Osmosis (RO) Water Piping:
 - a. Low Pressure Feed, Reject and Recycle Piping: Less than or equal to 520 kPa (75 psig): ASTM D1785, Schedule 80 PVC, ASTM D2855 socket welded and flanged.
 - b. RO Product Tubing from each Membrane Housing: ASTM D1785, Schedule 80 PVC, ASTM D2855 socket welded and flanged.
 - c. Low Pressure Control and Pressure Gage Tubing: Polyethylene.
 - d. High Pressure Reject and Recycle Piping: Greater than 520 kPa (75 psig): ASTM A269/A269M, Type 304 schedule 10 stainless steel with butt welded joints.
 - e. High Pressure Control and Pressure Gage Tubing: 6895 kPa (1000 psig) burst nylon.

2.4 EXPOSED WATER PIPING

- A. Finished Room: Use full iron pipe size chrome plated brass piping for exposed water piping connecting fixtures, casework, cabinets, equipment, and reagent racks when not concealed by apron including those furnished by the Government or specified in other sections.
1. Pipe: ASTM B43, standard weight.
 2. Fittings: ASME B16.15 cast bronze threaded fittings with chrome finish.
 3. Nipples: ASTM B687, Chromium-plated.

4. Unions: MSS SP-72, MSS SP-110, brass or bronze with chrome finish. Unions 65 mm (2-1/2 inches) and larger shall be flange type with approved gaskets.

B. Unfinished Rooms, Mechanical Rooms and Kitchens: Chrome-plated brass piping is not required. Paint piping systems as specified in Section 09 91 00, PAINTING.

2.5 STRAINERS

A. Provide on high pressure side of pressure reducing valves, on suction side of pumps, on inlet side of indicating and control instruments and equipment subject to sediment damage and where shown on drawings. Strainer element shall be removable without disconnection of piping.

B. Water: Basket or "Y" type with easily removable cover and brass strainer basket.

C. Body: Less than 75 mm (3 inches), brass or bronze; 75 mm (3 inches) and greater, cast iron or semi-steel.

2.6 DIELECTRIC FITTINGS

A. Provide dielectric couplings or unions between pipe of dissimilar metals.

2.7 STERILIZATION CHEMICALS

A. Hypochlorite: ASTM E1229.

B. Liquid Chlorine: ASTM E1120.

2.8 WATER HAMMER ARRESTER

A. Closed copper tube chamber with permanently sealed 413 kPa (60 psig) air charge above a Double O-ring piston. Two high heat Buna-N O-rings pressure packed and lubricated with FDA approved silicone compound. All units shall be designed in accordance with ASSE 1010. Access shall be provided where devices are concealed within partitions or above ceilings. Size and install in accordance with PDI-WH 201 requirements. Provide water hammer arrestors at:

1. All solenoid valves.
2. All groups of two or more flush valves.
3. All quick opening or closing valves.
4. All medical washing equipment.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Comply with the International Plumbing Code and the following:

1. Install branch piping for water from the piping system and connect to all fixtures, valves, cocks, outlets, casework, cabinets, and

equipment, including those furnished by the Government or specified in other sections.

2. Pipe shall be round and straight. Cutting shall be done with proper tools. Pipe, except for plastic and glass, shall be reamed to remove burrs and a clean smooth finish restored to full pipe inside diameter.
3. All pipe runs shall be laid out to avoid interference with other work/trades.
4. Install union and shut-off valve on pressure piping at connections to equipment.
5. Pipe Hangers, Supports and Accessories:
 - a. All piping shall be supported per the IPC, H-18-8 Seismic Design Handbook, MSS SP-58, and SMACNA as required.
 - b. Shop Painting and Plating: Hangers, supports, rods, inserts and accessories used for pipe supports shall be shop coated with zinc chromate primer paint. Electroplated copper hanger rods, hangers and accessories may be used with copper tubing.
 - c. Floor, Wall and Ceiling Plates, Supports, Hangers:
 - 1) Solid or split un-plated cast iron.
 - 2) All plates shall be provided with set screws.
 - 3) Pipe Hangers: Height adjustable clevis type.
 - 4) Adjustable Floor Rests and Base Flanges: Steel.
 - 5) Concrete Inserts: "Universal" or continuous slotted type.
 - 6) Hanger Rods: Mild, low carbon steel, fully threaded or Threaded at each end with two removable nuts at each end for positioning rod and hanger and locking each in place.
 - 7) Pipe Hangers and Riser Clamps: Malleable iron or carbon steel. Pipe Hangers and riser clamps shall have a copper finish when supporting bare copper pipe or tubing.
 - 8) Rollers: Cast iron.
 - 9) Self-drilling type expansion shields shall be "Phillips" type, with case hardened steel expander plugs.
 - 10) Hangers and supports utilized with insulated pipe and tubing shall have 180-degree (minimum) metal protection shield centered on and welded to the hanger and support. The shield thickness and length shall be engineered and sized for distribution of loads to preclude crushing of insulation without breaking the vapor barrier. The shield shall be sized

for the insulation and have flared edges to protect vapor-retardant jacket facing. To prevent the shield from sliding out of the clevis hanger during pipe movement, center-ribbed shields shall be used.

- 11) Miscellaneous Materials: As specified, required, directed, or as noted on the drawings for proper installation of hangers, supports and accessories. If the vertical distance exceeds 6.1 m (20 feet) for cast iron pipe additional support shall be provided in the center of that span. Provide all necessary auxiliary steel to provide that support.
 - 12) With the installation of each flexible expansion joint, provide piping restraints for the upstream and downstream section of the piping at the flexible expansion joint. Provide calculations supporting the restraint length design and type of selected restraints. Restraint calculations shall be based on the criteria from the manufacturer regarding their restraint design.
6. Install chrome plated cast brass escutcheon with set screw at each wall, floor, and ceiling penetration in exposed finished locations and within cabinets and millwork.
 7. Penetrations:
 - a. Firestopping: Where pipes pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke, and gases as specified in Section 07 84 00, FIRESTOPPING. Completely fill and seal clearances between raceways and openings with the firestopping materials.
 - b. Waterproofing: At floor penetrations, completely seal clearances around the pipe and make watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS. Bio-based materials shall be utilized when possible.
 - c. Acoustical sealant: Where pipes pass through sound rated walls, seal around the pipe penetration with an acoustical sealant that is compliant with ASTM C919.
- B. Domestic Water piping shall conform to the following:
1. Grade all lines to facilitate drainage. Provide drain valves at bottom of risers and all low points in system. Design domestic hot and cold water circulating lines with no traps.

2. Connect branch lines at bottom of main serving fixtures below and pitch down so that main may be drained through fixture. Connect branch lines to top of main serving only fixtures located on floor above.

3.2 TESTS

- A. General: Test system either in its entirety or in sections. Submit testing plan to COR 10 working days prior to test date.
- B. Potable Water System: Test after installation of piping and domestic water heaters, but before piping is concealed, before covering is applied, and before plumbing fixtures are connected. Fill systems with water and maintain hydrostatic pressure of 1035 kPa (150 psig) gage for two hours. No decrease in pressure is allowed. Provide a pressure gage with a shutoff and bleeder valve at the highest point of the piping being tested. Pressure gauge shall have 1 psig increments.
- C. Re-agent Grade Water Systems: Fill system with water and maintain hydrostatic pressure of 1380 kPa (200 psig) gage during inspection and prove tight.
- D. All Other Piping Tests: Test new installed piping under 1-1/2 times actual operating conditions and prove tight.
- E. The test pressure shall hold for the minimum time duration required by the applicable plumbing code or authority having jurisdiction.

3.3 STERILIZATION

- A. After tests have been successfully completed, thoroughly flush and sterilize the interior domestic water distribution system in accordance with AWWA C651.
- B. Use liquid chlorine or hypochlorite for sterilization.

3.4 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- B. Components provided under this section of the specification will be tested as part of a larger system.

3.5 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for four hours to instruct VA Personnel in operation and maintenance of the system.

- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

- - - E N D - - -

SECTION 22 13 00
FACILITY SANITARY AND VENT PIPING

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section pertains to sanitary sewer and vent systems, including piping, equipment and all necessary accessories as designated in this section.
- B. A complete listing of common acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.
- E. Section 07 84 00, FIRESTOPPING: Penetrations in rated enclosures.
- F. Section 07 92 00, JOINT SEALANTS: Sealant products.
- G. Section 09 91 00, PAINTING: Preparation and finish painting and identification of piping systems.
- H. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING: Pipe Hangers and Supports, Materials Identification.
- I. Section 22 07 11, PLUMBING INSULATION.
- J. Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS
- K. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS
- L. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.
- B. American Society of Mechanical Engineers (ASME):
 - A13.1-2007.....Identification of Piping Systems
 - A112.36.2M-1991.....Cleanouts
 - A112.6.3-2019.....Floor and Trench Drains
 - B1.20.1-2013.....Pipe Threads, General Purpose (Inch)

- B16.1-2015.....Gray Iron Pipe Flanges and Flanged Fittings
Classes 25, 125, and 250
- B16.4-2016.....Grey Iron Threaded Fittings Classes 125 and 250
- B16.15-2018.....Cast Copper Alloy Threaded Fittings, Classes
125 and 250
- B16.18-2018.....Cast Copper Alloy Solder Joint Pressure
Fittings
- B16.21-2016.....Nonmetallic Flat Gaskets for Pipe Flanges
- B16.22-2018.....Wrought Copper and Copper Alloy Solder-Joint
Pressure Fittings
- B16.23-2016.....Cast Copper Alloy Solder Joint Drainage
Fittings: DWV
- B16.24-2016.....Cast Copper Alloy Pipe Flanges and Flanged
Fittings, and Valves: Classes 150, 300, 600,
900, 1500, and 2500
- B16.29-2017.....Wrought Copper and Wrought Copper Alloy Solder-
Joint Drainage Fittings: DWV
- B16.39-2014.....Malleable Iron Threaded Pipe Unions Classes
150, 250, and 300
- B18.2.1-2012.....Square, Hex, Heavy Hex, and Askew Head Bolts
and Hex, Heavy Hex, Hex Flange, Lobed Head, and
Lag Screws (Inch Series)
- C. American Society of Sanitary Engineers (ASSE):
- 1001-2017.....Performance Requirements for Atmospheric Type
Vacuum Breakers
- 1018-2001.....Performance Requirements for Trap Seal Primer
Valves - Potable Water Supplied
- 1044-2015.....Performance Requirements for Trap Seal Primer
Devices - Drainage Types and Electronic Design
Types
- 1079-2012.....Performance Requirements for Dielectric Pipe
Unions
- D. American Society for Testing and Materials (ASTM):
- A53/A53M-2018.....Standard Specification for Pipe, Steel, Black
and Hot-Dipped, Zinc-coated, Welded and
Seamless
- A74-2017.....Standard Specification for Cast Iron Soil Pipe
and Fittings

A888-2018a.....Standard Specification for Hubless Cast Iron
Soil Pipe and Fittings for Sanitary and Storm
Drain, Waste, and Vent Piping Applications

B32-2008 (R2014).....Standard Specification for Solder Metal

B43-2015.....Standard Specification for Seamless Red Brass
Pipe, Standard Sizes

B88-2016.....Standard Specification for Seamless Copper
Water Tube

B306-2013.....Standard Specification for Copper Drainage Tube
(DWV)

B687-1999 (R2016).....Standard Specification for Brass, Copper, and
Chromium-Plated Pipe Nipples

B813-2016.....Standard Specification for Liquid and Paste
Fluxes for Soldering of Copper and Copper Alloy
Tube

B828-2016.....Standard Practice for Making Capillary Joints
by Soldering of Copper and Copper Alloy Tube
and Fittings

C564-2014.....Standard Specification for Rubber Gaskets for
Cast Iron Soil Pipe and Fittings

D2321-2018.....Standard Practice for Underground Installation
of Thermoplastic Pipe for Sewers and Other
Gravity-Flow Applications

D2564-2012 (R3018).....Standard Specification for Solvent Cements for
Poly (Vinyl Chloride) (PVC) Plastic Piping
Systems

D2665-2014.....Standard Specification for Poly(Vinyl Chloride)
(PVC) Plastic Drain, Waste, and Vent Pipe and
Fittings

D2855-2015.....Standard Practice for Two-Step (Primer and
Solvent Cement) Method of Joining Poly (Vinyl
Chloride) (PVC) or Chlorinated Poly (Vinyl
Chloride) CPVCP Pipe and Piping Components with
Tapered Sockets

D5926-2015.....Standard Specification for Poly (Vinyl
Chloride) (PVC) Gaskets for Drain, Waste, and
Vent (DWV), Sewer, Sanitary, and Storm Plumbing
Systems

- F402-2018.....Standard Practice for Safe Handling of Solvent
Cements, Primers, and Cleaners Used for Joining
Thermoplastic Pipe and Fittings
- F477-2014.....Standard Specification for Elastomeric Seals
(Gaskets) for Joining Plastic Pipe
- F1545-2015e1.....Standard Specification for Plastic-Lined
Ferrous Metal Pipe, Fittings, and Flanges
- E. Cast Iron Soil Pipe Institute (CISPI):
- 2006.....Cast Iron Soil Pipe and Fittings Handbook
- 301-2012.....Standard Specification for Hubless Cast Iron
Soil Pipe and Fittings for Sanitary and Storm
Drain, Waste, and Vent Piping Applications
- 310-2012.....Specification for Coupling for Use in
Connection with Hubless Cast Iron Soil Pipe and
Fittings for Sanitary and Storm Drain, Waste,
and Vent Piping Applications
- F. Copper Development Association, Inc. (CDA):
- A4015-14/19.....Copper Tube Handbook
- G. International Code Council (ICC):
- IPC-2018.....International Plumbing Code
- H. Manufacturers Standardization Society (MSS):
- SP-123-2018.....Non-Ferrous Threaded and Solder-Joint Unions
for Use with Copper Water Tube
- I. National Fire Protection Association (NFPA):
- 70-2020.....National Electrical Code (NEC)
- J. Underwriters' Laboratories, Inc. (UL):
- 508-99 (R2013).....Standard For Industrial Control Equipment

1.4 SUBMITTALS

- A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 13 00, FACILITY SANITARY AND VENT PIPING", with applicable paragraph identification.
- C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

1. Piping.
 2. Floor Drains.
 3. Grease Removal Unit.
 4. Cleanouts.
 5. Trap Seal Protection.
 6. Penetration Sleeves.
 7. Pipe Fittings.
 8. Traps.
 9. Exposed Piping and Fittings.
- D. Detailed shop drawing of clamping device and extensions when required in connection with the waterproofing membrane or the floor drain.
- E. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replaceable parts, and troubleshooting guide:
1. Include complete list indicating all components of the systems.
 2. Include complete diagrams of the internal wiring for each item of equipment.
 3. Diagrams shall have their terminals identified to facilitate installation, operation, and maintenance.
- F. Completed System Readiness Checklist provided by the CXA and completed by the Contractor, signed by a qualified technician, and dated on the date of completion, in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- G. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.5 QUALITY ASSURANCE

- A. Bio-Based Materials: For products designated by the USDA's bio-based Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit <http://www.biopreferred.gov>.
- B. Refer to Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for additional sustainable design requirements.

1.6 AS-BUILT DOCUMENTATION

- A. Comply with requirements in Paragraph "AS-BUILT DOCUMENTATION" of Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

PART 2 - PRODUCTS**2.1 SANITARY WASTE, DRAIN, AND VENT PIPING****A. Cast iron waste, drain, and vent pipe and fittings.**

1. Cast iron waste, drain, and vent pipe and fittings shall be used for the following applications:
 - a. Pipe buried in or in contact with earth.
 - b. Sanitary pipe extensions to a distance of approximately 1500 mm (5 feet) outside of the building.
 - c. Interior waste and vent piping above grade.
2. Cast iron Pipe shall be bell and spigot or hubless (plain end or no-hub or hubless).
3. The material for all pipe and fittings shall be cast iron soil pipe and fittings and shall conform to the requirements of CISPI 301, ASTM A888, or ASTM A74.
4. Cast iron pipe and fittings shall be made from a minimum of 95 percent post-consumer recycled material.
5. Joints for hubless pipe and fittings shall conform to the manufacturer's installation instructions. Couplings for hubless joints shall conform to CISPI 310. Joints for hub and spigot pipe shall be installed with compression gaskets conforming to the requirements of ASTM C564.

B. Copper Tube, (DWV):

1. Copper DWV tube sanitary waste, drain and vent pipe may be used for piping above ground, except for urinal drains.
2. The copper DWV tube shall be drainage type, drawn temper conforming to ASTM B306.
3. The copper drainage fittings shall be cast copper or wrought copper conforming to ASME B16.23 or ASME B16.29.
4. The joints shall be lead free, using a water flushable flux, and conforming to ASTM B32.

C. Polyvinyl Chloride (PVC)

1. Polyvinyl chloride (PVC) pipe and fittings are permitted where the waste temperature is less than 60 degrees C (140 degrees F).
2. PVC piping and fittings shall NOT be used for the following applications:
 - a. Waste collected from steam condensate drains.

- b. Spaces such as mechanical equipment rooms, kitchens, Sterile Processing Services, sterilizer areas, and areas designated for sleep.
 - c. Vertical waste and soil stacks serving more than two floors.
 - d. Exposed in mechanical equipment rooms.
 - e. Exposed inside of ceiling return plenums.
- 3. Polyvinyl chloride sanitary waste, drain, and vent pipe and fittings shall be solid core sewer piping conforming to ASTM D2665, sewer and drain series with ends for solvent cemented joints.
 - 4. Fittings: PVC fittings shall be solvent welded socket type using solvent cement conforming to ASTM D2564.

2.2 PUMP DISCHARGE PIPING

- A. Galvanized steel pump discharge pipe and fittings:
 - 1. Galvanized steel pipe shall be Schedule 40 weight class conforming to ASTM A53/A53M, with square cut grooved or threaded ends to match joining method.
 - 2. Fittings shall be Class 125, gray-iron threaded fittings conforming to ASME B16.4.
 - 3. Unions shall be Class 150 hexagonal-stock body with ball and socket, metal to metal, bronze seating surface, malleable iron conforming to ASME B16.39 with female threaded ends.
 - 4. Flanges shall be Class 125 cast iron conforming to ASME B16.1.
 - a. Flange gaskets shall be full face, flat nonmetallic, asbestos free conforming to ASME B16.21.
 - b. Flange nuts and bolts shall be carbon steel conforming to ASME B18.2.1.
- B. Copper pump discharge pipe and fittings:
 - 1. Copper tube shall be hard drawn Type L conforming to ASTM B88.
 - 2. Fittings shall be cast copper alloy conforming to ASME B16.18 or wrought copper conforming to ASME B16.22 with solder joint ends.
 - 3. Unions shall be copper alloy, hexagonal stock body with ball and socket, metal to metal seating surface conforming to MSS SP-123 with female solder-joint or threaded ends.
 - 4. Flanges shall be Class 150, cast copper conforming to ASME B16.24 with solder-joint end.
 - a. Flange gaskets shall be full face, flat nonmetallic, asbestos free conforming to ASME B16.21.

b. Flange nuts and bolts shall be carbon steel conforming to ASME B18.2.1.

5. Solder shall be lead free, water flushable flux conforming to ASTM B32 and ASTM B813.

2.3 EXPOSED WASTE PIPING

A. Chrome plated brass piping of full iron pipe size shall be used in finished rooms for exposed waste piping connecting fixtures, casework, cabinets, equipment, and reagent racks when not concealed by apron including those furnished by the Government or specified in other sections.

1. The Pipe shall meet ASTM B43, regular weight.
2. The Fittings shall conform to ASME B16.15.
3. Nipples shall conform to ASTM B687, Chromium-plated.
4. Unions shall be brass or bronze with chrome finish. Unions 65 mm (2-1/2 inches) and larger shall be flange type with approved gaskets.

B. In unfinished Rooms such as mechanical Rooms and Kitchens, Chrome-plated brass piping is not required. The pipe materials specified under the paragraph "Sanitary Waste, Drain, and Vent Piping" can be used. The sanitary pipe in unfinished rooms shall be painted as specified in Section 09 91 00, PAINTING.

2.4 SPECIALTY PIPE FITTINGS

A. Transition pipe couplings shall join piping with small differences in outside diameters or different materials. End connections shall be of the same size and compatible with the pipes being joined. The transition coupling shall be elastomeric, sleeve type reducing or transition pattern and include shear and corrosion resistant metal, tension band and tightening mechanism on each end. The transition coupling sleeve coupling shall be of the following material:

1. For cast iron soil pipes, the sleeve material shall be rubber conforming to ASTM C564.
2. For PVC soil pipes, the sleeve material shall be elastomeric seal or PVC, conforming to ASTM F477 or ASTM D5926.
3. For dissimilar pipes, the sleeve material shall be PVC conforming to ASTM D5926, or other material compatible with the pipe materials being joined.

B. The dielectric fittings shall conform to ASSE 1079 with a pressure rating of 861 kPa (125 psig) at a minimum temperature of 82 degrees C

(180 degrees F). The end connection shall be solder joint copper alloy and threaded ferrous.

- C. Dielectric flange insulating kits shall be of non-conducting materials for field assembly of companion flanges with a pressure rating of 1035 kPa (150 psig). The gasket shall be neoprene or phenolic. The bolt sleeves shall be phenolic or polyethylene. The washers shall be phenolic with steel backing washers.
- D. The di-electric nipples shall be electroplated steel nipple complying with ASTM F1545 with a pressure rating of 2070 kPa (300 psig) at 107 degrees C (225 degrees F). The end connection shall be male threaded. The lining shall be inert and noncorrosive propylene.

2.5 CLEANOUTS

- A. Cleanouts shall be the same size as the pipe, up to 100 mm (4 inches); and not less than 100 mm (4 inches) for larger pipe. Cleanouts shall be easily accessible and shall be gastight and watertight. Minimum clearance of 600 mm (24 inches) shall be provided for clearing a clogged sanitary line.
- B. Floor cleanouts shall be gray iron housing with clamping device and round, secured, scoriated, gray iron cover conforming to ASME A112.36.2M. A gray iron ferrule with hubless, socket, inside calk or spigot connection and counter sunk, taper-thread, brass or bronze closure plug shall be included. The frame and cover material and finish shall be nickel-bronze copper alloy with a square shape. The cleanout shall be vertically adjustable for a minimum of 50 mm (2 inches). When a waterproof membrane is used in the floor system, clamping collars shall be provided on the cleanouts. Cleanouts shall consist of wye fittings and eighth bends with brass or bronze screw plugs. Cleanouts in the resilient tile floors, quarry tile and ceramic tile floors shall be provided with square top covers recessed for tile insertion. In the carpeted areas, carpet cleanout markers shall be provided. Two way cleanouts shall be provided where indicated in the contract document and at every building exit. The loading classification for cleanouts in sidewalk areas or subject to vehicular traffic shall be heavy duty type.
- C. Cleanouts shall be provided at or near the base of the vertical stacks with the cleanout plug located approximately 600 mm (24 inches) above the floor. If there are no fixtures installed on the lowest floor, the cleanout shall be installed at the base of the stack. The cleanouts

shall be extended to the wall access cover. Cleanout shall consist of sanitary tees. Nickel-bronze square frame and stainless steel cover with minimum opening of 150 by 150 mm (6 by 6 inches) shall be furnished at each wall cleanout. Where the piping is concealed, a fixture trap or a fixture with integral trap, readily removable without disturbing concealed pipe, shall be accepted as a cleanout equivalent providing the opening to be used as a cleanout opening is the size required.

- D. In horizontal runs above grade, cleanouts shall consist of cast brass tapered screw plug in fitting or caulked/hubless cast iron ferrule. Plain end (hubless) piping in interstitial space or above ceiling may use plain end (hubless) blind plug and clamp.

2.6 FLOOR DRAINS

- A. General Data: floor drain shall comply with ASME A112.6.3. A caulking flange, inside gasket, or hubless connection shall be provided for connection to cast iron pipe, screwed or no hub outlets for connection to steel pipe. The drain connection shall be bottom outlet. A membrane clamp and extensions shall be provided, if required, where installed in connection with waterproof membrane. Puncturing membrane other than for drain opening shall not be permitted. Double drainage pattern floor drains shall have integral seepage pan for embedding into floor construction, and weep holes to provide adequate drainage from pan to drain pipe. For drains not installed in connection with a waterproof membrane, a .45 kg (16-ounce) soft copper flashing membrane, 600 mm (24 inches) square or another approved waterproof membrane shall be provided.
- B. Type B (FD-B) medium duty (non-traffic) floor drain shall comply with ASME A112.6.3. The type B floor drain shall be constructed of galvanized cast iron with medium duty nickel bronze grate, double drainage pattern, clamping device, without sediment bucket but with secondary strainer in bottom for large debris. The grate shall be 175 mm (7 inches) minimum.
- C. Type C (FD-C) medium duty (non-traffic) floor drain shall comply with ASME A112.6.3. The type C floor drain shall have a cast iron body, double drainage pattern, clamping device, light duty nickel bronze adjustable strainer with round or square grate of 150 mm (6 inches) width or diameter minimum for toilet rooms, showers, and kitchens.

- D. Type D (FD-D) medium duty (non-traffic) floor drain shall comply with ASME A112.6.3. The type D floor drain shall have a cast iron body with flange for membrane type flooring, integral reversible clamping device, seepage openings and 175 mm (7 inch) diameter or square satin nickel bronze or satin bronze strainer with 100 mm (4 inch) flange for toilet rooms, showers, and kitchens.
- E. Type V (FD-V) medium duty (non-traffic) floor drain shall comply with ASME A112.6.3 The type V floor drain shall have an oval funnel and cast iron body. Funnel strainer shall consist of a slotted cast iron floor-level grate funnel extension. Cut-out grate below funnel. Minimum dimensions as follows:
1. Area of strainer and collar - 23,000 square mm (36 square inches).
 2. Height of funnel - 95 mm (3-3/4 inches).
 3. Funnel size - 90 by 228 mm (3-1/2 by 9 inches).

2.7 TRAPS

- A. Traps shall be provided on all sanitary branch waste connections from fixtures or equipment not provided with traps. Exposed brass shall be polished brass chromium plated with nipple and set screw escutcheons. Concealed traps may be rough cast brass or same material as the piping they are connected to. Slip joints are prohibited on sewer side of trap. Traps shall correspond to fittings on cast iron soil pipe or steel pipe respectively, and size shall be as required by connected service or fixture.

2.8 PENETRATION SLEEVES

- A. A sleeve flashing device shall be provided at points where pipes pass through membrane waterproofed floors or walls. The sleeve flashing device shall be manufactured, cast iron fitting with clamping device that forms a sleeve for the pipe floor penetration of the floor membrane. A galvanized steel pipe extension shall be included in the top of the fitting that shall extend 50 mm (2 inches) above finished floor and galvanized steel pipe extension in the bottom of the fitting that shall extend through the floor slab. A waterproof caulked joint shall be provided at the top hub.

PART 3 - EXECUTION

3.1 PIPE INSTALLATION

- A. The pipe installation shall comply with the requirements of the International Plumbing Code (IPC) and these specifications.

- B. Branch piping shall be installed for waste from the respective piping systems and connect to all fixtures, valves, cocks, outlets, casework, cabinets, and equipment, including those furnished by the Government or specified in other sections.
- C. Pipe shall be round and straight. Cutting shall be done with proper tools. Pipe shall be reamed to full size after cutting.
- D. All pipe runs shall be laid out to avoid interference with other work.
- E. The piping shall be installed above accessible ceilings where possible.
- F. The piping shall be installed to permit valve servicing or operation.
- G. The piping shall be installed free of sags and bends.
- H. Changes in direction for soil and waste drainage and vent piping shall be made using appropriate branches, bends, and long sweep bends. Sanitary tees and short sweep quarter bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical. Long turn double wye branch and eighth bend fittings shall be used if two fixtures are installed back-to-back or side by side with common drain pipe. Straight tees, elbows, and crosses may be used on vent lines. Do not change direction of flow greater than 90 degrees. Proper size of standard increaser and reducers shall be used if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.
- I. Buried soil and waste drainage and vent piping shall be laid beginning at the low point of each system. Piping shall be installed true to grades and alignment indicated with unbroken continuity of invert. Hub ends shall be placed upstream. Required gaskets shall be installed according to manufacturer's written instruction for use of lubricants, cements, and other installation requirements.
- J. Cast iron piping shall be installed according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook," Chapter IV, "Installation of Cast Iron Soil Pipe and Fittings"
- K. Aboveground copper tubing shall be installed according to Copper Development Association's (CDA) "Copper Tube Handbook".
- L. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

3.2 JOINT CONSTRUCTION

- A. Hub and spigot, cast iron piping with gasket joints shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.
- B. Hub and spigot, cast iron piping with calked joints shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for lead and oakum calked joints.
- C. Hubless or No-hub, cast iron piping shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless piping coupling joints.
- D. For threaded joints, thread pipe with tapered pipe threads according to ASME B1.20.1. The threads shall be cut full and clean using sharp disc cutters. Threaded pipe ends shall be reamed to remove burrs and restored to full pipe inside diameter. Pipe fittings and valves shall be joined as follows:
 - 1. Apply appropriate tape or thread compound to external pipe threads unless dry seal threading is required by the pipe service.
 - 2. Pipe sections with damaged threads shall be replaced with new sections of pipe.
- E. Copper tube and fittings with soldered joints shall be joined according to ASTM B828. A water flushable, lead-free flux conforming to ASTM B813 and a lead-free alloy solder conforming to ASTM B32 shall be used.

3.3 SPECIALTY PIPE FITTINGS

- A. Transition coupling shall be installed at pipe joints with small differences in pipe outside diameters.
- B. Dielectric fittings shall be installed at connections of dissimilar metal piping and tubing.

3.4 PIPE HANGERS, SUPPORTS AND ACCESSORIES

- A. All piping shall be supported according to the International Plumbing Code (IPC), Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, and these specifications. Where conflicts arise between these the code and Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING the most restrictive or the requirement that specifies supports with highest loading or shortest spacing shall apply.
- B. Hangers, supports, rods, inserts and accessories used for pipe supports shall be painted according to Section 09 91 00, PAINTING. Electroplated copper hanger rods, hangers and accessories may be used with copper tubing.

- C. Horizontal piping and tubing shall be supported within 300 mm (12 inches) of each fitting or coupling.
- D. Horizontal cast iron piping shall be supported with the following maximum horizontal spacing and minimum hanger rod diameters:
 - 1. 40 mm or DN40 to 50 mm or DN50 (NPS 1-1/2 inch to NPS 2 inch): 1500 mm (60 inches) with 10 mm (3/8 inch) rod.
 - 2. 75 mm or DN75 (NPS 3 inch): 1500 mm (60 inches) with 15 mm (1/2 inch) rod.
 - 3. 100 mm or DN100 to 125 mm or DN125 (NPS 4 inch to NPS 5 inch): 1500 mm (60 inches) with 18 mm (5/8 inch) rod.
- E. The maximum spacing for plastic pipe shall be 1.22 m (4 feet).
- F. Vertical piping and tubing shall be supported at the base, at each floor, and at intervals no greater than 4.6 m (15 feet).
- G. In addition to the requirements in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, Floor, Wall, and Ceiling Plates, Supports, Hangers shall have the following characteristics:
 - 1. Solid or split unplated cast iron.
 - 2. All plates shall be provided with set screws.
 - 3. Height adjustable clevis type pipe hangers.
 - 4. Adjustable floor rests and base flanges shall be steel.
 - 5. Hanger rods shall be low carbon steel, fully threaded or threaded at each end with two removable nuts at each end for positioning rod and hanger and locking each in place.
 - 6. Riser clamps shall be malleable iron or steel.
 - 7. Rollers shall be cast iron.
 - 8. See Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, for requirements on insulated pipe protective shields at hanger supports.
- H. Miscellaneous materials shall be provided as specified, required, directed, or as noted in the contract documents for proper installation of hangers, supports and accessories. If the vertical distance exceeds 6.1 m (20 feet) for cast iron pipe additional support shall be provided in the center of that span. All necessary auxiliary steel shall be provided to provide that support.
- I. Cast escutcheon with set screw shall be provided at each wall, floor, and ceiling penetration in exposed finished locations and within cabinets and millwork.

J. Penetrations:

1. Fire Stopping: Where pipes pass through fire partitions, fire walls, smoke partitions, or floors, a fire stop shall be installed that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING. Clearances between raceways and openings shall be completely filled and sealed with the fire stopping materials.
2. Water proofing: At floor penetrations, clearances shall be completely sealed around the pipe and make watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS.

3.5 TESTS

- A. Sanitary waste and drain systems shall be tested either in its entirety or in sections.
- B. Waste System tests shall be conducted before trenches are backfilled or fixtures are connected. A water test or air test shall be conducted, as directed.
 1. If entire system is tested for a water test, tightly close all openings in pipes except highest opening, and fill system with water to point of overflow. If the waste system is tested in sections, tightly plug each opening except highest opening of section under test, fill each section with water and test with at least a 3 m (10 foot) head of water. In testing successive sections, test at least upper 3 m (10 feet) of next preceding section so that each joint or pipe except upper most 3 m (10 feet) of system has been submitted to a test of at least a 3 m (10 foot) head of water. Water shall be kept in the system, or in portion under test, for at least 15 minutes before inspection starts. System shall then be tight at all joints.
 2. For an air test, an air pressure of 34 kPa (5 psig) gauge shall be maintained for at least 15 minutes without leakage. A force pump and mercury column gauge shall be used for the air test.
 3. After installing all fixtures and equipment, open water supply so that all p-traps can be observed. For 15 minutes of operation, all p-traps shall be inspected for leaks and any leaks found shall be corrected.
 4. Final Tests: Either one of the following tests may be used.
 - a. Smoke Test: After fixtures are permanently connected and traps are filled with water, fill entire drainage and vent systems with

smoke under pressure of .25 kPa (1 inch of water) with a smoke machine. Chemical smoke is prohibited.

- b. Peppermint Test: Introduce 60 ml (2 ounces) of peppermint into each line or stack.

3.6 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- B. Components provided under this section of the specification shall be tested as part of a larger system.

3.7 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for 4 hours to instruct each VA personnel responsible in operation and maintenance of the system.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

- - - E N D - - -

**SECTION 22 40 00
PLUMBING FIXTURES**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Plumbing fixtures, associated trim and fittings necessary to make a complete installation from wall or floor connections to rough piping, and certain accessories.
- B. A complete listing of all acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.
- E. Section 07 92 00, JOINT SEALANTS: Sealing between fixtures and other finish surfaces.
- F. Section 08 31 13, ACCESS DOORS AND FRAMES: Flush panel access doors.
- G. Section 10 21 13, TOILET COMPARTMENTS: Through bolts.
- H. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- I. Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS: Requirements for commissioning, systems readiness checklist, and training.
- J. 22 13 00, FACILITY SANITARY AND VENT PIPING.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. The American Society of Mechanical Engineers (ASME):
 - A112.6.1M-1997 (R2012)..Supports for Off-the-Floor Plumbing Fixtures
for Public Use
 - A112.19.1-2013.....Enameled Cast Iron and Enameled Steel Plumbing
Fixtures
 - A112.19.2-2013.....Ceramic Plumbing Fixtures
 - A112.19.3-2008.....Stainless Steel Plumbing Fixtures
- C. American Society for Testing and Materials (ASTM):
 - A276-2013a.....Standard Specification for Stainless Steel Bars
and Shapes

B584-2008.....Standard Specification for Copper Alloy Sand
Castings for General Applications

D. CSA Group:

B45.4-2008 (R2013).....Stainless Steel Plumbing Fixtures

E. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-2006.....Metal Finishes Manual

F. American Society of Sanitary Engineering (ASSE):

1016-2011.....Automatic Compensating Valves for Individual
Showers and Tub/Shower Combinations

G. NSF International (NSF):

14-2013.....Plastics Piping System Components and Related
Materials

61-2013.....Drinking Water System Components - Health
Effects

372-2011.....Drinking Water System Components - Lead Content

H. American with Disabilities Act (A.D.A)

I. International Code Council (ICC):

IPC-2015.....International Plumbing Code

1.4 SUBMITTALS

- A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 40 00, PLUMBING FIXTURES", with applicable paragraph identification.
- C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, connections, and capacity.
- D. Operating Instructions: Comply with requirements in Section 01 00 00, GENERAL REQUIREMENTS.
- E. Completed System Readiness Checklist provided by the CxA and completed by the Contractor, signed by a qualified technician, and dated on the date of completion, in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- F. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.5 QUALITY ASSURANCE

- A. Bio-Based Materials: For products designated by the USDA's Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit <http://www.biopreferred.gov>.

1.6 AS-BUILT DOCUMENTATION

- A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.
- B. Submit operation and maintenance data updated to include submittal review comments, substitutions and construction revisions shall be in electronic version on compact disc or DVD inserted into a three-ring binder. All aspects of system operation and maintenance procedures, including piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices such as damper and door closure interlocks shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.
- C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and shall provide the complete set at the time of final systems certification testing. As-built drawings are to be provided, and a copy of them in AutoCAD version 2020 provided on compact disk or DVD. Should the installing contractor engage the testing company to provide as built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement.
- D. Certification documentation shall be provided to COR 10 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and certification that all results of tests were within limits specified.

PART 2 - PRODUCTS**2.1 MATERIALS**

- A. Material or equipment containing a weighted average of greater than 0.25 percent lead is prohibited in any potable water system intended for human consumption and shall be certified in accordance with NSF 61 or NSF 372. Endpoint devices used to dispense water for drinking shall meet the requirements of NSF 61.
- B. Plastic pipe, fittings, and solvent cement shall meet NSF 14 and shall be NSF listed for the service intended.

2.2 STAINLESS STEEL

- A. Corrosion-resistant Steel (CRS):
 - 1. Plate, Sheet and Strip: CRS flat products shall conform to chemical composition requirements of any 300 series steel specified in ASTM A276.
 - 2. Finish: Exposed surfaces shall have standard polish (ground and polished) equal to NAAMM finish Number 4.
- B. Die-cast zinc alloy products are prohibited.

2.3 STOPS

- A. Provide lock-shield loose key or screw driver pattern angle stops, straight stops, or stops integral with faucet, with each compression type faucet whether specifically called for or not, including sinks in solid-surface, wood and metal casework, laboratory furniture and pharmacy furniture. Locate stops centrally above or below fixture in accessible location.
- B. Furnish keys for lock shield stops to the COR.
- C. Supply from stops not integral with faucet shall be chrome plated copper flexible tubing or flexible stainless steel with inner core of non-toxic polymer.
- D. Supply pipe from wall to valve stop shall be rigid threaded IPS copper alloy pipe, i.e. red brass pipe nipple, chrome plated where exposed.
- E. Mental Health Area: Provide stainless steel drain guard for all lavatories not installed in casework.

2.4 ESCUTCHEONS

- A. Heavy type, chrome plated, with set screws. Provide for piping serving plumbing fixtures and at each wall, ceiling, and floor penetrations in exposed finished locations and within cabinets and millwork.

2.5 LAMINAR FLOW CONTROL DEVICE

- A. Smooth, bright stainless steel or satin finish, chrome plated metal laminar flow device shall provide non-aeration, clear, coherent laminar flow that will not splash in basin. Device shall also have a flow control restrictor and have vandal resistant housing. **Aerators are prohibited.**
- B. Flow Control Restrictor:
1. Capable of restricting flow from 32 ml/s to 95 ml/s (0.5 gpm to 1.5 gpm) for lavatories; 125 ml/s to 140 ml/s (2.0 gpm to 2.2 gpm) for sinks P-505 through P-520, P-524 and P-528; and 174 ml/s to 190 ml/s (2.75 gpm to 3.0 gpm) for dietary food preparation and rinse sinks or as specified.
 2. Compensates for pressure fluctuation maintaining flow rate specified above within 10 percent between 170 kPa and 550 kPa (25 psig and 80 psig).
 3. Operates by expansion and contraction, eliminates mineral/sediment build-up with self-cleaning action, and is capable of easy manual cleaning.

2.6 CARRIERS

- A. ASME A112.6.1M, with adjustable gasket faceplate chair carriers for wall hung closets with auxiliary anchor foot assembly, hanger rod support feet, and rear anchor tie down.
- B. ASME A112.6.1M, lavatory, concealed arm support. All lavatory chair carriers shall be capable of supporting the lavatory with a 250-pound vertical load applied at the front of the fixture.
- C. Where water closets, lavatories or sinks are installed back-to-back and carriers are specified, provide one carrier to serve both fixtures in lieu of individual carriers. The drainage fitting of the back-to-back carrier shall be so constructed that it prevents the discharge from one fixture from flowing into the opposite fixture.

2.7 WATER CLOSETS

- A. (P-111) Water Closet (Wall Hung, ASME A112.19.2) elongated bowl, siphon jet, wall outlet, top inlet spud, 4.8 L (1.28 gallons per flush with maximum 10 percent variance. Top of seat shall be 450 mm (18 inches) above finished floor.
1. Seat: Institutional/Industrial, solid plastic, extra heavy duty, chemical resistant, posture contoured body open front design less

cover for elongated bowls, integrally molded bumpers, concealed check hinge with stainless steel post. Color shall be white.

2. Fittings and Accessories: Gaskets-neoprene; bolts with chrome plated cap nuts and washers and carrier.
3. Flush valve: Large chloramines resistant diaphragm, semi-red brass body, hydraulic flush valve, battery operated concealed, non-hold open, push button operated minimum 40 mm (1-1/2 inches) diameter button, 25 mm (1 inch) IPS wheel handle back check angle stop valve, adjustable tailpiece, high pressure vacuum breaker, elbow flush connection, spud coupling for 40 mm (1-1/2 inches) top spud, and cast set screw wall and spud flanges. Provide 300 mm by 300 mm (12 inches by 12 inches) stainless steel access door with key operated cylinder lock specified in Section 08 31 13, ACCESS DOORS AND FRAMES.

- B. (P-114) Bariatric Floor Mounted Water Closet ASME A112.19.2, Fully enclosed floor mounted with integral seat, siphon jet, white-powder-coated, 14 gage type 304 stainless steel construction with white powder coating and hinged seat with cover, flush valve operated, top of seat 450 mm (18 inches) above floor. Bio-based materials shall be utilized when possible. Rated for bariatric use - 1000-pound minimum capacity.

1. Fittings and Accessories: Gaskets-neoprene, bolts with chromium plated cap nuts and washers, and extra heavy-duty carrier.
2. Flush Valve: exposed chrome plated diaphragm type with low force ADA compliant 6 L (1.6 gallon) per flush, seat bumper, integral screwdriver stop and vacuum breaker, solid-ring pipe support, and escutcheon.

2.8 LAVATORIES

- A. Dimensions for lavatories are specified, Length by width (distance from wall) and depth.
- B. Brass components in contact with water shall contain no more than 0.25 percent lead content by dry weight. Faucet flow rates shall be 3.9 L/m (1.5 gpm) for private lavatories and either 1.9 L/m (0.5 gpm) or 1.0 liter (0.25 gallons) per cycle for public lavatories.
- C. (P-401) Lavatory (Single Lever Handle Control ASME A112.19.2) straight back, approximately 508 mm by 457 mm (20 inches by 18 inches) and a 102 mm (4 inches) maximum apron, first quality vitreous china. Punching for

faucet on 102 mm (4 inches) centers. Set with rim 864 mm (34 inches) above finished floor.

1. Faucet: Solid cast brass construction, vandal resistant, heavy-duty single lever handle, center set. Control shall be washerless ceramic disc cartridge type. Provide laminar flow control device, adjustable hot water limit stop, and vandal proof screws. Flow shall be limited to 3.8 L/m (1.0 gpm).
 2. Drain: Cast or wrought brass with flat grid strainer offset tailpiece, chrome plated. Provide cover per A.D.A 4-19.4.
 3. Stops: Angle type, see paragraph "Stops". Provide cover per A.D.A 4-19.4.
 4. Trap: Cast copper alloy, 38 mm by 32 mm (1 1/2 inches by 1 1/4 inches) P-trap. Adjustable with connected elbow and 1.4 mm thick (17 gauge) tubing extensions to wall. Exposed metal trap surface and connection hardware shall be chrome plated with a smooth bright finish. Set trap parallel to wall. Provide cover per A.D.A 4-19.4.
- D. (P-402) Lavatory (Elbow Control, ASME A112.19.2) straight back, approximately 508 mm by 457 mm (20 inches by 18 inches) and a 102 mm (4 inches) maximum apron, first quality vitreous china. Punching for faucet on 203 mm (8 inches) centers. Set with rim 864 mm (34 inches) above finished floor.
1. Faucet: Solid cast brass construction with washerless ceramic disc mixing cartridge type and centrally exposed rigid gooseneck spout with outlet 127-152 mm (5-6 inches) above rim. Provide laminar flow control device. One hundred millimeters (4 inches) elbow handles on faucets shall be cast, formed, or drop forged copper alloy. Faucet, wall, and floor escutcheons shall be either copper alloy or CRS. Exposed metal parts, including exposed part under valve handle when in open position, shall have a smooth bright finish. Flow shall be limited to 3.8 L/m (1.0 gpm).
 2. Drain: Cast or wrought brass with flat grid strainer and offset tailpiece, chrome plated finish.
 3. Stops: Angle type, see paragraph "Stops".
 4. Trap: Cast copper alloy, 38 mm by 32 mm (1 1/2 inches by 1 1/4 inches) P-trap. Adjustable with connected elbow and 1.4 mm thick (17 gauge) tubing extensions to wall. Exposed metal trap surfaces and connection hardware shall be chrome plated with a smooth bright finish. Set trap parallel to wall.

5. Provide cover for exposed piping, drain, stops and trap per A.D.A.
- E. (P-413) Lavatory (Counter Mounted ASME A112.19.2) vitreous china, self-rimming, approximately 483 mm (19 inches) in diameter with punching for faucet on 203 mm (8 inches) centers. Mount unit in countertop.
 1. Faucet: Solid cast brass construction with washerless ceramic disc mixing cartridge type, rigid gooseneck spout with outlet 102 mm to 127 mm (4 inches to 5 inches) above slab with 102 mm (4 inches) wrist blade handles. Provide laminar flow control device. Faucet, wall, and floor escutcheons shall be either copper alloy or CRS. Exposed metal parts shall be chrome plated with a smooth bright finish.
 2. Drain: cast or wrought brass with flat grid strainer, offset tailpiece, brass, chrome plated.
 3. Stops: Angle type. See paragraph "Stops".
 4. Trap: Cast copper alloy, 38 mm by 32 mm (1 1/2 inches by 1 1/4 inches) P-trap, adjustable with connected elbow and 1.4mm thick (17 gauge) tubing extension to wall. Exposed metal trap surface and connection hardware shall be chrome plated with a smooth bright finish. Set trap parallel to the wall.
 5. Provide cover for exposed piping, drain, stops and trap per A.D.A.

2.9 SINKS AND LAUNDRY TUBS

- A. Dimensions for sinks and laundry tubs are specified, length by width (distance from wall) and depth.
- B. (P-501) Service Sink (Regular, ASME A112.19.1) service sink, class 1, single bowl, acid resistant enameled cast iron, approximately 610 mm by 508 mm (24 inches by 20 inches) with a 229 to 305 mm (9 to 12 inches) raised back without faucet holes. Equip sink with CRS rim guard and mounted on trap standard. Set sinks rim 711 mm (28 inches) above finished floor.
 1. Faucet: Part B, Type II, solid brass construction, 9.5 L/m (2.5 gpm) combination faucet with replaceable Monel seat, removable replacement unit containing all parts subject to wear, integral check/stops, mounted on wall above sink. Spout shall have a pail hook, 19 mm (3/4 inch) hose coupling threads, vacuum breaker, and top or bottom brace to wall. Four-arm handles on faucets shall be cast, formed, or drop forged copper alloy. Escutcheons shall be either forged copper alloy or CRS. Exposed metal parts, including

exposed part under valve handle when in open position, shall have a smooth bright finish.

2. Drain: Grid.
 3. Trap: Trap standard, painted outside and enameled inside with acid-resistant enamel, drain through adjoining wall.
- C. (P-521) Laundry Tub (Plastic, Single Compartment with Legs) fiber reinforced plastic, single bowl with raised back, approximately 635 mm by 559 mm (25 inches by 22 inches) by 356 mm (14 inches) deep, with base and legs.
1. Faucets: Solid brass construction, combination faucet with replacement Monel seat, removable replacement unit containing all parts subject to wear, vacuum breaker, integral stops, mounted on splash back. Lever handles on faucet shall be cast, formed, or drop forged copper alloy or CRS. Exposed metal parts, including exposed part under valve handle when in open position, shall have a smooth bright finish.
 2. Drain: Stopper.
 3. Trap: Cast copper alloy, 38 mm (1 1/2 inches) P-trap. Adjustable with connected elbow, and nipple to wall and escutcheon.
- D. (P-524) Sink, (CRS, Double Compartment, Countertop, ASME A112.19.3, Kitchen Sinks) self-rimming, approximately 838 mm by 559 mm (33 inches by 22 inches) with two compartments inside dimensions approximately 343 mm by 406 mm by 191 mm (13 1/2 inches by 16 inches by 7 1/2 inches), minimum 20 gage CRS. Corners and edges shall be well rounded.
1. Faucet: Kitchen sink, solid brass construction, 8.3 L/m (2.2 gpm) swing spout, chrome plated copper alloy with spray and hose.
 2. Drain: Drain plug with cup strainer, stainless steel.
 3. Trap: Cast copper alloy, 38 mm (1 1/2 inches) P-trap with cleanout plug, continuous drain with wall connection and escutcheon.
 4. Provide cover for exposed piping, drain, stops and trap per A.D.A.

2.10 SHOWER BATH FIXTURE

- A. (P-701) Shower Bath Fixture (Detachable, Wall Mounted, Concealed Supplies, Type T/P Combination Valve):
1. Shower Installation: Wall mounted detachable spray assembly, 600 mm (24 inch) wall bar, elevated vacuum breaker, supply elbow and flange and valve. All external trim, chrome plated metal.

2. Shower Head Assembly: Metallic shower head with flow control to limit discharge to 5.7 l/m (1.5 gpm), 1524 mm (60 inches) length of rubber lined CRS, chrome plated metal flexible, or white vinyl reinforced hose and supply wall elbow. Design showerhead to fit in palm of hand. Provide CRS or chrome plated metal wall bar with an adjustable swivel hanger for showerhead. Fasten wall bar securely to wall for hand support.
 3. Valves: Type T/P combination thermostatic and pressure balancing, with chrome plated metal lever type operating handle adjustable for rough-in variations and chrome plated metal or CRS face plate. Valve body shall be any suitable copper alloy. Internal parts shall be copper, nickel alloy, CRS or thermoplastic material. Valve inlet and outlet shall be 13 mm (1/2 inch) IPS. Provide external screwdriver check stops, vacuum breaker and temperature limit stops. Set stops for a maximum temperature of 50 degrees C (122 degrees F). All exposed fasteners shall be vandal resistant. Valve shall provide a minimum of 5.7 l/m (1.5 gpm) at 310 kPa (45 psig) pressure drop.
- B. (P-704) Shower Bath Fixture (Wall Mounted, Concealed Supplies, Hose Spray):
1. Shower Installation: Wall mounted showerhead connected to shower arm.
 2. Shower Heads: Chrome plated metal head, adjustable ball joint, self-cleaning head with automatic flow control device to limit discharge to not more than three gpm. Body, internal parts of shower head and flow control fittings shall be copper alloy or CRS. Install showerhead 1829 mm (72 inches) above finished floor.
 3. Valves: Type T/P combination temperature and pressure balancing, with chrome plated metal lever type operating with adjustment for rough-in variations handle and chrome plated metal or CRS face plate. Install diverter selector valve and elevated vacuum breaker to provide tempered water to shower head and hose spray. Valve body shall be any suitable copper alloy. Internal parts shall be copper nickel alloy, CRS or thermoplastic material. Valve inlet and outlet shall be 13 mm (1/2 inch) IPS. Provide external screwdriver check stops, and temperature limit stops. Set stops for a maximum temperature of 50 degrees C (122 degrees F). All exposed fasteners shall be vandal resistant. Valve shall provide a minimum of 5.7 l/m (1.5 gpm) at 310 kPa (45 psig) pressure drop.

4. Spray Assembly: Shall consist of a 1524 mm (60 inches) length of rubber lined CRS, chrome plated metal flexible, or white vinyl reinforced hose with coupling for connection to 13 mm (1/2 inch) hose supply elbow protruding through wall. Spray shall consist of a self-closing, lever-handle, faucet with thumb control having open-shut positions and intermediate positions for regulating water flow and elevated pressure type vacuum breaker. Provide wall hook for faucet.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Fixture Setting: Opening between fixture and floor and wall finish shall be sealed as specified under Section 07 92 00, JOINT SEALANTS. Bio-based materials shall be utilized when possible.
- B. Supports and Fastening: Secure all fixtures, equipment, and trimmings to partitions, walls, and related finish surfaces. Exposed heads of bolts and nuts in finished rooms shall be hexagonal, polished chrome plated brass with rounded tops.
- C. Through Bolts: For free standing marble and metal stud partitions refer to Section 10 21 13, TOILET COMPARTMENTS.
- D. Toggle Bolts: For hollow masonry units, finished or unfinished.
- E. Expansion Bolts: For brick or concrete or other solid masonry. Shall be 6 mm (1/4 inch) diameter bolts, and to extend at least 76 mm (3 inches) into masonry and be fitted with loose tubing or sleeves extending into masonry. Wood plugs, fiber plugs, lead or other soft metal shields are prohibited.
- F. Power Set Fasteners: May be used for concrete walls, shall be 6 mm (1/4 inch) threaded studs, and shall extend at least 32 mm (1 1/4 inches) into wall.
- G. Tightly cover and protect fixtures and equipment against dirt, water and chemical or mechanical injury.
- H. Where water closet waste pipe has to be offset due to beam interference, provide correct and additional piping necessary to eliminate relocation of water closet.
- I. Aerators are prohibited on lavatories and sinks.
- J. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no cost or additional time to the Government.

3.2 CLEANING

- A. At completion of all work, fixtures, exposed materials, and equipment shall be thoroughly cleaned.

3.3 WATERLESS URINAL

- A. Manufacturer shall provide an operating manual and onsite training for the proper care and maintenance of the urinals.

3.4 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
- B. Components provided under this section of the specification will be tested as part of a larger system.

3.5 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for four hours to instruct VA Personnel in operation and maintenance of the system.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

- - - E N D - - -

**SECTION 23 05 11
COMMON WORK RESULTS FOR HVAC**

PART 1 - GENERAL**1.1 DESCRIPTION**

A. The requirements of this Section apply to all sections of Division 23.

B. Definitions:

1. Exposed: Piping, ductwork, and equipment exposed to view in finished rooms.
2. Exterior: Piping, ductwork, and equipment exposed to weather be it temperature, humidity, precipitation, wind, or solar radiation.

C. Abbreviations/Acronyms:

1. ac: Alternating Current
2. AC: Air Conditioning
3. ACU: Air Conditioning Unit
4. ACR: Air Conditioning and Refrigeration
5. AI: Analog Input
6. AISI: American Iron and Steel Institute
7. AO: Analog Output
8. ASJ: All Service Jacket
9. AWG: American Wire Gauge
10. BACnet: Building Automation and Control Networking Protocol
11. BAg: Silver-Copper-Zinc Brazing Alloy
12. BAS: Building Automation System
13. BCuP: Silver-Copper-Phosphorus Brazing Alloy
14. bhp: Brake Horsepower
15. Btu: British Thermal Unit
16. Btu/h: British Thermal Unit Per Hour
17. CDA: Copper Development Association
18. C: Celsius
19. CD: Compact Disk
20. CFM: Cubic Foot Per Minute
21. CH: Chilled Water Supply
22. CHR: Chilled Water Return
23. CLR: Color
24. CO: Carbon Monoxide
25. COR: Contracting Officer's Representative
26. CPD: Condensate Pump Discharge
27. CPM: Cycles Per Minute

- 28. CPVC: Chlorinated Polyvinyl Chloride
- 29. CRS: Corrosion Resistant Steel
- 30. CTPD: Condensate Transfer Pump Discharge
- 31. CTPS: Condensate Transfer Pump Suction
- 32. CW: Cold Water
- 33. CWP: Cold Working Pressure
- 34. CxA: Commissioning Agent
- 35. dB: Decibels
- 36. dB(A): Decibels (A weighted)
- 37. DDC: Direct Digital Control
- 38. DI: Digital Input
- 39. DO: Digital Output
- 40. DVD: Digital Video Disc
- 41. DN: Diameter Nominal
- 42. DWV: Drainage, Waste and Vent
- 43. EPDM: Ethylene Propylene Diene Monomer
- 44. EPT: Ethylene Propylene Terpolymer
- 45. ETO: Ethylene Oxide
- 46. F: Fahrenheit
- 47. FAR: Federal Acquisition Regulations
- 48. FD: Floor Drain
- 49. FED: Federal
- 50. FG: Fiberglass
- 51. FSK: Foil-Scrim-Kraft facing
- 52. GC: Chilled Glycol Water Supply
- 53. GCR: Chilled Glycol Water Return
- 54. GH: Hot Glycol Water Heating Supply
- 55. GHR: Hot Glycol Water Heating Return
- 56. gpm: Gallons Per Minute
- 57. HDPE: High Density Polyethylene
- 58. Hg: Mercury
- 59. HOA: Hands-Off-Automatic
- 60. hp: Horsepower
- 61. HPS: High Pressure Steam (414 kPa (60 psig) and above)
- 62. HPR: High Pressure Steam Condensate Return
- 63. HW: Hot Water
- 64. HWH: Hot Water Heating Supply
- 65. HWHR: Hot Water Heating Return

- 66. Hz: Hertz
- 67. ID: Inside Diameter
- 68. IPS: Iron Pipe Size
- 69. kg: Kilogram
- 70. klb: 1000 lb
- 71. kPa: Kilopascal
- 72. lb: Pound
- 73. lb/hr: Pounds Per Hour
- 74. L/s: Liters Per Second
- 75. L/min: Liters Per Minute
- 76. LPS: Low Pressure Steam (103 kPa (15 psig) and below)
- 77. LPR: Low Pressure Steam Condensate Gravity Return
- 78. MAWP: Maximum Allowable Working Pressure
- 79. MAX: Maximum
- 80. MBtu/h: 1000 Btu/h
- 81. MBtu: 1000 Btu
- 82. MED: Medical
- 83. m: Meter
- 84. MFG: Manufacturer
- 85. mg: Milligram
- 86. mg/L: Milligrams Per Liter
- 87. MIN: Minimum
- 88. MJ: Megajoules
- 89. ml: Milliliter
- 90. mm: Millimeter
- 91. MPS: Medium Pressure Steam (110 kPa (16 psig) through 414 kPa (60 psig))
- 92. MPR: Medium Pressure Steam Condensate Return
- 93. MW: Megawatt
- 94. NC: Normally Closed
- 95. Nm: Newton Meter
- 96. NO: Normally Open
- 97. NPT: National Pipe Thread
- 98. NPS: Nominal Pipe Size
- 99. OD: Outside Diameter
- 100. OSD: Open Sight Drain
- 101. OS&Y: Outside Stem and Yoke
- 102. PC: Pumped Condensate

- 103. PID: Proportional-Integral-Differential
- 104. PLC: Programmable Logic Controllers
- 105. PP: Polypropylene
- 106. PPE: Personal Protection Equipment
- 107. ppb: Parts Per Billion
- 108. ppm: Parts Per Million
- 109. PRV: Pressure Reducing Valve \
- 110. PSIA: Pounds Per Square Inch Absolute
- 111. psig: Pounds Per Square Inch Gauge
- 112. PTFE: Polytetrafluoroethylene
- 113. PVC: Polyvinyl Chloride
- 114. PVDC: Polyvinylidene Chloride Vapor Retarder Jacketing, White
- 115. PVDF: Polyvinylidene Fluoride
- 116. rad: Radians
- 117. RH: Relative Humidity
- 118. RO: Reverse Osmosis
- 119. rms: Root Mean Square
- 120. RPM: Revolutions Per Minute
- 121. RS: Refrigerant Suction
- 122. RTD: Resistance Temperature Detectors
- 123. RTRF: Reinforced Thermosetting Resin Fittings
- 124. RTRP: Reinforced Thermosetting Resin Pipe
- 125. SCFM: Standard Cubic Feet Per Minute
- 126. SPEC: Specification
- 127. SPS: Sterile Processing Services
- 128. STD: Standard
- 129. SDR: Standard Dimension Ratio
- 130. SUS: Saybolt Universal Second
- 131. SW: Soft water
- 132. SWP: Steam Working Pressure
- 133. TAB: Testing, Adjusting, and Balancing
- 134. TDH: Total Dynamic Head
- 135. TEFC: Totally Enclosed Fan-Cooled
- 136. TFE: Tetrafluoroethylene
- 137. THERM: 100,000 Btu
- 138. THHN: Thermoplastic High-Heat Resistant Nylon Coated Wire
- 139. THWN: Thermoplastic Heat & Water-Resistant Nylon Coated Wire
- 140. T/P: Temperature and Pressure

- 141. USDA: U.S. Department of Agriculture
- 142. V: Volt
- 143. VAC: Vacuum
- 144. VA: Veterans Administration
- 145. VAC: Voltage in Alternating Current
- 146. VA CFM: VA Construction & Facilities Management
- 147. VA CFM CSS: VA Construction & Facilities Management, Consulting Support Service
- 148. VAMC: Veterans Administration Medical Center
- 149. VHA OCAMES: Veterans Health Administration - Office of Capital Asset Management Engineering and Support
- 150. VR: Vacuum condensate return
- 151. WCB: Wrought Carbon Steel, Grade B
- 152. WG: Water Gauge or Water Column
- 153. WOG: Water, Oil, Gas

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.
- D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.
- E. Section 05 50 00, METAL FABRICATIONS.
- F. Section 07 84 00, FIRESTOPPING.
- G. Section 07 92 00, JOINT SEALANTS.
- H. Section 09 91 00, PAINTING.
- I. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION.
- J. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
- K. Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.
- L. Section 23 07 11, HVAC AND BOILER PLANT INSULATION.
- M. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- N. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- O. Section 23 36 00, AIR TERMINAL UNITS.
- P. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- Q. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES.
- R. Section 26 29 11, MOTOR CONTROLLERS.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.
- B. Air Movement and Control Association (AMCA):
410-1996.....Recommended Safety Practices for Users and
Installers of Industrial and Commercial Fans
- C. American Society of Mechanical Engineers (ASME):
B31.1-2018.....Power Piping
B31.9-2014.....Building Services Piping
ASME Boiler and Pressure Vessel Code:
BPVC Section IX-2019 Welding, Brazing, and Fusing Qualifications
- D. American Society for Testing and Materials (ASTM):
A36/A36M-2014.....Standard Specification for Carbon Structural
Steel
A575-1996 (R2018).....Standard Specification for Steel Bars, Carbon,
Merchant Quality, M-Grades
- E. Association for Rubber Products Manufacturers (ARPM):
IP-20-2015.....Specifications for Drives Using Classical
V-Belts and Sheaves
IP-21-2016.....Specifications for Drives Using Double-V
(Hexagonal) Belts
IP-24-2016.....Specifications for Drives Using Synchronous
Belts
IP-27-2015.....Specifications for Drives Using Curvilinear
Toothed Synchronous Belts
- F. Manufacturers Standardization Society (MSS) of the Valve and Fittings
Industry, Inc.:
SP-58-2018.....Pipe Hangers and Supports-Materials, Design,
Manufacture, Selection, Application, and
Installation
SP-127-2014a.....Bracing for Piping Systems: Seismic-Wind-
Dynamic Design, Selection, and Application
- G. Military Specifications (MIL):
MIL-P-21035B-2013.....Paint High Zinc Dust Content, Galvanizing
Repair (Metric)

H. National Fire Protection Association (NFPA):

70-2017.....National Electrical Code (NEC)

101-2018.....Life Safety Code

I. Department of Veterans Affairs (VA):

PG-18-10-2016.....Physical Security and Resiliency Design Manual

1.4 SUBMITTALS

- A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 23 05 11, COMMON WORK RESULTS FOR HVAC", with applicable paragraph identification.
- C. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements, and all equipment that requires regular maintenance, calibration, etc are accessible from the floor or permanent work platform. It is the Contractor's responsibility to ensure all submittals meet the VA specifications and requirements and it is assumed by the VA that all submittals do meet the VA specifications unless the Contractor has requested a variance in writing and approved by COR prior to the submittal. If at any time during the project, it is found that any item does not meet the VA specifications and there was no variance approval the Contractor shall correct at no additional cost or time to the Government even if a submittal was approved.
- D. If equipment is submitted which differs in arrangement from that shown, provide documentation proving equivalent performance, design standards and drawings that show the rearrangement of all associated systems. Additionally, any impacts on ancillary equipment or services such as foundations, piping, and electrical shall be the Contractor's responsibility to design, supply, and install at no additional cost or time to the Government. VA approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.
- E. Prior to submitting shop drawings for approval, Contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed contract documents and have jointly coordinated and

properly integrated their equipment and controls to provide a complete and efficient installation.

- F. Submittals and shop drawings for interdependent items, containing applicable descriptive information, shall be furnished together. Coordinate and properly integrate materials and equipment to provide a completely compatible and efficient installation.
- G. Samples: Samples will not be required, except for insulation or where materials offered differ from specification requirements. Samples shall be accompanied by full description of characteristics different from specification. The Government, at the Government's expense, will perform evaluation and testing if necessary. The Contractor may submit samples of additional material at the Contractor's option; however, if additional samples of materials are submitted later, pursuant to Government request, adjustment in contract price and time will be made.
- H. Coordination/Shop Drawings:
1. Submit complete consolidated and coordinated shop drawings for all new systems, and for existing systems that are in the same areas.
 2. The coordination/shop drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8-inch equal to one foot). Clearly identify and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show locations and adequate clearance for all equipment, piping, valves, control panels and other items. Show the access means for all items requiring access for operations and maintenance. Provide detailed coordination/shop drawings of all piping and duct systems. The drawings should include all lockout/tagout points for all energy/hazard sources for each piece of equipment. Coordinate lockout/tagout procedures and practices with local VA requirements.
 3. Do not install equipment foundations, equipment or piping until coordination/shop drawings have been approved.
 4. In addition, for HVAC systems, provide details of the following:
 - a. Mechanical equipment rooms.
 - b. Interstitial space.
 - c. Hangers, inserts, supports, and bracing.
 - d. Pipe sleeves.
 - e. Duct or equipment penetrations of floors, walls, ceilings, or roofs.

- I. Manufacturer's Literature and Data: Include full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity. Submit under the pertinent section rather than under this section.
1. Submit belt drive with the driven equipment. Submit selection data for specific drives when requested by the COR.
 2. Submit electric motor data and variable speed drive data with the driven equipment.
 3. Equipment and materials identification.
 4. Fire-stopping materials.
 5. Hangers, inserts, supports and bracing. Provide complete stress analysis for variable spring and constant support hangers.
 6. Wall, floor, and ceiling plates.
- J. HVAC Maintenance Data and Operating Instructions:
1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.
 2. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:
 - a. Include complete list indicating all components of the systems.
 - b. Include complete diagrams of the internal wiring for each item of equipment.
 - c. Diagrams shall have their terminals identified to facilitate installation, operation, and maintenance.
 3. Provide a listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment. Include in the listing belts for equipment: Belt manufacturer, model number, size, and style, and distinguished whether of multiple belt sets.
- K. Provide copies of approved HVAC equipment submittals to the TAB and Commissioning Subcontractor.
- L. Completed System Readiness Checklist provided by the Commissioning Agent and completed by the Contractor, signed by a qualified technician, and dated on the date of completion, in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

- M. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

1.5 QUALITY ASSURANCE

- A. Mechanical, electrical, and associated systems shall be safe, reliable, efficient, durable, easily, and safely operable and maintainable, easily and safely accessible, and in compliance with applicable codes as specified. The systems shall be comprised of high quality institutional-class and industrial-class products of manufacturers that are experienced specialists in the required product lines. All construction firms and personnel shall be experienced and qualified specialists in industrial and institutional HVAC.
- B. Flow Rate Tolerance for HVAC Equipment: Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.
- C. Equipment Vibration Tolerance:
1. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT. Equipment shall be factory-balanced to this tolerance and re-balanced on site, as necessary.
 2. After HVAC air balance work is completed and permanent drive sheaves are in place, perform field mechanical balancing and adjustments required to meet the specified vibration tolerance.
- D. Products Criteria:
1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 3 years (or longer as specified elsewhere). The design, model and size of each item shall have been in satisfactory and efficient operation on at least three installations for approximately three years. However, digital electronics devices, software, and systems such as controls, instruments, computer workstation, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least three years. See other specification sections for any exceptions and/or additional requirements.
 2. Refer to all other sections for quality assurance requirements for systems and equipment specified therein.
 3. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.

4. The products and execution of work specified in Division 33 shall conform to the referenced codes and standards as required by the specifications. Local codes and amendments shall be enforced, along with requirements of local utility companies. The most stringent requirements of these specifications, local codes, or utility company requirements shall always apply. Any conflicts shall be brought to the attention of the COR.
 5. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be of the same manufacturer and model number, or if different models are required, they shall be of the same manufacturer and identical to the greatest extent possible (i.e., same model series).
 6. Assembled Units: Performance and warranty of all components that make up an assembled unit shall be the responsibility of the manufacturer of the completed assembly.
 7. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped, or otherwise permanently marked on each item of equipment.
 8. Use of asbestos products or equipment or materials containing asbestos is prohibited.
- E. HVAC Equipment Service Providers: Service providers shall be authorized and trained by the manufacturers of the equipment supplied. These providers shall be capable of responding onsite and provide acceptable service to restore equipment operations within 4 hours of receipt of notification by phone, e-mail, or fax in event of an emergency, such as the shutdown of equipment; or within 24 hours in a non-emergency. Submit names, mail and e-mail addresses and phone numbers of service personnel and companies providing service under these conditions for (as applicable to the project: fans, air handling units, chillers, control systems, pumps, critical instrumentation, computer workstation and programming.
- F. HVAC Mechanical Systems Welding: Before any welding is performed, Contractor shall submit a certificate certifying that welders comply with the following requirements:
1. Qualify welding processes and operators for piping according to ASME BPVC Section IX. Provide proof of current certification.

2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
 3. Certify that each welder and welding operator has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
 4. All welds shall be stamped according to the provisions of the AWS or ASME as required herein and by the associated code.
- G. Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the COR with submittals. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material and removal by the Contractor and no additional cost or time to the Government.
- H. Execution (Installation, Construction) Quality:
1. Apply and install all items in accordance with manufacturer's written instructions. Refer conflicts between the manufacturer's instructions and the contract documents to the COR for resolution. Provide written hard copies and computer files on CD or DVD of manufacturer's installation instructions to the COR with submittals prior to commencing installation of any item. Installation of the item will not be allowed to proceed until the recommendations are received and approved by the VA. Failure to furnish these recommendations is a cause for rejection of the material.
 2. All items that require access, such as for operating, cleaning, servicing, maintenance, and calibration, shall be easily and safely accessible by persons standing at floor level, or standing on permanent platforms, without the use of portable ladders. Examples of these items include, but are not limited to, all types of valves, filters and strainers, transmitters, control devices. Prior to commencing installation work, refer conflicts between this requirement and contract documents to the COR for resolution. Failure of the Contractor to resolve or point out any issues will result in the Contractor correcting at no additional cost or time to the Government.

3. Complete coordination/shop drawings shall be required in accordance with Article, SUBMITTALS. Construction work shall not start on any system until the coordination/shop drawings have been approved by VA.
4. Workmanship/craftsmanship will be of the highest quality and standards. The VA reserves the right to reject any work based on poor quality of workmanship this work shall be removed and done again at no additional cost or time to the Government.
- I. Upon request by Government, provide lists of previous installations for selected items of equipment. Include contact persons who will serve as references, with current telephone numbers and e-mail addresses.
- J. Guaranty: Warranty of Construction, FAR Clause 52.246-21.

1.6 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:

1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage or theft.
2. Large equipment such as fans, air handling units, etc. if shipped on open trailer trucks shall be covered with shrink on plastics or waterproof tarpaulins that provide protection from exposure to rain, road salts and other transit hazards. Protection shall be kept in place until equipment is moved into a building or installed as designed.
3. Repair damaged equipment in first class, new operating condition, and appearance; or replace same as determined and directed by the COR. Such repair or replacement shall be at no additional cost or time to the Government.
4. Protect interiors of new equipment and piping systems against entry of foreign matter. Clean both inside and outside before painting or placing equipment in operation.
5. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.
6. Protect plastic piping and tanks from ultraviolet light (sunlight).

B. Cleanliness of Piping and Equipment Systems:

1. Exercise care in storage and handling of equipment and piping material to be incorporated in the work. Remove debris arising from cutting, threading, and welding of piping.
2. Piping systems shall be flushed, blown, or pigged as necessary to deliver clean systems.
3. Clean interior of all tanks prior to delivery for beneficial use by the Government.
4. Boilers shall be left clean following final internal inspection by Government insurance representative or inspector.
5. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.7 AS-BUILT DOCUMENTATION

- A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.
- B. Submit operation and maintenance data updated to include submittal review comments, VA approved substitutions and construction revisions shall be in electronic version on CD or DVD inserted into a three-ring binder. All aspects of system operation and maintenance procedures, including applicable piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.
- C. The installing Contractor shall maintain as-built drawings of each completed phase for verification; and shall provide the complete set at the time of final systems certification testing. Should the installing Contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement. Provide record drawings as follows:

Red-lined, hand-marked drawings are to be provided, with one paper copy and a scanned PDF version of the hand-marked drawings provided on CD or DVD.

- D. The as-built drawings shall indicate the location and type of all lockout/tagout points for all energy sources for all equipment and pumps to include breaker location and numbers, valve tag numbers, etc. Coordinate lockout/tagout procedures and practices with local VA requirements.
- E. Certification documentation shall be provided to COR 21 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and provide documentation/certification that all results of tests were within limits specified. Test results shall contain written sequence of test procedure with written test results annotated at each step along with the expected outcome or setpoint. The results shall include all readings, including but not limited to data on device (make, model and performance characteristics), normal pressures, switch ranges, trip points, amp readings, and calibration data to include equipment serial numbers or individual identifications, etc.

1.8 JOB CONDITIONS - WORK IN EXISTING BUILDING

- A. Building Operation: Government employees will be continuously operating and managing all facilities, including temporary facilities that serve the VAMC.
- B. Maintenance of Service: Schedule all work to permit continuous service as required by the VAMC.
- C. Steam and Condensate Service Interruptions: Limited steam and condensate service interruptions, as required for interconnections of new and existing systems, will be permitted by the COR during periods when the demands are not critical to the operation of the VAMC. These non-critical periods are limited to between 8 pm and 5 am in the appropriate off-season (if applicable). Provide at least 10 working days advance notice to the COR. The request shall include a detailed plan on the proposed shutdown and the intended work to be done along with manpower levels. All equipment and materials must be onsite and verified with plan 5 days prior to the shutdown or it will need to be rescheduled.

- D. Building Working Environment: Maintain the architectural and structural integrity of the building and the working environment at all times. Maintain the interior of building at 18 degrees C (65 degrees F) minimum. Limit the opening of doors, windows, or other access openings to brief periods as necessary for rigging purposes. Storm water or ground water leakage is prohibited. Provide daily clean-up of construction and demolition debris on all floor surfaces and on all equipment being operated by VA. Maintain all egress routes and safety systems/devices.
- E. Acceptance of Work for Government Operation: As new equipment, systems and facilities are made available for operation and these items are deemed of beneficial use to the Government, inspections will be made, and tests will be performed. Based on the inspections, a list of contract deficiencies will be issued to the Contractor. After correction of deficiencies as necessary for beneficial use, the Contracting Officer will process necessary acceptance and the equipment will then be under the control and operation of Government personnel.

PART 2 - PRODUCTS

2.1 FACTORY-ASSEMBLED PRODUCTS

- A. Provide maximum standardization of components to reduce spare part requirements.
- B. Performance and warranty of all components that make up an assembled unit shall be the responsibility of the manufacturer of the completed assembly.
1. All components of an assembled unit need not be products of same manufacturer.
 2. Constituent parts that are alike shall be products of a single manufacturer.
 3. Components shall be compatible with each other and with the total assembly for intended service.
 4. Contractor shall guarantee performance of assemblies of components and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.
- C. Equipment and components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a nameplate securely affixed in a conspicuous place, or cast integral

with, stamped or otherwise permanently marked upon the components of the equipment.

- D. Major items of equipment, which serve the same function, must be the same make and model. Exceptions must be approved by the VA but may be permitted if performance requirements cannot be met.

2.2 COMPATIBILITY OF RELATED EQUIPMENT

- A. Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational plant that conforms to contract requirements.

2.3 V-BELT DRIVES

- A. Type: ARPM standard V-belts with proper motor pulley and driven sheave. Belts shall be constructed of reinforced cord and rubber.
- B. Dimensions, rating, and selection standards: ARPM IP-20 and ARPM IP-21.
- C. Minimum Horsepower Rating: Motor horsepower plus recommended ARPM service factor (not less than 20 percent) in addition to the ARPM allowances for pitch diameter, center distance, and arc of contact.
- D. Maximum Speed: 25 m/s (5000 feet per minute).
- E. Adjustment Provisions: For alignment and ARPM standard allowances for installation and take-up.
- F. Drives may utilize a single V-Belt (any cross section) when it is the manufacturer's standard.
- G. Multiple Belts: Matched to ARPM specified limits by measurement on a belt measuring fixture. Seal matched sets together to prevent mixing or partial loss of sets. Replacement, when necessary, shall be an entire set of new matched belts.
- H. Sheaves and Pulleys:
1. Material: Pressed steel, or close-grained cast iron.
 2. Bore: Fixed or bushing type for securing to shaft with keys.
 3. Balanced: Statically and dynamically.
 4. Groove spacing for driving and driven pulleys shall be the same.
- I. Drive Types, Based on ARI 435:
1. Provide adjustable-pitch or fixed-pitch drive as follows:
 - a. Fan speeds up to 1800 RPM: 7.5 kW (10 horsepower) and smaller.
 - b. Fan speeds over 1800 RPM: 2.2 kW (3 horsepower) and smaller.
 2. Provide fixed-pitch drives for drives larger than those listed above.

3. The final fan speeds required to just meet the system CFM and pressure requirements, without throttling the design air flow branch, shall be determined by adjustment of a temporary adjustable-pitch motor sheave or by fan law calculation if a fixed-pitch drive is used initially.

J. Final Drive Set: If adjustment is required beyond the capabilities of the factory drive set, the final drive set shall be provided as part of this contract at no additional cost or time to the Government.

2.4 SYNCHRONOUS BELT DRIVES

- A. Type: ARPM synchronous belts with proper motor pulley and driven sheave. Belts shall be constructed of reinforced cord and rubber.
- B. Dimensions, rating, and selection standards: ARPM IP-24 and ARPM IP-27.
- C. Minimum Horsepower Rating: Motor horsepower plus recommended ARPM service factor (not less than 20 percent) in addition to the ARPM allowances for pitch diameter, center distance, and arc of contact.
- D. Maximum Speed: 25 m/s (5000 feet per minute).
- E. Adjustment Provisions: For alignment and ARPM standard allowances for installation and take-up.
- F. Drives may utilize a single belt of manufacturer's standard width for the application.
- G. Multiple Belts: Matched to ARPM specified limits by measurement on a belt measuring fixture. Seal matched sets together to prevent mixing or partial loss of sets. Replacement, when necessary, shall be an entire set of new matched belts.
- H. Sheaves and Pulleys:
 1. Material: Pressed steel, or close-grained cast iron.
 2. Bore: Fixed or bushing type for securing to shaft with keys.
 3. Balanced: Statically and dynamically.
- I. Final Drive Set: The final fan speeds required to just meet the system CFM and pressure requirements, without throttling the design air flow branch, shall be determined by fan law calculation. If adjustment is required beyond the capabilities of the factory drive set, the final drive set shall be provided as part of this contract at no additional cost or time to the Government.

2.5 DRIVE GUARDS

- A. For machinery and equipment, provide guards as shown in AMCA 410 for belts, chains, couplings, pulleys, sheaves, shafts, gears, and other moving parts regardless of height above the floor to prevent damage to

equipment and injury to personnel. Drive guards may be excluded where motors and drives are inside factory-fabricated air handling unit casings.

- B. Pump shafts and couplings shall be fully guarded by a sheet steel guard, covering coupling and shaft but not bearings. Material shall be minimum 16-gauge sheet steel; all edges shall be hemmed, and ends shall be bent into flanges and the flanges shall be drilled and attached to pump base with minimum of four 6 mm (1/4 inch) bolts. Reinforce guard as necessary to prevent side play forcing guard onto couplings.
- C. V-belt and sheave assemblies shall be totally enclosed, firmly mounted, non-resonant. Guard shall be an assembly of minimum 22-gauge sheet steel and expanded or perforated metal to permit observation of belts. 25 mm (1 inch) diameter hole shall be provided at each shaft centerline to permit speed measurement.
- D. Materials: Sheet steel, expanded metal or wire mesh rigidly secured so as to be removable without disassembling pipe, duct, or electrical connections to equipment.
- E. Access for Speed Measurement: 25 mm (1 inch) diameter hole at each shaft center.

2.6 LIFTING ATTACHMENTS

- A. Provide equipment with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.7 ELECTRIC MOTORS

- A. All material and equipment furnished, and installation methods shall conform to the requirements of Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT; Section 26 29 11, MOTOR CONTROLLERS; and, Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES. Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection, and operation of the systems. Provide special energy efficient premium efficiency type motors as scheduled.

2.8 VARIABLE SPEED MOTOR CONTROLLERS

- A. Refer to Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS and Section 26 29 11, MOTOR CONTROLLERS for specifications.

- B. Coordinate variable speed motor controller communication protocol with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- C. Provide variable speed motor controllers with or without a bypass contactor as indicated in contract drawings.
- D. The combination of controller and motor shall be provided by the manufacturer of the driven equipment, such as pumps and fans, and shall be rated for 100 percent output performance. Multiple units of the same class of equipment, i.e. air handlers, fans, pumps, shall be product of a single manufacturer.
- E. Motors shall be premium efficiency type and be approved by the motor controller manufacturer. The controller-motor combination shall be guaranteed to provide full motor nameplate horsepower in variable frequency operation. Both driving and driven motor/fan sheaves shall be fixed pitch.
- F. Controller shall not add any current or voltage transients to the input ac power distribution system, DDC controls, sensitive medical equipment, etc., nor shall be affected from other devices on the ac power system.

2.9 EQUIPMENT AND MATERIALS IDENTIFICATION

- A. Use symbols, nomenclature and equipment numbers specified, shown on the contract documents, and shown in the maintenance manuals.
Identification for piping is specified in Section 09 91 00, PAINTING.
- B. Interior (Indoor) Equipment: Engraved nameplates, with letters not less than 5 mm (3/16 inch) high of brass with black-filled letters, or rigid black plastic with white letters specified in Section 09 91 00, PAINTING permanently fastened to the equipment. Identify unit components such as coils, filters, fans, etc.
- C. Exterior (Outdoor) Equipment: Brass nameplates, with engraved black filled letters, not less than 5 mm (3/16 inch) high riveted or bolted to the equipment.
- D. Control Items: Label all instrumentation, temperature and humidity sensors, controllers, and control dampers. Identify and label each item as they appear on the control diagrams.
- E. Valve Tags and Lists:
 - 1. HVAC and Mechanical Rooms: Provide for all valves other than for equipment in Section 23 82 00, CONVECTION HEATING AND COOLING UNITS and Section 23 36 00, AIR TERMINAL UNITS.

2. Valve tags: Engraved black filled numbers and letters not less than 15 mm (1/2 inch) high for number designation, and not less than 6 mm (1/4 inch) for service designation on 19-gauge 40 mm (1-1/2 inches) round brass disc, attached with brass "S" hook or brass chain.
3. Valve lists: Typed or printed plastic coated card(s), sized 215 mm (8-1/2 inches) by 275 mm (11 inches) showing tag number, valve function and area of control, for each service or system. Punch sheets for a 3-ring notebook.
4. Provide detailed plan for each floor of the building indicating the location and valve number for each valve. Identify location of each valve with a color-coded thumb tack in ceiling.

F. Ceiling Grid Labels:

1. 50 mm (2 inch) long by 15 mm (1/2 inch) wide by 0.025 mm (1 mil) thick UV resistant metalized polyester label with red border color and black custom lettering on white background interior. Peel and stick adhesive backing. Label and adhesive manufactured specifically for use in equipment inventory tagging.
2. Custom print labels with above ceiling HVAC equipment numbers.

2.10 FIRESTOPPING

- A. Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke, and gases where penetrations occur for piping and ductwork. Refer to Section 23 07 11, HVAC, AND BOILER PLANT INSULATION, for firestop pipe and duct insulation.

2.11 GALVANIZED REPAIR COMPOUND

- A. Mil-P-21035B, paint form.

2.12 HVAC PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

- A. Vibration Isolators: Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- B. Supports for Roof Mounted Items:
1. Equipment: Equipment rails shall be galvanized steel, minimum 1.3 mm (18 gauge), with integral baseplate, continuous welded corner seams, factory installed 50 by 100 mm (2 by 4 inches) treated wood nailer, 1.3 mm (18 gauge) galvanized steel counter flashing cap with screws, built-in cant strip, (except for gypsum or tectum deck), minimum height 275 mm (11 inches). For surface insulated roof deck, provide raised cant strip to start at the upper surface of the insulation.

2. Pipe/duct pedestals: Provide a galvanized Unistrut channel welded to U-shaped mounting brackets which are secured to side of rail with galvanized lag bolts.
- C. Pipe Supports: Comply with MSS SP-58. Type Numbers specified refer to this standard. For selection and application comply with MSS SP-58. Refer to Section 05 50 00, METAL FABRICATIONS, for miscellaneous metal support materials and prime coat painting requirements.
- D. Attachment to Concrete Building Construction:
1. Concrete insert: MSS SP-58, Type 18.
 2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 100 mm (4 inches) thick when approved by the COR for each job condition.
 3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 100 mm (4 inches) thick when approved by the COR for each job condition.
- E. Attachment to Steel Building Construction:
1. Welded attachment: MSS SP-58, Type 22.
 2. Beam clamps: MSS SP-58, Types 20, 21, 28 or 29. Type 23 C-clamp may be used for individual copper tubing up to 23 mm (7/8 inch) outside diameter.
- F. Attachment to existing structure: Support from existing floor/roof frame.
- G. Attachment to Wood Construction: Wood screws or lag bolts.
- H. Hanger Rods: Hot-rolled steel, ASTM A36/A36M or ASTM A575 for allowable load listed in MSS SP-58. For piping, provide adjustment means for controlling level or slope. Types 13 or 15 turn-buckles shall provide 40 mm (1-1/2 inches) minimum of adjustment and incorporate locknuts. All-thread rods are acceptable.
- I. Hangers Supporting Multiple Pipes (Trapeze Hangers): Galvanized, cold formed, lipped steel channel horizontal member, not less than 41 mm by 41 mm (1-5/8 inches by 1-5/8 inches), 2.7 mm (12 gauge), designed to accept special spring held, hardened steel nuts. Trapeze hangers are prohibited for use for steam supply and condensate piping.
1. Allowable hanger load: Manufacturers rating less 91 kg (200 pounds).
 2. Guide individual pipes on the horizontal member of every other trapeze hanger with 6 mm (1/4 inch) U-bolt fabricated from steel rod. Provide Type 40 insulation shield, secured by two 15 mm (1/2

inch) galvanized steel bands, or preinsulated calcium silicate shield for insulated piping at each hanger.

J. Supports for Piping Systems:

1. Select hangers sized to encircle insulation on insulated piping. Refer to Section 23 07 11, HVAC AND BOILER PLANT INSULATION for insulation thickness. To protect insulation, provide Type 39 saddles for roller type supports or preinsulated calcium silicate shields. Provide Type 40 insulation shield or preinsulated calcium silicate shield at all other types of supports and hangers including those for preinsulated piping.
2. Piping Systems except High and Medium Pressure Steam (MSS SP-58):
 - a. Standard clevis hanger: Type 1; provide locknut.
 - b. Riser clamps: Type 8.
 - c. Wall brackets: Types 31, 32 or 33.
 - d. Roller supports: Type 41, 43, 44 and 46.
 - e. Saddle support: Type 36, 37 or 38.
 - f. Turnbuckle: Types 13 or 15. Preinsulate.
 - g. U-bolt clamp: Type 24.
 - h. Copper Tube:
 - 1) Hangers, clamps, and other support material in contact with tubing shall be painted with copper colored epoxy paint, plastic coated or taped with non-adhesive isolation tape to prevent electrolysis.
 - 2) For vertical runs use epoxy painted or plastic-coated riser clamps.
 - 3) For supporting tube to strut: Provide epoxy painted pipe straps for copper tube or plastic inserted vibration isolation clamps.
 - 4) Insulated Lines: Provide pre-insulated calcium silicate shields sized for copper tube.
 - i. Supports for plastic piping: As recommended by the pipe manufacturer with black rubber tape extending one inch beyond steel support or clamp.
3. High and Medium Pressure Steam (MSS SP-58):
 - a. Provide eye rod or Type 17 eye nut near the upper attachment.
 - b. Piping 50 mm (2 inches) and larger: Type 43 roller hanger. For roller hangers requiring seismic bracing provide a Type 1 clevis hanger with Type 41 roller attached by flat side bars.

c. Piping with Vertical Expansion and Contraction:

- 1) Movement up to 20 mm (3/4 inch): Type 51 or 52 variable spring unit with integral turn buckle and load indicator.
 - 2) Movement more than 20 mm (3/4 inch): Type 54 or 55 constant support unit with integral adjusting nut, turn buckle and travel position indicator.
4. Converter and Expansion Tank Hangers: May be Type 1 sized for the shell diameter. Insulation where required will cover the hangers.

K. Pre-insulated Calcium Silicate Shields:

1. Provide 360-degree water resistant high density 965 kPa (140 psig) compressive strength calcium silicate shields encased in galvanized metal.
2. Pre-insulated calcium silicate shields to be installed at the point of support during erection.
3. Shield thickness shall match the pipe insulation.
4. The type of shield is selected by the temperature of the pipe, the load it must carry, and the type of support it will be used with.
 - a. Shields for supporting chilled or cold water shall have insulation that extends a minimum of 25 mm (1 inch) past the sheet metal. Provide for an adequate vapor barrier in chilled lines.
 - b. The pre-insulated calcium silicate shield shall support the maximum allowable water filled span as indicated in MSS SP-58. To support the load, the shields may have one or more of the following features: structural inserts 4138 kPa (600 psig) compressive strength, an extra bottom metal shield, or formed structural steel (ASTM A36/A36M) wear plates welded to the bottom sheet metal jacket.
5. Shields may be used on steel clevis hanger type supports, roller supports or flat surfaces.

2.13 PIPE PENETRATIONS

- A. Install sleeves during construction for other than blocked out floor openings for risers in mechanical bays.
- B. To prevent accidental liquid spills from passing to a lower level, provide the following:
 1. For sleeves: Extend sleeve 25 mm (1 inch) above finished floor and provide sealant for watertight joint.

2. For blocked out floor openings: Provide 40 mm (1-1/2 inch) angle set in silicone adhesive around opening.
 3. For drilled penetrations: Provide 40 mm (1-1/2 inch) angle ring or square set-in silicone adhesive around penetration.
- C. Penetrations through beams or ribs are prohibited but may be installed in concrete beam flanges. Any deviation from these requirements must receive prior approval of COR.
- D. Sheet Metal, Plastic, or Moisture-resistant Fiber Sleeves: Provide for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.
- E. Cast Iron or Zinc Coated Pipe Sleeves: Provide for pipe passing through exterior walls below grade. Make space between sleeve and pipe watertight with a modular or link rubber seal. Seal shall be applied at both ends of sleeve.
- F. Galvanized Steel or an alternate Black Iron Pipe with asphalt coating Sleeves: Provide for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. Provide sleeve for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, connect sleeve with floor plate.
- G. Brass Pipe Sleeves: Provide for pipe passing through quarry tile, terrazzo or ceramic tile floors. Connect sleeve with floor plate.
- H. Sleeves are not required for wall hydrants for fire department connections or in drywall construction.
- I. Sleeve Clearance: Sleeve through floors, walls, partitions, and beam flanges shall be one inch greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation. Interior openings shall be caulked tight with fire stopping material and sealant to prevent the spread of fire, smoke, and gases.
- J. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS.

2.14 DUCT PENETRATIONS

- A. Provide curbs for roof mounted piping, ductwork, and equipment. Curbs shall be 450 mm (18 inches) high with continuously welded seams, built-in cant strip, interior baffle with acoustic insulation, curb bottom, hinged curb adapter.

- B. Provide firestopping for openings through fire and smoke barriers, maintaining minimum required rating of floor, ceiling, or wall assembly. See section 07 84 00, FIRESTOPPING.

2.15 SPECIAL TOOLS AND LUBRICANTS

- A. Furnish, and turn over to the COR, tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.
- B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.
- C. Refrigerant Tools: Provide system charging/Evacuation equipment, gauges, fittings, and tools required for maintenance of furnished equipment.
- D. Tool Containers: Hardwood or metal, permanently identified for intended service and mounted, or located, where directed by the COR.
- E. Lubricants: A minimum of 0.95 L (1 quart) of oil, and 0.45 kg (1 pound) of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application.

2.16 WALL, FLOOR AND CEILING PLATES

- A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.
- B. Thickness: Not less than 2.4 mm (3/32 inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025 inch) for up to 80 mm (3-inch pipe), 0.89 mm (0.035 inch) for larger pipe.
- C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Provide a watertight joint in spaces where brass or steel pipe sleeves are specified.

2.17 ASBESTOS

- A. Materials containing asbestos are prohibited.

PART 3 - EXECUTION

3.1 GENERAL

- A. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

3.2 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING

- A. Location of piping, sleeves, inserts, hangers, and equipment, access provisions shall be coordinated with the work of all trades. The coordination/shop drawings shall be submitted for review. Locate piping, sleeves, inserts, hangers, ductwork, and equipment clear of windows, doors, openings, light outlets, and other services and utilities. Equipment coordination/shop drawings shall be prepared to coordinate proper location and personnel access of all facilities. The drawings shall be submitted for review. Follow manufacturer's published recommendations for installation methods not otherwise specified.
- B. Operating Personnel Access and Observation Provisions: Select and arrange all equipment and systems to provide clear view and easy access, without use of portable ladders, for maintenance and operation of all devices including, but not limited to all equipment items, valves, filters, strainers, transmitters, sensors, control devices. All gauges and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Do not reduce or change maintenance and operating space and access provisions that are shown on the contract documents.
- C. Equipment and Piping Support: Coordinate structural systems necessary for pipe and equipment support with pipe and equipment locations to permit proper installation.
- D. Location of pipe sleeves, trenches and chases shall be accurately coordinated with equipment and piping locations.
- E. Cutting Holes:
 - 1. Cut holes through concrete and masonry by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill is prohibited, except as permitted by COR where working area space is limited.
 - 2. Locate holes to avoid interference with structural members such as slabs, columns, ribs, beams or reinforcing. Holes shall be laid out in advance and drilling done only after approval by COR. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to COR for approval.
 - 3. Do not penetrate membrane waterproofing.
- F. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other service are not shown but must be provided.

G. Electrical Interconnection of Instrumentation or Controls: This generally not shown but must be provided. This includes interconnections of sensors, transmitters, transducers, control devices, control, and instrumentation panels, instruments, and computer workstations. Devices shall be located so they are easily accessible for testing, maintenance, calibration, etc. The COR has the final determination on what is accessible and what is not. Comply with NFPA 70.

H. Protection and Cleaning:

1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the COR. Damaged or defective items in the opinion of the COR, shall be replaced.
2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Tightly cover and protect fixtures and equipment against dirt, water chemical, or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials, and equipment.

I. Concrete and Grout: Use concrete and non-shrink grout 20 MPa (3000 psig) minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE.

J. Install gauges, thermometers, valves, and other devices with due regard for ease in reading or operating and maintaining said devices. Locate and position thermometers and gauges to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.

K. Install steam piping expansion joints as per manufacturer's recommendations.

L. Work in Existing Building:

1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations, and restoration of existing building(s).
2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service

piping at times that will least interfere with normal operation of the facility.

M. Work in Animal Research Areas: Seal all pipe and duct penetrations with silicone sealant to prevent entrance of insects.

N. Switchgear/Electrical Equipment Drip Protection: Every effort shall be made to eliminate the installation of pipe above electrical and data/telephone switchgear. If this is not possible, encase pipe in a second pipe with a minimum of joints. Installation of piping, ductwork, leak protection apparatus or other installations foreign to the electrical installation shall not be located in the space equal to the width and depth of the equipment and extending from to a height of 1.8 m (6 feet) above the equipment or to ceiling structure, whichever is lower (NFPA 70).

O. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance or inspections, equipment shall be removed, and reinstalled or remedial action performed as directed at no additional cost or time to the Government.
2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to motors, fans, pumps, belt guards, transformers, high voltage lines, conduit and raceways, piping, hot surfaces, and ductwork. The COR has final determination on whether an installation meets this requirement or not.

3.3 TEMPORARY PIPING AND EQUIPMENT

A. Continuity of operation of existing facilities will generally require temporary installation or relocation of equipment and piping.

B. The Contractor shall provide all required facilities in accordance with the requirements of phased construction and maintenance of service. All piping and equipment shall be properly supported, sloped to drain, operate without excessive stress, and shall be insulated where injury can occur to personnel by contact with operating facilities. The requirements of Article, ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING apply.

- C. Temporary facilities and piping shall be completely removed and any openings in structures sealed. Provide necessary blind flanges and caps to seal open piping remaining in service.

3.4 RIGGING

- A. Design is based on application of available equipment. Openings in building structures are planned to accommodate design scheme.
- B. Alternative methods of equipment delivery may be offered by Contractor and will be considered by Government under specified restrictions of phasing and maintenance of service requirements as well as structural integrity of the building.
- C. Close all openings in the building when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.
- D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures shall be Contractor's full responsibility. Upon request, the Government will check structure adequacy and advise Contractor of recommended restrictions.
- E. Contractor shall check all clearances, weight limitations and shall offer a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time, and responsibility.
- F. Follow approved rigging plan.
- G. Restore building to original condition upon completion of rigging work.

3.5 PIPE AND EQUIPMENT SUPPORTS

- A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels designed by a structural engineer, secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Drill or burn holes in structural steel only with the prior approval of the COR.
- B. Use of chain pipe supports; wire or strap hangers; wood for blocking, stays and bracing; or, hangers suspended from piping above are prohibited. Replace or thoroughly clean rusty products and paint with zinc primer.

- C. Hanger rods shall be used that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. Provide a minimum of 15 mm (1/2 inch) clearance between pipe or piping covering and adjacent work.
- D. HVAC Horizontal Pipe Support Spacing: Refer to MSS SP-58. Provide additional supports at valves, strainers, in-line pumps and other heavy components. Provide a support within one foot of each elbow.
- E. HVAC Vertical Pipe Supports:
1. Up to 150 mm (6-inch pipe), 9 m (30 feet) long, bolt riser clamps to the pipe below couplings, or welded to the pipe and rests supports securely on the building structure.
 2. Vertical pipe larger than the foregoing, support on base elbows or tees, or substantial pipe legs extending to the building structure.
- F. Overhead Supports:
1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.
 2. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.
 3. Tubing and capillary systems shall be supported in channel troughs.
- G. Floor Supports:
1. Provide concrete bases, concrete anchor blocks and pedestals, and structural steel systems for support of equipment and piping. Concrete bases and structural systems shall be anchored and doweled to resist forces under operating and seismic conditions (if applicable) without excessive displacement or structural failure.
 2. Bases and supports shall not be located and installed until equipment mounted thereon has been approved. Bases shall be sized to match equipment mounted thereon plus 50 mm (2 inch) excess on all edges. Chiller foundations shall have horizontal dimensions that exceed chiller base frame dimensions by at least 150 mm (6 inches) on all sides. Structural contract documents shall be reviewed for additional requirements. Bases shall be neatly

finished and smoothed, shall have chamfered edges at the top, and shall be suitable for painting.

3. All equipment shall be shimmed, leveled, firmly anchored, and grouted with epoxy grout. Anchor bolts shall be placed in sleeves, anchored to the bases. Fill the annular space between sleeves and bolts with a granular material to permit alignment and realignment.

3.6 MECHANICAL DEMOLITION

- A. Rigging access, other than indicated on the contract documents, shall be provided by the Contractor after approval for structural integrity by the COR. Such access shall be provided without additional cost or time to the Government. Where work is in an operating plant, provide approved protection from dust and debris at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.
- B. In an operating facility, maintain the operation, cleanliness, and safety. Government personnel will be carrying on their normal duties of operating, cleaning, and maintaining equipment and plant operation. Confine the work to the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Debris accumulated in the area to the detriment of plant operation is prohibited. Perform all flame cutting to maintain the fire safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times. Perform all work in accordance with recognized fire protection standards. Inspection will be made by personnel of the VAMC, and Contractor shall follow all directives of the COR with regard to rigging, safety, fire safety, and maintenance of operations.
- C. Unless specified otherwise, all piping, wiring, conduit, and other devices associated with the equipment not re-used in the new work shall be completely removed from Government property per Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT. This includes all concrete pads, pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. All openings shall be sealed after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with contract documents where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the contract documents of the other

disciplines in the project for additional facilities to be demolished or handled.

- D. All indicated valves including gate, globe, ball, butterfly and check, all pressure gauges and thermometers with wells shall remain Government property and shall be removed and delivered to COR and stored as directed. The Contractor shall remove all other material and equipment, devices, and demolition debris under these contract documents. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate.

3.7 CLEANING AND PAINTING

- A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.
- B. In addition, the following special conditions apply:
1. Cleaning shall be thorough. Solvents, cleaning materials and methods recommended by the manufacturers shall be used for the specific tasks. All rust shall be removed prior to painting and from surfaces to remain unpainted. Repair scratches, scuffs, and abrasions prior to applying prime and finish coats.
 2. The following material and equipment shall not be painted:
 - a. Motors, controllers, control switches, and safety switches.
 - b. Control and interlock devices.
 - c. Regulators.
 - d. Pressure reducing valves.
 - e. Control valves and thermostatic elements.
 - f. Lubrication devices and grease fittings.
 - g. Copper, brass, aluminum, stainless steel and bronze surfaces.
 - h. Valve stems and rotating shafts.
 - i. Pressure gauges and thermometers.
 - j. Glass.
 - k. Nameplates.
 3. Control and instrument panels shall be cleaned, damaged surfaces repaired, and shall be touched-up with matching paint obtained from panel manufacturer.

4. Pumps, motors, steel and cast-iron bases, and coupling guards shall be cleaned, and shall be touched-up with the same paint type and color as utilized by the pump manufacturer.
5. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats. This may include painting exposed metals where hangers were removed or where equipment was moved or removed.
6. Paint shall withstand the following temperatures without peeling or discoloration:
 - a. Condensate and Feedwater: 38 degrees C (100 degrees F) on insulation jacket surface and 121 degrees C (250 degrees F) on metal pipe surface.
 - b. Steam: 52 degrees C (125 degrees F) on insulation jacket surface and 190 degrees C (374 degrees F) on metal pipe surface.
7. Final result shall be smooth, even-colored, even-textured factory finish on all items. Completely repaint the entire piece of equipment if necessary to achieve this.
8. Lead based paints are prohibited.

3.8 IDENTIFICATION SIGNS

- A. Provide laminated plastic signs, with engraved lettering not less than 5 mm (3/16 inch) high, designating functions, for all equipment, switches, motor controllers, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.
- B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, performance.
- C. Pipe Identification: Refer to Section 09 91 00, PAINTING.
- D. Attach ceiling grid label on ceiling grid location directly underneath above-ceiling air terminal, control system component, valve, filter unit, fan etc.

3.9 MOTOR AND DRIVES

- A. Use synchronous belt drives only on equipment controlled by soft starters or variable frequency drive motor controllers without a bypass contactor. Use V-belt drives on all other applications.
- B. Alignment of V-Belt Drives: Set driving and driven shafts parallel and align so that the corresponding grooves are in the same plane.

- C. Alignment of Synchronous Belt Drives: Set driving and driven shafts parallel and align so that the corresponding pulley flanges are in the same plane.
- D. Alignment of Direct-Connect Drives: Securely mount motor in accurate alignment so that shafts are per coupling manufacturer's tolerances when both motor and driven machine are operating at normal temperatures.

3.10 LUBRICATION

- A. All equipment and devices requiring lubrication shall be lubricated prior to initial operation. Field-check all devices for proper lubrication.
- B. All devices and equipment shall be equipped with required lubrication fittings or devices. A minimum of 0.95 liter (1 quart) of oil and 0.45 kg (1 pound) of grease of manufacturer's recommended grade and type for each different application shall be provided; also provide 12 grease sticks for lubricated plug valves. Deliver all materials to COR in unopened containers that are properly identified as to application.
- C. All lubrication points shall be accessible without disassembling equipment, except to remove access plates.
- D. All lubrication points shall be extended to one side of the equipment.

3.11 STARTUP, TEMPORARY OPERATION AND TESTING

- A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.
- B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.
- C. The Commissioning Agent will observe startup and Contractor testing of selected equipment. Coordinate the startup and Contractor testing schedules with COR and Commissioning Agent. Provide a minimum notice of 10 working days prior to startup and testing.
- D. Startup of equipment shall be performed as described in equipment specifications. Vibration within specified tolerance shall be verified prior to extended operation. Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

3.12 OPERATING AND PERFORMANCE TESTS

- A. Prior to the final inspection, perform required tests as specified in Section 01 00 00, GENERAL REQUIREMENTS Article, TESTS, and in individual Division 23 specification sections and submit the test reports and records to the COR.
- B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs, or replacements, and repeat tests at no additional cost or time to the Government.
- C. When completion of certain work or system occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then conduct such performance tests and finalize control settings for heating systems and for cooling systems respectively during first actual seasonal use of respective systems following completion of work. Rescheduling of these tests shall be requested in writing to COR for approval.
- D. No adjustments may be made during the acceptance inspection. All adjustments shall have been made by this point.
- E. Perform tests as required for commissioning provisions in accordance with Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS and Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.

3.13 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- B. Components provided under this section of the specification will be tested as part of a larger system.

3.14 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for 4 hours to instruct each VA personnel responsible in operation and maintenance of the system.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

SECTION 23 05 12
GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies the furnishing, installation, and connection of motors for HVAC and steam generation equipment.
- B. A complete listing of common acronyms and abbreviations are included in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.
- E. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- F. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- G. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- H. Section 26 24 19, MOTOR CONTROL CENTERS.
- I. Section 26 29 11, MOTOR CONTROLLERS.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.
- B. American Bearing Manufacturers Association (ABMA):
 - 9-2015.....Load Ratings and Fatigue Life for Ball Bearings
 - 11-014/.....Load Ratings and Fatigue Life for Roller Bearings
- C. American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE):
 - 90.1-2013.....Energy Efficient Design of New Buildings Except Low-Rise Residential Buildings
- D. Institute of Electrical and Electronics Engineers (IEEE):
 - 112-2017.....Standard Test Procedure for Polyphase Induction Motors and Generators
 - 841-2009.....IEEE Standard for Petroleum and Chemical Industry-Premium-Efficiency, Severe-Duty,

Totally Enclosed Fan-Cooled (TEFC) Squirrel
Cage Induction Motors--Up to and Including 370
kW (500 hp)

E. National Electrical Manufacturers Association (NEMA):

MG 1-2019.....Motors and Generators

MG 2-014.....Safety Standard for Construction and Guide for
Selection, Installation and Use of Electric
Motors and Generators

250-2014.....Enclosures for Electrical Equipment (1000 Volts
Maximum)

F. National Fire Protection Association (NFPA):

70-2014.....National Electrical Code (NEC)

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT", with applicable paragraph identification.

C. Submit motor submittals with driven equipment.

D. Shop Drawings:

1. Provide documentation to demonstrate compliance with contract documents.

2. Motor nameplate information shall be submitted including electrical ratings, efficiency, bearing data, power factor, frame size, dimensions, mounting details, materials, horsepower, voltage, phase, speed (RPM), enclosure, starting characteristics, torque characteristics, code letter, full load and locked rotor current, service factor, and lubrication method.

E. Manufacturer's Literature and Data including Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

F. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:

1. Include complete list indicating all components of the systems.

2. Include complete diagrams of the internal wiring for each item of equipment.
 3. Diagrams shall have their terminals identified to facilitate installation, operation, and maintenance.
- G. Certification: Two weeks prior to final inspection, unless otherwise noted, certification shall be submitted to the COR stating that the motors have been properly applied, installed, adjusted, lubricated, and tested.
- H. Completed System Readiness Checklist provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- I. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

1.5 AS-BUILT DOCUMENTATION

- A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.
- B. Submit operation and maintenance data updated to include submittal review comments, VA approved substitutions and construction revisions shall be in electronic version on CD or DVD inserted into a three-ring binder. All aspects of system operation and maintenance procedures, including applicable piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.
- C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and shall provide the complete set at the time of final systems certification testing. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement. Provide record drawings as follows:

1. Red-lined, hand-marked drawings are to be provided, with one paper copy and a scanned PDF version of the hand-marked drawings provided on CD or DVD.
- D. The as-built drawings shall indicate the location and type of all lockout/tagout points for all energy sources for all equipment and pumps to include breaker location and numbers, valve tag numbers, etc. Coordinate lockout/tagout procedures and practices with local VA requirements.
- E. Certification documentation shall be provided to COR 21 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and provide documentation/certification that all results of tests were within limits specified. Test results shall contain written sequence of test procedure with written test results annotated at each step along with the expected outcome or setpoint. The results shall include all readings, including but not limited to data on device (make, model and performance characteristics), normal pressures, switch ranges, trip points, amp readings, and calibration data to include equipment serial numbers or individual identifications, etc.

PART 2 - PRODUCTS

2.1 MOTORS

- A. For alternating current, fractional, and integral horsepower motors, NEMA MG 1 and NEMA MG 2 shall apply.
- B. For severe duty TEFC motors, IEEE 841 shall apply.
- C. All material and equipment furnished, and installation methods shall conform to the requirements of Section 26 29 11, MOTOR CONTROLLERS; and Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES. Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection, and operation of the systems. Provide premium efficiency type motors. Unless otherwise specified for a particular application, use electric motors with the following requirements.
- D. Single-phase Motors: Motors for centrifugal fans and pumps may be split phase or permanent split capacitor (PSC) type. Provide capacitor-start type for hard starting applications.
- E. Poly-phase Motors: NEMA Design B, Squirrel cage, induction type.

1. Two Speed Motors: Each two-speed motor shall have two separate windings. Provide a time- delay (20 seconds minimum) relay for switching from high to low speed.
- F. Voltage ratings shall be as follows:
1. Single phase:
 - a. Motors connected to 120-volt systems: 115 volts.
 - b. Motors connected to 208-volt systems: 200 volts.
 - c. Motors connected to 240-volt or 480-volt systems: 230/460 volts, dual connection.
 2. Three phase:
 - a. Motors connected to 208-volt systems: 200 volts.
 - b. Motors, less than 74.6 kW (100 hp), connected to 240-volt or 480-volt systems: 208-230/460 volts, dual connection.
 - c. Motors, 74.6 kW (100 hp) or larger, connected to 240-volt systems: 230 volts.
 - d. Motors, 74.6 kW (100 hp) or larger, connected to 480-volt systems: 460 volts.
 - e. Motors connected to high voltage systems (Over 600V): Shall conform to NEMA MG 1 for connection to the nominal system voltage shown on the drawings.
- G. Number of phases shall be as follows:
1. Motors, less than 373 W (1/2 hp): Single phase.
 2. Motors, 373 W (1/2 hp) and larger: 3 phase.
 3. Exceptions:
 - a. Hermetically sealed motors.
 - b. Motors for equipment assemblies, less than 746 W (1 hp), may be single phase provided the manufacturer of the proposed assemblies cannot supply the assemblies with three phase motors.
- H. Horsepower ratings shall be adequate for operating the connected loads continuously in the prevailing ambient temperatures in areas where the motors are installed, without exceeding the NEMA standard temperature rises for the motor insulation.
- I. Motor designs, as indicated by the NEMA code letters, shall be coordinated with the connected loads to assure adequate starting, acceleration, and running torque without exceeding nameplate ratings or considering service factor.

J. Motor Enclosures:

1. Shall be the NEMA types as specified and/or shown in the Contract Documents.
2. Where the types of motor enclosures are not shown on the drawings, they shall be the NEMA types per NEMA 250, which are most suitable for the environmental conditions where the motors are being installed. Enclosure requirements for certain conditions are as follows:
 - a. Motors located outdoors, indoors in wet or high humidity locations, or in unfiltered airstreams shall be totally enclosed type.
 - b. Where motors are located in an NEC 511 classified area, provide TEFC explosion proof motor enclosures.
 - c. Where motors are located in a corrosive environment, provide TEFC enclosures with corrosion resistant finish.
3. Enclosures shall be primed, and finish coated at the factory with manufacturer's prime coat and standard finish.

K. Electrical Design Requirements:

1. Motors shall be continuous duty.
2. The insulation system shall be rated minimum of Class B, 130 degrees C (266 degrees F).
3. The maximum temperature rise by resistance at rated power shall not exceed Class B limits, 80 degrees C (176 degrees F).
4. The speed/torque and speed/current characteristics shall comply with NEMA Design A or B, as specified.
5. Motors shall be suitable for full voltage starting, unless otherwise noted. Coordinate motor features with applicable motor controllers.
6. Motors for variable frequency drive applications shall adhere to NEMA MG 1, Part 30, Application Considerations for Constant Speed Motors Used on a Sinusoidal Bus with Harmonic Content and General-Purpose Motors Used with Adjustable-Voltage or Adjustable-Frequency Controls or Both, or NEMA MG 1, Part 31, Definite-Purpose Inverter-Fed Polyphase Motors.

L. Mechanical Design Requirements:

1. Bearings shall be rated in accordance with ABMA 9 or ABMA 11 for a minimum fatigue life of 26,280 hours for belt-driven loads and 100,000 hours for direct-drive loads based on L10 (Basic Rating Life) at full load direct coupled, except vertical high thrust

motors which require a 40,000 hour rating. A minimum fatigue life of 40,000 hours is required for VFD drives.

2. Vertical motors shall be capable of withstanding a momentary up thrust of at least 30 percent of normal down thrust.
3. Grease lubricated bearings shall be designed for electric motor use. Grease shall be capable of the temperatures associated with electric motors and shall be compatible with Polyurea based greases.
4. Grease fittings, if provided, shall be Alemite type or equivalent.
5. Oil lubricated bearings, when specified, shall have an externally visible sight glass to view oil level.
6. Vibration shall not exceed 3.8 mm (0.15 inch) per second, unfiltered peak.
7. Noise level shall meet the requirements of the application.
8. Motors on 180 frames and larger shall have provisions for lifting eyes or lugs capable of a safety factor of 5.
9. All external fasteners shall be corrosion resistant.
10. Condensation heaters, when specified, shall keep motor windings at least 5 degrees C (9 degrees F) above ambient temperature.
11. Winding thermostats, when specified shall be normally closed, connected in series.
12. Grounding provisions shall be in the main terminal box.

M. Special Requirements:

1. Where motor power requirements of equipment furnished deviate from power shown on plans, provide electrical service designed under the requirements of NFPA 70 without additional cost or time to the Government.
2. Assemblies of motors, starters, controls, and interlocks on factory assembled and wired devices shall be in accordance with the requirements of this specification.
3. Wire and cable materials specified in the electrical division of the specifications shall be modified as follows:
 - a. Wiring material located where temperatures can exceed 71 degrees C (160 degrees F) shall be stranded copper with Teflon FEP insulation with jacket. This includes wiring on the boilers.
 - b. Other wiring at boilers and to control panels shall be NFPA 70 designation THWN.

- c. Provide shielded conductors or wiring in separate conduits for all instrumentation and control systems where recommended by manufacturer of equipment.
4. Select motor sizes so that the motors do not operate into the service factor at maximum required loads on the driven equipment. Motors on pumps shall be sized for non-overloading at all points on the pump performance curves.
5. Motors utilized with variable frequency drives shall be rated "inverter-duty" per NEMA MG 1, Part 31, Definite-Purpose Inverter-Fed Polyphase Motors. Provide motor shaft grounding apparatus that will protect bearings from damage from stray currents.
- N. Additional requirements for specific motors, as indicated in the other sections listed in Article, RELATED SECTIONS shall also apply.
- O. NEMA Premium Efficiency Electric Motors (Motor Efficiencies): All permanently wired polyphase motors of 746 W (1 hp) or more shall meet the minimum full-load efficiencies as indicated in the following table. Motors of 746 W (1 hp) or more with open, drip-proof, or TEFC enclosures shall be NEMA premium efficiency type, unless otherwise indicated. Motors provided as an integral part of motor driven equipment are excluded from this requirement if a minimum seasonal or overall efficiency requirement is indicated for that equipment by the provisions of another section.

Minimum Premium Efficiencies Open Drip-Proof				Minimum Premium Efficiencies Totally Enclosed Fan-Cooled (TEFC)			
Rating kW (hp)	1200 RPM	1800 RPM	3600 RPM	Rating kW (hp)	1200 RPM	1800 RPM	3600 RPM
0.746 (1)	82.5%	85.5%	77.0%	0.746 (1)	82.5%	85.5%	77.0%
1.12 (1.5)	86.5%	86.5%	84.0%	1.12 (1.5)	87.5%	86.5%	84.0%
1.49 (2)	87.5%	86.5%	85.5%	1.49 (2)	88.5%	86.5%	85.5%
2.24 (3)	88.5%	89.5%	85.5%	2.24 (3)	89.5%	89.5%	86.5%
3.73 (5)	89.5%	89.5%	86.5%	3.73 (5)	89.5%	89.5%	88.5%
5.60 (7.5)	90.2%	91.0%	88.5%	5.60 (7.5)	91.0%	91.7%	89.5%
7.46 (10)	91.7%	91.7%	89.5%	7.46 (10)	91.0%	91.7%	90.2%
11.2 (15)	91.7%	93.0%	90.2%	11.2 (15)	91.7%	92.4%	91.0%
14.9 (20)	92.4%	93.0%	91.0%	14.9 (20)	91.7%	93.0%	91.0%
18.7 (25)	93.0%	93.6%	91.7%	18.7 (25)	93.0%	93.6%	91.7%
22.4 (30)	93.6%	94.1%	91.7%	22.4 (30)	93.0%	93.6%	91.7%

29.8 (40)	94.1%	94.1%	92.4%	29.8 (40)	94.1%	94.1%	92.4%
37.3 (50)	94.1%	94.5%	93.0%	37.3 (50)	94.1%	94.5%	93.0%
44.8 (60)	94.5%	95.0%	93.6%	44.8 (60)	94.5%	95.0%	93.6%
56.9 (75)	94.5%	95.0%	93.6%	56.9 (75)	94.5%	95.4%	93.6%
74.6 (100)	95.0%	95.4%	93.6%	74.6 (100)	95.0%	95.4%	94.1%
93.3 (125)	95.0%	95.4%	94.1%	93.3 (125)	95.0%	95.4%	95.0%
112 (150)	95.4%	95.8%	94.1%	112 (150)	95.8%	95.8%	95.0%
149.2 (200)	95.4%	95.8%	95.0%	149.2 (200)	95.8%	96.2%	95.4%

- P. Minimum Power Factor at Full Load and Rated Voltage: 90 percent at 1200 RPM, 1800 RPM, and 3600 RPM. Power factor correction capacitors shall be provided unless the motor meets the 0.90 requirement without it or if the motor is controlled by a variable frequency drive. The power factor correction capacitors shall be able to withstand high voltage transients and power line variations without breakdown.
- Q. Energy Efficiency of Small Motors (Motor Efficiencies): All motors under 746 W (1 hp) shall meet the requirements of the DOE Small Motor Regulation.

Polyphase Open Motors Average full load efficiency				Capacitor-start capacitor-run and capacitor-start induction run open motors Average full load efficiency			
Rating kW (hp)	6 poles	4 poles	2 poles	Rating kW (hp)	6 poles	4 poles	2 poles
0.18 (0.25)	67.5	69.5	65.6	0.18 (0.25)	62.2	68.5	66.6
0.25 (0.33)	71.4	73.4	69.5	0.25 (0.33)	66.6	72.4	70.5
0.37 (0.5)	75.3	78.2	73.4	0.37 (0.5)	76.2	76.2	72.4
0.55 (0.75)	81.7	81.1	76.8	0.55 (0.75)	80.2	81.8	76.2

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install motors in accordance with manufacturer's recommendations, the NEC, NEMA, as shown on the drawings and/or as required by other sections of these specifications.
- B. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

3.2 FIELD TESTS

- A. All tests shall be witnessed by the Commissioning Agent or by the COR.
- B. Perform an electric insulation resistance Test using a megohmmeter on all motors after installation before startup. All shall test free from grounds.
- C. Perform Load test in accordance with IEEE 112, Test Method B, to determine freedom from electrical or mechanical defects and compliance with performance data.
- D. Insulation Resistance: Not less than one-half meg-ohm between stator conductors and frame, to be determined at the time of final inspection.
- E. All test data shall be compiled into a report form for each motor and provided to the contracting officer or their representative.

3.3 STARTUP AND TESTING

- A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.
- B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.
- C. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with COR and Commissioning Agent. Provide a minimum notice of 10 working days prior to startup and testing.

3.4 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- B. Components provided under this section of the specification will be tested as part of a larger system.

3.5 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for eight hours to instruct each VA personnel responsible in operation and maintenance of the system.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

SECTION 23 05 41
NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies the application of noise control measures, and vibration control techniques to boiler plant rotating equipment and parts including chillers, cooling towers, boilers, pumps, fans, compressors, motors, and steam turbines.
- B. A complete listing of all common acronyms and abbreviations are included in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- Noise criteria, , vibration tolerance and vibration isolation for HVAC and plumbing work.

1.2 RELATED WORK

- A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA and SAMPLES.
- B. Section 23 05 10, COMMON WORK RESULTS FOR HVAC.
- C. Section 23 31 00, HVAC DUCTS and CASINGS.
- D. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

1.3 QUALITY ASSURANCE

- A. Refer to article, QUALITY ASSURANCE in specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Noise Criteria:
1. Noise levels in all 8 octave bands due to equipment and duct systems shall not exceed following NC levels:

TYPE OF ROOM	NC LEVEL
Audio Speech Pathology	25
Audio Suites	25
Auditoriums, Theaters	35-40
Bathrooms and Toilet Rooms	40
Chapels	35
Conference Rooms	35
Corridors (Nurse Stations)	40
Corridors (Public)	40
Dining Rooms, Food Services/ Serving	40
Examination Rooms	35
Gymnasiums	50

Kitchens	50
Laboratories (With Fume Hoods)	45 to 55
Laundries	50
Lobbies, Waiting Areas	40
Locker Rooms	45
Offices, Large Open	40
Offices, Small Private	35
Operating Rooms	40
Patient Rooms	35
Phono/Cardiology	25
Recreation Rooms	40-45
Shops	50
SPD (Decontamination and Clean Preparation)	45
Therapeutic Pools	45
Treatment Rooms	35
Warehouse	50
X-Ray and General Work Rooms	40

2. For equipment which has no sound power ratings scheduled on the plans, the contractor shall select equipment such that the foregoing noise criteria, local ordinance noise levels, and OSHA requirements are not exceeded. Selection procedure shall be in accordance with ASHRAE Fundamentals Handbook, Chapter 8, Sound and Vibration.
3. An allowance, not to exceed 5db, may be added to the measured value to compensate for the variation of the room attenuating effect between room test condition prior to occupancy and design condition after occupancy which may include the addition of sound absorbing material, such as, furniture. This allowance may not be taken after occupancy. The room attenuating effect is defined as the difference between sound power level emitted to room and sound pressure level in room.
4. In absence of specified measurement requirements, measure equipment noise levels three feet from equipment and at an elevation of maximum noise generation.

C. Seismic Restraint Requirements:

1. Equipment:

- a. All mechanical equipment not supported with isolators external to the unit shall be securely anchored to the structure. Such mechanical equipment shall be properly supported to resist a horizontal force of 20 percent of the weight of the equipment furnished.
- b. All mechanical equipment mounted on vibration isolators shall be provided with seismic restraints capable of resisting a horizontal force of 50 percent of the weight of the equipment furnished.

2. Piping: Refer to specification Section 23 05 10, COMMON WORK RESULTS FOR HVAC.

3. Ductwork: Refer to specification Section 23 31 00, HVAC DUCTS AND CASINGS.

D. Allowable Vibration Tolerances for Rotating, Non-reciprocating Equipment: Not to exceed a self-excited vibration maximum velocity of 5 mm per second (0.20 inch per second) RMS, filter in, when measured with a vibration meter on bearing caps of machine in vertical, horizontal, and axial directions or measured at equipment mounting feet if bearings are concealed. Measurements for internally isolated fans and motors may be made at the mounting feet.

1.4 SUBMITTALS

A. Submit in accordance with specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data:

1. Vibration isolators:

- a. Floor mountings
- b. Hangers
- c. Snubbers
- d. Thrust restraints

2. Bases.

3. Seismic restraint provisions and bolting.

4. Acoustical enclosures.

C. Isolator manufacturer shall furnish with submittal load calculations for selection of isolators, including supplemental bases, based on lowest operating speed of equipment supported.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. (ASHRAE):
Handbook 2017.....Fundamentals Handbook, Chapter 8, Sound and Vibration
- C. American Society for Testing and Materials (ASTM):
A123/A123M-2017.....Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
A307-2016.....Standard Specification for Carbon Steel Bolts and Studs, 60,000 PSI Tensile Strength
D2240-05(2010).....Standard Test Method for Rubber Property - Durometer Hardness
- D. Manufacturers Standardization (MSS):
SP-58-2018.....Pipe Hangers and Supports-Materials, Design and Manufacture
- E. Occupational Safety and Health Administration (OSHA):
29 CFR 1960.95.....Occupational Noise Exposure
- F. American Society of Civil Engineers (ASCE):
ASCE 7-2017.....Minimum Design Loads for Buildings and Other Structures.
- G. American National Standards Institute / Sheet Metal and Air Conditioning Contractor's National Association (ANSI/SMACNA):
001-2008.....Seismic Restraint Manual: Guidelines for Mechanical Systems, 3rd Edition.
- H. International Code Council (ICC):
IBC 2018.....International Building Code.
- I. Department of Veterans Affairs (VA):
H-18-8 2016.....Seismic Design Requirements.

PART 2 - PRODUCTS**2.1 GENERAL REQUIREMENTS**

- A. Type of isolator, base, and minimum static deflection shall be as required for each specific equipment application as recommended by isolator or equipment manufacturer but subject to minimum requirements indicated herein and in the schedule on the drawings.

- B. Elastometric Isolators shall comply with ASTM D2240 and be oil resistant neoprene with a maximum stiffness of 60 durometer and have a straight-line deflection curve.
- C. Exposure to weather: Isolator housings to be either hot dipped galvanized or powder coated to ASTM B117 salt spray testing standards. Springs to be powder coated or electro galvanized. All hardware to be electro galvanized. In addition, provide limit stops to resist wind velocity. Velocity pressure established by wind shall be calculated in accordance with section 1609 of the International Building Code. A minimum wind velocity of 75 mph shall be employed.
- D. Uniform Loading: Select and locate isolators to produce uniform loading and deflection even when equipment weight is not evenly distributed.
- E. Color code isolators by type and size for easy identification of capacity.

2.2 SEISMIC RESTRAINT REQUIREMENTS FOR EQUIPMENTS

- A. Bolt pad mounted equipment, without vibration isolators, to the floor or other support using ASTM A307 standard bolting material.
- B. Floor mounted equipment, with vibration Isolators: Type SS. Where Type N isolators are used provide channel frame base horizontal restraints bolted to the floor, or other support, on all sides of the equipment. Size and material required for the base shall be as recommended by the isolator manufacturer.
- C. On all sides of suspended equipment, provide bracing for rigid supports and provide restraints for resiliently supported equipment.

2.3 VIBRATION ISOLATORS

- A. Floor Mountings:
 - 1. Double Deflection Neoprene (Type N): Shall include neoprene covered steel support plated (top and bottom), friction pads, and necessary bolt holes.
 - 2. Spring Isolators (Type S): Shall be free-standing, laterally stable and include acoustical friction pads and leveling bolts. Isolators shall have a minimum ratio of spring diameter-to-operating spring height of 1.0 and an additional travel to solid equal to 50 percent of rated deflection.
 - 3. Captive Spring Mount for Seismic Restraint (Type SS):
 - a. Design mounts to resiliently resist seismic forces in all directions. Snubbing shall take place in all modes with adjustment to limit upward, downward, and horizontal travel to a maximum of 6

mm (1/4-inch) before contacting snubbers. Mountings shall have a minimum rating of one G coefficient of gravity as calculated and certified by a registered structural engineer.

- b. All mountings shall have leveling bolts that must be rigidly bolted to the equipment. Spring diameters shall be no less than 0.8 of the compressed height of the spring at rated load. Springs shall have a minimum additional travel to solid equal to 50 percent of the rated deflection. Mountings shall have ports for spring inspection. Provide an all-directional neoprene cushion collar around the equipment bolt.
4. Spring Isolators with Vertical Limit Stops (Type SP): Similar to spring isolators noted above, except include a vertical limit stop to limit upward travel if weight is removed and also to reduce movement and spring extension due to wind loads. Provide clearance around restraining bolts to prevent mechanical short circuiting. Isolators shall have a minimum seismic rating of one G.
5. Pads (Type D), Washers (Type W), and Bushings (Type L): Pads shall be natural rubber or neoprene waffle, neoprene and steel waffle, or reinforced duck and neoprene. Washers and bushings shall be reinforced duck and neoprene. Washers and bushings shall be reinforced duck and neoprene. Size pads for a maximum load of 345 kPa (50 pounds per square inch).
6. Seismic Pad (Type DS): Pads shall be natural rubber / neoprene waffle with steel top plate and drilled for an anchor bolt. Washers and bushings shall be reinforced duck and neoprene. Size pads for a maximum load of 345 kPa (50 pounds per square inch).
- B. Hangers: Shall be combination neoprene and springs unless otherwise noted and shall allow for expansion of pipe.
 1. Combination Neoprene and Spring (Type H): Vibration hanger shall contain a spring and double deflection neoprene element in series. Spring shall have a diameter not less than 0.8 of compressed operating spring height. Spring shall have a minimum additional travel of 50 percent between design height and solid height. Spring shall permit a 15-degree angular misalignment without rubbing on hanger box.
 2. Spring Position Hanger (Type HP): Similar to combination neoprene and spring hanger except hanger shall hold piping at a fixed

- elevation during installation and include a secondary adjustment feature to transfer load to spring while maintaining same position.
3. Neoprene (Type HN): Vibration hanger shall contain a double deflection type neoprene isolation element. Hanger rod shall be separated from contact with hanger bracket by a neoprene grommet.
 4. Spring (Type HS): Vibration hanger shall contain a coiled steel spring in series with a neoprene grommet. Spring shall have a diameter not less than 0.8 of compressed operating spring height. Spring shall have a minimum additional travel of 50 percent between design height and solid height. Spring shall permit a 15-degree angular misalignment without rubbing on hanger box.
 5. Hanger supports for piping 50 mm (2 inches) and larger shall have a pointer and scale deflection indicator.
 6. Hangers used in seismic applications shall be provided with a neoprene and steel rebound washer installed $\frac{1}{4}$ ' clear of bottom of hanger housing in operation to prevent spring from excessive upward travel
- C. Snubbers: Each spring mounted base shall have a minimum of four all-directional or eight two directional (two per side) seismic snubbers that are double acting. Elastomeric materials shall be shock absorbent neoprene bridge quality bearing pads, maximum 60 durometer, replaceable and have a minimum thickness of 6 mm (1/4 inch). Air gap between hard and resilient material shall be not less than 3 mm (1/8 inch) nor more than 6 mm (1/4 inch). Restraints shall be capable of withstanding design load without permanent deformation.
- D. Thrust Restraints (Type THR): Restraints shall provide a spring element contained in a steel frame with neoprene pads at each end attachment. Restraints shall have factory preset thrust and be field adjustable to allow a maximum movement of 6 mm (1/4 inch) when the fan starts and stops. Restraint assemblies shall include rods, angle brackets and other hardware for field installation.

2.4 BASES

- A. Rails (Type R): Design rails with isolator brackets to reduce mounting height of equipment and cradle machines having legs or bases that do not require a complete supplementary base. To assure adequate stiffness, height of members shall be a minimum of 1/12 of longest base dimension but not less than 100 mm (4 inches). Where rails are used

with neoprene mounts for small fans or close coupled pumps, extend rails to compensate overhang of housing.

- B. Integral Structural Steel Base (Type B): Design base with isolator brackets to reduce mounting height of equipment which require a complete supplementary rigid base. To assure adequate stiffness, height of members shall be a minimum of 1/12 of longest base dimension, but not less than 100 mm (four inches).
- C. Inertia Base (Type I): Base shall be a reinforced concrete inertia base. Pour concrete into a welded steel channel frame, incorporating prelocated equipment anchor bolts and pipe sleeves. Level the concrete to provide a smooth uniform bearing surface for equipment mounting. Provide grout under uneven supports. Channel depth shall be a minimum of 1/12 of longest dimension of base but not less than 150 mm (six inches). Form shall include 13-mm (1/2-inch) reinforcing bars welded in place on minimum of 203 mm (eight inch) centers running both ways in a layer 40 mm (1-1/2 inches) above bottom. Use height saving brackets in all mounting locations. Weight of inertia base shall be equal to or greater than weight of equipment supported to provide a maximum peak-to-peak displacement of 2 mm (1/16 inch).
- D. Curb Mounted Isolation Base (Type CB): Fabricate from aluminum to fit on top of standard curb with overlap to allow water run-off and have wind and water seals which shall not interfere with spring action. Provide resilient snubbers with 6 mm (1/4 inch) clearance for wind resistance. Top and bottom bearing surfaces shall have sponge type weather seals. Integral spring isolators shall comply with Spring Isolator (Type S) requirements.

2.5 SOUND ATTENUATING UNITS

Refer to specification Section 23 31 00, HVAC DUCTS and CASINGS.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Vibration Isolation:
 - 1. No metal-to-metal contact will be permitted between fixed and floating parts.
 - 2. Connections to Equipment: Allow for deflections equal to or greater than equipment deflections. Electrical, drain, piping connections, and other items made to rotating or reciprocating equipment (pumps, compressors, etc.) which rests on vibration isolators, shall be

- isolated from building structure for first three hangers or supports with a deflection equal to that used on the corresponding equipment.
3. Common Foundation: Mount each electric motor on same foundation as driven machine. Hold driving motor and driven machine in positive rigid alignment with provision for adjusting motor alignment and belt tension. Bases shall be level throughout length and width. Provide shims to facilitate pipe connections, leveling, and bolting.
 4. Provide heat shields where elastomers are subject to temperatures over 38 degrees C (100 degrees F).
 5. Extend bases for pipe elbow supports at discharge and suction connections at pumps. Pipe elbow supports shall not short circuit pump vibration to structure.
 6. Non-rotating equipment such as heat exchangers and convertors shall be mounted on isolation units having the same static deflection as the isolation hangers or support of the pipe connected to the equipment.
- B. Inspection and Adjustments: Check for vibration and noise transmission through connections, piping, ductwork, foundations, and walls. Adjust, repair, or replace isolators as required to reduce vibration and noise transmissions to specified levels.

3.2 ADJUSTING

- A. Adjust vibration isolators after piping systems are filled and equipment is at operating weight.
- B. Adjust limit stops on restrained spring isolators to mount equipment at normal operating height. After equipment installation is complete, adjust limit stops so they are out of contact during normal operation.
- C. Attach thrust limits at centerline of thrust and adjust to a maximum of 1/4inch (6-mm) movement during start and stop.
- D. Adjust active height of spring isolators.
- E. Adjust snubbers according to manufacturer's recommendations.
- F. Adjust seismic restraints to permit free movement of equipment within normal mode of operation.
- G. Torque anchor bolts according to equipment manufacturer's recommendations to resist seismic forces.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection,

start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - - E N D - - -

SELECTION GUIDE FOR VIBRATION ISOLATORS

EQUIPMENT		ON GRADE			20FT FLOOR SPAN			30FT FLOOR SPAN			40FT FLOOR SPAN			50FT FLOOR SPAN		
		BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL
REFRIGERATION MACHINES																
PACKAGED HERMETIC		---	D	0.3	---	SP	0.8	---	SP	1.5	---	SP	1.5	R	SP	2.5
OPEN CENTRIFUGAL		B	D	0.3	B	SP	0.8	---	SP	1.5	B	SP	1.5	B	SP	3.5
RECIPROCATING:																
ALL		---	D	0.3	---	SP	0.8	R	SP	2.0	R	SP	2.5	R	SP	3.5
PUMPS																
CLOSE COUPLED	UP TO 1-1/2 HP	---	---	---	---	D, L, W	---	---	---	D, L, W	---	---	---	---	D, L, W	---
	2 HP & OVER	---	---	---	I	S	0.8	I	S	1.5	I	S	1.5	I	S	2.0
LARGE INLINE	Up to 25 HP	---	---	---	---	S	0.75	---	S	1.50	---	S	1.50	---	---	NA
	26 HP THRU 30 HP	---	---	---	---	S	1.0	---	S	1.50	---	S	2.50	---	---	NA
BASE MOUNTED	UP TO 10 HP	---	---	---	---	D, L, W	---	---	---	D, L, W	---	---	---	---	D, L, W	---
	15 HP THRU 40 HP	I	S	1.0	I	S	1.0	I	S	2.0	I	S	2.0	I	S	2.0

EQUIPMENT		ON GRADE			20FT FLOOR SPAN			30FT FLOOR SPAN			40FT FLOOR SPAN			50FT FLOOR SPAN		
		BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL
	50 HP & OVER	I	S	1.0	I	S	1.0	I	S	2.0	I	S	2.5	I	S	2.5
ROOF FANS																
ABOVE OCCUPIED AREAS:																
5 HP & OVER		---	---	---	CB	S	1.0	CB	S	1.0	CB	S	1.0	CB	S	1.0
CENTRIFUGAL FANS																
UP TO 50 HP:																
UP TO 200 RPM		B	N	0.3	B	S	2.5	B	S	2.5	B	S	3.5	B	S	3.5
201 – 300 RPM		B	N	0.3	B	S	2.0	B	S	2.5	B	S	2.5	B	S	3.5
301 – 500 RPM		B	N	0.3	B	S	2.0	B	S	2.0	B	S	2.5	B	S	3.5
501 RPM & OVER		B	N	0.3	B	S	2.0	B	S	2.0	B	S	2.0	B	S	2.5
AIR HANDLING UNIT PACKAGES																
SUSPENDED:																
UP THRU 5 HP		---	---	---	---	H	1.0	---	H	1.0	---	H	1.0	---	H	1.0
7-1/2 HP & OVER:																
UP TO 500 RPM		---	---	---	---	H, THR	1.5	---	H, THR	2.5	---	H, THR	2.5	---	H, THR	2.5
501 RPM & OVER		---	---	---	---	H, THR	0.8	---	H, THR	0.8	---	H, TH R	0.8	---	H, TH R	2.0

EQUIPMENT	ON GRADE			20FT FLOOR SPAN			30FT FLOOR SPAN			40FT FLOOR SPAN			50FT FLOOR SPAN		
	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL
FLOOR MOUNTED:															
UP THRU 5 HP	---	D	---	---	S	1.0	---	S	1.0	---	S	1.0	---	S	1.0
7-1/2 HP & OVER:															
UP TO 500 RPM	---	D	---	R	S, THR	1.5	R	S, THR	2.5	R	S, THR	2.5	R	S, THR	2.5
501 RPM & OVER	---	D	---	---	S, THR	0.8	---	S, THR	0.8	R	S, THR	1.5	R	S, THR	2.0
CONDENSING UNITS															
ALL	---	SS	0.25	---	SS	0.75	---	SS	1.5	CB	SS	1.5	---	---	NA
IN-LINE CENTRIFUGAL AND VANE AXIAL FANS, FLOOR MOUNTED: (APR 9)															
UP THRU 50 HP:															
UP TO 300 RPM	---	D	---	R	S	2.5	R	S	2.5	R	S	2.5	R	S	3.5
301 - 500 RPM	---	D	---	R	S	2.0	R	S	2.0	R	S	2.5	R	S	2.5
501 - & OVER	---	D	---	---	S	1.0	---	S	1.0	R	S	2.0	R	S	2.5

NOTES:

1. Edit the Table above to suit where isolator, other than those shown, are used, such as for seismic restraints and position limit stops.
2. For suspended floors lighter than 100 mm (4 inch) thick concrete, select deflection requirements from next higher span.
3. For separate chiller building on grade, pump isolators may be omitted.
4. Direct bolt fire pumps to concrete base. Provide pads (D) for domestic water booster pump package.
5. For projects in seismic areas, use only SS & DS type isolators and snubbers.
6. For floor mounted in-line centrifugal blowers (ARR 1): use "B" type in lieu of "R" type base.
7. Suspended: Use "H" isolators of same deflection as floor mounted.

SECTION 23 05 93
TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 - GENERAL**1.1 DESCRIPTION**

A. Testing, adjusting, and balancing (TAB) of heating, ventilating and air conditioning (HVAC) systems. TAB includes the following:

1. Planning systematic TAB procedures.
2. Design Review Report.
3. Systems Inspection report.
4. Duct Air Leakage test report.
5. Systems Readiness Report.
6. Balancing air and water distribution systems; adjustment of total system to provide design performance; and testing performance of equipment and automatic controls.
7. Vibration and sound measurements.
8. Recording and reporting results.
9. Document critical paths of flow on reports.

B. Definitions:

1. Basic TAB used in this Section: Chapter 39, "Testing, Adjusting and Balancing" of 2019 ASHRAE Handbook, "HVAC Applications".
2. TAB: Testing, Adjusting and Balancing; the process of checking and adjusting HVAC systems to meet design objectives.
3. AABC: Associated Air Balance Council.
4. NEBB: National Environmental Balancing Bureau.
5. TABB: Testing Adjusting and Balancing Bureau
6. SMACNA: Sheet Metal Contractors National Association
7. Hydronic Systems: Includes chilled water, heating hot water and glycol-water systems.
8. Air Systems: Includes all outside air, supply air, return air, exhaust air and relief air systems.
9. Flow rate tolerance: The allowable percentage variation, minus to plus, of actual flow rate from values (design) in the contract documents.

1.2 RELATED WORK

- A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Section 23 05 10, COMMON WORK RESULTS FOR BOILER PLANTS and STEAM GENERATION.
- C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

- D. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- E. Section 23 07 11, HVAC, AND BOILER PLANT INSULATION.
- F. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- G. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- H. Section 23 31 00, HVAC DUCTS AND CASINGS.
- I. Section 23 36 00, AIR TERMINAL UNITS.
- J. Section 23 64 00, PACKAGED WATER CHILLERS.

1.3 QUALITY ASSURANCE

- A. Refer to Articles, Quality Assurance and Submittals, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- B. Qualifications:
 - 1. TAB Agency: The TAB agency shall be a subcontractor of the General Contractor and shall report to and be paid by the General Contractor.
 - 2. The TAB agency shall be either a certified member of AABC, NEEB, TABB or NEBB to perform TAB service for HVAC, water balancing and vibrations and sound testing of equipment. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the agency loses subject certification during this period, the General Contractor shall immediately notify the COR and submit another qualified TAB firm for approval. Any agency that has been the subject of disciplinary action by either the AABC, TABB or NEBB within the five years preceding Contract Award shall not be eligible to perform any work related to the TAB. All work performed in this Section and in other related Sections by the TAB agency shall be considered invalid if the TAB agency loses its certification prior to Contract completion, and the successor agency's review shows unsatisfactory work performed by the predecessor agency.
 - 3. TAB Specialist: The TAB specialist shall be either a member of AABC or TABB or an experienced technician of the Agency certified by NEBB. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the Specialist loses subject certification during this period, the General Contractor shall immediately notify the Resident Engineer and submit another TAB Specialist for approval. Any individual that has been the

- subject of disciplinary action by either the AABC or the NEBB within the five years preceding Contract Award shall not be eligible to perform any duties related to the HVAC systems, including TAB. All work specified in this Section and in other related Sections performed by the TAB specialist shall be considered invalid if the TAB Specialist loses its certification prior to Contract completion and must be performed by an approved successor.
4. TAB Specialist shall be identified by the General Contractor within 60 days after the notice to proceed. The TAB specialist will be coordinating, scheduling, and reporting all TAB work and related activities and will provide necessary information as required by the Resident Engineer. The responsibilities would specifically include:
 - a. Shall directly supervise all TAB work.
 - b. Shall sign the TAB reports that bear the seal of the TAB standard. The reports shall be accompanied by report forms and schematic drawings required by the TAB standard, AABC, TABB or NEBB.
 - c. Would follow all TAB work through its satisfactory completion.
 - d. Shall provide final markings of settings of all HVAC adjustment devices.
 - e. Permanently mark location of duct test ports.
 - f. Shall document critical paths from the fan or pump. These critical paths are ones in which are 100% open from the fan or pump to the terminal device. This will show the least amount of restriction is being imposed on the system by the TAB firm.
 5. All TAB technicians performing actual TAB work shall be experienced and must have done satisfactory work on a minimum of 3 projects comparable in size and complexity to this project. Qualifications must be certified by the TAB agency in writing. The lead technician shall be certified by AABC, TABB or NEBB
- C. Test Equipment Criteria: The instrumentation shall meet the accuracy/calibration requirements established by AABC National Standards, TABB/SMACNA International Standards, or by NEBB Procedural Standards for Testing, Adjusting and Balancing of Environmental Systems and instrument manufacturer. Provide calibration history of the instruments to be used for test and balance purpose.
- D. TAB Criteria:

1. One or more of the applicable AABC, NEBB, TABB or SMACNA publications, supplemented by ASHRAE Handbook "2019 HVAC Applications" Chapter 39, and requirements stated herein shall be the basis for planning, procedures, and reports.
2. Flow rate tolerance: Following tolerances are allowed. For tolerances not mentioned herein follow 2011 ASHRAE Handbook "2019 HVAC Applications", Chapter 39, as a guideline. Air Filter resistance during tests, artificially imposed, if necessary, shall be at least 100 percent of manufacturer recommended change over pressure drop values for pre-filters and after-filters.
 - a. Air handling unit and all other fans, cubic meters/min (cubic feet per minute): Minus 0 percent to plus 10 percent.
 - b. Air terminal units (maximum values): Minus 2 percent to plus 10 percent.
 - c. Exhaust hoods/cabinets: 0 percent to plus 10 percent.
 - d. Minimum outside air: 0 percent to plus 10 percent.
 - e. Individual room air outlets and inlets, and air flow rates not mentioned above: Minus 5 percent to plus 10 percent except if the air to a space is 100 CFM or less the tolerance would be minus 5 to plus 5 percent.
 - f. Heating hot water pumps and hot water coils: Minus 5 percent to plus 5 percent.
 - g. Chilled water and condenser water pumps: Minus 0 percent to plus 5 percent.
 - h. Chilled water coils: Minus 0 percent to plus 5 percent.
3. Systems shall be adjusted for energy efficient operation as described in PART 3.
4. Typical TAB procedures and critical path results shall be demonstrated to the Resident Engineer for one air distribution system (including all fans, three terminal units, three rooms randomly selected by the COR one of which shall be a critical path) and one hydronic system (pumps and three coils) as follows:
 - a. When field TAB work begins.
 - b. During each partial final inspection and the final inspection for the project if requested by VA.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

- B. Submit names and qualifications of TAB agency and TAB specialists within 60 days after the notice to proceed. Submit information on three recently completed projects and a list of proposed test equipment.
- C. For use by the Resident Engineer staff, submit one complete set of applicable AABC, NEBB or TABB publications that will be the basis of TAB work.
- D. Submit Following for Review and Approval:
 - 1. Design Review Report within 90 days for conventional design projects after the system layout on air and water side is completed by the Contractor.
 - 2. Systems inspection report on equipment and installation for conformance with design.
 - 3. Duct Air Leakage Test Report.
 - 4. Systems Readiness Report.
 - 5. Intermediate and Final TAB reports covering flow balance and adjustments, performance tests, vibration tests and sound tests.
 - 6. Include in final reports uncorrected installation deficiencies noted during TAB and applicable explanatory comments on test results that differ from design requirements.
 - 7. Include in each report the critical path for each balanced branch (air and hydronic. Every branch shall have at least one terminal device damper 100% open.
- E. Prior to request for Final or Partial Final inspection, submit completed Test and Balance report for the area with noted critical paths.

1.5 APPLICABLE PUBLICATIONS

- A. The following publications form a part of this specification to the extent indicated by the reference thereto. In text the publications are referenced to by the acronym of the organization.
- B. American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc. (ASHRAE):
Handbook 2019.....HVAC Applications ASHRAE Handbook, Chapter 39, Testing, Adjusting, and Balancing and Chapter 49, Sound and Vibration Control
- C. Associated Air Balance Council (AABC):
7th Edition 2016 AABC National Standards for Total System Balance

D. National Environmental Balancing Bureau (NEBB):

9th Edition 2019 Procedural Standards for Testing, Adjusting,
Balancing of Environmental Systems

3rd Edition 2015 Procedural Standards for the Measurement of
Sound and Vibration

2nd Edition 2019 ... Standard for Whole Building Technical Commissioning
of New Construction

E. Sheet Metal and Air Conditioning Contractors National Association
(SMACNA):

3rd Edition 2005 HVAC SYSTEMS Testing, Adjusting and Balancing
TABB- TAB Procedural Guide Current Edition

PART 2 - PRODUCTS

2.1 PLUGS

Provide plastic plugs to seal holes drilled in ductwork for test
purposes.

2.2 INSULATION REPAIR MATERIAL

See Section 23 07 11, HVAC and BOILER PLANT INSULATION Provide for
repair of insulation removed or damaged for TAB work.

PART 3 - EXECUTION

3.1 GENERAL

- A. Refer to TAB Criteria in Article, Quality Assurance.
- B. Obtain applicable contract documents and copies of approved submittals
for HVAC equipment and automatic control systems.

3.2 DESIGN REVIEW REPORT

The TAB Specialist shall review the Contract Plans and specifications
and advise the Resident Engineer of any design deficiencies that would
prevent the HVAC systems from effectively operating in accordance with
the sequence of operation specified or prevent the effective and
accurate TAB of the system. The TAB Specialist shall provide a report
individually listing each deficiency and the corresponding proposed
corrective action necessary for proper system operation.

3.3 SYSTEMS INSPECTION REPORT

- A. Inspect equipment and installation for conformance with design.
- B. The inspection and report are to be done after air distribution
equipment is on site and duct installation has begun, but well in
advance of performance testing and balancing work. The purpose of the
inspection is to identify and report deviations from design and ensure
that systems will be ready for TAB at the appropriate time.

- C. Reports: Follow check list format developed by AABC, NEBB or SMACNA (TABB), supplemented by narrative comments, with emphasis on air handling units and fans. Check for conformance with submittals. Verify that diffuser and register sizes are correct. Check air terminal unit installation including their duct sizes and routing.

3.4 DUCT AIR LEAKAGE TEST REPORT

TAB Agency shall perform the leakage test as outlined in "Duct leakage Tests and Repairs" in Section 23 31 00, HVAC DUCTS and CASINGS for TAB agency's role and responsibilities in witnessing, recording and reporting of deficiencies.

3.5 SYSTEM READINESS REPORT

- A. Inspect each System to ensure that it is complete including installation and operation of controls. Submit report to RE in standard format and forms prepared and or approved by the Commissioning Agent.
- B. Verify that all items such as ductwork piping, dampers, valves, ports, terminals, connectors, etc., that is required for TAB are installed. Provide a report to the Resident Engineer.

3.6 TAB REPORTS

- A. Submit an intermediate report for 50 percent of systems and equipment tested and balanced to establish satisfactory test results.
- B. The TAB contractor shall provide raw data immediately in writing to the Resident Engineer if there is a problem in achieving intended results before submitting a formal report.
- C. If over 20 percent of readings in the intermediate report fall outside the acceptable range, the TAB report shall be considered invalid, and all contract TAB work shall be repeated after engineering and construction have been evaluated and re-submitted for approval at no additional cost to the owner.
- D. Do not proceed with the remaining systems until intermediate report is approved by the Resident Engineer.

3.7 TAB PROCEDURES

- A. TAB shall be performed in accordance with the requirement of the Standard under which TAB agency is certified by either AABC, TABB or NEBB. Balancing shall be done proportionally to all applicable systems.
1. At least one trunk damper shall be 100% open.
 2. At least one branch damper shall be 100%open per trunk.
 3. At least one terminal device duct be 100% open per branch.

- B. General: During TAB all related system components shall be in full operation. Fan and pump rotation, motor loads and equipment vibration shall be checked and corrected as necessary before proceeding with TAB. Set controls and/or block off parts of distribution systems to simulate design operation of variable volume air or water systems for test and balance work.
- C. Allow 14 days' time in construction schedule for TAB and submission of all reports for an organized and timely correction of deficiencies.
- D. Air Balance and Equipment Test: Include air handling units, fans, terminal units, fan coil units, room diffusers/outlets/inlets, computer room AC units, and laboratory fume hoods and biological safety cabinets.
1. Artificially load air filters by partial blanking to produce static air pressure drop of manufacturer's recommended pressure drop.
 2. Adjust fan speeds to provide design air flow. V-belt drives, including fixed pitch pulley requirements, are specified in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
 3. Test and balance systems in all specified modes of operation, including variable volume, economizer, and fire emergency modes. Verify that dampers and other HVAC controls function properly.
 4. Variable air volume (VAV) systems:
 - a. Coordinate TAB, including system volumetric controls, with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
 - b. Section 23 36 00, AIR TERMINAL UNITS, specifies that maximum and minimum flow rates for air terminal units (ATU) be factory set. Check and readjust ATU flow rates if necessary to meet design criteria. Balance air distribution from ATU on full cooling maximum scheduled cubic meters per minute (cubic feet per minute). Reset room thermostats and check ATU operation from maximum to minimum cooling, to the heating mode, and back to cooling. Record and report the heating coil leaving air temperature when the ATU is in the maximum heating mode. Record and report outdoor air flow rates under all operating conditions (The test shall demonstrate that the minimum outdoor air ventilation rate shall remain constant under all operating conditions).
 - c. Adjust operating pressure control setpoint to maintain the design flow to each space with the lowest setpoint.

5. Record final measurements for air handling equipment performance data sheets.
- E. Water Balance and Equipment Test: Include circulating pumps, convertors, coils, coolers, and condensers:
 1. Coordinate water chiller flow balancing with Section 23 64 00, PACKAGED WATER CHILLERS.
 2. Adjust flow rates for equipment. Set coils and evaporator to values on equipment submittals, if different from values on contract drawings.
 3. Primary-secondary (variable volume) systems: Coordinate TAB with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC. Balance systems at design water flow and then verify that variable flow controls function as designed.
 4. Record final measurements for hydronic equipment on performance data sheets. Include entering and leaving water temperatures for heating and cooling coils, and for convertors. Include entering and leaving air temperatures (DB/WB for cooling coils) for air handling units and reheat coils. Make air and water temperature measurements at the same time.

3.8 VIBRATION TESTING

- A. Furnish instruments and perform vibration measurements as specified in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT. Field vibration balancing is specified in Section 23 05 11, COMMON WORK RESULTS FOR HVAC. Provide measurements for all rotating HVAC equipment of 373 watts (1/2 horsepower) and larger, including centrifugal/screw compressors, cooling towers, pumps, fans, and motors.
- B. Record initial measurements for each unit of equipment on test forms and submit a report to the Resident Engineer. Where vibration readings exceed the allowable tolerance Contractor shall be directed to correct the problem. The TAB agency shall verify that the corrections are done and submit a final report to the Resident Engineer.

3.9 SOUND TESTING

- A. Perform and record required sound measurements in accordance with Paragraph, QUALITY ASSURANCE in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
 1. Take readings in rooms, approximately three percent of all rooms.
The Resident Engineer may designate the specific rooms to be tested.

2. Provide chiller and cooling tower sound measurements. Refer to Section 23 64 00, PACKAGED WATER CHILLERS and Section 23 65 00, COOLING TOWERS.

- B. Take measurements with a calibrated sound level meter and octave band analyzer of the accuracy required by AABC, TABB or NEBB.
- C. Sound reference levels, formulas and coefficients shall be according to 2019 ASHRAE Handbook, "HVAC Applications", Chapter 49, SOUND AND VIBRATION CONTROL.
- D. Determine compliance with specifications as follows:
 - 1. When sound pressure levels are specified, including the NC Criteria in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT:
 - a. Reduce the background noise as much as possible by shutting off unrelated audible equipment.
 - b. Measure octave band sound pressure levels with specified equipment "off."
 - c. Measure octave band sound pressure levels with specified equipment "on."
 - d. Use the DIFFERENCE in corresponding readings to determine the sound pressure due to equipment.

DIFFERENCE:	0	1	2	3	4	5 to 9	10 or More
FACTOR:	10	7	4	3	2	1	0

Sound pressure level due to equipment equals sound pressure level with equipment "on" minus FACTOR.

- e. Plot octave bands of sound pressure level due to equipment for typical rooms on a graph which also shows noise criteria (NC) curves.
- 2. When sound power levels are specified:
 - a. Perform steps 1.a. thru 1.d., as above.
 - b. For indoor equipment: Determine room attenuating effect, i.e., difference between sound power level and sound pressure level. Determined sound power level will be the sum of sound pressure level due to equipment plus the room attenuating effect.
 - c. For outdoor equipment: Use directivity factor and distance from noise source to determine distance factor, i.e., difference between sound power level and sound pressure level. Measured

sound power level will be the sum of sound pressure level due to equipment plus the distance factor. Use 10 meters (30 feet) for sound level location.

3. Where sound pressure levels are specified in terms of dB(A), as in Section 23 65 00, COOLING TOWERS, measure sound levels using the "A" scale of meter. Single value readings will be used instead of octave band analysis.
- E. Where measured sound levels exceed specified level, the installing contractor or equipment manufacturer shall take remedial action approved by the Resident Engineer and the necessary sound tests shall be repeated.
- F. Test readings for sound testing could go higher than 15 percent if determination is made by the Resident Engineer based on the recorded sound data.

3.10 MARKING OF SETTINGS

Following approval of Tab final Report, the setting of all HVAC adjustment devices including valves, splitters and dampers shall be permanently marked by the TAB Specialist so that adjustment can be restored if disturbed at any time. Style and colors used for markings shall be coordinated with the Resident Engineer.

3.11 IDENTIFICATION OF TEST PORTS

The TAB Specialist shall permanently and legibly identify the location points of duct test ports. If the ductwork has exterior insulation, the identification shall be made on the exterior side of the insulation. All penetrations through ductwork and ductwork insulation shall be sealed to prevent air leaks and maintain integrity of vapor barrier.

3.12 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.13 CRITICAL FLOW PATH

- A. Provide a documented critical path for all fluid flows. There shall be at least one terminal device that can be traced back to the fan or pump where there is no damper or valves that are less than 100% open.

- - E N D - - -

SECTION 23 08 00**COMMISSIONING OF HVAC SYSTEMS****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. The requirements of this Section apply to all sections of Division 23.
- B. This project will have selected building systems commissioned. The complete list of equipment and systems to be commissioned is specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The commissioning process, which the Contractor is responsible to execute, is defined in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. A Commissioning Agent (CxA) appointed by the VA will manage the commissioning process.

1.2 RELATED WORK

- A. Section 01 00 00 GENERAL REQUIREMENTS.
- B. Section 01 33 00 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.
- D. Section 23 05 41 NOISE AND VIBRATION CONTROL for HVAC PIPING AND EQUIPMENT.
- E. Section 23 05 93 TESTING, ADJUSTING, AND BALANCING FOR HVAC.
- F. Section 23 09 23 DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

1.3 SUMMARY

- A. This Section includes requirements for commissioning the HVAC systems of the related subsystems and equipment. This Section supplements the general requirements specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.
- B. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for more details regarding processes and procedures as well as roles and responsibilities for all Commissioning Team members.

1.4 DEFINITIONS

- A. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for definitions.

1.5 COMMISSIONED SYSTEMS

- A. Commissioning of a system or systems specified in Division 23 is part of the construction process. Documentation and testing of these systems, as well as training of the VA's Operation and Maintenance personnel in accordance with the requirements of Section 01 91 00

GENERAL COMMISSIONING REQUIREMENTS and of Division 23, is required in cooperation with the VA and the Commissioning Agent.

- B. The Facility HVAC systems commissioning will include the systems listed in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

1.6 SUBMITTALS

- A. The commissioning process requires review of selected Submittals that pertain to the systems to be commissioned. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.
- B. The commissioning process requires Submittal review simultaneously with engineering review. Specific submittal requirements related to the commissioning process are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

1.7 APPLICABLE PUBLICATIONS

- A. The following publications form a part of this specification to the extent indicated by the reference thereto. In text the publications are referenced to by the acronym of the organization.
- B. Department of Veterans Affairs (VA):
PG 18-10 2007.....Mission Critical Facilities - DRAFT
PG 18-10 2007.....Life-Safety Protected Facilities - DRAFT
- C. American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc. (ASHRAE):
HANDBOOK 2019.....HVAC Applications ASHRAE Handbook, Chapter 39,
Testing, Adjusting, and Balancing, Chapter 44,
HVAC Commissioning and Chapter 49, Sound and
Vibration Control
HANDBOOK 2017.....HVAC Fundamentals ASHRAE Handbook, Chapter 8,
Sound and Vibration
- D. Associated Air Balance Council (AABC):
7th Edition 2016.....AABC National Standards for Total System
Balance
- E. National Environmental Balancing Bureau (NEBB):
9th Edition 2019.....Procedural Standards for Testing, Adjusting,
Balancing of Environmental Systems
3rd Edition 015 Procedural Standards for the Measurement of
Sound and Vibration

2nd Edition 2019 ... Standard for Whole Building Technical

Commissioning of New Construction

F. Sheet Metal and Air Conditioning Contractors National Association
(SMACNA):

006-2006.....HVAC Duct Construction Standard - Metal and
Flexible Duct

3rd Edition 2005 HVAC Systems Testing, Adjusting and Balancing

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 CONSTRUCTION INSPECTIONS

A. Commissioning of HVAC systems will require inspection of individual elements of the HVAC systems construction throughout the construction period. The Contractor shall coordinate with the Commissioning Agent in accordance with Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS and the Commissioning plan to schedule HVAC systems inspections as required to support the Commissioning Process.

3.2 PRE-FUNCTIONAL CHECKLISTS

A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. Refer to Sections 23 05 41 NOISE AND VIBRATION CONTROL for HVAC PIPING AND EQUIPMENT, Section 23 05 93 TESTING, ADJUSTING, AND BALANCING FOR HVAC and Section 23 09 23 DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC requirements. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning Agent will select a broader sample of checklists for review. If the Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the checklists for the type of equipment will be returned to the Contractor for correction and resubmission. Refer to SECTION 01 91 00 GENERAL

COMMISSIONING REQUIREMENTS for submittal requirements for Pre-Functional Checklists, Equipment Startup Reports, and other commissioning documents.

3.3 CONTRACTORS TESTS

- A. Contractor tests as required by other sections of Division 23 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. All testing shall be incorporated into the project schedule. Contractor shall provide no less than 7 calendar days' notice of testing. The Commissioning Agent will witness selected Contractor tests at the sole discretion of the Commissioning Agent. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

3.4 SYSTEMS FUNCTIONAL PERFORMANCE TESTING:

- A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the Resident Engineer. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed. See Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS, for additional requirements.

3.5 TRAINING OF VA PERSONNEL

- A. Training of the VA operation and maintenance personnel is required in cooperation with the Resident Engineer and Commissioning Agent. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. Contractor shall submit training agendas and trainer resumes in accordance with the requirements of Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The instruction shall be scheduled in coordination with the VA Resident Engineer after submission and approval of formal training plans. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS and Division 23 Sections for additional Contractor training requirements.

----- **END** -----

SECTION 23 09 23
DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC

PART 1 - GENERAL

1.1 DESCRIPTION

A. provide (a) direct-digital control system(s) as indicated on the project documents, point list, interoperability tables, drawings and as described in these specifications. Include a complete and working direct-digital control system. Include all engineering, programming, controls and installation materials, installation labor, commissioning and start-up, training, final project documentation and warranty.

1. The direct-digital control system(s) shall be native BACnet. All new workstations, controllers, devices, and components shall be listed by BACnet Testing Laboratories. All new workstations, controllers, devices, and components shall be accessible using a Web browser interface and shall communicate exclusively using the ASHRAE Standard 135 BACnet communications protocol without the use of gateways, unless otherwise allowed by this Section of the technical specifications, specifically shown on the design drawings, and specifically requested otherwise by the VA. 3. The work administered by this Section of the technical specifications shall include all labor, materials, special tools, equipment, enclosures, power supplies, software, software licenses, Project specific software configurations and database entries, interfaces, wiring, tubing, installation, labeling, engineering, calibration, documentation, submittals, testing, verification, training services, permits and licenses, transportation, shipping, handling, administration, supervision, management, insurance, Warranty, specified services and any other items required for a complete and fully functional Controls System.
2. The control systems shall be designed such that each mechanical system shall operate under stand-alone mode. The A/E shall designate what each "mechanical systems" is composed of. The contractor administered by this Section of the technical specifications shall provide controllers for each mechanical system. In the event of a network communication failure, or the loss of any other controller, the control system shall continue to operate independently. Failure of the ECC shall have no effect on the field controllers, including those involved with global strategies.

3. The control system shall accommodate 1 Engineering Control Center(s) and the control system shall accommodate 20 web-based Users simultaneously, and the access to the system should be limited only by operator password.
- B. Some products are furnished but not installed by the contractor administered by this Section of the technical specifications. The contractor administered by this Section of the technical specifications shall formally coordinate in writing and receive from other contractors formal acknowledgements in writing prior to submission the installation of the products. These products include but are not limited to the following:
1. Control valves.
 2. Flow switches.
 3. Flow meters.
 4. Sensor wells and sockets in piping.
 5. Terminal unit controllers.
 6. Variable Speed Drives (VFD)/(VSMC). Refer to 26 29 11 VARIABLE SPEED MOTOR CONTROLLERS for drive requirements.
- C. Some products are installed but not furnished by the contractor administered by this Section of the technical specifications. The contractor administered by this Section of the technical specifications shall formally coordinate in writing and receive from other contractors formal acknowledgements in writing prior to submission the procurement of the products. These products include but are not limited to the following:
1. Factory-furnished accessory thermostats and sensors furnished with unitary equipment.
- D. Some products are not provided by, but are nevertheless integrated with the work executed by, the contractor administered by this Section of the technical specifications. These products include but are not limited to the following:
1. Fire alarm systems. If zoned fire alarm is required by the project-specific requirements, this interface shall require multiple relays, which are provided and installed by the fire alarm system contractor, to be monitored.
 2. Terminal units' velocity sensors
 - 3 ECM Motors.

4. The following systems have limited control (as individually noted below) from the ECC:

a. Constant temperature rooms: temperature out of acceptable range and status alarms.

b. Elevators: status alarms.

E. Responsibility Table:

Work/Item/System	Furnish	Install	Low Voltage Wiring	Line Power
Control system low voltage and communication wiring	23 09 23	23 09 23	23 09 23	N/A
Terminal units	23	23	N/A	26
Controllers for terminal units	23 09 23	23	23 09 23	16
LAN conduits and raceway	23 09 23	23 09 23	N/A	N/A
Automatic dampers (not furnished with equipment)	23 09 23	23	N/A	N/A
Automatic damper actuators	23 09 23	23 09 23	23 09 23	23 09 23
Manual valves	23	23	N/A	N/A
Automatic valves	23 09 23	23	23 09 23	23 09 23
Pipe insertion devices and taps, flow and pressure stations.	23	23	N/A	N/A
Thermowells	23 09 23	23	N/A	N/A
Current Switches	23 09 23	23 09 23	23 09 23	N/A
Control Relays	23 09 23	23 09 23	23 09 23	N/A
All control system nodes, equipment, housings, enclosures and panels.	23 09 23	23 09 23	23 09 23	26
VFDs	23	23/26	23 09 23	26
Fan Coil controls (not furnished with equipment)	23 09 23	23 09 23	23 09 23	26
Unit Heater controls (not furnished with equipment)	23 09 23	23 09 23	23 09 23	26
Air-to-Air Energy Recovery Equipment	23 09 23	23 09 23	23 09 23	26
Starters, HOA switches	23	23	N/A	26

1.2 RELATED WORK

A. Section 21 05 11, Common Work Results for Fire Suppression

- B. Section 21 10 00, Water-Based Fire-Suppression Systems.
- C. Section 22 11 23, Domestic Water Pumps.
- E. Section 23 21 13, Hydronic Piping.
- F. Section 23 22 13, Steam and Condensate Heating Piping.
- G. Section 23 31 00, HVAC Ducts and Casings.
- H. Section 23 72 00, Air-to-Air Energy Recovery Equipment.
- I. Section 23 82 00, Convection Heating and Cooling Units.
- J. Section 26 05 11, Requirements for Electrical Installations.
- K. Section 26 05 21, Low-Voltage Electrical Power Conductors and Cables (600 Volts and Below).
- L. Section 26 05 26, Grounding and Bonding for Electrical Systems.
- M. Section 26 05 33, Raceway and Boxes for Electrical Systems.
- N. Section 26 27 26, Wiring Devices.
- O. Section 26 29 11, Motor Controllers.
- P. Section 27 15 00, Communications Structured Cabling
- Q. Section 28 31 00, Fire Detection and Alarm System.

1.3 DEFINITION

- A. Algorithm: A logical procedure for solving a recurrent mathematical problem; A prescribed set of well-defined rules or processes for the solution of a problem in a finite number of steps.
- B. Analog: A continuously varying signal value (e.g., temperature, current, velocity etc.
- C. BACnet: A Data Communication Protocol for Building Automation and Control Networks, ANSI/ASHRAE Standard 135. This communications protocol allows diverse building automation devices to communicate data and services over a network.
- D. BACnet/IP: Annex J of Standard 135. It defines and allows for using a reserved UDP socket to transmit BACnet messages over IP networks. A BACnet/IP network is a collection of one or more IP sub-networks that share the same BACnet network number.
- E. Baud: It is a signal change in a communication link. One signal change can represent one or more bits of information depending on type of transmission scheme. Simple peripheral communication is normally one bit per Baud. (e.g., Baud rate = 78,000 Baud/sec is 78,000 bits/sec, if one signal change = 1 bit).
- F. Binary: A two-state system where a high signal level represents an "ON" condition and an "OFF" condition is represented by a low signal level.

- G. Control Unit (CU): Generic term for any controlling unit, stand-alone, microprocessor based, digital controller residing on secondary LAN or Primary LAN, used for local controls or global controls
- H. Deadband: A temperature range over which no heating or cooling is supplied, i.e., 22-25 degrees C (72-78 degrees F), as opposed to a single point change over or overlap).
- I. Device: a control system component that contains a BACnet Device Object and uses BACnet to communicate with other devices.
- J. Device Object: Every BACnet device requires one Device Object, whose properties represent the network visible properties of that device. Every Device Object requires a unique Object Identifier number on the BACnet internetwork. This number is often referred to as the device instance.
- K. Device Profile: A specific group of services describing BACnet capabilities of a device, as defined in ASHRAE Standard 135-2008, Annex L. Standard device profiles include BACnet Operator Workstations (B-OWS), BACnet Building Controllers (B-BC), BACnet Advanced Application Controllers (B-AAC), BACnet Application Specific Controllers (B-ASC), BACnet Smart Actuator (B-SA), and BACnet Smart Sensor (B-SS). Each device used in new construction is required to have a PICS statement listing which service and BIBBs are supported by the device.
- L. Direct Digital Control (DDC): Microprocessor based control including Analog/Digital conversion and program logic. A control loop or subsystem in which digital and analog information is received and processed by a microprocessor, and digital control signals are generated based on control algorithms and transmitted to field devices in order to achieve a set of predefined conditions.
- M. Engineering Control Center (ECC): The centralized control point for the intelligent control network. The ECC comprises of personal computer and connected devices to form a single workstation.
- N. Ethernet: A trademark for a system for exchanging messages between computers on a local area network using coaxial, fiber optic, or twisted-pair cables.
- O. Graphic Sequence of Operation: It is a graphical representation of the sequence of operation, showing all inputs and output logical blocks.
- P. I/O Unit: The section of a digital control system through which information is received and transmitted. I/O refers to analog input (AI, digital input (DI), analog output (AO) and digital output (DO).

Analog signals are continuous and represent temperature, pressure, flow rate etc, whereas digital signals convert electronic signals to digital pulses (values), represent motor status, filter status, on-off equipment etc.

- Q. I/P: a method for conveying and routing packets of information over LAN paths. User Datagram Protocol (UDP) conveys information to "sockets" without confirmation of receipt. Transmission Control Protocol (TCP) establishes "sessions", which have end-to-end confirmation and guaranteed sequence of delivery.
- R. Local Area Network (LAN): A communication bus that interconnects operator workstation and digital controllers for peer-to-peer communications, sharing resources and exchanging information.
- S. Native BACnet Device: A device that uses BACnet as its primary method of communication with other BACnet devices without intermediary gateways. A system that uses native BACnet devices at all levels is a native BACnet system.
- T. Object Properties: Attributes of an object. Examples include present value and high limit properties of an analog input object. Properties are defined in ASHRAE 135; some are optional, and some are required. Objects are controlled by reading from and writing to object properties.
- U. Operating system (OS): Software, which controls the execution of computer application programs.
- V. Peripheral: Different components that make the control system function as one unit. Peripherals include monitor, printer, and I/O unit.
- W. PID: Proportional, integral, and derivative control, used to control modulating equipment to maintain a setpoint.
- X. Repeater: A network component that connects two or more physical segments at the physical layer.
- Y. Router: a component that joins together two or more networks using different LAN technologies. Examples include joining a BACnet Ethernet LAN to a BACnet MS/TP LAN.
- Z. Sensors: devices measuring state points or flows, which are then transmitted back to the DDC system.
- AA. Thermostats: devices measuring temperatures, which are used in control of standalone or unitary systems and equipment not attached to the DDC system.

1.4 QUALITY ASSURANCE**A. Criteria:**

1. Single Source Responsibility of subcontractor: Either the DDC Contractor or the System Integrator shall obtain hardware and software supplied under this Section and delegate the responsibility to a single source controls installation subcontractor. The Integration subcontractor shall be responsible for the complete design, installation, integration, and commissioning of the system. The controls subcontractor shall be in the business of design, installation, and service of such building automation control systems similar in size and complexity.
2. Equipment and Materials: Equipment and materials shall be cataloged products of manufacturers regularly engaged in production and installation of HVAC control systems. Products shall be manufacturer's latest standard design and have been tested and proven in actual use.
3. The controls subcontractor shall provide a list of no less than five similar projects which have building control systems as specified in this Section. These projects must be on-line and functional such that the Department of Veterans Affairs (VA) representative could observe the control systems in full operation.
4. The controls subcontractor shall have an in-place facility within 50 miles with technical staff, spare parts inventory for the next five (5) years, and necessary test and diagnostic equipment to support the control systems.
5. The controls subcontractor shall have minimum of three years of experience in design and installation of building automation systems similar in performance to those specified in this Section.
6. Provide a competent and experienced Project Manager employed by the Controls Contractor. The Project Manager shall be supported as necessary by other Contractor employees in order to provide professional engineering, technical and management service for the work. The Project Manager shall attend scheduled Project Meetings as required and shall be empowered to make technical, scheduling, and related decisions on behalf of the Controls Contractor.

B. Codes and Standards:

1. All work shall conform to the applicable Codes and Standards.

2. Electronic equipment shall conform to the requirements of FCC Regulation, Part 15, Governing Radio Frequency Electromagnetic Interference, and be so labeled.

1.5 PERFORMANCE

A. The system shall conform to the following:

1. Graphic Display: The system shall display up to four (4) graphics on a single screen with a minimum of twenty (20) dynamic points per graphic. All current data shall be displayed within ten (10) seconds of the request.
2. Graphic Refresh: The system shall update all dynamic points with current data within eight (8) seconds. Data refresh shall be automatic, without operator intervention.
3. Object Command: The maximum time between the command of a binary object by the operator and the reaction by the device shall be two (2) seconds. Analog objects shall start to adjust within two (2) seconds.
4. Object Scan: All changes of state and change of analog values shall be transmitted over the high-speed network such that any data used or displayed at a controller or workstation will be current, within the prior six (6) seconds.
5. Alarm Response Time: The maximum time from when an object goes into alarm to when it is annunciated at the workstation shall not exceed (10) seconds.
6. Program Execution Frequency: Custom and standard applications shall be capable of running as often as once every (5) seconds. The Contractor shall be responsible for selecting execution times consistent with the mechanical process under control.
7. Multiple Alarm Annunciations: All workstations on the network shall receive alarms within five (5) seconds of each other.
8. Performance: Programmable Controllers shall be able to execute DDC PID control loops at a selectable frequency from at least once every one (1) second. The controller shall scan and update the process value and output generated by this calculation at this same frequency.
9. Reporting Accuracy: Listed below are minimum acceptable reporting end-to-end accuracies for all values reported by the specified system:

Measured Variable	Reported Accuracy
Space temperature	$\pm 0.5^{\circ}\text{C}$ ($\pm 1^{\circ}\text{F}$)
Ducted air temperature	$\pm 0.5^{\circ}\text{C}$ [$\pm 1^{\circ}\text{F}$]
Outdoor air temperature	$\pm 1.0^{\circ}\text{C}$ [$\pm 2^{\circ}\text{F}$]
Dew Point	$\pm 1.5^{\circ}\text{C}$ [$\pm 3^{\circ}\text{F}$]
Water temperature	$\pm 0.5^{\circ}\text{C}$ [$\pm 1^{\circ}\text{F}$]
Relative humidity	$\pm 2\%$ RH
Water flow	$\pm 1\%$ of reading
Air flow (terminal)	$\pm 10\%$ of reading
Air flow (measuring stations)	$\pm 5\%$ of reading
Air pressure (ducts)	± 25 Pa [± 0.1 "w.c.]
Air pressure (space)	± 0.3 Pa [± 0.001 "w.c.]
Water pressure	$\pm 2\%$ of full scale *Note 1
Electrical Power	$\pm 0.5\%$ of reading

Note 1: for both absolute and differential pressure

10. Control stability and accuracy: Control sequences shall maintain measured variable at setpoint within the following tolerances:

Controlled Variable	Control Accuracy	Range of Medium
Air Pressure	± 50 Pa (± 0.2 in. w.g.)	0-1.5 kPa (0-6 in. w.g.)
Air Pressure	± 3 Pa (± 0.01 in. w.g.)	-25 to 25 Pa (-0.1 to 0.1 in. w.g.)
Airflow	$\pm 10\%$ of full scale	
Space Temperature	$\pm 1.0^{\circ}\text{C}$ ($\pm 2.0^{\circ}\text{F}$)	
Duct Temperature	$\pm 1.5^{\circ}\text{C}$ ($\pm 3^{\circ}\text{F}$)	
Humidity	$\pm 5\%$ RH	MRI, SPS, PHARMACY
Fluid Pressure	± 10 kPa (± 1.5 psi)	0-1 MPa (1-150 psi)
Fluid Pressure	± 250 Pa (± 1.0 in. w.g.)	0-12.5 kPa (0-50 in. w.g.) differential

11. Extent of direct digital control: control design shall allow for at least the points indicated on the points lists on the drawings.

1.6 WARRANTY

- A. Labor and materials for control systems shall be warranted for a period as specified under Warranty in FAR clause 52.246-21.

- B. Control system failures during the warranty period shall be adjusted, repaired, or replaced at no cost or reduction in service to the owner. The system includes all computer equipment, transmission equipment, and all sensors and control devices.
- C. The on-line support service shall allow the Controls supplier to dial out over telephone lines to or connect via (through password-limited access) VPN through the internet to monitor and control the facility's building automation system. This remote connection to the facility shall be within two (2) hours of the time that the problem is reported. This coverage shall include normal business hours, after business hours, weekend, and holidays. If the problem cannot be resolved with on-line support services, the Controls supplier shall dispatch the qualified personnel to the job site to resolve the problem within 24 hours after the problem is reported.
- D. Controls subcontractor shall be responsible for temporary operations and maintenance of the control systems during the construction period until final commissioning, training of facility operators and acceptance of the project by VA.

1.7 SUBMITTALS

- A. Submit shop drawings in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's literature and data for all components including but not limited to the following:
 - 1. A wiring diagram for each type of input device and output device including DDC controllers, modems, repeaters, etc. Diagram shall show how the device is wired and powered, showing typical connections at the digital controllers and each power supply, as well as the device itself. Show for all field connected devices, including but not limited to, control relays, motor starters, electric or electronic actuators, and temperature pressure, flow and humidity sensors and transmitters.
 - 2. A diagram of each terminal strip, including digital controller terminal strips, terminal strip location, termination numbers and the associated point names.
 - 3. Control dampers and control valves schedule, including the size and pressure drop.

4. Control air-supply components, and computations for sizing compressors, receivers, and main air-piping, if pneumatic controls are furnished.
5. Catalog cut sheets of all equipment used. This includes but is not limited to software (by manufacturer and by third parties), DDC controllers, panels, peripherals, airflow measuring stations and associated components, and auxiliary control devices such as sensors, actuators, and control dampers. When manufacturer's cut sheets apply to a product series rather than a specific product, the data specifically applicable to the project shall be highlighted. Each submitted piece of literature and drawings should clearly reference the specification and/or drawings that it supposed to represent.
6. Sequence of operations for each system and the associated control diagrams. Equipment and control labels shall correspond to those shown on the drawings.
7. Color prints of proposed graphics with a list of points for display.
8. Furnish a BACnet Protocol Implementation Conformance Statement (PICS) for each BACnet-compliant device.
9. Schematic wiring diagrams for all control, communication, and power wiring. Provide a schematic drawing of the central system installation. Label all cables and ports with computer manufacturers' model numbers and functions. Show all interface wiring to the control system.
10. An instrumentation list for each controlled system. Each element of the controlled system shall be listed in table format. The table shall show element name, type of device, manufacturer, model number, and product data sheet number.
11. Riser diagrams of wiring between central control unit (CCU) and all control panels.
12. Plan drawings showing routing of LAN and locations of control panels, controllers, routers, gateways, ECC, and larger controlled devices.
13. Construction details for all installed conduit, cabling, raceway, cabinets, and similar. Construction details of all penetrations and their protection.
14. Quantities of submitted items may be reviewed but it is the responsibility of the contractor administered by this Section of the

technical specifications to provide sufficient quantities for a complete and working system.

C. Product Certificates: Compliance with Article, QUALITY ASSURANCE.

D. Licenses: Provide licenses for all software residing on and used by the Controls Systems, ECC, and portable OWS and transfer these licenses to the Owner prior to completion.

E. As Built Control Drawings:

1. Furnish three (3) copies of as-built drawings for each control system. The documents shall be submitted for approval prior to final completion.
2. Furnish one (1) set of applicable control system prints for each mechanical system for wall mounting. The documents shall be submitted for approval prior to final completion.
3. Furnish one (1) CD-ROM in CAD DWG and/or .DXF format for the drawings noted in subparagraphs above.

F. Operation and Maintenance (O/M) Manuals):

1. Submit in accordance with Article, INSTRUCTIONS, in Specification Section 01 00 00, GENERAL REQUIREMENTS.
2. Include the following documentation:
 - a. General description and specifications for all components, including logging on/off, alarm handling, producing trend reports, overriding computer control, and changing set points and other variables.
 - b. Detailed illustrations of all the control systems specified for ease of maintenance and repair/replacement procedures, and complete calibration procedures.
 - c. One copy of the final version of all software provided including operating systems, programming language, operator workstation software, and graphics software.
 - d. Complete troubleshooting procedures and guidelines for all systems.
 - e. Complete operating instructions for all systems.
 - f. Recommended preventive maintenance procedures for all system components including a schedule of tasks for inspection, cleaning, and calibration. Provide a list of recommended spare parts needed to minimize downtime.
 - g. Training Manuals: Submit the course outline and training material to the Owner for approval three (3) weeks prior to the training

to VA facility personnel. These persons will be responsible for maintaining and the operation of the control systems, including programming. The Owner reserves the right to modify any or all of the course outline and training material.

- h. Licenses, guaranty, and other pertaining documents for all equipment and systems.

G. Submit Performance Report to COR prior to final inspection.

1.8 INSTRUCTIONS

1. The O&M Manuals shall contain approved submittals as outlined in Article 1.7, SUBMITTALS. The Controls subcontractor will review the manual contents with VA facilities personnel during second phase of training.
2. Training shall be given by direct employees of the controls system subcontractor.

1.9 PROJECT CONDITIONS (ENVIRONMENTAL CONDITIONS OF OPERATION)

- A. The ECC and peripheral devices and system support equipment shall be designed to operate in ambient condition of 20 to 35°C (65 to 90°F) at a relative humidity of 20 to 80% non-condensing.
- B. All electronic equipment shall operate properly with power fluctuations of plus 10 percent to minus 15 percent of nominal supply voltage.
- C. Sensors and controlling devices shall be designed to operate in the environment, which they are sensing or controlling.

1.10 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Heating, Refrigerating, and Air-Conditioning Engineers (ASHRAE):
135-2017.....BACNET Building Automation and Control Networks
- C. American Society of Testing Materials (ASTM):
B32-2014.....Standard Specification for Solder Metal
B88-2016.....Standard Specifications for Seamless Copper Water Tube
B88M-2018.....Standard Specification for Seamless Copper Water Tube (Metric)
B280-2019.....Standard Specification for Seamless Copper Tube for Air-Conditioning and Refrigeration Field Service
D2737-2018.....Standard Specification for Polyethylene (PE) Plastic Tubing

D. Federal Communication Commission (FCC):

Rules and Regulations Title 47 Chapter 1-2014 Part 15: Radio Frequency Devices.

E. Institute of Electrical and Electronic Engineers (IEEE):

802.3-2018.....Information Technology-Telecommunications and Information Exchange between Systems-Local and Metropolitan Area Networks- Specific Requirements-Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access method and Physical Layer Specifications

F. National Fire Protection Association (NFPA):

70-2017.....National Electric Code
90A-2018.....Standard for Installation of Air-Conditioning and Ventilation Systems

G. Underwriter Laboratories Inc (UL):

94-2013.....Tests for Flammability of Plastic Materials for Parts and Devices and Appliances
294-2013.....Access Control System Units
486A/486B-2018.....Wire Connectors
555S-2014 (R2016).....Standard for Smoke Dampers
916-2015.....Energy Management Equipment
1076-2018.....Proprietary Burglar Alarm Units and Systems

PART 2 - PRODUCTS**2.1 MATERIALS**

A. Use new products that the manufacturer is currently manufacturing and that have been installed in a minimum of **25** installations. Spare parts shall be available for at least **five** years after completion of this contract.

2.2 CONTROLS SYSTEM ARCHITECTURE

A. General

1. The Controls Systems shall consist of multiple Nodes and associated equipment connected by industry standard digital and communication network arrangements.
2. The ECC, building controllers and principal communications network equipment shall be standard products of recognized major manufacturers available through normal PC and computer vendor channels - not "Clones" assembled by a third-party subcontractor.
3. The networks shall, at minimum, comprise, as necessary, the following:
 - a. A fixed ECC and a portable operator's terminal.

- b. Network computer processing, data storage and BACnet-compliant communication equipment including Servers and digital data processors.
 - c. BACnet-compliant routers, bridges, switches, hubs, modems, gateways, interfaces, and similar communication equipment.
 - d. Active processing BACnet-compliant building controllers connected to other BACnet-compliant controllers together with their power supplies and associated equipment.
 - e. Addressable elements, sensors, transducers, and end devices.
 - f. Third-party equipment interfaces and gateways as described and required by the Contract Documents.
 - g. Other components required for a complete and working Control Systems as specified.
- B. The Specifications for the individual elements and component subsystems shall be minimum requirements and shall be augmented as necessary by the Contractor to achieve both compliance with all applicable codes, standards, and to meet all requirements of the Contract Documents.
- C. Network Architecture
- 1. The Controls communication network shall utilize BACnet communications protocol operating over a standard Ethernet LAN and operate at a minimum speed of 100 Mb/sec.
 - 2. The networks shall utilize only copper and optical fiber communication media as appropriate and shall comply with applicable codes, ordinances, and regulations. They may also utilize digital wireless technologies as appropriate to the application.

2.3 COMMUNICATION

- A. Control products, communication media, connectors, repeaters, hubs, and routers shall comprise a BACnet internetwork. Controller and operator interface communication shall conform to ANSI/ASHRAE Standard 135, BACnet.
- 1. The Data link/physical layer protocol between the ECC and all B-BC's (for communication) acceptable to the VA throughout its facilities is Ethernet (ISO 8802-3) and BACnet/IP.
 - 3. The MS/TP data link/physical layer protocol is not acceptable to the VA in any new BACnet network or sub-network in its healthcare or lab facilities.

- B. Each controller shall have a communication port for connection to an operator interface.
- C. Internetwork operator interface and value passing shall be transparent to internetwork architecture.
 - 1. An operator interface connected to a controller shall allow the operator to interface with each internetwork controller as if directly connected. Controller information such as data, status, reports, system software, and custom programs shall be viewable and editable from each internet controller.
 - 2. Inputs, outputs, and control variables used to integrate control strategies across multiple controllers shall be readable by each controller on the internetwork. Program and test all cross-controller links required to execute specified control system operation. An authorized operator shall be able to edit cross-controller links by typing a standard object address.
- D. System shall be expandable to at least twice the required input and output objects with additional controllers, associated devices, and wiring. Expansion shall not require operator interface hardware additions or software revisions.
- E. ECCs and Controllers with real-time clocks shall use the BACnet Time Synchronization service. The system shall automatically synchronize system clocks daily from an operator-designated device via the internetwork. The system shall automatically adjust for daylight savings and standard time as applicable.

laser rollers

2.4 BACNET PROTOCOL ANALYZER

- A. For ease of troubleshooting and maintenance, provide a BACnet protocol analyzer. Provide its associated fittings, cables, and appurtenances, for connection to the communications network. The BACnet protocol analyzer shall be able to, at a minimum: capture and store to a file all data traffic on all network levels; measure bandwidth usage; filter out (ignore) selected traffic.

2.5 NETWORK AND DEVICE NAMING CONVENTION

- A. Network Numbers
 - 1. BACnet network numbers shall be based on a "facility code, network" concept. The "facility code" is the VAMC's or VA campus' assigned numeric value assigned to a specific facility or building. The "network" typically corresponds to a "floor" or other logical

configuration within the building. BACnet allows 65535 network numbers per BACnet internet work.

2. The network numbers are thus formed as follows: "Net #" = "FFFNN" where:

- a. FFF = Facility code (see below)
- b. NN = 00-99 This allows up to 100 networks per facility or building

B. Device Instances

1. BACnet allows 4194305 unique device instances per BACnet internet work. Using Agency's unique device instances are formed as follows: "Dev #" = "FFFNDD" where
 - a. FFF and N are as above and
 - b. DD = 00-99, this allows up to 100 devices per network.
2. Note Special cases, where the network architecture of limiting device numbering to DD causes excessive subnet works. The device number can be expanded to DDD and the network number N can become a single digit. In NO case shall the network number N and the device number D exceed 4 digits.
3. Facility code assignments:
4. 000-400 Building/facility number
5. Note that some facilities have a facility code with an alphabetic suffix to denote wings, related structures, etc. The suffix will be ignored. Network numbers for facility codes above 400 will be assigned in the range 000-399.

C. Device Names

1. Name the control devices based on facility name, location within a facility, the system, or systems that the device monitors and/or controls, or the area served. The intent of the device naming is to be easily recognized. Names can be up to 254 characters in length, without embedded spaces. Provide the shortest descriptive, but unambiguous, name. For example, in building #123 prefix the number with a "B" followed by the building number, if there is only one chilled water pump "CHWP-1", a valid name would be "B123.CHWP.1.STARTSTOP". If there are two pumps designated "CHWP-1", one in a basement mechanical room (Room 0001) and one in a penthouse mechanical room (Room PH01), the names could be "B123.R0001.CHWP.1.STARTSTOP" or "B123.RPH01.CHWP.1.STARTSTOP". In the case of unitary controllers, for example a VAV box controller, a name might be

"B123.R101.VAV". These names should be used for the value of the "Object Name" property of the BACnet Device objects of the controllers involved so that the BACnet name and the EMCS name are the same.

2.6 BACNET DEVICES

- A. All BACnet Devices - controllers, gateways, routers, actuators, Operator Displays, and sensors shall conform to BACnet Device Profiles and shall be BACnet Testing Laboratories (BTL) -Listed as conforming to those Device Profiles. Protocol Implementation Conformance Statements (PICSs), describing the BACnet capabilities of the Devices shall be published and available for the Devices through links in the BTL website.
1. BACnet Building Controllers, shall conform to the BACnet B-BC Device Profile, and shall be BTL-Listed as conforming to the B-BC Device Profile. The Device's PICS shall be submitted.
 2. BACnet Advanced Application Controllers shall conform to the BACnet B-AAC Device Profile and shall be BTL-Listed as conforming to the B-AAC Device Profile. The Device's PICS shall be submitted.
 3. BACnet Application Specific Controllers shall conform to the BACnet B-ASC Device Profile and shall be BTL-Listed as conforming to the B-ASC Device Profile. The Device's PICS shall be submitted.
 4. BACnet Smart Actuators shall conform to the BACnet B-SA Device Profile and shall be BTL-Listed as conforming to the B-SA Device Profile. The Device's PICS shall be submitted.
 5. BACnet Smart Sensors shall conform to the BACnet B-SS Device Profile and shall be BTL-Listed as conforming to the B-SS Device Profile. The Device's PICS shall be submitted.
 6. BACnet routers and gateways shall conform to the BACnet B-OTH Device Profile and shall be BTL-Listed as conforming to the B-OTH Device Profile. The Device's PICS shall be submitted.

2.7 CONTROLLERS

- A. General. Provide an adequate number of BTL listed B-BC building controllers, BTL listed B-AAC, BTL listed B-ASC, BTL listed B-SA, and BTL listed B-SS's to achieve the performance specified in the Part 1 Article on "System Performance." Each of these controllers shall meet the following requirements.
1. Communication.

- a. Each B-BC controller shall reside on a BACnet network using the ISO 8802-3 (Ethernet) Data Link/Physical layer protocol for its communications.
 - b. Each B-BC controller shall provide a service communication port using BACnet Data Link/Physical layer protocol for connection to a portable operator's terminal. If this port is not available built into the controller, contractor is to install a 4 port unmanaged switch inside the B-BC control cabinet.
 2. Keypad. A local keypad and display shall be provided for each controller. The keypad shall be provided for interrogating and editing data. Provide a system security password shall be available to prevent unauthorized use of the keypad and display.
 3. Serviceability. Provide diagnostic LEDs for power, communication, and processor. All wiring connections shall be made to field-removable, modular terminal strips or to a termination card connected by a ribbon cable.
 4. Memory. The controller shall maintain all BIOS and programming information in the event of a power loss for at least 72 hours.
 5. The controller shall be able to operate at 90% to 110% of nominal voltage rating and shall perform an orderly shutdown below 80% nominal voltage. Controller operation shall be protected against electrical noise of 5 to 120 Hz and from keyed radios up to 5 W at 1 m (3 ft).
 6. Transformer. Power supply for the ASC must be rated at a minimum of 125% of B-ASC power consumption and shall be of the fused or current limiting type.
- B. Provide BTL-Listed B-ASC application specific controllers for each piece of equipment for which they are constructed. Application specific controllers shall communicate with other BACnet devices on the internetwork using the BACnet Read (Execute) Property service.
1. Each B-ASC shall be capable of stand-alone operation and shall continue to provide control functions without being connected to the network.
 2. Each B-ASC will contain sufficient I/O capacity to control the target system.
 3. Communication.
 - a. Each controller shall reside on a BACnet network using the ISO 8802-3 (Ethernet) Data Link/Physical layer protocol for its

communications. Each building controller also shall perform BACnet routing if connected to a network of custom application and application specific controllers.

- b. Each controller shall have a BACnet Data Link/Physical layer compatible connection for a laptop computer or a portable operator's tool. This connection shall be extended to a space temperature sensor port where shown.
4. Serviceability. Provide diagnostic LEDs for power, communication, and processor. All wiring connections shall be made to field-removable, modular terminal strips or to a termination card connected by a ribbon cable.
5. Memory. The application specific controller shall use nonvolatile memory and maintain all BIOS and programming information in the event of a power loss.
6. Immunity to power and noise. Controllers shall be able to operate at 90% to 110% of nominal voltage rating and shall perform an orderly shutdown below 80%. Operation shall be protected against electrical noise of 5-120 Hz and from keyed radios up to 5 W at 1 m (3 ft).

C. Direct Digital Controller Software

1. The software programs specified in this section shall be commercially available, concurrent, multi-tasking operating system and support the use of software application that operates under DOS or Microsoft Windows.
2. All points shall be identified by up to 30-character point name and 16-character point descriptor. The same names shall be used at the ECC.
3. All control functions shall execute within the stand-alone control units. All new controllers installed will also include all software and/or hardware required to program, commission, or alter the sequence of operation of said controller(s). Controllers requiring software or hardware that is not commercially available will not be allowed. Installation of software and/or hardware for controller configuration will be the responsibility of the DDC contractor. COR will direct to install said hardware and/or software on either the B-AWS or portable operator terminal. The VA shall be able to customize control strategies and sequences of operations defining the appropriate control loop algorithms and choosing the optimum loop parameters without requiring the services of a DDC contractor.

4. All controllers shall be capable of being programmed to utilize stored default values for assured fail-safe operation of critical processes. Default values shall be invoked upon sensor failure or, if the primary value is normally provided by the central or another CU, or by loss of bus communication. Individual application software packages shall be structured to assume a fail-safe condition upon loss of input sensors. Loss of an input sensor shall result in output of a sensor-failed message at the ECC. Each ACU and RCU shall have capability for local readouts of all functions. The UCUs shall be read remotely.
5. All DDC control loops shall be able to utilize any of the following control modes:
 - a. Two position (on-off, slow-fast) control.
 - b. Proportional control.
 - c. Proportional plus integral (PI) control.
 - d. Proportional plus integral plus derivative (PID) control. All PID programs shall automatically invoke integral wind-up prevention routines whenever the controlled unit is off, under manual control of an automation system or time-initiated program.
 - e. Automatic tuning of control loops.
6. System Security: Operator access shall be secured using individual password and operator's name. Passwords shall restrict the operator to the level of object, applications, and system functions assigned to him. A minimum of three (3) or a maximum of six (6) levels of security for operator access shall be provided.
7. Application Software: The controllers shall provide the following programs as a minimum for the purpose of optimizing energy consumption while maintaining comfortable environment for occupants. All application software shall reside and run in the system digital controllers. Editing of the application shall occur at the ECC or via a portable operator's terminal, when it is necessary, to directly access the programmable unit.
 - a. Power Demand Limiting (PDL): Power demand limiting program shall monitor the building power consumption and limit the consumption of electricity to prevent peak demand charges. PDL shall continuously track the electricity consumption from a pulse input generated at the kilowatt-hour/demand electric meter. PDL shall sample the meter data to continuously forecast the electric

demand likely to be used during successive time intervals. If the forecast demand indicates that electricity usage will likely to exceed a user preset maximum allowable level, then PDL shall automatically shed electrical loads. Once the demand load has met, loads that have been shed shall be restored and returned to normal mode. Control system shall be capable of demand limiting by resetting the HVAC system set points to reduce load while maintaining indoor air quality.

- b. Economizer: An economizer program shall be provided for VAV systems. This program shall control the position of air handler relief, return, and outdoors dampers. If the outdoor air dry bulb temperature and humidity fall below changeover set point the energy control center will modulate the dampers to provide 100 percent outdoor air. The operator shall be able to override the economizer cycle and return to minimum outdoor air operation at any time.
- c. Optimum Start/Stop (OSS): Optimum start/stop program shall automatically be coordinated with event scheduling. The OSS program shall start HVAC equipment at the latest possible time that will allow the equipment to achieve the desired zone condition by the time of occupancy, and it shall also shut down HVAC equipment at the earliest possible time before the end of the occupancy period and still maintain desired comfort conditions. The OSS program shall consider both outside weather conditions and inside zone conditions. The program shall automatically assign longer lead times for weekend and holiday shutdowns. The program shall poll all zones served by the associated AHU and shall select the warmest and coolest zones. These shall be used in the start time calculation. It shall be possible to assign occupancy start times on a per air handler unit basis. The program shall meet the local code requirements for minimum outdoor air while the building is occupied. Modification of assigned occupancy start/stop times shall be possible via the ECC.
- d. Event Scheduling: Provide a comprehensive menu driven program to automatically start and stop designated points or a group of points according to a stored time. This program shall provide the capability to individually command a point or group of points.

When points are assigned to one common load group it shall be possible to assign variable time advances/delays between each successive start or stop within that group. Scheduling shall be calendar based and advance schedules may be defined up to one year in advance. Advance schedule shall override the day-to-day schedule. The operator shall be able to define the following information:

- 1) Time, day.
 - 2) Commands such as on, off, auto.
 - 3) Time delays between successive commands.
 - 4) Manual overriding of each schedule.
 - 5) Allow operator intervention.
- e. Alarm Reporting: The operator shall be able to determine the action to be taken in the event of an alarm. Alarms shall be routed to the ECC based on time and events. An alarm shall be able to start programs, login the event, print and display the messages. The system shall allow the operator to prioritize the alarms to minimize nuisance reporting and to speed operator's response to critical alarms. A minimum of six (6) priority levels of alarms shall be provided for each point.
- f. Maintenance Management (PM): The program shall monitor equipment status and generate maintenance messages based upon the operators defined equipment run time, starts, and/or calendar date limits. A preventative maintenance alarm shall be printed indicating maintenance requirements based on pre-defined run time. Each preventive message shall include point description, limit criteria and preventative maintenance instruction assigned to that limit. A minimum of 480-character PM shall be provided for each component of units such as air handling units.

2.8 SPECIAL CONTROLLERS

- A. Room Differential Pressure Controller: The differential pressure in isolation rooms shall be maintained by controlling the quantity of air exhausted from or supplied to the room. A sensor-controller shall measure and control the velocity of air flowing into or out of the room through a sampling tube installed in the wall separating the room from the adjacent space and display the value on its monitor. The sensor-controller shall meet the following as a minimum:

1. Operating range: -0.25 to +0.25 inches of water column
2. Resolution: 5 percent of reading
3. Accuracy: +/- 10 percent of reading +/- 0.005 inches of water column
4. Analog output: 4-20 ma
5. Operating temperature range: 32°F-120°F

2.9 SENSORS (AIR, WATER AND STEAM)

- A. Sensors' measurements shall be read back to the DDC system and shall be visible by the ECC.
- B. Temperature and Humidity Sensors shall be electronic, vibration and corrosion resistant for wall, immersion, and/or duct mounting. Provide all remote sensors as required for the systems.
 1. Temperature Sensors: thermistor type for terminal units and Resistance Temperature Device (RTD) with an integral 4-20 mA transmitter type for all other sensors.
 - a. Duct sensors shall be rigid or averaging type as shown on drawings. Averaging sensor shall be a minimum of 1 linear ft of sensing element for each sq ft of cooling/heating coil face area.
 - b. Immersion sensors shall be provided with a separable well made of stainless steel, bronze or monel material. Pressure rating of well is to be consistent with the system pressure in which it is to be installed. Temperature well shall be filled with a thermal compound compatible with installed sensor.
 - c. All space sensors shall be equipped with in-space User set-point adjustment, override switch, numerical temperature display on sensor cover, and BACNet communication port. Match room thermostats. Provide a tooled-access cover.
 - 1) Public space sensor: setpoint adjustment shall be only through the ECC or through the DDC system's diagnostic device/laptop. Do not provide in-space User set-point adjustment. Provide an opaque keyed-entry cover if needed to restrict in-space User set-point adjustment.
 - d. Outdoor air temperature sensors shall have watertight inlet fittings and be shielded from direct sunlight.
 - e. Room security sensors shall have stainless steel cover plate with insulated back and security screws.
 - f. Wire: Twisted, shielded-pair cable.
 - g. Output Signal: 4-20 mA.
 2. Humidity Sensors: Bulk polymer sensing element type.

- a. Duct and room sensors shall have a sensing range of 20 to 80 percent with accuracy of ± 2 to ± 5 percent RH, including hysteresis, linearity, and repeatability.
- b. Outdoor humidity sensors shall be furnished with element guard and mounting plate and have a sensing range of 0 to 100 percent RH.
- c. Continuous Output Signal: 4-20 mA
- C. Static Pressure Sensors: Non-directional, temperature compensated.
 - 1. 4-20 mA output signal.
 - 2. 0 to 5 inches wg for duct static pressure range.
 - 3. 0 to 0.25 inch wg for Building static pressure range.
- D. Water flow sensors:
 - 1. Type: Insertion vortex type with retractable probe assembly and 2-inch full port gate valve.
 - a. Pipe size: up to 24 inches.
 - b. Retractor: ASME threaded, non-rising stem type with hand wheel.
 - c. Mounting connection: 2-inch 150 PSI flange.
 - d. Sensor assembly: Design for expected water flow and pipe size.
 - e. Seal: Teflon (PTFE).
 - 2. Controller:
 - a. Integral to unit.
 - b. Locally display flow rate and total.
 - c. Output flow signal to BAS/EMS/BES/BMCS: Digital pulse or BACNet type.
 - 3. Performance:
 - a. Turndown: 20:1
 - b. Response time: Adjustable from 1 to 100 seconds.
 - c. Power: 24 volt DC
 - 4. Install flow meters according to manufacturer's recommendations.
Where recommended by manufacturer because of mounting conditions, provide flow rectifier.
- E. Water Flow Sensors: shall be insertion turbine type with turbine element, retractor and preamplifier/transmitter mounted on a two-inch full port isolation valve; assembly easily removed or installed as a single unit under line pressure through the isolation valve without interference with process flow; calibrated scale shall allow precise positioning of the flow element to the required insertion depth within plus or minus 1 mm (0.05 inch); wetted parts shall be constructed of

stainless steel. Operating power shall be nominal 24 VDC. Local instantaneous flow indicator shall be LED type in NEMA 4 enclosure with 3-1/2 digital display, for wall or panel mounting.

1. Performance characteristics:

- a. Ambient conditions: -40°C to 60°C (-40°F to 140°F), 5 to 100% humidity.
- b. Operating conditions: 850 kPa (125 psig), 0°C to 120°C (30°F to 250°F), 0.15 to 12 m per second (0.5 to 40 feet per second) velocity.
- c. Nominal range (turn down ratio): 10 to 1.
- d. Preamplifier mounted on meter shall provide 4-20 mA, a divided pulse output or switch closure signal for units of volume or mass per a time base. Signal transmission distance shall be a minimum of 1,800 meters (6,000 feet). Preamplifier for bi-directional flow measurement shall provide a directional contact closure from a relay mounted in the preamplifier.
- e. Pressure Loss: Maximum 1 percent of the line pressure in line sizes above 100 mm (4 inches).
- f. Ambient temperature effects, less than 0.005 percent calibrated span per °C (°F) temperature change.
- g. RFI effect - flow meter shall not be affected by RFI.
- h. Power supply effect less than 0.02 percent of span for a variation of plus or minus 10 percent power supply.

F. Steam Flow Sensor/Transmitter:

1. Sensor: Vortex shedder incorporating wing type sensor and amplification technology for high signal-to-noise ratio, carbon steel body with 316 stainless steel working parts, 24 VDC power, NEMA 4 enclosure.
 - a. Ambient conditions, -40°C to 80°C (-40°F to 175°F).
 - b. Process conditions, 900 kPa (125 psig) saturated steam.
 - c. Turn down ratio, 20 to 1.
 - d. Output signal, 4-20 ma DC.
 - e. Processor/Transmitter, NEMA 4 enclosure with keypad program selector and six-digit LCD output display of instantaneous flow rate or totalized flow, solid state switch closure signal shall be provided to the nearest DDC panel for totalization.

- 1) Ambient conditions, -20°C to 50°C (0°F-120°F), 0 95 percent non-condensing RH.
 - 2) Power supply, 120 VAC, 60 hertz or 24 VDC.
 - 3) Internal battery, provided for 24-month retention of RAM contents when all other power sources are removed.
- f. Sensor on all steam lines shall be protected by pigtail siphons installed between the sensor and the line and shall have an isolation valve installed between the sensor and pressure source.
- G. Flow switches:
1. Shall be either paddle or differential pressure type.
 - a. Paddle-type switches (liquid service only) shall be UL Listed, SPDT snap-acting, adjustable sensitivity with NEMA 4 enclosure.
 - b. Differential pressure type switches (air or water service) shall be UL listed, SPDT snap acting, NEMA 4 enclosure, with scale range and differential suitable for specified application.
- H. Current Switches: Current operated switches shall be self-powered, solid state with adjustable trip current as well as status, power, and relay command status LED indication. The switches shall be selected to match the current of the application and output requirements of the DDC systems.

2.10 CONTROL CABLES

- A. General:
1. All control cabling shall be installed in conduit, minimum of 3/4 inch. Conduit shall be installed in accordance with 26 05 33 Raceway and Boxes for Electrical Systems.
 2. Ground cable shields, drain conductors, and equipment to eliminate shock hazard and to minimize ground loops, common-mode returns, noise pickup, cross talk, and other impairments. Comply with Sections 27 15 00 and 26 05 26.
 3. Cable conductors to provide protection against induction in circuits. Crosstalk attenuation within the System shall be in excess of -80 dB throughout the frequency ranges specified.
 4. Minimize the radiation of RF noise generated by the System equipment so as not to interfere with any audio, video, data, computer main distribution frame (MDF), telephone customer service unit (CSU), and electronic private branch exchange (EPBX) equipment the System may service.

5. The as-installed drawings shall identify each cable as labeled, used cable, and bad cable pairs.
 6. Label system's cables on each end. Test and certify cables in writing to the VA before conducting proof-of-performance testing. Minimum cable test requirements are for impedance compliance, inductance, capacitance, signal level compliance, opens, shorts, cross talk, noise, and distortion, and split pairs on all cables in the frequency ranges used. Make available all cable installation and test records at demonstration to the VA. All changes (used pair, failed pair, etc.) shall be posted in these records as the change occurs.
 7. Power wiring shall not be run in conduit with communications trunk wiring or signal or control wiring operating at 100 volts or less.
- B. Analogue control cabling shall be not less than No. 18 AWG solid or stranded, with thermoplastic insulated conductors as specified in Section 26 05 21.
- C. Copper digital communication cable between the ECC and the B-BC and B-AAC controllers shall be 100BASE-TX Ethernet, Category 6 Plenum Rated, not less than minimum 24 American Wire Gauge (AWG) solid, Shielded Twisted Pair (STP) or Unshielded Twisted Pair (UTP), with thermoplastic insulated conductors, enclosed in a thermoplastic outer jacket, as specified in Section 27 15 00.
1. Other types of media commonly used within IEEE Std 802.3 LANs (e.g., 10Base-T and 10Base-2) shall be used only in cases to interconnect with existing media.
- D. All MS/TP communications cables for devices utilizing the EIA-485 standard must be listed for use on EIA-485 networks by the manufacturer of the cable. This requirement overrides any cable recommendation by the controller manufacturer. The use of EIA-485 communication cables shall not affect the warranty from the installing DDC contractor. Cables shall have the following characteristic:
1. Nominal Impedance: 100-130 Ohms
 2. Twisted/shielded construction of 1, 1.5, or 2 pairs depending on controller requirements.
 3. Be plenum rated when required
 4. Cables designated for use by the cable manufacturer for use in PA or Speaker systems shall not be allowed, regardless of recommendations by the controller manufacturer.

- E. Optical digital communication fiber, if used, shall be Singlemode fiber matching materials specified under 27 15 00. Terminations, patch panels, and other hardware shall be compatible with the specified fiber and shall be as specified in Section 27 15 00. Fiber-optic cable shall be suitable for use with the 100Base-FX or the 100Base-SX standard (as applicable) as defined in IEEE Std 802.3.

2.11 THERMOSTATS AND HUMIDISTATS

- A. Room thermostats controlling unitary standalone heating and cooling devices not connected to the DDC system shall have three modes of operation (heating - null or dead band - cooling). Thermostats for patient bedrooms shall have capability of being adjusted to eliminate null or dead band. Wall mounted thermostats shall match the finish in the existing building, setpoint range and temperature display and external adjustment:
1. Electronic Thermostats: Solid-state, microprocessor based, programmable to daily, weekend, and holiday schedules.
 - a. Public Space Thermostat: Public space thermostat shall have a thermistor sensor and shall not have a visible means of set point adjustment. Adjustment shall be via the digital controller to which it is connected.
 - b. Patient Room Thermostats: thermistor with in-space User set point adjustment and an on-casing room temperature numerical temperature display.
 - c. Psychiatric Patient Room Sensors: Electronic duct sensor as noted under Article 2.4.
 - d. Battery replacement without program loss.
- B. Strap-on thermostats shall be enclosed in a dirt-and-moisture proof housing with fixed temperature switching point and single pole, double throw switch.
- C. Freezestats shall have a minimum of 300 mm (one linear foot) of sensing element for each 0.093 square meter (one square foot) of coil area. A freezing condition at any increment of 300 mm (one foot) anywhere along the sensing element shall be sufficient to operate the thermostatic element. Freezestats shall be manually reset.
- D. Room Humidistats: Provide fully proportioning humidistat with adjustable throttling range for accuracy of settings and conservation. The humidistat shall have set point scales shown in percent of relative

humidity located on the instrument. Systems showing moist/dry or high/low are not acceptable.

2.12 FINAL CONTROL ELEMENTS AND OPERATORS

- A. Fail Safe Operation: Control valves and dampers shall provide "fail safe" operation in either the normally open or normally closed position as required for freeze, moisture, and smoke or fire protection.
- B. Spring Ranges: Range as required for system sequencing and to provide tight shut-off.
- C. Power Operated Control Dampers (other than VAV Boxes): Factory fabricated, balanced type dampers. All modulating dampers shall be opposed blade type and gasketed. Blades for two-position, duct-mounted dampers shall be parallel, airfoil (streamlined) type for minimum noise generation and pressure drop.
 - 1. Leakage: maximum leakage in closed position shall not exceed 7 L/S (15 CFMs) differential pressure for outside air and exhaust dampers and 200 L/S/ square meter (40 CFM/sq. ft.) at 50 mm (2 inches) differential pressure for other dampers.
 - 2. Frame shall be galvanized steel channel with seals as required to meet leakage criteria.
 - 3. Blades shall be galvanized steel or aluminum, 200 mm (8 inch) maximum width, with edges sealed as required.
 - 4. Bearing shall be nylon, bronze sleeve, or ball type.
 - 5. Hardware shall be zinc-plated steel. Connected rods and linkage shall be non-slip. Working parts of joints shall be brass, bronze, nylon, or stainless steel.
 - 6. Maximum air velocity and pressure drop through free area the dampers:
 - a. Duct mounted damper: 600 meter per minute (2000 fpm).
 - b. Maximum static pressure loss: 50 Pascal (0.20 inches water gage).
- D. Smoke Dampers and Combination Fire/Smoke Dampers: Dampers and operators are specified in Section 23 31 00, HVAC DUCTS AND CASINGS. Control of these dampers is specified under this Section.
- E. Control Valves:
 - 1. Valves shall be rated for a minimum of 150 percent of system operating pressure at the valve location but not less than 900 kPa (125 psig).
 - 2. Valves 50 mm (2 inches) and smaller shall be bronze body with threaded or flare connections.

3. Valves 60 mm (2 1/2 inches) and larger shall be bronze or iron body with flanged connections.
 4. Brass or bronze seats except for valves controlling media above 100 degrees C (210 degrees F), which shall have stainless steel seats.
 5. Flow characteristics:
 - a. Three way modulating valves shall be globe pattern. Position versus flow relation shall be linear relation for steam or equal percentage for water flow control.
 - b. Two-way modulating valves shall be globe pattern. Position versus flow relation shall be linear for steam and equal percentage for water flow control.
 - c. Two-way 2-position valves shall be ball, gate, or butterfly type.
 6. Maximum pressure drop:
 - a. Two position steam control: 20 percent of inlet gauge pressure.
 - b. Modulating Steam Control: 80 percent of inlet gauge pressure (acoustic velocity limitation).
 - c. Modulating water flow control, greater of 3 meters (10 feet) of water or the pressure drop through the apparatus.
 7. Two position water valves shall be line size.
- F. Damper and Valve Operators and Relays:
1. Electric operator shall provide full modulating control of dampers and valves. For dampers a linkage and pushrod shall be furnished for mounting the actuator on the damper frame internally in the duct, externally in the duct, externally on the duct wall, or shall be furnished with a direct-coupled design. Metal parts shall be aluminum, mill finish galvanized steel, or zinc plated steel or stainless steel. Provide actuator heads which allow for electrical conduit attachment. The motor(s) shall have sufficient closure torque to allow for complete closure of valve or damper under pressure. Provide multiple motors as required to achieve sufficient close-off torque.
 - a. Minimum valve close-off pressure shall be equal to the system pump's dead-head pressure, minimum 50 psig for valves smaller than 4 inches.
 2. Electronic damper operators: Metal parts shall be aluminum, mill finish galvanized steel, or zinc plated steel or stainless steel. Provide actuator heads which allow for electrical conduit attachment. The motors shall have sufficient closure torque to allow

for complete closure of valve or damper under pressure. Provide multiple motors as required to achieve sufficient close-off torque.

- a. VAV Box actuator shall be mounted on the damper axle or shall be of the air valve design and shall provide complete modulating control of the damper. The motor shall have a closure torque of 35-inch pounds minimum with full torque applied at close off to attain minimum leakage.

3. See and coordinate drawings for required control operation.

2.13 AIR FLOW CONTROL

- A. Airflow and static pressure shall be controlled via digital controllers with inputs from airflow control measuring stations and static pressure inputs as specified. Controller outputs shall be analog or pulse width modulating output signals. The controllers shall include the capability to control via simple proportional (P) control, proportional plus integral (PI), proportional plus integral plus derivative (PID), and on-off. The airflow control programs shall be factory-tested programs that are documented in the literature of the control manufacturer.

1. Airflow measuring stations shall measure airflow by the pitot tube traverse method. Each unit shall consist of a network of static and total pressure sensors, factory positioned and connected in parallel, to produce an equalized velocity pressure. The measured velocity pressure converted to airflow (cfm) shall have accuracy within 2 percent of the full scale throughout the velocity range from 200 to 1,200 meter per minute (700 to 4,000 fpm).
2. Airflow measuring stations shall consist of 16-gauge sheet metal casing, an aluminum air velocity treatment and air straightening section with an open face area not less than 97 percent and a total and static pressure sensing manifold made of copper. Each station shall contain noncombustible sensors which shall be incapable of producing toxic gases or fumes in the event of elevated duct temperatures. All interconnecting tubing shall be internal to the unit with the exception of one total pressure and one static pressure meter connection.
3. Each air flow measuring station shall be installed to meet at least the manufacturer's minimum installation conditions and shall not amplify the sound level within the duct. The maximum resistance to airflow shall not exceed 0.3 times the velocity head for the duct

stations and 0.6 times the velocity head for the fan stations. The unit shall be suitable for continuous operation up to a temperature of 120°C (250°F).

4. Differential pressure transducers shall measure and transmit pressure signals to the direct digital controller.

B. Air Flow Measuring Station -- Electronic Thermal Type:

1. Air Flow Sensor Probe:

- a. Each air flow sensor shall contain two individual thermal sensing elements. One element shall determine the velocity of the air stream while the other element shall compensate for changes in temperature. Each thermal flow sensor and its associated control circuit and signal conditioning circuit shall be factory calibrated and be interchangeable to allow replacement of a sensor without recalibration of the entire flow station. The sensor in the array shall be located at the center of equal area segment of the duct and the number of sensors shall be adequate to accommodate the expected velocity profile and variation in flow and temperature. The airflow station shall be of the insertion type in which sensor support structures are inserted from the outside of the ducts to make up the complete electronic velocity array.
- b. Thermal flow sensor shall be constructed of hermetically sealed thermistors or nickel chromium or reference grade platinum wire, wound over an epoxy, stainless steel or ceramic mandrel and coated with a material suitable for the conditions to be encountered. Each dual sensor shall be mounted in an extruded aluminum alloy strut.

2. Air Flow Sensor Grid Array:

- a. Each sensor grid shall consist of a lattice network of temperature sensors and linear integral controllers (ICs) situated inside an aluminum casing suitable for mounting in a duct. Each sensor shall be mounted within a strut facing downstream of the airflow and located so that it is protected on the upstream side. All wiring shall be encased (out of the air stream) to protect against mechanical damage.
- b. The casing shall be made of welded aluminum of sufficient strength to prevent structural bending and bowing. Steel or iron composite shall not be acceptable in the casing material.

- c. Pressure drop through the flow station shall not exceed 4 Pascal (0.015" W.G.) at 1,000 meter per minute (3,000 FPM).

3. Electronics Panel:

- a. Electronics Panel shall consist of a surface mounted enclosure complete with solid-state microprocessor and software.
- b. Electronics Panel shall be A/C powered 24 VAC and shall have the capability to transmit signals of 4-20 ma type or PWM type for use in control of the HVAC Systems. The electronic panel shall have the capability to accept user defined scaling parameters for all output signals.
- c. Electronics Panel shall have the capability to digitally display airflow in CFM and temperature in degrees F. The displays shall be provided as an integral part of the electronics panel. The electronic panel shall have the capability to totalize the output flow in CFM for two or more systems, as required. A single output signal shall be provided which will equal the sum of the systems totalized. Output signals shall be provided for temperature and airflow. Provide remote mounted air flow or temperature displays where indicated on the plans.
- d. Electronics Panel shall have the following:
- 1) Minimum of 12-bit A/D conversion.
 - 2) Field adjustable digital primary output offset and gain.
 - 3) Airflow analog output scaling of 100 to 10,000 FPM.
 - 4) Temperature analog output scaling from -45°C to 70°C (-50°F to 160°F).
 - 5) Analog output resolution (full scale output) of 0.025%.
- e. All readings shall be in I.P. units.

4. Thermal flow sensors and its electronics shall be installed as per manufacturer's instructions. The required probe sensor density shall be as follows:

Probe Sensor Density	
Area (sq.ft.)	Qty. Sensors
<=1	2
>1 to <4	4
4 to <8	6
8 to <12	8
12 to <16	12

≥ 16	16

- a. Complete installation shall not exhibit more than $\pm 2.0\%$ error in airflow measurement output for variations in the angle of flow of up to 10 percent in any direction from its calibrated orientation. Repeatability of readings shall be within $\pm 0.25\%$.
- D. Static Pressure Measuring Station: shall consist of one or more static pressure sensors and transmitters along with relays or auxiliary devices as required for a complete functional system. The span of the transmitter shall not exceed two times the design static pressure at the point of measurement. The output of the transmitter shall be true representation of the input pressure with plus or minus 25 Pascal (0.1 inch) W.G. of the true input pressure:
1. Static pressure sensors shall have the same requirements as Airflow Measuring Devices except that total pressure sensors are optional, and only multiple static pressure sensors positioned on an equal area basis connected to a network of headers are required.
 2. For systems with multiple major trunk supply ducts, furnish a static pressure transmitter for each trunk duct. The transmitter signal representing the lowest static pressure shall be selected and this shall be the input signal to the controller.
 3. The controller shall receive the static pressure transmitter signal and Control Unit (CU) shall provide a control output signal to the supply fan capacity control device. The control mode shall be proportional plus integral (PI) (automatic reset) and where required shall also include derivative mode.
 4. In systems with multiple static pressure transmitters, provide a switch located near the fan discharge to prevent excessive pressure during abnormal operating conditions. High-limit switches shall be manually reset.
- E. Constant Volume Control Systems shall consist of an air flow measuring station along with such relays and auxiliary devices as required to produce a complete functional system. The transmitter shall receive its air flow signal and static pressure signal from the flow measuring station and shall have a span not exceeding three times the design flow rate. The CU shall receive the transmitter signal and shall provide an output to the fan volume control device to maintain a constant flow rate. The CU shall provide proportional plus integral (PI) (automatic reset) control mode and where required also inverse derivative mode.

Overall system accuracy shall be plus or minus the equivalent of 2 Pascal (0.008 inch) velocity pressure as measured by the flow station.

F. Airflow Synchronization:

1. Systems shall consist of an air flow measuring station for each main supply and return duct, the CU and such relays, as required to provide a complete functional system that will maintain a constant flow rate difference between supply and return air to an accuracy of $\pm 10\%$. In systems where there is no suitable location for a flow measuring station that will sense total supply or return flow, provide multiple flow stations with a differential pressure transmitter for each station. Signals from the multiple transmitters shall be added through the CU such that the resultant signal is a true representation of total flow.
2. The total flow signals from supply and return air shall be the input signals to the CU. This CU shall track the return air fan capacity in proportion to the supply air flow under all conditions.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:

1. Examine project plans for control devices and equipment locations; and report any discrepancies, conflicts, or omissions to COR for resolution before proceeding for installation.
2. Install equipment, piping, wiring /conduit parallel to or at right angles to building lines.
3. Install all equipment and piping in readily accessible locations. Do not run tubing and conduit concealed under insulation or inside ducts.
4. Mount control devices, tubing and conduit located on ducts and apparatus with external insulation on standoff support to avoid interference with insulation.
5. Provide sufficient slack and flexible connections to allow for vibration of piping and equipment.
6. Run tubing and wire connecting devices on or in control cabinets parallel with the sides of the cabinet neatly racked to permit tracing.
7. Install equipment level and plumb.

B. Electrical Wiring Installation:

1. All wiring and cabling shall be installed in conduits. Install conduits and wiring in accordance with Specification Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS. Conduits carrying control wiring and cabling shall be dedicated to the control wiring and cabling: these conduits shall not carry power wiring. Provide plastic end sleeves at all conduit terminations to protect wiring from burrs.
2. Install analog signal and communication cables in conduit and in accordance with Specification Division 27 - COMMUNICATIONS. Install digital communication cables in conduit and in accordance with Specification Section 27 15 00, COMMUNICATIONS STRUCTURED CABLING.
3. Install conduit and wiring between operator workstation(s), digital controllers, electrical panels, indicating devices, instrumentation, miscellaneous alarm points, thermostats, and relays as shown on the drawings or as required under this section.
4. Install all electrical work required for a fully functional system and not shown on electrical plans or required by electrical specifications. Where low voltage (less than 50 volt) power is required, provide suitable Class B transformers.
5. Install all system components in accordance with local Building Code and National Electric Code.
 - a. Splices: Splices in shielded and coaxial cables shall consist of terminations and the use of shielded cable couplers. Terminations shall be in accessible locations. Cables shall be harnessed with cable ties.
 - b. Equipment: Fit all equipment contained in cabinets or panels with service loops, each loop being at least 300 mm (12 inches) long. Equipment for fiber optics system shall be rack mounted, as applicable, in ventilated, self-supporting, code gauge steel enclosure. Cables shall be supported for minimum sag.
 - c. Cable Runs: Keep cable runs as short as possible. Allow extra length for connecting to the terminal board. Do not bend flexible coaxial cables in a radius less than ten times the cable outside diameter.
 - d. Use vinyl tape, sleeves, or grommets to protect cables from vibration at points where they pass around sharp corners, through walls, panel cabinets, etc.

6. Conceal cables, except in mechanical rooms and areas where other conduits and piping are exposed.
7. Permanently label or code each point of all field terminal strips to show the instrument or item served. Color-coded cable with cable diagrams may be used to accomplish cable identification.
8. Grounding: ground electrical systems per manufacturer's written requirements for proper and safe operation.

C. Install Sensors and Controls:

1. Temperature Sensors:

- a. Install all sensors and instrumentation according to manufacturer's written instructions. Temperature sensor locations shall be readily accessible, permitting quick replacement and servicing of them without special skills and tools.
- b. Calibrate sensors to accuracy specified, if not factory calibrated.
- c. Use of sensors shall be limited to its duty, e.g., duct sensor shall not be used in lieu of room sensor.
- d. Install room sensors permanently supported on wall frame. They shall be mounted at 1.5 meter (5.0 feet) above the finished floor unless otherwise noted on the plans or drawings.
- e. Mount sensors rigidly and adequately for the environment within which the sensor operates. Separate extended-bulb sensors form contact with metal casings and coils using insulated standoffs.
- f. Sensors used in mixing plenum, and hot and cold decks shall be of the averaging of type. Averaging sensors shall be installed in a serpentine manner horizontally across duct. Each bend shall be supported with a capillary clip.
- g. All pipe mounted temperature sensors shall be installed in wells.
- h. All wires attached to sensors shall be air sealed in their conduits or in the wall to stop air transmitted from other areas affecting sensor reading.
- i. Permanently mark terminal blocks for identification. Protect all circuits to avoid interruption of service due to short-circuiting or other conditions. Line-protect all wiring that comes from external sources to the site from lightning and static electricity.

2. Pressure Sensors:

- a. Install duct static pressure sensor tips facing directly downstream of airflow.
 - b. Install high-pressure side of the differential switch between the pump discharge and the check valve.
 - c. Install snubbers and isolation valves on steam pressure sensing devices.
3. Actuators:
- a. Mount and link damper and valve actuators according to manufacturer's written instructions.
 - b. Check operation of damper/actuator combination to confirm that actuator modulates damper smoothly throughout stroke to both open and closed position.
 - c. Check operation of valve/actuator combination to confirm that actuator modulates valve smoothly in both open and closed position.
4. Flow Switches:
- a. Install flow switch according to manufacturer's written instructions.
 - b. Mount flow switch a minimum of 5 pipe diameters up stream and 5 pipe diameters downstream or 600 mm (2 feet) whichever is greater, from fittings and other obstructions.
 - c. Assure correct flow direction and alignment.
 - d. Mount in horizontal piping-flow switch on top of the pipe.
- D. Installation of network:
1. Ethernet:
- a. The network shall employ Ethernet LAN architecture, as defined by IEEE 802.3. The Network Interface shall be fully Internet Protocol (IP) compliant allowing connection to currently installed IEEE 802.3, Compliant Ethernet Networks.
 - b. The network shall directly support connectivity to a variety of cabling types. As a minimum provide the following connectivity: 100 Base TX (Category 5e cabling) for the communications between the ECC and the B-BC and the B-AAC controllers.
2. Third party interfaces: Contractor shall integrate real-time data from building systems by other trades and databases originating from other manufacturers as specified and required to make the system work as one system.
- E. Installation of digital controllers and programming:

1. Provide a separate digital control panel for each major piece of equipment, such as air handling unit, chiller, pumping unit etc. Points used for control loop reset such as outdoor air, outdoor humidity, or space temperature could be located on any of the remote-control units.
2. Provide sufficient internal memory for the specified control sequences and trend logging. There shall be a minimum of 25 percent of available memory free for future use.
3. System point names shall be human readable, permitting easy operator interface without the use of a written point index.
4. Provide software programming for the applications intended for the systems specified and adhere to the strategy algorithms provided.
5. Provide graphics for each piece of equipment and floor plan in the building. This includes each chiller, cooling tower, air handling unit, fan, terminal unit, boiler, pumping unit etc. These graphics shall show all points dynamically as specified in the point list.

3.2 SYSTEM VALIDATION AND DEMONSTRATION

- A. As part of final system acceptance, a system demonstration is required (see below). Prior to start of this demonstration, the contractor is to perform a complete validation of all aspects of the controls and instrumentation system.
- B. Validation
 1. Prepare and submit for approval a validation test plan including test procedures for the performance verification tests. Test Plan shall address all specified functions of the ECC and all specified sequences of operation. Explain in detail actions and expected results used to demonstrate compliance with the requirements of this specification. Explain the method for simulating the necessary conditions of operation used to demonstrate performance of the system. Test plan shall include a test check list to be used by the Installer's agent to check and initial that each test has been successfully completed. Deliver test plan documentation for the performance verification tests to the owner's representative 30 days prior to start of performance verification tests. Provide draft copy of operation and maintenance manual with performance verification test.
 2. After approval of the validation test plan, installer shall carry out all tests and procedures therein. Installer shall completely

check out, calibrate, and test all connected hardware and software to insure that system performs in accordance with approved specifications and sequences of operation submitted. Installer shall complete and submit Test Check List.

C. Demonstration

1. System operation and calibration to be demonstrated by the installer in the presence of the Architect, Cx Agent or COR on random samples of equipment as dictated by the COR. Should random sampling indicate improper work, the owner reserves the right to subsequently witness complete calibration of the system at no addition cost to the VA.
2. Demonstrate to authorities that all required safeties and life safety functions are fully functional and complete. PG-18-10 Safety DM
3. Make accessible, personnel to provide necessary adjustments and corrections to systems as directed by balancing agency.
4. The following witnessed demonstrations of field control equipment shall be included:
 - a. Observe HVAC systems in shut down condition. Check dampers and valves for normal position.
 - b. Test application software for its ability to communicate with digital controllers, operator workstation, and uploading and downloading of control programs.
 - c. Demonstrate the software ability to edit the control program off-line.
 - d. Demonstrate reporting of alarm conditions for each alarm and ensure that these alarms are received at the assigned location, including operator workstations.
 - e. Demonstrate ability of software program to function for the intended applications-trend reports, change in status etc.
 - f. Demonstrate via graphed trends to show the sequence of operation is executed in correct manner, and that the HVAC systems operate properly through the complete sequence of operation, e.g., seasonal change, occupied/unoccupied mode, and warm-up condition.
 - g. Demonstrate hardware interlocks and safeties functions, and that the control systems perform the correct sequence of operation after power loss and resumption of power loss.

- h. Prepare and deliver to the VA graphed trends of all control loops to demonstrate that each control loop is stable, and the set points are maintained.
 - i. Demonstrate that each control loop responds to set point adjustment and stabilizes within one (1) minute(s). Control loop trend data shall be instantaneous and the time between data points shall not be greater than one (1) minute.
5. Witnessed demonstration of ECC functions shall consist of:
- a. Running each specified report.
 - b. Display and demonstrate each data entry to show site specific customizing capability. Demonstrate parameter changes.
 - c. Step through penetration tree, display all graphics, demonstrate dynamic update, and direct access to graphics.
 - d. Execute digital and analog commands in graphic mode.
 - e. Demonstrate DDC loop precision and stability via trend logs of inputs and outputs (6 loops minimum).
 - f. Demonstrate Energy Management System (EMS) performance via trend logs and command trace.
 - g. Demonstrate scan, update, and alarm responsiveness.
 - h. Demonstrate spreadsheet/curve plot software, and its integration with database.
 - i. Demonstrate on-line user guide and help function and mail facility.
 - j. Demonstrate digital system configuration graphics with interactive upline and downline load and demonstrate specified diagnostics.
 - k. Demonstrate multitasking by showing dynamic curve plot, and graphic construction operating simultaneously via split screen.
 - l. Demonstrate class programming with point options of beep duration, beep rate, alarm archiving, and color banding.

----- END -----

**SECTION 23 21 13
HYDRONIC PIPING**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Water piping to connect HVAC equipment, including the following:
 - 1. Chilled water, condenser water, heating hot water and drain piping.
 - 2. Extension of domestic water make-up piping for HVAC systems.
 - 3. Glycol-water piping.
- B. A complete listing of common acronyms and abbreviations are included in Section 23 05 10, COMMON WORK RESULTS FOR BOILER PLANT AND STEAM GENERATION Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.
- E. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.
- F. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- G. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- H. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: Temperature and pressure sensors and valve operators.
- I. Section 23 21 23, HYDRONIC PUMPS: Pumps.
- J. Section 23 22 13, STEAM AND CONDENSATE HEATING PIPING.
- K. Section 23 25 00, HVAC WATER TREATMENT: Water treatment for open and closed systems.
- L. Section 23 82 00, CONVECTION HEATING AND COOLING UNITS: Induction units, fan coil units, Unit Heaters, and radiant ceiling panels.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.

B. American Society of Mechanical Engineers (ASME):

- B1.20.1-2013.....Pipe Threads, General Purpose (Inch)
- B16.3-2016.....Malleable Iron Threaded Fittings: Classes 150
and 300
- B16.4-2016.....Gray Iron Threaded Fittings: (Classes 125 and
250)
- B16.5-2017.....Pipe Flanges and Flanged Fittings: NPS 1/2
through NPS 24 Metric/Inch Standard
- B16.9-2018.....Factory Made Wrought Buttwelding Fittings
- B16.11-2016.....Forged Fittings, Socket-Welding and Threaded
- B16.18-2018.....Cast Copper Alloy Solder Joint Pressure
Fittings
- B16.22-2018.....Wrought Copper and Copper Alloy Solder-Joint
Pressure Fittings
- B16.24-2016.....Cast Copper Alloy Pipe Flanges and Flanged
Fittings: Classes 150, 300, 600, 900, 1500, and
2500
- B16.39-2014.....Malleable Iron Threaded Pipe Unions: Classes
150, 250, and 300
- B16.42-2016.....Ductile Iron Pipe Flanges and Flanged Fittings
- B31.9-2014.....Building Services Piping
- B40.100-2013.....Pressure Gauges and Gauge Attachments
- ASME Boiler and Pressure Vessel Code:
BPVC Section VIII-2015..Rules for Construction of Pressure Vessels

C. American Society for Testing and Materials (ASTM):

- A47/A47M-2018.....Standard Specification for Ferritic Malleable
Iron Castings
- A53/A53M-2018.....Standard Specification for Pipe, Steel, Black
and Hot-Dipped, Zinc-Coated, Welded and
Seamless
- A106/A106M-2019.....Standard Specification for Seamless Carbon
Steel Pipe for High-Temperature Service
- A126-2004 (R2019).....Standard Specification for Gray Iron Castings
for Valves, Flanges, and Pipe Fittings
- A183-2014.....Standard Specification for Carbon Steel Track
Bolts and Nuts

- A216/A216M-2018.....Standard Specification for Steel Castings,
Carbon, Suitable for Fusion Welding, for High-
Temperature Service
- A307-2016.....Standard Specification for Carbon Steel Bolts,
Studs, and Threaded Rod 60,000 PSI Tensile
Strength
- A536-1984 (R2019).....Standard Specification for Ductile Iron
Castings
- B62-2017.....Standard Specification for Composition Bronze
or Ounce Metal Castings
- B88-2016.....Standard Specification for Seamless Copper
Water Tube
- F439-2019.....Standard Specification for Chlorinated Poly
(Vinyl Chloride) (CPVC) Plastic Pipe Fittings,
Schedule 80
- F441/F441M-2015.....Standard Specification for Chlorinated Poly
(Vinyl Chloride) (CPVC) Plastic Pipe, Schedules
40 and 80
- D. American Welding Society (AWS):
- B2.1/B2.1M-2014.....Standard for Welding Procedure and Performance
Specification
- E. Expansion Joint Manufacturer's Association, Inc. (EJMA):
- EJMA 2017.....Expansion Joint Manufacturer's Association
Standards, Tenth Edition
- F. Manufacturers Standardization Society (MSS) of the Valve and Fitting
Industry, Inc.:
- SP-67-2017.....Butterfly Valves
- SP-70-2014.....Gray Iron Gate Valves, Flanged and Threaded
Ends
- SP-71-2014.....Gray Iron Swing Check Valves, Flanged and
Threaded Ends
- SP-80-2014.....Bronze Gate, Globe, Angle, and Check Valves
- SP-85-2014.....Gray Iron Globe and Angle Valves, Flanged and
Threaded Ends
- SP-110-2014.....Ball Valves Threaded, Socket-Welding, Solder
Joint, Grooved and Flared Ends
- SP-125-2018.....Gray Iron and Ductile Iron In-line, Spring-
Loaded, Center-Guided Check Valves

G. Tubular Exchanger Manufacturers Association (TEMA):

TEMA Standards 2015.....9th Edition

1.4 SUBMITTALS

- A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 23 21 13, HYDRONIC PIPING", with applicable paragraph identification.
- C. Manufacturer's Literature and Data including Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.
 - 1. Pipe and equipment supports.
 - 2. Pipe and tubing, with specification, class or type, and schedule.
 - 3. Pipe fittings, including miscellaneous adapters and special fittings.
 - 4. Flanges, gaskets, and bolting.
 - 5. Couplings and fittings.
 - 6. Valves of all types.
 - 7. Strainers.
 - 8. Flexible connectors for water service.
 - 9. Pipe alignment guides.
 - 10. Expansion joints.
 - 11. Expansion compensators.
 - 12. All specified hydronic system components.
 - 13. Water flow measuring devices.
 - 14. Gauges.
 - 15. Thermometers and test wells.
- D. Manufacturer's certified data report, Form No. U-1, for ASME pressure vessels:
 - 1. Heat Exchangers (Water to Water).
 - 2. Air separators.
 - 3. Expansion tanks.
 - 4. Buffer tanks.
- E. Submit the welder's qualifications in the form of a current (less than one-year old) and formal certificate.

- F. Coordination Drawings: Refer to paragraph, SUBMITTALS of Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- G. As-Built Piping Diagrams: Provide drawing as follows for chilled water, condenser water, and heating hot water system and other piping systems and equipment.
 - 1. One wall-mounted stick file with complete set of prints. Mount stick file in the chiller plant or control room along with control diagram stick file.
 - 2. One complete set of reproducible drawings.
 - 3. One complete set of drawings in electronic AutoCAD and pdf format.
- H. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:
 - 1. Include complete list indicating all components of the systems.
 - 2. Include complete diagrams of the internal wiring for each item of equipment.
 - 3. Diagrams shall have their terminals identified to facilitate installation, operation, and maintenance.
- I. Completed System Readiness Checklist provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician, and dated on the date of completion, in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- J. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

1.5 QUALITY ASSURANCE

- A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC, which includes welding qualifications.
- B. Submit prior to welding of steel piping a certificate of Welder's certification. The certificate shall be current and not more than one-year old.
- C. All couplings, fittings, valves, and specialties shall be the products of a single manufacturer.
 - 1. All castings used for coupling housings, fittings, valve bodies, etc., shall be date stamped for quality assurance and traceability.

1.6 AS-BUILT DOCUMENTATION

- A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.

- B. Submit operation and maintenance data updated to include submittal review comments, VA approved substitutions and construction revisions shall be in electronic version on CD or DVD inserted into a three-ring binder. All aspects of system operation and maintenance procedures, including applicable piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.
- C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and shall provide the complete set at the time of final systems certification testing. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement. Provide record drawings as follows:
1. Red-lined, hand-marked drawings are to be provided, with one paper copy and a scanned PDF version of the hand-marked drawings provided on CD or DVD.
- D. The as-built drawings shall indicate the location and type of all lockout/tagout points for all energy sources for all equipment and pumps to include breaker location and numbers, valve tag numbers, etc. Coordinate lockout/tagout procedures and practices with local VA requirements.
- E. Certification documentation shall be provided to COR 21 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and provide documentation/certification that all results of tests were within limits specified. Test results shall contain written sequence of test procedure with written test results annotated at each step along with the expected outcome or setpoint. The

results shall include all readings, including but not limited to data on device (make, model and performance characteristics), normal pressures, switch ranges, trip points, amp readings, and calibration data to include equipment serial numbers or individual identifications, etc.

1.7 SPARE PARTS

- A. For mechanical pressed sealed fittings provide tools required for each pipe size used at the facility.

PART 2 - PRODUCTS

2.1 PIPE AND EQUIPMENT SUPPORTS, PIPE SLEEVES, AND WALL AND CEILING PLATES

- A. Provide in accordance with Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

2.2 PIPE AND TUBING

- A. Chilled Water, Condenser Water, Heating Hot Water, and Glycol-Water, and Vent Piping:
 - 1. Steel: ASTM A53/A53M Grade B, seamless or ERW, Schedule 40.
 - 2. Copper water tube option: ASTM B88, Type K or L, hard drawn.
- B. Extension of Domestic Water Make-up Piping: ASTM B88, Type K or L, hard drawn copper tubing.
- C. Cooling Coil Condensate Drain Piping:
 - 1. From air handling units: Copper water tube, ASTM B88, Type M, or Schedule 40 PVC plastic piping.
 - 2. From fan coil or other terminal units: Copper water tube, ASTM B88, Type M for runouts and Type L for mains.
- D. Chemical Feed Piping for Condenser Water Treatment: CPVC, Schedule 80, ASTM F441/F441M.
- E. Pipe supports, including insulation shields, for above ground piping: Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

2.3 FITTINGS FOR STEEL PIPE

- A. 50 mm (2 inches) and Smaller: Screwed or welded joints.
 - 1. Butt welding: ASME B16.9 with same wall thickness as connecting piping.
 - 2. Forged steel, socket welding or threaded: ASME B16.11.
 - 3. Screwed: 150-pound malleable iron, ASME B16.3. 125-pound cast iron, ASME B16.4, may be used in lieu of malleable iron. Bushing reduction of a single pipe size, or use of close nipples, is not acceptable.
 - 4. Unions: ASME B16.39.

5. Water hose connection adapter: Brass, pipe thread to 20 mm (3/4 inch) garden hose thread, with hose cap nut.
- B. 65 mm (2-1/2 inches) and Larger: Welded or flanged joints.
 1. Butt welding fittings: ASME B16.9 with same wall thickness as connecting piping. Elbows shall be long radius type, unless otherwise noted.
 2. Welding flanges and bolting: ASME B16.5:
 - a. Water service: Weld neck or slip-on, plain face, with 3.2 mm (1/8 inch) thick full-face neoprene gasket suitable for 104 degrees C (220 degrees F).
 - 1) Contractor's option: Convuluted, cold formed 150-pound steel flanges, with Teflon gaskets, may be used for water service.
 - b. Flange bolting: Carbon steel machine bolts or studs and nuts, ASTM A307, Grade B.
- C. Welded Branch and Tap Connections: Forged steel weldolets, or branchlets and threadolets may be used for branch connections up to one pipe size smaller than the main. Forged steel half-couplings, ASME B16.11 may be used for drain, vent, and gauge connections.

2.4 FITTINGS FOR COPPER TUBING

- A. Joints:
 1. Solder Joints: Joints shall be made up in accordance with recommended practices of the materials applied. Apply 95/5 tin and antimony on all copper piping.
 2. Mechanically formed tee connection in water and drain piping: Form mechanically extracted collars in a continuous operation by drilling pilot hole and drawing out tube surface to form collar, having a height of not less than three times the thickness of tube wall. Adjustable collaring device shall ensure proper tolerance and complete uniformity of the joint. Notch and dimple joining branch tube in a single process to provide free flow where the branch tube penetrates the fitting.
- B. Bronze Flanges and Flanged Fittings: ASME B16.24.
- C. Fittings: ASME B16.18 cast copper or ASME B16.22 solder wrought copper.

2.5 FITTINGS FOR PLASTIC PIPING

- A. Schedule 40, socket type for solvent welding.
- B. Schedule 40 PVC drain piping: Drainage pattern.
- C. Chemical feed piping for condenser water treatment: CPVC, Schedule 80, ASTM F439.

2.6 DIELECTRIC FITTINGS

- A. Provide where copper tubing and ferrous metal pipe are joined.
- B. 50 mm (2 inches) and Smaller: Threaded dielectric union, ASME B16.39.
- C. 65 mm (2-1/2 inches) and Larger: Flange union with dielectric gasket and bolt sleeves, ASME B16.42. Dielectric gasket material shall be compatible with hydronic medium.
- D. Temperature Rating, 99 degrees C (210 degrees F).
- E. Contractor's option: On pipe sizes 50 mm (2 inch) and smaller, screwed end brass ball valves or dielectric nipples may be used in lieu of dielectric unions.

2.7 SCREWED JOINTS

- A. Pipe Thread: ASME B1.20.1.
- B. Lubricant or Sealant: Oil and graphite or other compound approved for the intended service.

2.8 VALVES

- A. Asbestos packing is not acceptable.
- B. All valves of the same type shall be products of a single manufacturer.
- C. Provide chain operators for valves 150 mm (6 inches) and larger when the centerline is located 2.4 m (8 feet) or more above the floor or operating platform.
- D. Shut-Off Valves:
 - 1. Ball Valves (Pipe sizes 50 mm (2 inch) and smaller): MSS SP-110, screwed or solder connections, brass or bronze body with chrome-plated ball with full port and Teflon seat at 2758 kPa (400 psig) working pressure rating. Provide stem extension to allow operation without interfering with pipe insulation.
 - 2. Butterfly Valves (Pipe Sizes 65 mm (2-1/2 inch) and larger): Provide stem extension to allow 50 mm (2 inches) of pipe insulation without interfering with valve operation. MSS SP-67, flange lug type rated 1200 kPa (175 psig) working pressure at 93 degrees C (200 degrees F). Valves shall be ANSI Leakage Class VI and rated for bubble tight shut-off to full valve pressure rating. Valve shall be rated for dead end service and bi-directional flow capability to full rated pressure. Butterfly valves are prohibited for direct buried pipe applications.
 - a. Body: Cast iron, ASTM A126, Class B. Malleable iron, ASTM A47/A47M electro-plated, or ductile iron, ASTM A536, Grade 65-45-12 electro-plated.

- b. Trim: Bronze, aluminum bronze, or 300 series stainless steel disc, bronze bearings, 316 stainless steel shaft and manufacturer's recommended resilient seat. Resilient seat shall be field replaceable, and fully line the body to completely isolate the body from the product. A phosphate coated steel shaft or stem is acceptable, if the stem is completely isolated from the product.
 - c. Actuators: Field interchangeable. Valves for balancing service shall have adjustable memory stop to limit open position.
 - 1) Valves 150 mm (6 inches) and smaller: Lever actuator with minimum of seven locking positions, except where chain wheel is required.
 - 2) Valves 200 mm (8 inches) and larger: Enclosed worm gear with handwheel, and where required, chain-wheel operator.
 - 3) Gate Valves:
 - a) 50 mm (2 inches) and smaller: MSS SP-80, Bronze, 1035 kPa (150 psig), wedge disc, rising stem, union bonnet.
 - b) 65 mm (2-1/2 inches) and larger: Flanged, outside screw and yoke. MSS SP-70, iron body, bronze mounted, 861 kPa (125 psig) wedge disc.
- E. Globe and Angle Valves:
- 1. Globe Valves:
 - a. 50 mm (2 inches) and smaller: MSS SP-80, bronze, 1035 kPa (150 psig) Globe valves shall be union bonnet with metal plug type disc.
 - b. 65 mm (2-1/2 inches) and larger: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS SP-85 for globe valves.
 - 2. Angle Valves:
 - a. 50 mm (2 inches) and smaller: MSS SP-80, bronze, 1035 kPa (150 psig) Angle valves shall be union bonnet with metal plug type disc.
 - b. 65 mm (2-1/2 inches) and larger: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS SP-85 for angle.
- F. Check Valves:
- 1. Swing Check Valves:
 - a. 50 mm (2 inches) and smaller: MSS SP-80, bronze, 1035 kPa (150 psig), 45-degree swing disc.

- b. 65 mm (2-1/2 inches) and larger: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS SP-71 for check valves.
- 2. Non-Slam or Silent Check Valve: Spring loaded double disc swing check or internally guided flat disc lift type check for bubble tight shut-off. Provide where check valves are shown in chilled water and hot water piping. Check valves incorporating a balancing feature may be used.
 - a. Body: MSS SP-125 cast iron, ASTM A126, Class B, or steel, ASTM A216/A216M, Class WCB, or ductile iron, ASTM 536, flanged or wafer type.
 - b. Seat, disc and spring: 18-8 stainless steel, or bronze, ASTM B62. Seats may be elastomer material.
- G. Water Flow Balancing Valves: For flow regulation and shut-off. Valves shall be line size rather than reduced to control valve size.
 - 1. Ball style valve.
 - 2. A dual-purpose flow balancing valve and adjustable flow meter, with bronze or cast-iron body, calibrated position pointer, valved pressure taps or quick disconnects with integral check valves and preformed polyurethane insulating enclosure.
 - 3. Provide a readout kit including flow meter, readout probes, hoses, flow charts or calculator, and carrying case.
- H. Automatic Balancing Control Valves: Factory calibrated to maintain constant flow (plus or minus five percent) over system pressure fluctuations of 27 to 393 kPa (4 to 57 psig). Provide standard pressure taps and four sets of capacity charts. Valves shall be line size and be one of the following designs:
 - 1. Gray iron ASTM A126 or brass body rated 1200 kPa (175 psig) at 93 degrees C (200 degrees F), with stainless steel piston and spring.
 - 2. Brass or ferrous body designed for 2070 kPa (300 psig) service at 121 degrees C (250 degrees F), with corrosion resistant, tamper proof, self-cleaning piston/spring assembly that is easily removable for inspection or replacement.
 - 3. Combination assemblies containing ball type shut-off valves, unions, flow regulators, strainers with blowdown valves and pressure temperature ports shall be acceptable.
 - 4. Provide a readout kit including flow meter, probes, hoses, flow charts and carrying case.

- I. Manual Radiator/Convactor Valves: Brass, packless, with position indicator.

2.9 WATER FLOW MEASURING DEVICES

- A. Minimum overall accuracy plus or minus three percent over a range of 70 to 110 percent of design flow. Select devices for not less than 110 percent of design flow rate.
- B. Venturi Type: Bronze, steel, or cast iron with bronze throat, with valved pressure sensing taps upstream and at the throat.
- C. Wafer Type Circuit Sensor: Cast iron wafer-type flow meter equipped with readout valves to facilitate the connecting of a differential pressure meter. Each readout valve shall be fitted with an integral check valve designed to minimize system fluid loss during the monitoring process.
- D. Self-Averaging Annular Sensor Type: Brass or stainless-steel metering tube, shutoff valves and quick-coupling pressure connections. Metering tube shall be rotatable so all sensing ports may be pointed down-stream when unit is not in use.
- E. Insertion Turbine Type Sensor: Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- F. Flow Measuring Device Identification:
 - 1. Metal tag attached by chain to the device.
 - 2. Include meter or equipment number, manufacturer's name, meter model, flow rate factor and design flow rate in gpm.
- G. Portable Water Flow Indicating Meters:
 - 1. Minimum 150 mm (6 inch) diameter dial forged brass body, beryllium-copper bellows, designed for 1200 kPa (175 psig) working pressure at 121 degrees C (250 degrees F).
 - 2. Bleed and equalizing valves.
 - 3. Vent and drain hose and two 3 m (10 feet) lengths of hose with quick disconnect connections.
 - 4. Factory-fabricated carrying case with hose compartment and a bound set of capacity curves showing flow rate versus pressure differential.
 - 5. Provide one portable meter for each range of differential pressure required for the installed flow devices.

- H. Permanently Mounted Water Flow Indicating Meters: Minimum 150 mm (6 inch) diameter, or 457 mm (18 inch) long scale, for 120 percent of design flow rate, direct reading in gpm, with three valve manifold and two shut-off valves.

2.10 STRAINERS

A. Y Type.

1. Screens: Bronze, Monel metal or 18-8 stainless steel, free area not less than 2-1/2 times pipe area, with perforations as follows: 1.1 mm (0.045 inch) diameter perforations for 100 mm (4 inches) and larger: 3.2 mm (1/8 inch) diameter perforations.

B. Suction Diffusers: Specified in Section 23 21 23, HYDRONIC PUMPS.

2.11 FLEXIBLE CONNECTORS FOR WATER SERVICE

A. Flanged Spool Connector:

1. Single arch or multiple arch type. Tube and cover shall be constructed of chlorobutyl elastomer with full faced integral flanges to provide a tight seal without gaskets. Connectors shall be internally reinforced with high strength synthetic fibers impregnated with rubber or synthetic compounds as recommended by connector manufacturer, and steel reinforcing rings.
2. Working pressures and temperatures shall be as follows:
 - a. Connector sizes 50 mm to 100 mm (2 inches to 4 inches), 1137 kPa (165 psig) at 121 degrees C (250 degrees F).
 - b. Connector sizes 125 mm to 300 mm (5 inches to 12 inches), 965 kPa (140 psig) at 121 degrees C (250 degrees F).
3. Provide ductile iron retaining rings and control units.

2.12 EXPANSION JOINTS

- A. Factory built devices, inserted in the pipe lines, designed to absorb axial cyclical pipe movement which results from thermal expansion and contraction. This includes factory-built or field-fabricated guides located along the pipe lines to restrain lateral pipe motion and direct the axial pipe movement into the expansion joints.
- B. Manufacturing Quality Assurance: Conform to Expansion Joints Manufacturers Association (EJMA) Standards.
- C. Bellows - Internally Pressurized Type:
1. Multiple corrugations of Type 304 or Type A240-321 stainless steel.
 2. Internal stainless-steel sleeve entire length of bellows.

3. External cast iron equalizing rings for services exceeding 345 kPa (50 psig).
 4. Welded ends.
 5. Design shall conform to standards of EJMA and ASME B31.9.
 6. External tie rods designed to withstand pressure thrust force upon anchor failure if one or both anchors for the joint are at change in direction of pipeline.
 7. Integral external cover.
- D. Bellows - Externally Pressurized Type:
1. Multiple corrugations of Type 304 stainless steel.
 2. Internal and external guide integral with joint.
 3. Design for external pressurization of bellows to eliminate squirm.
 4. Welded ends.
 5. Conform to the standards of EJMA and ASME B31.9.
 6. Threaded connection at bottom, 25 mm (1 inch) minimum, for drain or drip point.
 7. Integral external cover and internal sleeve.
- E. Expansion Compensators:
1. Corrugated bellows, externally pressurized, stainless steel or bronze.
 2. Internal guides and anti-torque devices.
 3. Threaded ends.
 4. External shroud.
 5. Conform to standards of EJMA.
- F. Expansion Joint (Contractor's Option): 2413 kPa (350 psig) maximum working pressure, steel pipe fitting consisting of telescoping body and slip-pipe sections, PTFE modified polyphenylene sulfide coated slide section, with welded or flanged ends, suitable for axial end movement to 75 mm (3 inch).
- G. Expansion Joint Identification: Provide stamped brass or stainless-steel nameplate on each expansion joint listing the manufacturer, the allowable movement, flow direction, design pressure and temperature, date of manufacture, and identifying the expansion joint by the identification number on the contract drawings.
- H. Guides: Provide factory-built guides along the pipe line to permit axial movement only and to restrain lateral and angular movement. Guides must be designed to withstand a minimum of 15 percent of the

axial force which will be imposed on the expansion joints and anchors. Field-built guides may be used if detailed on the contract drawings.

- I. Supports: Provide saddle supports and frame or hangers for heat exchanger. Mounting height shall be adjusted to facilitate gravity return of steam condensate. Construct supports from steel, weld joints.

2.13 HYDRONIC SYSTEM COMPONENTS

- A. Heat Exchanger (Water to Water): Shell and tube type, U-bend removable tube bundle, heating fluid in shell, heated fluid in tubes, equipped with support cradles.
1. Maximum tube velocity: 2.3 m/s (7.5 f/s).
 2. Tube fouling factor: TEMA Standards, but not less than 0.001.
 3. Materials:
 - a. Shell: Steel.
 - b. Tube sheet and tube supports: Steel or brass.
 - c. Tubes: 20 mm (3/4 inch) OD copper.
 - d. Head or bonnet: Cast iron or steel.
 4. Construction: In accordance with ASME BPVC Section VIII for 861 kPa (125 psig) working pressure for shell and tubes. Provide manufacturer's certified data report, Form No. U-1.
- B. Optional Heat Transfer Package: In lieu of field erected individual components, the Contractor may provide a factory or shop assembled package of converters, pumps, and other components, pre-piped and pre-wired supported on a welded steel frame or skid. Refer to Section 23 22 13, STEAM AND CONDENSATE HEATING PIPING, for additional requirements.
- C. Air Purger: Cast iron or fabricated steel, 861 kPa (125 psig) water working pressure, for in-line installation.
- D. Tangential Air Separator: ASME BPVC Section VIII construction for 861 kPa (125 psig) working pressure, flanged tangential inlet and outlet connection, internal perforated stainless-steel air collector tube designed to direct released air into expansion tank, bottom blowdown connection. Provide Form No. U-1. If scheduled on the drawings, provide a removable stainless-steel strainer element having 5 mm (3/16 inch) perforations and free area of not less than five times the cross-sectional area of connecting piping.
- E. Diaphragm Type Pre-Pressurized Expansion Tank: ASME BPVC Section VIII construction for 861 kPa (125 psig) working pressure, welded steel shell, rustproof coated, with a flexible elastomeric diaphragm suitable

for a maximum operating temperature of 115 degrees C (240 degrees F). Provide Form No. U-1. Tank shall be equipped with system connection, drain connection, standard air fill valve and be factory pre-charged to a minimum of 83 kPa (12 psig).

- F. Closed Expansion (Compression) Tank: ASME BPVC Section VIII construction for 861 kPa (125 psig) working pressure, steel, rustproof coated. Provide gauge glass, with protection guard, and angle valves with tapped openings for drain (bottom) and plugged vent (top). Provide Form No. U-1.
1. Vertical floor-mounted expansion tank: Provide gauge glass, system or drain connection (bottom) and air charging (top) tappings. Provide gate valve and necessary adapters for charging system. Tank support shall consist of floor mounted base ring with drain access opening or four angle iron legs with base plates.
- G. Pressure Reducing Valve (Water): Diaphragm or bellows operated, spring loaded type, with minimum adjustable range of 28 kPa (4 psig) above and below set point. Bronze, brass or iron body and bronze, brass or stainless-steel trim, rated 861 kPa (125 psig) working pressure at 107 degrees C (225 degrees F).
- H. Pressure Relief Valve: Bronze or iron body and bronze or stainless-steel trim, with testing lever. Comply with ASME BPVC Section VIII and bear ASME stamp.
- I. Automatic Air Vent Valves (where shown on drawings): Cast iron or semi-steel body, 1035 kPa (150 psig) working pressure, stainless steel float, valve, valve seat and mechanism, minimum 15 mm (1/2 inch) water connection and 6 mm (1/4 inch) air outlet. Air outlet shall be piped to the nearest floor drain.
- J. Buffer Tank: Buffer tank shall be constructed with a built-in baffle to allow mixing of the fluid inside the tank. Tank shall be constructed in accordance with ASME BPVC Section VIII requirements and stamped and registered with the National Board of Boiler and Pressure Vessel Inspectors. Tank shall have a working pressure of 861 kPa (125 psig) and shall come equipped with a base ring for installing the buffer tank directly on a level surface. The tank shall be furnished with two flanged connections, tappings for air vent, relief valve and drain. Buffer tank shall have a capacity as indicated on the drawings.

2.14 WATER FILTERS AND POT CHEMICAL FEEDERS

- A. See Section 23 25 00, HVAC WATER TREATMENT, paragraph, CHEMICAL TREATMENT FOR CLOSED LOOP SYSTEMS.

2.15 GAUGES, PRESSURE AND COMPOUND

- A. ASME B40.100, Accuracy Grade 1A, (pressure, vacuum, or compound for air, oil or water), initial mid-scale accuracy 1 percent of scale (Qualify grade), metal or phenolic case, 115 mm (4-1/2 inches) in diameter, 6 mm (1/4 inch) NPT bottom connection, white dial with black graduations and pointer, clear glass or acrylic plastic window, suitable for board mounting. Provide red "set hand" to indicate normal working pressure.
- B. Provide brass lever handle union cock. Provide brass/bronze pressure snubber for gauges in water service.
- C. Range of Gauges: Provide range equal to at least 130 percent of normal operating range.
1. For condenser water suction (compound): 101 kPa (30 inches Hg) to 690 kPa (100 psig).

2.16 PRESSURE/TEMPERATURE TEST PROVISIONS

- A. Pete's Plug: 6 mm (1/4 inch) MPT by 75 mm (3 inches) long, brass body and cap, with retained safety cap, nordel self-closing valve cores, permanently installed in piping where shown, or in lieu of pressure gauge test connections shown on the drawings.
- B. Provide one each of the following test items to the COR:
1. 6 mm (1/4 inch) FPT by 3.2 mm (1/8 inch) diameter stainless steel pressure gauge adapter probe for extra-long test plug.
2. 90 mm (3-1/2 inch) diameter, one percent accuracy, compound gauge, 101 kPa (30 inches Hg) to 690 kPa (100 psig) range.
3. 0 to 104 degrees C (32 to 220 degrees F) pocket thermometer one-half degree accuracy, 25 mm (1 inch) dial, 125 mm (5 inch) long stainless-steel stem, plastic case.

2.17 THERMOMETERS

- A. Mercury or organic liquid filled type, red or blue column, clear plastic window, with 150 mm (6 inch) brass stem, straight, fixed or adjustable angle as required for each in reading.
- B. Case: Chrome plated brass or aluminum with enamel finish.
- C. Scale: Not less than 225 mm (9 inches), range as described below, two-degree graduations.

- D. Separable Socket (Well): Brass, extension neck type to clear pipe insulation.
- E. Scale ranges:
 - 1. Chilled Water and Glycol-Water: 0 to 38 degrees C (32 to 100 degrees F).
 - 2. Hot Water and Glycol-Water: 38 to 93 degrees C (100 to 200 degrees F).

2.18 FIRESTOPPING MATERIAL

- A. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

PART 3 - EXECUTION

3.1 GENERAL

- A. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.
- B. The drawings show the general arrangement of pipe and equipment but do not show all required fittings and offsets that may be necessary to connect pipes to equipment, fan-coils, coils, radiators, etc., and to coordinate with other trades. Provide all necessary fittings, offsets and pipe runs based on field measurements and at no additional cost or time to the Government. Coordinate with other trades for space available and relative location of HVAC equipment and accessories to be connected on ceiling grid. Pipe location on the drawings shall be altered by contractor where necessary to avoid interferences and clearance difficulties.
- C. Store materials to avoid excessive exposure to weather or foreign materials. Keep inside of piping relatively clean during installation and protect open ends when work is not in progress.
- D. Support piping securely. Refer to PART 3, Section 23 05 11, COMMON WORK RESULTS FOR HVAC. Install heat exchangers at height sufficient to provide gravity flow of condensate to the flash tank and condensate pump.
- E. Install piping generally parallel to walls and column center lines, unless shown otherwise on the drawings. Space piping, including insulation, to provide 25 mm (1 inch) minimum clearance between adjacent piping or other surface. Unless shown otherwise, slope drain piping down in the direction of flow not less than 25 mm (1 inch) in 12

m (40 feet). Provide eccentric reducers to keep bottom of sloped piping flat.

- F. Locate and orient valves to permit proper operation and access for maintenance of packing, seat and disc. Generally, locate valve stems in overhead piping in horizontal position. Provide a union adjacent to one end of all threaded end valves. Control valves usually require reducers to connect to pipe sizes shown on the drawing. Install butterfly valves with the valve open as recommended by the manufacturer to prevent binding of the disc in the seat.
- G. Offset equipment connections to allow valving off for maintenance and repair with minimal removal of piping. Provide flexibility in equipment connections and branch line take-offs with 3-elbow swing joints where noted on the drawings.
- H. Tee water piping runouts or branches into the side of mains or other branches. Avoid bull-head tees, which are two return lines entering opposite ends of a tee and exiting out the common side.
- I. Provide manual or automatic air vent at all piping system high points and drain valves at all low points. Install piping to floor drains from all automatic air vents.
- J. Connect piping to equipment as shown on the drawings. Install components furnished by others such as:
 - 1. Water treatment pot feeders and condenser water treatment systems.
 - 2. Flow elements (orifice unions), control valve bodies, flow switches, pressure taps with valve, and wells for sensors.
- K. Thermometer Wells: In pipes 65 mm (2-1/2 inches) and smaller increase the pipe size to provide free area equal to the upstream pipe area.
- L. Firestopping: Fill openings around uninsulated piping penetrating floors or fire walls, with firestop material. For firestopping insulated piping refer to Section 23 07 11, HVAC AND BOILER PLANT INSULATION.
- M. Where copper piping is connected to steel piping, provide dielectric connections.

3.2 PIPE JOINTS

- A. Welded: Beveling, spacing and other details shall conform to ASME B31.9 and AWS B2.1/B2.1M. See Welder's qualification requirements under "Quality Assurance" in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- B. Screwed: Threads shall conform to ASME B1.20.1; joint compound shall be applied to male threads only and joints made up so no more than three

threads show. Coat exposed threads on steel pipe with joint compound, or red lead paint for corrosion protection.

C. 125 Pound Cast Iron Flange (Plain Face): Mating flange shall have raised face, if any, removed to avoid overstressing the cast iron flange.

D. Solvent Welded Joints: As recommended by the manufacturer.

3.3 EXPANSION JOINTS (BELLOWS AND SLIP TYPE)

A. Anchors and Guides: Provide type, quantity and spacing as recommended by manufacturer of expansion joint and as shown. A professional engineer shall verify in writing that anchors and guides are properly designed for forces and moments which will be imposed.

B. Cold Set: Provide setting of joint travel at installation as recommended by the manufacturer for the ambient temperature during the installation.

C. Preparation for Service: Remove all apparatus provided to restrain joint during shipping or installation. Representative of manufacturer shall visit the site and verify that installation is proper.

D. Access: Expansion joints must be located in readily accessible space. Locate joints to permit access without removing piping or other devices. Allow clear space to permit replacement of joints and to permit access to devices for inspection of all surfaces and for adding.

3.4 LEAK TESTING ABOVEGROUND PIPING

A. Inspect all joints and connections for leaks and workmanship and make corrections as necessary to the satisfaction of the COR. Tests may be either of those below, or a combination, as approved by the COR.

B. An operating test at design pressure, and for hot systems, design maximum temperature.

C. A hydrostatic test at 1.5 times design pressure. For water systems, the design maximum pressure would usually be the static head, or expansion tank maximum pressure, plus pump head. Factory tested equipment (convertors, exchangers, coils, etc.) need not be field tested. Isolate equipment where necessary to avoid excessive pressure on mechanical seals and safety devices.

3.5 FLUSHING AND CLEANING PIPING SYSTEMS

A. Water Piping: Clean systems as recommended by the suppliers of chemicals specified in Section 23 25 00, HVAC WATER TREATMENT.

B. Initial Flushing: Remove loose dirt, mill scale, metal chips, weld beads, rust, and like deleterious substances without damage to any

system component. Provide temporary piping or hose to bypass coils, control valves, exchangers and other factory cleaned equipment unless acceptable means of protection are provided, and subsequent inspection of hide-out areas takes place. Isolate or protect clean system components, including pumps and pressure vessels, and remove any component which may be damaged. Open all valves, drains, vents, and strainers at all system levels. Remove plugs, caps, spool pieces, and components to facilitate early debris discharge from system.

Sectionalize system to obtain debris carrying velocity of 1.8 m/s (5.9 f/s), if possible. Connect dead-end supply and return headers as necessary. Flush bottoms of risers. Install temporary strainers where necessary to protect down-stream equipment. Supply and remove flushing water and drainage by various type hose, temporary and permanent piping, and Contractor's booster pumps. Flush until clean as approved by the COR.

- C. Cleaning: Using products supplied in Section 23 25 00, HVAC WATER TREATMENT, circulate systems at normal temperature to remove adherent organic soil, hydrocarbons, flux, pipe mill varnish, pipe joint compounds, iron oxide, and like deleterious substances not removed by flushing, without chemical or mechanical damage to any system component. Removal of tightly adherent mill scale is not required. Keep isolated equipment which is "clean" and where dead-end debris accumulation cannot occur. Sectionalize system, if possible, to circulate at velocities not less than 1.8 m/s (5.9 f/s). Circulate each section for not less than 4 hours. Blow-down all strainers, or remove and clean as frequently as necessary. Drain and prepare for final flushing.
- D. Final Flushing: Return systems to conditions required by initial flushing after all cleaning solution has been displaced by clean make-up. Flush all dead ends and isolated clean equipment. Gently operate all valves to dislodge any debris in valve body by throttling velocity. Flush for not less than one hour.

3.6 WATER TREATMENT

- A. Install water treatment equipment and provide water treatment system piping.
- B. Close and fill system as soon as possible after final flushing to minimize corrosion.

- C. Charge systems with chemicals specified in Section 23 25 00, HVAC WATER TREATMENT.
- D. Utilize this activity, by arrangement with the COR, for instructing VA operating personnel.

3.7 STARTUP AND TESTING

- A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.
- B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.
- C. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with COR and Commissioning Agent. Provide a minimum notice of 10 working days prior to startup and testing.
- D. Adjust red set hand on pressure gauges to normal working pressure.

3.8 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- B. Components provided under this section of the specification will be tested as part of a larger system.

3.9 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for 4 hours to instruct each VA personnel responsible in operation and maintenance of the system.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

SECTION 23 21 23
HYDRONIC PUMPS

PART 1 - GENERAL**1.1 DESCRIPTION**

A.Capacity: Liters per second (L/s) (Gallons per minute (gpm)) of the fluid pumped. Hydronic pumps for Heating, Ventilating and Air Conditioning.

B.Definitions:

1. Capacity: Liters per second (L/s) (Gallons per minute (gpm)) of the fluid pumped.
2. Head: Total dynamic head in kPa (feet) of the fluid pumped.
3. Flat head-capacity curve: Where the shutoff head is less than 1.16 times the head at the best efficiency point.

C.A complete listing of common acronyms and abbreviations are included in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.2 RELATED WORK

- A.Section 01 00 00, GENERAL REQUIREMENTS.
- B.Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C.Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- D.Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.
- E.Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- F.Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT.
- G.Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- H.Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.
- I.Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- J.Section 23 21 13, HYDRONIC PIPING.
- K.Section 26 29 11, MOTOR CONTROLLERS.

1.3 APPLICABLE PUBLICATIONS

A.The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.

B.American Society of Mechanical Engineers (ASME):

B16.1-2015.....Cast Iron Pipe Flanges and Flanged Fittings:
Classes 25, 125, and 250

C.American Society for Testing and Materials (ASTM):

A48/48M-2003(R2016).....Standard Specification for Gray Iron Castings

B62-2017.....Standard Specification for Composition Bronze
or Ounce Metal Castings

1.4 SUBMITTALS

A.Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B.Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 23 21 23, HYDRONIC PUMPS", with applicable paragraph identification.

C.Manufacturer's Literature and Data including Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

1. Pumps and accessories.
2. Motors and drives.
3. Variable speed motor controllers.

D.Characteristic Curves: Head-capacity, efficiency-capacity, brake horsepower-capacity, and NPSHR-capacity for each pump and for combined pumps in parallel or series service. Identify pump and show fluid pumped, specific gravity, pump speed and curves plotted from zero flow to maximum for the impeller being furnished and at least the maximum diameter impeller that can be used with the casing.

E.Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:

1. Include complete list indicating all components of the systems.
2. Include complete diagrams of the internal wiring for each item of equipment.
3. Diagrams shall have their terminals identified to facilitate installation, operation, and maintenance.

F.Completed System Readiness Checklist provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

G.Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

1.5 QUALITY ASSURANCE**A.Design Criteria:**

1. Pumps design and manufacturer shall conform to Hydraulic Institute Standards.
2. Pump sizes, capacities, pressures, operating characteristics, and efficiency shall be as scheduled.
3. Head-capacity curves shall slope up to maximum head at shut-off. Curves shall be relatively flat for closed systems. Select pumps near the midrange of the curve, so the design capacity falls to the left of the best efficiency point, to allow a cushion for the usual drift to the right in operation, without approaching the pump curve end point and possible cavitation and unstable operation. Select pumps for open systems so that required net positive suction head (NPSHR) does not exceed the net positive head available (NPSHA).
4. Pump Driver: Furnish with pump. Size shall be non-overloading at any point on the head-capacity curve, including in a parallel or series pumping installation with one pump in operation.
5. Provide all pumps with motors, impellers, drive assemblies, bearings, coupling guard and other accessories specified. Statically and dynamically balance all rotating parts.
6. Furnish each pump and motor with a nameplate giving the manufacturers name, serial number of pump, capacity in gpm and head in feet at design condition, horsepower, voltage, frequency, speed and full load current and motor efficiency.
7. Test all pumps before shipment. The manufacturer shall certify all pump ratings.
8. After completion of balancing, provide replacement of impellers or trim impellers to provide specified flow at actual pumping head, as installed.

B.Allowable Vibration Tolerance for Pump Units: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

1.6 AS-BUILT DOCUMENTATION

- A.Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.
- B.Submit operation and maintenance data updated to include submittal review comments, VA approved substitutions and construction revisions shall be in electronic version on CD or DVD inserted into a three-ring

binder. All aspects of system operation and maintenance procedures, including applicable piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and shall provide the complete set at the time of final systems certification testing. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement. Provide record drawings as follows:

1. Red-lined, hand-marked drawings are to be provided, with one paper copy and a scanned PDF version of the hand-marked drawings provided on CD or DVD.

- 2.

D. The as-built drawings shall indicate the location and type of all lockout/tagout points for all energy sources for all equipment and pumps to include breaker location and numbers, valve tag numbers, etc. Coordinate lockout/tagout procedures and practices with local VA requirements.

E. Certification documentation shall be provided to COR 21 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and provide documentation/certification that all results of tests were within limits specified. Test results shall contain written sequence of test procedure with written test results annotated at each step along with the expected outcome or setpoint. The results shall include all readings, including but not limited to data on device (make, model and performance characteristics), normal

pressures, switch ranges, trip points, amp readings, and calibration data to include equipment serial numbers or individual identifications, etc.

1.7 SPARE MATERIALS

A. Furnish one spare seal and casing gasket for each pump to the COR.

PART 2 - PRODUCTS

2.1 CENTRIFUGAL PUMPS, BRONZE FITTED

A. General:

1. Provide pumps that will operate continuously without overheating bearings or motors at every condition of operation on the pump curve, or produce noise audible outside the room or space in which installed.
2. Provide pumps of size, type and capacity as indicated, complete with electric motor and drive assembly, unless otherwise indicated.
Design pump casings for the indicated working pressure and factory test at 1-1/2 times the designed pressure.
3. Provide pumps of the same type, the product of a single manufacturer, with pump parts of the same size and type interchangeable.
4. General Construction Requirements
 - a. Balance: Rotating parts, statically and dynamically.
 - b. Construction: To permit servicing without breaking piping or motor connections.
 - c. Pump Motors: Provide high efficiency motors, inverter duty for variable speed service. Refer to Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT. Motors shall be TEFC and operate at 1750 RPM unless noted otherwise.
 - d. Heating pumps shall be suitable for handling water to 107 degrees C (225 degrees F).
 - e. Provide coupling guards that meet OSHA requirements.
 - f. Pump Connections: Flanged.
 - g. Pump shall be factory tested.
 - h. Performance: As scheduled on the Contract Drawings.
5. Variable Speed Pumps:
 - a. The pumps shall be the type shown on the drawings and specified herein flex coupled to an open drip proof a TEFC motor.
 - b. Variable Speed Motor Controllers: Refer to Section 26 29 11, MOTOR CONTROLLERS and to Section 23 05 11, COMMON WORK RESULTS

FOR HVAC Article, VARIABLE SPEED MOTOR CONTROLLERS. Furnish controllers with pumps and motors.

- c. Pump operation and speed control shall be as shown on the drawings.
- d. Direct drive pumps with integrated variable frequency drive (VFD) utilizing the design pump curve programmed on board the built-in controller (also known as sensor-less, or self-sensing). Pump to comply with paragraphs in this section. VFD and motor to comply with Section 26 29 11, MOTOR CONTROLLERS.

B. In-Line Type, Base Mounted End Suction or Double Suction Type:

- 1. Casing and Bearing Housing: Close-grained cast iron, ASTM A48/A48M.
- 2. Casing Wear Rings: Bronze.
- 3. Suction and Discharge: Plain face flange, 861 kPa (125 psig), ASME B16.1.
- 4. Casing Vent: Manual brass cock at high point.
- 5. Casing Drain and Gauge Taps: 15 mm (1/2 inch) plugged connections minimum size.
- 6. Impeller: Bronze, ASTM B62, enclosed type, keyed to shaft.
- 7. Shaft: Steel, Type 1045 or stainless steel.
- 8. Shaft Seal: Manufacturer's standard mechanical type to suit pressure and temperature and fluid pumped.
- 9. Shaft Sleeve: Bronze or stainless steel.
- 10. Motor: Furnish with pump. Refer to Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT.
- 11. Base Mounted Pumps:
 - a. Designed for disassembling for service or repair without disturbing the piping or removing the motor.
 - b. Impeller Wear Rings: Bronze.
 - c. Shaft Coupling: Non-lubricated steel flexible type or spacer type with coupling guard, bolted to the baseplate.
 - d. Bearings (Double-Suction pumps): Regreaseable ball or roller type.
 - e. Provide lip seal and slinger outboard of each bearing.
 - f. Base: Cast iron or fabricated steel for common mounting to a concrete base.
- 12. Provide line sized shut-off valve and suction strainer, maintain manufacturer recommended straight pipe length on pump suction (with

blow down valve). Contractor option: Provide suction diffuser as follows:

- a. Body: Cast iron with steel inlet vanes and combination diffuser-strainer-orifice cylinder with 5 mm (3/16 inch) diameter openings for pump protection. Provide taps for strainer blowdown and gauge connections.
- b. Provide adjustable foot support for suction piping.
- c. Strainer free area: Not less than five times the suction piping.
- d. Provide disposable startup strainer.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.
- B. Follow manufacturer's written instructions for pump mounting and startup. Access/Service space around pumps shall not be less than minimum space recommended by pumps manufacturer.
- C. Provide drains for bases and seals for base mounted pumps, piped to and discharging into floor drains.
- D. Coordinate location of thermometer and pressure gauges as per Section 23 21 13, HYDRONIC PIPING.

3.2 STARTUP AND TESTING

- A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.
- B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.
- C. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with COR and Commissioning Agent. Provide a minimum notice of 10 working days prior to startup and testing.
- D. Verify that the piping system has been flushed, cleaned, and filled.
- E. Lubricate pumps before startup.
- F. Prime the pump, vent all air from the casing and verify that the rotation is correct. To avoid damage to mechanical seals, never start or run the pump in dry condition.

- G. Verify that correct size heaters-motor over-load devices are installed for each pump controller unit.
- H. Field modifications to the bearings and or impeller (including trimming) are prohibited. If the pump does not meet the specified vibration tolerance send the pump back to the manufacturer for a replacement pump. All modifications to the pump shall be performed at the factory.
- I. Ensure the disposable strainer is free of debris prior to testing and balancing of the hydronic system.
- J. After several days of operation, replace the disposable startup strainer with a regular strainer in the suction diffuser.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- B. Components provided under this section of the specification will be tested as part of a larger system.

3.4 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for 4 hours to instruct each VA personnel responsible in operation and maintenance of the system.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

**SECTION 23 25 00
HVAC WATER TREATMENT**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies cleaning and treatment of circulating HVAC water systems, including the following.
1. Cleaning compounds.
 2. Chemical treatment for closed loop heat transfer systems.
 3. Chemical treatment for open loop systems.
 4. Glycol-water heat transfer systems.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- D. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- E. Section 23 21 13, HYDRONIC PIPING.

1.3 QUALITY ASSURANCE

- A. Refer to paragraph, QUALITY ASSURANCE in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- B. Technical Services: Provide the services of an experienced water treatment chemical engineer or technical representative to direct flushing, cleaning, pre-treatment, training, debugging, and acceptance testing operations; direct and perform chemical limit control during construction period and monitor systems for a period of 12 months after acceptance, including not less than 6 service calls and written status reports. Emergency calls are not included. During this period perform monthly tests of the cooling tower for Legionella pneumophila and submit reports stating Legionella bacteria count per millimeter. These tests shall be conducted in a certified laboratory and not by a technician in the field. Minimum service during construction/start-up shall be 6 hours.
- C. Field Quality Control and Certified Laboratory Reports: During the one-year guarantee period, the water treatment laboratory shall provide not less than 12 reports based on on-site periodic visits, as stated in paragraph 1.3.B, sample taking and testing, and review with VA

personnel, of water treatment control for the previous period. In addition to field tests, the water treatment laboratory shall provide certified laboratory test reports. These monitoring reports shall assess chemical treatment accuracy, scale formation, fouling and corrosion control, and shall contain instructions for the correction of any out-of-control condition.

D. Log Forms: Provide one year supply of preprinted water treatment test log forms.

E. Chemicals: Chemicals shall be non-toxic approved by local authorities and meeting applicable EPA requirements.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data including:

1. Cleaning compounds and recommended procedures for their use.
2. Chemical treatment for closed systems, including installation and operating instructions.
3. Chemical treatment for open loop systems, including installation and operating instructions.
4. Glycol-water system materials, equipment, and installation.

C. Water analysis verification.

D. Materials Safety Data Sheet for all proposed chemical compounds, based on U.S. Department of Labor Form No. L5B-005-4.

E. Maintenance and operating instructions in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1.5 APPLICABLE PUBLICATIONS

A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. National Fire Protection Association (NFPA):

70-2017.....National Electric Code (NEC)

C. American Society for Testing and Materials (ASTM):

F441/F441M-02-2018 Standard Specification for Chlorinated Poly
(Vinyl Chloride) (CPVC) Plastic Pipe, Schedules
40 and 80

PART 2 - PRODUCTS**2.1 CLEANING COMPOUNDS**

- A. Alkaline phosphate or non-phosphate detergent/surfactant/specific to remove organic soil, hydrocarbons, flux, pipe mill varnish, pipe compounds, iron oxide, and like deleterious substances, with or without inhibitor, suitable for system wetted metals without deleterious effects.
- B. All chemicals to be acceptable for discharge to sanitary sewer.
- C. Refer to Section 23 21 13, HYDRONIC PIPING and Section 23 22 13, STEAM and CONDENSATE HEATING PIPING, PART 3, for flushing and cleaning procedures.

2.2 CHEMICAL TREATMENT FOR CLOSED LOOP SYSTEMS

- A. Inhibitor: Provide sodium nitrite/borate, molybdate-based inhibitor or other approved compound suitable for make-up quality and make-up rate and which will cause or enhance bacteria/corrosion problems or mechanical seal failure due to excessive total dissolved solids. Shot feed manually. Maintain inhibitor residual as determined by water treatment laboratory, taking into consideration residual and temperature effect on pump mechanical seals.
- B. pH Control: Inhibitor formulation shall include adequate buffer to maintain pH range of 8.0 to 10.5.
- C. Performance: Protect various wetted, coupled, materials of construction including ferrous, and red and yellow metals. Maintain system essentially free of scale, corrosion, and fouling. Corrosion rate of following metals shall not exceed specified mills per year penetration; ferrous, 0-2; brass, 0-1; copper, 0-1. Inhibitor shall be stable at equipment skin surface temperatures and bulk water temperatures of not less than 121 degrees C (250 degrees F) and 52 degrees C (125 degrees Fahrenheit) respectively. Heat exchanger fouling and capacity reduction shall not exceed that allowed by fouling factor 0.0005.
- D. Pot Feeder: By-pass type, complete with necessary shut off valves, drain and air release valves, and system connections, for introducing chemicals into system, cast iron or steel tank with funnel or large opening on top for easy chemical addition. Feeders shall be 18.9 L (five gallon) minimum capacity at 860 kPa (125 psig) minimum working pressure.

- E. Side stream Water Filter for Closed Loop Systems: Stainless steel housing, and polypropylene filter media with polypropylene stainless steel core. Filter media shall be compatible with antifreeze and water treatment chemicals used in the system. Replaceable filter cartridges for sediment removal service with minimum 20 micrometer particulate at 98 percent efficiency for approximately five (5) percent of system design flow rate. Filter cartridge shall have a maximum pressure drop of 13.8 kPa (2 psig) at design flow rate when clean, and maximum pressure drop of 172 kPa (25 psig) when dirty. A constant flow rate valve shall be provided in the piping to the filter. Inlet and outlet pressure gauges shall be provided to monitor filter condition.

2.3 GLYCOL-WATER SYSTEM

- A. Propylene glycol shall be inhibited with 1.75 percent dipotassium phosphate. Do not use automotive anti-freeze because the inhibitors used are not needed and can cause sludge precipitate that interferes with heat transfer.
- B. Provide required amount of glycol to obtain the percent by volume for glycol-water systems as follows and to provide one-half tank reserve supply: 30 percent for hydronic system.
- C. Pot Feeder Make-up Unit: By pass type for chemical treatment, schedule 3.5 mm (10 gauge) heads, 20 mm (3/4-inch) system connections and large neck opening for chemical addition. Feeders shall be 19 Liters (5 gallon) minimum size.
- D. Glycol-Water Make-up System:
1. Glycol-Water storage tank: Self-supporting polyethylene, minimum 90 mil thickness, with removable cover or black steel with 90 mil polyethylene insert. Capacity shall be 213 L (55 gallons), with approximate diameter of 584 mm (23 inches) and height of 914 mm (36 inches). Reinforced threaded pipe connections shall be provided for all connections. Provide identification for tank showing name of the contents.
 2. Glycol-Water make-up pump: Bronze fitted, self-priming, high head type suitable for pumping a 33 percent to 50 percent glycol-water solution in intermittent service. The pump shall be provided with a mechanical shaft seal and be flange connected to a 1750 rpm NEMA type C motor. The pump capacity shall be 11 L/m (3 gpm), 345 kPa (50 psig) discharge pressure with a suction lift capability of 127 mm (5

inches) of mercury. The pump may be a "gear-within-a-gear" positive displacement type with built-in relief valve set for 296 kPa (43 psig), or the pump may be a regenerative turbine type providing self-priming with built-in or external relief valve set for design head of the pump.

3. Back pressure regulating valve: Spring loaded, diaphragm actuated type with bronze or steel body, stainless steel trim with capacity to relieve 100 percent of pump flow with an allowable rise in the regulated pressure of 69 kPa (10 psig) above the set point. Set point shall be 103 kPa (15 psig) above system PRV setting.
4. Low water level control: Steel or plastic float housing, stainless steel or plastic float, positive snap-acting SPST switch mechanism, rated 10 amps-120 volt AC, in General Purpose (NEMA 1) enclosure. The control shall be rated for pressures to 1034 kPa (150 psig) and make alarm circuit on low water level. The alarm circuit shall be wired to an alarm light on the nearest local Temperature Control panel (LTCP). Provide remote output relay to indicate alarm condition at the Building Control System specified under Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

2.5 EQUIPMENT AND MATERIALS IDENTIFICATION

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Delivery and Storage: Deliver all chemicals in manufacturer's sealed shipping containers. Store in designated space and protect from deleterious exposure and hazardous spills.
- B. Install equipment furnished by the chemical treatment supplier and charge systems according to the manufacturer's instructions and as directed by the Technical Representative.
- C. Refer to Section 23 21 13 HYDRONIC PIPING for chemical treatment piping, installed as follows:
 1. Provide a by-pass line around water meters and bleed off piping assembly. Provide ball valves to allow for bypassing, isolation, and servicing of components.
 2. Bleed off water piping with bleed off piping assembly shall be piped from pressure side of circulating water piping to a convenient drain. Bleed off connection to main circulating water piping shall be upstream of chemical injection nozzles.

3. Provide piping for the flow assembly piping to the main control panel and accessories.
 - a. The inlet piping shall connect to the discharge side of the circulating water pump.
 - b. The outlet piping shall connect to the water piping serving the cooling tower downstream of the heat source.
 - c. Provide inlet Y-strainer and ball valves to isolate and service main control panel and accessories.
4. Install injection nozzles with corporation stops in the water piping serving the cooling tower downstream of the heat source.
5. Provide piping for corrosion monitor rack per manufacturer's installation instructions. Provide ball valves to isolate and service rack.
6. Provide installation supervision, start-up and operating instruction by manufacturer's technical representative.
- D. Before adding cleaning chemical to the closed system, all air handling coils and fan coil units should be isolated by closing the inlet and outlet valves and opening the bypass valves. This is done to prevent dirt and solids from lodging the coils.
- E. Do not valve in or operate system pumps until after system has been cleaned.
- F. After chemical cleaning is satisfactorily completed, open the inlet and outlet valves to each coil and close the by-pass valves. Also, clean all strainers.
- G. Perform tests and report results in accordance with Section 01 00 00, GENERAL REQUIREMENTS.
- H. After cleaning is complete, and water PH is acceptable to manufacturer of water treatment chemical, add manufacturer-recommended amount of chemicals to systems.
- I. Instruct VA personnel in system maintenance and operation in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

- - - E N D - - -

**SECTION 23 31 00
HVAC DUCTS AND CASINGS**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Ductwork and accessories for HVAC including the following:
 - 1. Supply air, return air, outside air, exhaust, make-up air, and relief systems.
- B. Definitions:
 - 1. SMACNA Standards as used in this specification means the HVAC Duct Construction Standards, Metal and Flexible.
 - 2. Seal or Sealing: Use of liquid or mastic sealant, with or without compatible tape overlay, or gasketing of flanged joints, to keep air leakage at duct joints, seams and connections to an acceptable minimum.
 - 3. Duct Pressure Classification: SMACNA HVAC Duct Construction Standards, Metal and Flexible.
 - 4. Exposed Duct: Exposed to view in a finished room,.

1.2 RELATED WORK

- A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Section 07 84 00, FIRESTOPPING: Fire Stopping Material.
- C. Section 08 90 00, LOUVERS and VENTS: Outdoor and Exhaust Louvers.
- D. Section 22 11 00, FACILITY WATER DISTRIBUTION: Plumbing Connections.
- E. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General Mechanical Requirements.
- F. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT: Noise Level Requirements.
- G. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC: Testing and Balancing of Air Flows.
- H. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: Duct Mounted Instrumentation.
- I. Section 23 36 00, AIR TERMINAL UNITS: Air Flow Control Valves and Terminal Units.
- J. Section 23 40 00, HVAC AIR CLEANING DEVICES: Air Filters and Filters' Efficiencies.
- K. Section 23 82 00, CONVECTION HEATING and COOLING UNITS.
- L. Section 23 82 16, AIR COILS: Duct Mounted Coils.

1.3 QUALITY ASSURANCE

- A. Refer to article, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- B. Fire Safety Code: Comply with NFPA 90A.
- C. Duct System Construction and Installation: Referenced SMACNA Standards are the minimum acceptable quality.
- D. Duct Sealing, Air Leakage Criteria, and Air Leakage Tests: Ducts shall be sealed as per duct sealing requirements of SMACNA HVAC Air Duct Leakage Test Manual for duct pressure classes shown on the drawings.
- E. Duct accessories exposed to the air stream, such as dampers of all types (except smoke dampers) and access openings, shall be of the same material as the duct or provide at least the same level of corrosion resistance.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Rectangular ducts:
 - a. Schedules of duct systems, materials and selected SMACNA construction alternatives for joints, sealing, gage and reinforcement.
 - b. Duct liner.
 - c. Sealants and gaskets.
 - d. Access doors.
 - 2. Round and flat oval duct construction details:
 - a. Manufacturer's details for duct fittings.
 - b. Duct liner.
 - c. Sealants and gaskets.
 - d. Access sections.
 - e. Installation instructions.
 - 3. Volume dampers, back draft dampers.
 - 4. Upper hanger attachments.
 - 5. Fire dampers, fire doors, and smoke dampers with installation instructions.
 - 6. Sound attenuators, including pressure drop and acoustic performance.
 - 7. Flexible ducts and clamps, with manufacturer's installation instructions.
 - 8. Flexible connections.

- 9. Instrument test fittings.
- 10 Details and design analysis of alternate or optional duct systems.
- 11 COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Civil Engineers (ASCE):
 - ASCE7-2017.....Minimum Design Loads for Buildings and Other Structures
- C. American Society for Testing and Materials (ASTM):
 - A167-2009.....Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
 - A653-2019.....Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy coated (Galvannealed) by the Hot-Dip process
 - A1011-2018.....Standard Specification for Steel, Sheet and Strip, Hot rolled, Carbon, structural, High-Strength Low-Alloy, High Strength Low-Alloy with Improved Formability, and Ultra-High Strength
 - B209-2014.....Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
 - C1071-2019.....Standard Specification for Fibrous Glass Duct Lining Insulation (Thermal and Sound Absorbing Material)
 - E84-2014.....Standard Test Method for Surface Burning Characteristics of Building Materials
- D. National Fire Protection Association (NFPA):
 - 90A-2018.....Standard for the Installation of Air Conditioning and Ventilating Systems
 - 96-2018.....Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations

E. Sheet Metal and Air Conditioning Contractors National Association
(SMACNA):

3rd Edition -2006.....HVAC Duct Construction Standards, Metal and
Flexible

2nd Edition -2012.....HVAC Air Duct Leakage Test Manual

6th Edition -2016.....Fibrous Glass Duct Construction Standards

F. Underwriters Laboratories, Inc. (UL):

181-2013.....Factory-Made Air Ducts and Air Connectors

555-2006 Standard for Fire Dampers

555S-2014.....Standard for Smoke Dampers

PART 2 - PRODUCTS

2.1 DUCT MATERIALS AND SEALANTS

- A. General: Except for systems specified otherwise, construct ducts, casings, and accessories of galvanized sheet steel, ASTM A653, coating G90; or, aluminum sheet, ASTM B209, alloy 1100, 3003 or 5052.
- B. Specified Corrosion Resistant Systems: Stainless steel sheet, ASTM A167, Class 302 or 304, Condition A (annealed) Finish No. 4 for exposed ducts and Finish No. 2B for concealed duct or ducts located in mechanical rooms.
- C. Joint Sealing: Refer to SMACNA HVAC Duct Construction Standards.
1. Sealant: Elastomeric compound, gun or brush grade, maximum 25 flame spread, and 50 smoke developed (dry state) compounded specifically for sealing ductwork as recommended by the manufacturer. Generally, provide liquid sealant, with or without compatible tape, for low clearance slip joints and heavy, permanently elastic, mastic type where clearances are larger. Oil base caulking and glazing compounds are not acceptable because they do not retain elasticity and bond.
 2. Tape: Use only tape specifically designated by the sealant manufacturer and apply only over wet sealant. Pressure sensitive tape shall not be used on bare metal or on dry sealant.
 3. Gaskets in Flanged Joints: Soft neoprene.
- D. Approved factory-made joints may be used.

2.2 DUCT CONSTRUCTION AND INSTALLATION

- A. Regardless of the pressure classifications outlined in the SMACNA Standards, fabricate and seal the ductwork in accordance with the following pressure classifications:

B. Duct Pressure Classification:

0 to 50 mm (2 inch)

> 50 mm to 75 mm (2 inch to 3 inch)

> 75 mm to 100 mm (3 inch to 4 inch)

Show pressure classifications on the floor plans.

C. Seal Class: All ductwork shall receive Class A Seal

D. Round and Flat Oval Ducts: Furnish duct and fittings made by the same manufacturer to insure good fit of slip joints. When submitted and approved in advance, round and flat oval duct, with size converted on the basis of equal pressure drop, may be furnished in lieu of rectangular duct design shown on the drawings.

1. Elbows: Diameters 80 through 200 mm (3 through 8 inches) shall be two sections die stamped, all others shall be gored construction, maximum 18 degree angle, with all seams continuously welded or standing seam. Coat galvanized areas of fittings damaged by welding with corrosion resistant aluminum paint or galvanized repair compound.
2. Provide bell mouth, conical tees or taps, laterals, reducers, and other low loss fittings as shown in SMACNA HVAC Duct Construction Standards.
3. Ribbed Duct Option: Lighter gage round/oval duct and fittings may be furnished provided certified tests indicating that the rigidity and performance is equivalent to SMACNA standard gage ducts are submitted.
 - a. Ducts: Manufacturer's published standard gage, G90 coating, spiral lock seam construction with an intermediate standing rib.
 - b. Fittings: May be manufacturer's standard as shown in published catalogs, fabricated by spot welding and bonding with neoprene base cement or machine formed seam in lieu of continuous welded seams.
4. Provide flat side reinforcement of oval ducts as recommended by the manufacturer and SMACNA HVAC Duct Construction Standard S3.13.

Because of high pressure loss, do not use internal tie-rod reinforcement unless approved by the Resident Engineer.

E. Casings and Plenums: Construct in accordance with SMACNA HVAC Duct Construction Standards Section 6, including curbs, access doors, pipe penetrations, eliminators and drain pans. Access doors shall be hollow metal, insulated, with latches and door pulls, 500 mm (20 inches) wide

by 1200 - 1350 mm (48 - 54 inches) high. Provide view port in the doors where shown. Provide drain for outside air louver plenum. Outside air plenum shall have exterior insulation. Drain piping shall be routed to the nearest floor drain.

- F. Volume Dampers: Single blade or opposed blade, multi-louver type as detailed in SMACNA Standards. Refer to SMACNA for Single Blade and Figure 2.13 for Multi-blade Volume Dampers.
- G. Duct Hangers and Supports: Refer to SMACNA Standards Section IV. Avoid use of trapeze hangers for round duct.

2.3 DUCT LINER (WHERE INDICATED ON DRAWINGS)

- A. Duct sizes shown on drawings for lined duct are clear opening inside lining.
- B. Duct liner is only permitted to be used for return, relief and general exhaust ducts. Duct liner is not permitted for outside air ducts, supply air ducts or any other positive pressure ductwork (provide exterior insulation only).
- C. Rectangular Duct or Casing Liner: ASTM C1071, Type I (flexible), or Type II (board), 25 mm (one inch) minimum thickness, applied with mechanical fasteners and 100 percent coverage of adhesive in conformance with SMACNA, Duct Liner Application Standard.
- D. Round and Oval Duct Liner: Factory fabricated double-walled with 75 mm (one inch) thick sound insulation and inner perforated galvanized metal liner. Construction shall comply with flame and smoke rating required by NFPA 90A. Metal liner shall be 1.0 to 0.60 mm (20 to 24 gage) having perforations not exceeding 2.4 mm (3/32 inch) diameter and approximately 22 percent free area. Metal liner for fittings need not be perforated. Assemblies shall be complete with continuous sheet Mylar liner, 2 mil thickness, between the perforated liner and the insulation to prevent erosion of the insulation. Provide liner couplings/spacer for metal liner. At the end of insulated sections, provide insulation end fittings to reduce outer shell to liner size. Provide liner spacing/concentricity leaving airway unobstructed.

2.4 DUCT ACCESS DOORS, PANELS AND SECTIONS

- A. Provide access doors, sized and located for maintenance work, upstream, in the following locations:
 - 1. Each duct mounted coil and humidifier.

2. Each fire damper (for link service), smoke damper and automatic control damper.
 3. Each duct mounted smoke detector.
 4. For cleaning operating room supply air duct and kitchen hood exhaust duct, locate access doors at 6 m (20 feet) intervals and at each change in duct direction.
- B. Openings shall be as large as feasible in small ducts, 300 mm by 300 mm (12 inch by 12 inch) minimum where possible. Access sections in insulated ducts shall be double-wall, insulated. Transparent shatterproof covers are preferred for uninsulated ducts.
1. For rectangular ducts: Refer to SMACNA HVAC Duct Construction Standards (Figure 2-12).
 2. For round and flat oval duct: Refer to SMACNA HVAC duct Construction Standards (Figure 2-11).

2.5 FIRE DAMPERS

- A. Galvanized steel, interlocking blade type, UL listing and label, 1-1/2-hour rating, 70 degrees C (160 degrees F) fusible line, 100 percent free opening with no part of the blade stack or damper frame in the air stream.
- B. Fire dampers in wet air exhaust shall be of stainless-steel construction, all others may be galvanized steel.
- C. Minimum requirements for fire dampers:
1. The damper frame may be of design and length as to function as the mounting sleeve, thus eliminating the need for a separate sleeve, as allowed by UL 555. Otherwise provide sleeves and mounting angles, minimum 1.9 mm (14 gage), required to provide installation equivalent to the damper manufacturer's UL test installation.
 2. Submit manufacturer's installation instructions conforming to UL rating test.

2.6 SMOKE DAMPERS

- A. Maximum air velocity, through free area of open damper, and pressure loss: Low pressure and medium pressure duct (supply, return, exhaust, outside air): 450 m/min (1500 fpm). Maximum static pressure loss: 32 Pa (0.13 inch W.G.).
- B. Maximum air leakage, closed damper: 0.32 cubic meters /min/square meter (4.0 CFM per square foot) at 750 Pa (3-inch W.G.) differential pressure.
- C. Minimum requirements for dampers:

1. Shall comply with requirements of Table 6-1 of UL 555S, except for the Fire Endurance and Hose Stream Test.
 2. Frame: Galvanized steel channel with side, top and bottom stops or seals.
 3. Blades: Galvanized steel, parallel type preferably, 300 mm (12 inch) maximum width, edges sealed with neoprene, rubber or felt, if required to meet minimum leakage. Airfoil (streamlined) type for minimum noise generation and pressure drop are preferred for duct mounted dampers.
 4. Shafts: Galvanized steel.
 5. Bearings: Nylon, bronze sleeve or ball type.
 6. Hardware: Zinc plated.
 7. Operation: Automatic open/close. No smoke damper that requires manual reset or link replacement after actuation is acceptable. See drawings for required control operation.
- D. Motor operator (actuator): Provide pneumatic or electric as required by the automatic control system, externally mounted on stand-offs to allow complete insulation coverage.

2.7 COMBINATION FIRE AND SMOKE DAMPERS

Combination fire and smoke dampers: Multi-blade type units meeting all requirements of both fire dampers and smoke dampers shall be used where shown and may be used at the Contractor's option where applicable.

2.8 FIRE DOORS

Galvanized steel, interlocking blade type, UL listing and label, 71 degrees C (160 degrees F) fusible link, 3-hour rating and approved for openings in Class A fire walls with rating up to 4 hours, 100 percent free opening with no part of the blade stack or damper frame in the air stream.

2.9 FLEXIBLE AIR DUCT

- A. General: Factory fabricated, complying with NFPA 90A for connectors not passing through floors of buildings. Flexible ducts shall not penetrate any fire or smoke barrier which is required to have a fire resistance rating of one hour or more. Flexible duct length shall not exceed 1.5 m (5 feet). Provide insulated acoustical air duct connectors in supply air duct systems and elsewhere as shown.
- B. Flexible ducts shall be listed by Underwriters Laboratories, Inc., complying with UL 181. Ducts larger than 200 mm (8 inches) in diameter

shall be Class 1. Ducts 200 mm (8 inches) in diameter and smaller may be Class 1 or Class 2.

- C. Insulated Flexible Air Duct: Factory made including mineral fiber insulation with maximum C factor of 0.25 at 24 degrees C (75 degrees F) mean temperature, encased with a low permeability moisture barrier outer jacket, having a puncture resistance of not less than 50 Beach Units. Acoustic insertion loss shall not be less than 3 dB per 300 mm (foot) of straight duct, at 500 Hz, based on 150 mm (6 inch) duct, of 750 m/min (2500 fpm).
- D. Application Criteria:
1. Temperature range: -18 to 93 degrees C (0 to 200 degrees F) internal.
 2. Maximum working velocity: 1200 m/min (4000 feet per minute).
 3. Minimum working pressure, inches of water gage: 2500 Pa (10 inches) positive, 500 Pa (2 inches) negative.
- E. Duct Clamps: 100 percent nylon strap, 80 kg (175 pounds) minimum loop tensile strength manufactured for this purpose or stainless-steel strap with cadmium plated worm gear tightening device. Apply clamps with sealant and as approved for UL 181, Class 1 installation.

2.10 FLEXIBLE DUCT CONNECTIONS

Where duct connections are made to fans, air terminal units, and air handling units, install a non-combustible flexible connection of 822 g (29 ounce) neoprene coated fiberglass fabric approximately 150 mm (6 inches) wide. For connections exposed to sun and weather provide hypalon coating in lieu of neoprene. Burning characteristics shall conform to NFPA 90A. Securely fasten flexible connections to round ducts with stainless steel or zinc-coated iron draw bands with worm gear fastener. For rectangular connections, crimp fabric to sheet metal and fasten sheet metal to ducts by screws 50 mm (2 inches) on center. Fabric shall not be stressed other than by air pressure. Allow at least 25 mm (one inch) slack to ensure that no vibration is transmitted.

2.12 FIRESTOPPING MATERIAL

Refer to Section 07 84 00, FIRESTOPPING.

2.13 SEISMIC RESTRAINT FOR DUCTWORK

Refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

2.14 DUCT MOUNTED THERMOMETER (AIR)

- A. Stem Type Thermometers: ASTM E1, 7-inch scale, red appearing mercury, lens front tube, cast aluminum case with enamel finish and clear glass or polycarbonate window, brass stem, 2 percent of scale accuracy to ASTM E77 scale calibrated in degrees Fahrenheit.
- B. Thermometer Supports:
 - 1. Socket: Brass separable sockets for thermometer stems with or without extensions as required, and with cap and chain.
 - 2. Flange: 3 inch outside diameter reversible flange, designed to fasten to sheet metal air ducts, with brass perforated stem.

2.15 DUCT MOUNTED TEMPERATURE SENSOR (AIR)

Refer to Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

2.16 INSTRUMENT TEST FITTINGS

- A. Manufactured type with a minimum 50 mm (two inch) length for insulated duct, and a minimum 25 mm (one inch) length for duct not insulated. Test hole shall have a flat gasket for rectangular ducts and a concave gasket for round ducts at the base, and a screw cap to prevent air leakage.
- B. Provide instrument test holes at each duct or casing mounted temperature sensor or transmitter, and at entering and leaving side of each heating coil, cooling coil, and heat recovery unit.

2.17 AIR FLOW CONTROL VALVES (AFCV)

Refer to Section 23 36 00 / 23 82 00, AIR TERMINAL UNITS / CONVECTION HEATING and COOLING UNITS.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Comply with provisions of Section 23 05 11, COMMON WORK RESULTS FOR HVAC, particularly regarding coordination with other trades and work in existing buildings.
- B. Fabricate and install ductwork and accessories in accordance with referenced SMACNA Standards:
 - 1. Drawings show the general layout of ductwork and accessories but do not show all required fittings and offsets that may be necessary to connect ducts to equipment, boxes, diffusers, grilles, etc., and to coordinate with other trades. Fabricate ductwork based on field measurements. Provide all necessary fittings and offsets at no additional cost to the government. Coordinate with other trades for

- space available and relative location of HVAC equipment and accessories on ceiling grid. Duct sizes on the drawings are inside dimensions which shall be altered by Contractor to other dimensions with the same air handling characteristics where necessary to avoid interferences and clearance difficulties.
2. Provide duct transitions, offsets and connections to dampers, coils, and other equipment in accordance with SMACNA Standards. Provide streamliner, when an obstruction cannot be avoided and must be taken in by a duct. Repair galvanized areas with galvanizing repair compound.
 3. Provide bolted construction and tie-rod reinforcement in accordance with SMACNA Standards.
 4. Construct casings, eliminators, and pipe penetrations in accordance with SMACNA Standards, Chapter 6. Design casing access doors to swing against air pressure so that pressure helps to maintain a tight seal.
- C. Install duct hangers and supports in accordance with SMACNA Standards.
- D. Install fire dampers, smoke dampers and combination fire/smoke dampers in accordance with the manufacturer's instructions to conform to the installation used for the rating test. Install fire dampers, smoke dampers and combination fire/smoke dampers at locations indicated and where ducts penetrate fire rated and/or smoke rated walls, shafts and where required by the Resident Engineer. Install with required perimeter mounting angles, sleeves, breakaway duct connections, corrosion resistant springs, bearings, bushings and hinges per UL and NFPA. Demonstrate re-setting of fire dampers and operation of smoke dampers to the Resident Engineer.
- E. Seal openings around duct penetrations of floors and fire rated partitions with fire stop material as required by NFPA 90A.
- F. Flexible duct installation: Refer to SMACNA Standards, Chapter 3. Ducts shall be continuous, single pieces not over 1.5 m (5 feet) long (NFPA 90A), as straight and short as feasible, adequately supported. Centerline radius of bends shall be not less than two duct diameters. Make connections with clamps as recommended by SMACNA. Clamp per SMACNA with one clamp on the core duct and one on the insulation jacket. Flexible ducts shall not penetrate floors, or any chase or partition designated as a fire or smoke barrier, including corridor partitions fire rated one hour or two hours. Support ducts SMACNA Standards.

- G. Where diffusers, registers and grilles cannot be installed to avoid seeing inside the duct, paint the inside of the duct with flat black paint to reduce visibility.
- H. Control Damper Installation:
 - 1. Provide necessary blank-off plates required to install dampers that are smaller than duct size. Provide necessary transitions required to install dampers larger than duct size.
 - 2. Assemble multiple sections dampers with required interconnecting linkage and extend required number of shafts through duct for external mounting of damper motors.
 - 3. Provide necessary sheet metal baffle plates to eliminate stratification and provide air volumes specified. Locate baffles by experimentation, and affix and seal permanently in place, only after stratification problem has been eliminated.
 - 4. Install all damper control/adjustment devices on stand-offs to allow complete coverage of insulation.
- I. Air Flow Measuring Devices (AFMD): Install units with minimum straight run distances, upstream and downstream as recommended by the manufacturer.
- J. Low Pressure Duct Liner: Install in accordance with SMACNA, Duct Liner Application Standard.
- K. Protection and Cleaning: Adequately protect equipment and materials against physical damage. Place equipment in first class operating condition or return to source of supply for repair or replacement, as determined by Resident Engineer. Protect equipment and ducts during construction against entry of foreign matter to the inside and clean both inside and outside before operation and painting. When new ducts are connected to existing ductwork, clean both new and existing ductwork by mopping and vacuum cleaning inside and outside before operation.

3.2 DUCT LEAKAGE TESTS AND REPAIR

- A. Ductwork leakage testing shall be performed by the Testing and Balancing Contractor directly contracted by the General Contractor and independent of the Sheet Metal Contractor.
- B. Ductwork leakage testing shall be performed for the entire air distribution system (including all supply, return, exhaust and relief ductwork), section by section, including fans, coils and filter sections.

- C. Test procedure, apparatus and report shall conform to SMACNA Leakage Test manual. The maximum leakage rate allowed is 4 percent of the design air flow rate.
- D. All ductwork shall be leak tested first before enclosed in a shaft or covered in other inaccessible areas.
- E. All tests shall be performed in the presence of the Resident Engineer and the Test and Balance agency. The Test and Balance agency shall measure and record duct leakage and report to the Resident Engineer and identify leakage source with excessive leakage.
- F. If any portion of the duct system tested fails to meet the permissible leakage level, the Contractor shall rectify sealing of ductwork to bring it into compliance and shall retest it until acceptable leakage is demonstrated to the Resident Engineer.
- G. All tests and necessary repairs shall be completed prior to insulation or concealment of ductwork.
- H. Make sure all openings used for testing flow and temperatures by TAB Contractor are sealed properly.

3.4 TESTING, ADJUSTING AND BALANCING (TAB)

Refer to Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

3.5 OPERATING AND PERFORMANCE TESTS

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

- - - E N D - - -

SECTION 23 37 00
AIR OUTLETS AND INLETS

PART 1 - GENERAL**1.1 DESCRIPTION**

B. Air Outlets and Inlets: Diffusers, Registers, and Grilles.

1.2 RELATED WORK

A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Section 08 90 00, LOUVERS and VENTS.

C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

D. Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

E. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

1.3 QUALITY ASSURANCE

A. Refer to Article, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

B. Fire Safety Code: Comply with NFPA 90A.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data:

1. Air intake/exhaust hoods.

2. Diffusers, registers, grilles, and accessories.

C. Coordination Drawings: Refer to article, SUBMITTALS, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. Air Diffusion Council Test Code:

1062 GRD-2015.....Certification, Rating, and Test Manual 4th
Edition

C. American Society of Civil Engineers (ASCE):

ASCE7-2017.....Minimum Design Loads for Buildings and Other
Structures

D. American Society for Testing and Materials (ASTM):

- A167-99 2009.....Standard Specification for Stainless and
Heat-Resisting Chromium-Nickel Steel Plate,
Sheet and Strip
- B209- 2014.....Standard Specification for Aluminum and
Aluminum-Alloy Sheet and Plate
- E. National Fire Protection Association (NFPA):
90A-2018.....Standard for the Installation of Air
Conditioning and Ventilating Systems
- F. Underwriters Laboratories, Inc. (UL):
181-2013.....UL Standard for Safety Factory-Made Air Ducts
and Connectors

PART 2 - PRODUCTS

2.1 EQUIPMENT SUPPORTS

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

2.2 AIR OUTLETS AND INLETS

A. Materials:

1. Steel or aluminum except that all supply air outlets installed in operating rooms and Cystoscopy rooms (see Article 2.3C.3) shall be stainless steel. Use aluminum air outlets and inlets for facilities located in high-humidity areas. Exhaust air registers located in combination toilets and shower stalls shall be constructed from aluminum. Provide manufacturer's standard gasket.
2. Exposed Fastenings: The same material as the respective inlet or outlet. Fasteners for aluminum may be stainless steel.
3. Contractor shall review all ceiling drawings and details and provide all ceiling mounted devices with appropriate dimensions and trim for the specific locations.

B. Performance Test Data: In accordance with Air Diffusion Council Code 1062GRD. Refer to Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT for NC criteria.

C. Air Supply Outlets:

1. Ceiling Diffusers: Suitable for surface mounting, exposed T-bar or special tile ceilings, off-white finish, square or round neck connection as shown on the drawings. Provide plaster frame for units in plaster ceilings.

- a. Square, louver, fully adjustable pattern: round neck, surface mounting unless shown otherwise on the drawings. Provide equalizing or control grid and volume control damper.
 - b. Louver face type: Square or rectangular, removable core for 1-, 2-, 3-, or 4-way directional pattern. Provide equalizing or control grid and opposed blade damper.
2. Supply Registers: Double deflection type with horizontal face bars and opposed blade damper with removable key operator.
 - a. Margin: Flat, 30 mm (1-1/4 inches) wide.
 - b. Bar spacing: 20 mm (3/4 inch) maximum.
 - c. Finish: Off white baked enamel for ceiling mounted units. Wall units shall have a prime coat for field painting or shall be extruded with manufacturer's standard finish.
3. Supply Grilles: Same as registers but without the opposed blade damper.
- D. Return and Exhaust Registers and Grilles: Provide opposed blade damper without removable key operator for registers.
 1. Finish: Off-white baked enamel for ceiling mounted units. Wall units shall have a prime coat for field painting or shall be extruded aluminum with manufacturer's standard aluminum finish.
 2. Standard Type: Fixed horizontal face bars set at 30 to 45 degrees, approximately 30 mm (1-1/4 inch) margin.
 3. Perforated Face Type: To match supply units.
 4. Grid Core Type: 13 mm by 13 mm (1/2 inch by 1/2 inch) core with 30 mm (1-1/4 inch) margin.
 5. Linear Type: To match supply units.
 6. Door Grilles: Are furnished with the doors.
 7. Egg Crate Grilles: Aluminum or Painted Steel 1/2 by 1/2 by 1/2-inch grid providing 90% free area.
 - a. Heavy extruded aluminum frame shall have countersunk screw mounting. Unless otherwise indicated, register blades and frame shall have factory applied white finish.
 - b. Grille shall be suitable for duct or surface mounting as indicated on drawings. All necessary appurtenances shall be provided to allow for mounting.

2.5 FILTER RETURN/EXHAUST GRILLE

- A. Provide grille within stream 1-inch-deep MERV 4 filter and removable face.
 - 1. Finish: Off-white baked enamel for ceiling mounted units. Wall units shall have a prime coat for field painting or shall be extruded aluminum with manufacturer's standard aluminum finish. Stainless Steel shall be No. 4 finish.
 - 2. Standard Type: Fixed horizontal face bars set at 30 to 45 degrees, approximately 30 mm (1-1/4 inch) margin.
 - 3. Steel, Aluminum, or Stainless steel as scheduled.
 - 4. Standard face connected to a mounting frame with space for a throwaway filter. Hold face closed by a locking screw. Provide retaining clips to hold filter in place. Provide fiberglass throwaway filter.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Comply with provisions of Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION, particularly regarding coordination with other trades and work in existing buildings.
- B. Protection and Cleaning: Protect equipment and materials against physical damage. Place equipment in first class operating condition or return to source of supply for repair or replacement, as determined by Resident Engineer. Protect equipment during construction against entry of foreign matter to the inside and clean both inside and outside before operation and painting.

3.2 INTAKE/ EXHAUST HOODS EXPOSED TO WIND VELOCITY

Provide additional support and bracing to all exposed ductwork installed on the roof or outside the building to withstand wind velocity of 145 km/h (90 mph).

3.3 TESTING, ADJUSTING AND BALANCING (TAB)

Refer to Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

3.4 OPERATING AND PERFORMANCE TESTS

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

- - - E N D - - -

SECTION 23 40 00
HVAC AIR CLEANING DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Air filters for heating, ventilating and air conditioning.
- B. Definitions: Refer to ASHRAE Standard 52.2 for definitions of face velocity, net effective filtering area, media velocity, initial resistance (pressure drop), MERV (Minimum Efficiency Reporting Value), PSE (Particle Size Efficiency), particle size ranges for each MERV number, dust holding capacity and explanation of electrostatic media used filtration products versus mechanical filtration products. Refer to ASHRAE Standard 52.2 Appendix J for definition of MERV-A.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.
- D. Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.
- E. Section 23 37 00 AIR OUTLETS AND INLETS.

1.3 QUALITY ASSURANCE

- A. Air Filter Performance Report for Extended Surface Filters:
 - 1. Submit a test report for each Grade of filter being offered. The report shall not be more than three (3) years old and prepared by using test equipment, method and duct section as specified by ASHRAE Standard 52.2 for type filter under test and acceptable to Resident Engineer, indicating that filters comply with the requirements of this specification. Filters utilizing partial or complete synthetic media will be tested in compliance with pre-conditioning steps as stated in Appendix J. All testing is to be conducted on filters with a nominal 24 inch by 24-inch face dimension. Test for 150 m/min (500 fpm) will be accepted for lower velocity rated filters provided the

test report of an independent testing laboratory complies with all the requirements of this specification.

- B. Filter Warranty for Extended Surface Filters: Guarantee the filters against leakage, blow-outs, and other deficiencies during their normal useful life, up to the time that the filter reaches the final pressure drop. Defective filters shall be replaced at no cost to the Government.
- C. Comply with UL Standard 900 for flame test.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Extended surface filters.
 - 2. Holding frames. Identify locations.
 - 3. Side access housings. Identify locations, verify insulated doors.
 - 4. HEPA filters.
 - 5. Magnehelic gages.
- C. Air Filter performance reports.
- D. Suppliers warranty.
- E. Field test results for HEPA filters as per paragraph 2.3.E.3.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. American Society of Heating, Refrigerating and Air-conditioning Engineers, Inc. (ASHRAE):
52.2-2017.....Method of Testing General Ventilation Air-Cleaning Devices for Removal Efficiency by Particle Size, including Appendix J
- C. American Society of Mechanical Engineers (ASME):
NQA-1-2017.....Quality Assurance Requirements for Nuclear Facilities Applications
- D. Underwriters Laboratories, Inc. (UL):
900; Revision 15 July 2015 Test Performance of Air Filter Units

PART 2 - PRODUCTS**2.1 REPLACEMENT FILTER ELEMENTS TO BE FURNISHED**

- A. To allow temporary use of HVAC systems for testing and in accordance with Paragraph, TEMPORARY USE OF MECHANICAL AND ELECTRICAL SYSTEMS in Section 01 00 00, GENERAL REQUIREMENTS, provide one complete set of additional filters to the Resident Engineer.
- B. The Resident Engineer will direct whether these additional filters will either be installed as replacements for dirty units or turned over to VA for future use as replacements.

2.2 EXTENDED SURFACE AIR FILTERS

- A. Use factory assembled air filters of the extended surface type with supported or non-supported cartridges for removal of particulate matter in air conditioning, heating, and ventilating systems. Filter units shall be of the extended surface type fabricated for disposal when the contaminant load limit is reached as indicated by maximum (final) pressure drop.
- B. Filter Classification: UL listed and approved conforming to UL Standard 900.
- C. HVAC Filter Types

HVAC Filter Types Table 2.2C				
MERV Value ASHRAE 52.2	MERV-A Value ASHRAE 62.2 Appendix J	Application	Particle Size	Thickness /Type
8	8-A	Pre-Filter	3 to 10 Microns	50 mm (2-inch) Throwaway
11	11-A	After-Filter	1 to 3 Microns	150 mm (6-inch) or 300 mm (12-inch) Rigid Cartridge
13	13-A	After-Filter	0.3 to 1 Microns	150 mm (6-inch) or 300 mm (12-inch) Rigid Cartridge
14	14-A	After-Filter	0.3 to 1 Microns	150 mm (6-inch) or 300 mm (12-inch) Rigid Cartridge

D. HEPA Filters

HEPA Filters Table 2.2D				
Efficiency at 0.3 Micron	Application	Initial Resistance (inches w.g.)	Rated CFM	Construction
99.97	Final Filter	1.35	1100	Galvanized Frame X- Body

99.97	Final Filter	1.00	2000	Aluminum Frame V-Bank

2.3 MEDIUM EFFICIENCY PLEATED PANEL PRE-FILTERS (2"; MERV 8; UL 900 CLASS 2):

- A. Construction: Air filters shall be medium efficiency ASHRAE pleated panels consisting of cotton and synthetic or 100% virgin synthetic media, self-supporting media with required media stabilizers, and beverage board enclosing frame. Filter media shall be lofted to a uniform depth and formed into a uniform radial pleat. The media stabilizers shall be bonded to the downstream side of the media to maintain radial pleats and prevent media oscillation. An enclosing frame of no less than 28-point high wet-strength beverage board shall provide a rigid and durable enclosure. The frame shall be bonded to the media on all sides to prevent air bypass. Integral diagonal support members on the air entering and air exiting side shall be bonded to the apex of each pleat to maintain uniform pleat spacing in varying airflows.
- B. Performance: The filter shall have a Minimum Efficiency Reporting Value of MERV 8 when evaluated under the guidelines of ASHRAE Standard 52.2. It shall also have a MERV-A of 8 when tested per Appendix J of the same standard. The media shall maintain or increase in efficiency over the life of the filter. Pertinent tolerances specified in Section 7.4 of the Air-Conditioning and Refrigeration Institute (ARI) Standard 850-2014 shall apply to the performance ratings. All testing is to be conducted on filters with a nominal 24" x 24" face dimension.

Minimum Efficiency Reporting (MERV)	8
Dust Holding Capacity (Grams)	105
Nominal Size (Width x Height x Depth)	24x24x2
Rated Air Flow Capacity (Cubic Feet per Minute)	2,000
Rated Air Flow Rate (Feet per Minute)	500
Final Resistance (Inches w.g.)	1.0
Maximum Recommended Change-Out Resistance (Inches w.g.)	0.66
Rated Initial Resistance (Inches w.g.)	0.33

- C. The filters shall be approved and listed by Underwriters' Laboratories, Inc. as Class 2 when tested according to U. L. Standard 900 and CAN 4-5111.

2.4 FILTER HOUSINGS/SUPPORT FRAMES

- A. Side Servicing Housings (HVAC Grade)

1. Filter housing shall be two-stage filter system consisting of 16-gauge galvanized steel enclosure, aluminum filter mounting track, universal filter holding frame, insulated dual-access doors, static pressure tap, filter gaskets and seals. In-line housing depth shall not exceed 21". Sizes shall be as noted on enclosed drawings or other supporting materials.
2. Construction: The housing shall be constructed of 16-gauge galvanized steel with pre-drilled standing flanges to facilitate attachment to other system components. Corner posts of Z-channel construction shall ensure dimensional adherence. Where installed outdoors, the housing shall be weatherproof and suitable for rooftop/outdoor installation. The housing shall incorporate the capability of two stages of filtration without modification to the housing. A filter track, of aluminum construction shall be an integral component of housing construction. The track shall accommodate a 2" deep prefilter, a 6" or 12" deep rigid final filter, or a pocket filter with header. Insulated dual access doors, swing-open type, shall include high-memory sponge neoprene gasket to facilitate a door-to-filter seal. Each door shall be equipped with adjustable and replaceable positive sealing UV-resistant star-style knobs and replaceable door hinges. A universal holding frame constructed of 18-gauge galvanized steel, equipped with centering dimples, multiple fastener lances, and polyurethane filter sealing gasket, shall be included to facilitate installation of high-efficiency filters. The housing shall include a pneumatic fitting to allow the installation of a static pressure gauge to evaluate pressure drop across a single filter or any combination of installed filters.
3. Performance: Leakage at rated airflow, upstream to downstream of filter, holding frame, and slide mechanism shall be less than 1% at 3.0" w.g. Leakage in to or out of the housing shall be less than one half of 1% at 3.0" w.g. Accuracy of pneumatic pressure fitting, when to evaluate a single-stage, or multiple filter stages, shall be accurate within $\pm 3\%$ at 0.6" w.g.
4. Manufacturer shall provide evidence of facility certification to ISO 9001:2015.

2.5 INSTRUMENTATION

- A. Magnehelic Differential Pressure Filter Gages: Nominal 100 mm (four inch) diameter, zero to 500 Pa (zero-to-two-inch water gage), three inch for HEPA) range, except for MERV 17 HEPA Final Filters, where the range shall be zero to 750 Pa (zero to three inch water gage) Gauges shall be flush-mounted in aluminum panel board, complete with static tips, copper or aluminum tubing, and accessory items to provide zero adjustment.
- B. DDC static (differential) air pressure measuring station. Refer to Specification Section 23 09 23 DIRECT DIGITAL CONTROL SYSTEM FOR HVAC
- C. Provide one DDC sensor across each extended surface filter. Provide Petcocks for each gauge or sensor.
- D. Provide one common filter gauge for two-stage filter banks with isolation valves to allow differential pressure measurement.

2.6 HVAC EQUIPMENT FACTORY FILTERS

- A. Manufacturer standard filters within fabricated packaged equipment should be specified with the equipment and should adhere to industry standard.
- B. Cleanable filters are not permitted.
- C. Automatic Roll Type filters are not permitted.

2.7 FILTER RETURN GRILLES

Refer to Section 23 37 00 AIR OUTLETS AND INLETS.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Install supports, filters and gages in accordance with manufacturer's instructions.
- B. Label clearly with words "Contaminated Air" on exhaust ducts leading to the HEPA filter housing.

3.2 START-UP AND TEMPORARY USE

- A. Clean and vacuum air handling units and plenums prior to starting air handling systems.
- B. Replace Pre-filters and install clean filter units prior to final inspection as directed by the Resident Engineer.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection,

start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - E N D - - -

SECTION 23 64 00
PACKAGED WATER CHILLERS

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Scroll air-cooled chillers complete with accessories.

1.2 RELATED WORK

- A. Section 00 72 00, GENERAL CONDITIONS.
- B. Section 01 00 00, GENERAL REQUIREMENTS.
- C. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS
- E. Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- F. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION EQUIPMENT.
- G. Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
- H. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- I. Section 23 21 13, HYDRONIC PIPING.
- J. Section 23 21 23, HYDRONIC PUMPS.
- K. Section 23 31 00, HVAC DUCTS and CASINGS
- L. Section 23 81 00, DECENTRALIZED UNITARY HVAC EQUIPMENT.
- M. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.

1.3 DEFINITION

- A. Engineering Control Center (ECC): The centralized control point for the intelligent control network. The ECC comprises of personal computer and connected devices to form a single workstation.
- B. BACNET: Building Automation Control Network Protocol, ASHRAE Standard 135.
- C. Ethernet: A trademark for a system for exchanging messages between computers on a local area network using coaxial, fiber optic, or twisted-pair cables.

1.4 QUALITY ASSURANCE

- A. Refer to Paragraph, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION, and comply with the following.
- B. Refer to PART 3 herein after and Section 01 00 00, GENERAL REQUIREMENTS for test performance.
- C. Comply with AHRI requirements for testing and certification of the chillers.

- D. Refer to paragraph, WARRANTY, Section 00 72 00, GENERAL CONDITIONS, except as noted below:
 - 1. Provide a 5-year motor and compressor warranty to include materials, parts and labor.
- E. Refer to OSHA 29 CFR 1910.95(a) and (b) for Occupational Noise Exposure Standard
- F. Refer to ASHRAE Standard 15, Safety Standard for Refrigeration System, for refrigerant vapor detectors and monitor.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air Conditioning, Heating and Refrigeration Institute (AHRI):
 - 370-2015.....Sound Rating of Large Outdoor Refrigerating and Air-Conditioning Equipment
 - 495-2005(R2009).....Refrigerant Liquid Receivers
 - 550/590-2018.....Standard for Water Chilling Packages Using the Vapor Compression Cycle
 - 560-2000.....Absorption Water Chilling and Water Heating Packages
 - 575-2017.....Methods for Measuring Machinery Sound within Equipment Space
- C. American Society of Heating, Refrigerating, and Air-Conditioning Engineers (ASHRAE):
 - 15-2019.....Safety Standard for Mechanical Refrigeration Systems
 - GDL 3-1996.....Guidelines for Reducing Emission of Halogenated Refrigerants in Refrigeration and Air-Conditioning Equipment and Systems
- D. American Society of Mechanical Engineers (ASME):
 - CFVC VIII-1 2019 ASME Boiler and Pressure Vessel Code, Section VIII, "Pressure Vessels - Division 1"
- E. American Society of Testing Materials (ASTM):
 - C 534/C534M-2017.....Preformed, Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form

C 612-2014.....Mineral-fiber Block and Board Thermal
Insulation

F. National Electrical Manufacturing Association (NEMA):

250-2014.....Enclosures for Electrical Equipment (1000 Volts
Maximum)

G. National Fire Protection Association (NFPA):

70-2017.....National Electrical Code

H. Underwriters Laboratories, Inc. (UL):

1995-2015..... Heating and Cooling Equipment

1.6 SUBMITTALS

A. Submit in accordance with Specification Section 01 33 23, SHOP
DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data.

1. Centrifugal scroll chillers, including motor starters, control panels, and vibration isolators, and remote condenser data shall include the following:
 - a. Rated capacity.
 - b. Pressure drop.
 - c. Efficiency at full load and part load WITHOUT applying any tolerance indicated in the AHRI 550/590/Standard.
 - d. Refrigerant
 - e. Fan performance (Air-Cooled Chillers only.)
 - f. Accessories.
 - g. Installation instructions.
 - h. Startup procedures.
 - i. Wiring diagrams, including factor-installed and field-installed wiring.
 - j. Sound/Noise data report. Manufacturer shall provide sound ratings. Noise warning labels shall be posted on equipment.
 - l. Refrigerant vapor detectors and monitors.

C. Maintenance and operating manuals for each piece of equipment in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

D. Run test report for all chillers.

E. Product Certificate: Signed by chiller manufacturer certifying that chillers furnished comply with AHRI requirements. The test report shall include calibrated curves, calibration records, and data sheets for the instrumentation used in factory tests.

PART 2 - PRODUCTS**2.1 ROTARY-SCREW AND SCROLL AIR-COOLED WATER CHILLERS**

- A. General: Factory-assembled and-tested rotary-screw or scroll water chillers, complete with evaporator, compressors, motor, starters, integral condenser, and controls mounted on a welded steel base. The chiller unit shall consist of two compressors minimum, but not more than eight, mounted on a single welded steel base. Where compressors are paralleled, not more than two shall be so connected and not less than two independent refrigerant circuits shall be provided. Chiller shall be capable of operating one of the following refrigerants: HCFC-134a or HCFC-410a.
- B. Performance: Provide the capacity as shown on the drawings. Part load and full load efficiency ratings of the chiller shall not exceed those shown on the drawings. If chillers are required to operate at less than 25 percent of full unit rated capacity, specify provision for hot gas by-pass, to operate the unit stable at any stage of capacity reduction.
- C. Capacity of a single air-cooled chiller shall not exceed 250 Tons (Standard AHRI Conditions).
- D. Applicable Standard: Chillers shall be rated and certified according to AHRI 550/590, and shall be stamped in compliance with AHRI certification.
- E. Acoustics: Sound pressure levels shall not exceed the following specified levels. The manufacturer shall provide sound treatment if required to comply with the specified maximum levels. Testing shall be in accordance with AHRI requirements.

OCTAVE BAND								Overall
<u>63</u>	<u>125</u>	<u>250</u>	<u>500</u>	<u>1000</u>	<u>2000</u>	<u>4000</u>	<u>8000</u>	<u>dB (A)</u>

- F. Compressor (Rotary-Screw Type): Positive-displacement oil injected type, direct drive, cast-iron casing, precision-machined for minimum clearance about periphery of rotors. Lubrication system shall provide oil at proper temperature to all moving parts. Capacity control shall be by means of single slide valve to modulate the capacity from 100 to 20percent of full unit rated capacity and hot gas bypass without

unstable compressor operation. The slide valve shall be hydraulically operated upon the actuation of temperature or pressure sensor.

- G. Compressor (Scroll Type): Three dimensional, positive-displacement, hermetically sealed design, with suction and discharge valves, crankcase oil heater and suction strainer. Compressor shall be mounted on vibration isolators. Rotating parts shall be factory balanced. Lubrication system shall consist of reversible, positive displacement pump, strainer, oil level sight glass, and oil charging valve. Capacity control shall be by on-off compressor cycling of single and multiple compressors and hot gas bypass.
- H. Refrigerants Circuit: Each circuit shall contain include an expansion valve, refrigerant charging connections, hot-gas muffler, compressor suction and discharge shutoff valves, replaceable-core filter drier, sight glass with moisture indicator, liquid-line solenoid valve and insulated suction line.
- I. Refrigerant and Oil: Sufficient volume of dehydrated refrigerant and lubricating oil shall be provided to permit maximum unit capacity operation before and during tests. Replace refrigerant charge lost during the warranty period, due to equipment failure, without cost to the Government.
- J. Condenser:
1. Air-cooled integral condenser as shown on the drawings and specified hereinafter.
 2. Integral Condenser: Condenser coils shall be extended surface fin and tube type, seamless copper tubes with aluminum fins. For corrosion protection, see Paragraph 2.7 below. Condenser coils shall be factory air tested at 3105 kPa (450 psig). Condenser fans shall be propeller type, directly connected to motor shaft. Fans shall be statically and dynamically balanced, with wire safety guards. Condenser fan motors with permanently lubricated ball bearings and three-phase thermal overload protection. Unit shall start -18°C (0°F) with external damper assemblies. Units shall have grilles factory mounted to prevent damage to coil surfaces.
- K. Evaporator: Shell and tube design with seamless copper tubes roller expanded into tube sheets. Designed, tested, and stamped in accordance with applicable portions of ASME Boiler and Pressure Vessel Code, Section VIII, for working pressure produced by the water system, but not less than 1035 kPa (15 psig). Refrigerant side working pressure

shall comply with ASHRAE Standard 15. Shell shall be constructed of carbon steel. For the waterside of liquid cooler the performance shall be based on a water velocity not less than 1 m/s (3 fps) with a maximum water velocity of 3 m/s (10 fps) and a fouling factor 0.0000176 m^2 degrees C (0.0001 hr. sq. ft.) degrees F/Btu. Brazed plate and frame type heat exchanger design. Brazed plate evaporator shall be constructed of stainless steel with copper brazing material. The evaporator shall be designed for a minimum of 1.5 times the working pressure produced by the water system, but not less than 10,350 kPa (150 psig). Refrigerant side working pressure shall comply with ASHRAE Standard 15. Evaporator for packaged air-cooled chiller units designed for outdoor installation shall be protected against freeze-up in ambient temperature down to -30 degrees C (-20 degrees F) by a resistance heater cable under insulation with thermostat set to operate below 3 degrees C (37 degrees F) ambient.

- L. Insulation: Evaporator, suction piping, compressor, and all other parts subject to condensation shall be insulated with 20 mm (0.75 inch) minimum thickness of flexible-elastomeric thermal insulation, complying with ASTM C534.
- M. Refrigerant Receiver: Provide a liquid receiver for chiller units when system refrigerant charge exceeds 80 percent of condenser refrigerant volume. Liquid receivers shall be horizontal-type, designed, fitted, and rated in conformance with AHRI 495. Receiver shall be constructed and tested in conformance with Section VIII D1 of the ASME Boiler and Pressure Vessel Code. Each receiver shall have a storage capacity not less than 20 percent in excess of that required for fully charged system. Each receiver shall be equipped with inlet, outlet drop pipes, drain plug, purging valve, and relief devices as required by ASHRAE Standard 15.
- N. Controls: Chiller shall be furnished with unit mounted, stand-alone, microprocessor-based controls in NEMA 3R enclosure, hinged and lockable, factory wired with a single point power connection and separate control circuit. The control panel provide chiller operation, including monitoring of sensors and actuators, and shall be furnished with light emitting diodes or liquid-crystal display keypad.

1. Following shall display as a minimum on the panel:

- a. Date and time.

- b. Outdoor air temperature.
 - c. Operating and alarm status.
 - d. Entering and leaving water temperature-chilled water.
 - e. Operating set points-temperature and pressure.
 - f. Refrigerant temperature and pressure.
 - g. Operating hours.
 - h. Number of starts.
 - i. Current limit set point.
 - j. Maximum motor amperage (percent).
2. Control Functions:
- a. Manual or automatic startup and shutdown time schedule.
 - b. Condenser water temperature.
 - c. Entering and leaving chilled water temperature and control set points.
 - d. Automatic lead-lag switch.
3. Safety Functions: Following conditions shall shut down the chiller and require manual reset to start:
- a. Loss of chilled water flow.
 - b. Loss of condenser water flow (for water-cooled chillers only).
 - c. Low chilled water temperature.
 - d. Compressor motor current-overload protection.
 - e. Freeze protection (for air-cooled chillers).
 - f. Starter fault.
 - g. High or low oil pressure.
 - h. Recycling pumpdown.
- O. The chiller control panel shall provide leaving chilled water temperature reset based on outdoor air temperature 4-20 ma or 0-10 VDC signal from Energy Control Center (ECC).
- P. Provide contacts for remote start/stop, alarm for abnormal operation or shutdown, and for Engineering Control Center (ECC).
- Q. Chiller control panel shall either reside on the "LonTalk FTT-10a network", and provide data using LonMark standard network variable types and configuration properties, or BACnet interworking using ARCNET or MS/TP physical data link layer protocol for communication with building automation control system.
- R. Auxiliary hydronic system and the chiller(s) shall be interlocked to provide time delay and start sequencing as indicated on control drawings.

- S. Motor: Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION. Compressor motor furnished with the chiller shall be in accordance with the chiller manufacturer and the electrical specification Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION EQUIPMENT. Starting torque of motors shall be suitable for driven machines.
- T. Motor Starter: Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION. Provide a starter in NEMA I enclosure, designed for floor or unit mounted chiller using multiple compressors, with the lead compressor starting at its minimum capacity may be provided with across-the-line starter. See Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS for additional requirements.

2.5 CONDENSERS

- A. Air-Cooled Condensers: Suitable for remote installation in a weather-protected casing. For multiple compressors chiller units, provide a separate air-cooled condenser to match the compressor:
1. Condenser coils shall be extended surface fin and tube type, seamless copper tubes with aluminum fins. See Paragraph 2.7 below for corrosion protection
 2. Fans shall be either housed-centrifugal or plenum or propeller type as best suited for application, directly connected to motor shaft or indirectly connected to motor by means of a V-belt drive. Fans shall be statically and dynamically balanced.
 3. Discharge air from each air-cooled condenser in vertical direction either directly from fan casing or by means of supplementary wind deflectors.
 4. Condenser Controls: Provide head pressure controls for operation of the system down to 5 degrees C (40 degrees F) by cycling the fans.
- B. Refrigerant Piping: Refrigerant piping shall be as specified in specification Section 23 23 00, REFRIGERANT PIPING.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in for concrete equipment bases, anchor-bolt sizes and locations, piping and electrical to verify actual locations and sizes before chiller installation and other conditions that might affect chiller performance, maintenance, and operation. Equipment locations

shown on drawings are approximate. Determine exact locations before proceeding with installation.

3.2 EQUIPMENT INSTALLATION

- A. Install chiller on concrete base with isolation pads or vibration isolators.
 - 1. Concrete base is specified in Section 03 30 00, CAST-IN-PLACE CONCRETE
 - 2. Vibration isolator types and installation requirements are specified in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT
 - 3. Anchor chiller to concrete base according to manufacturer's written instructions and for seismic restraint on vibration isolators.
 - 4. Charge the chiller with refrigerant, if not factory charged.
 - 5. Install accessories and any other equipment furnished loose by the manufacturer, including remote starter, remote control panel, and remote flow switches, according to the manufacturer written instructions and electrical requirements.
 - 6. Chillers shall be installed in a manner as to provide easy access for tube pull and removal of compressor and motors etc.
- B. Install refrigerant monitoring and safety equipment in accordance with ASHRAE Standard 15.
- C. Install refrigerant piping as specified in Section 23 23 00, REFRIGERANT PIPING and ASHRAE Standard 15.
- D. Install thermometers and gages as recommended by the manufacturer and/or as shown on drawings.
- E. Piping Connections:
 - 1. Make piping connections to the chiller for chilled water, condenser water, and automatic tube brush cleaning system and other connections as necessary for proper operation and maintenance of the equipment.
 - 2. Make equipment connections with flanges and couplings for easy removal and replacement of equipment from the equipment room.

3.3 STARTUP AND TESTING

- A. Engage manufacturer's factory-trained representative to perform startup and testing service.
- B. Inspect, equipment installation, including field-assembled components, and piping and electrical connections.

- C. After complete installation startup checks, according to the manufacturers written instructions, do the following to demonstrate to the COR that the equipment operate and perform as intended.
1. Check refrigerant charge is sufficient and chiller has been tested for refrigerant leak.
 2. Check bearing lubrication and oil levels.
 3. Verify proper motor rotation.
 4. Verify pumps associated with chillers are installed and operational.
 5. Verify thermometers and gages are installed.
 6. Verify purge system, if installed, is functional and relief piping is routed outdoor.
 7. Operate chiller for run-in-period in accordance with the manufacturer's instruction and observe its performance.
 8. Check and record refrigerant pressure, water flow, water temperature, and power consumption of the chiller.
 9. Test and adjust all controls and safeties. Replace or correct all malfunctioning controls, safeties and equipment as soon as possible to avoid any delay in the use of the equipment.
 10. Prepare a written report outlining the results of tests and inspections, and submit it to the COR.
- D. Engage manufacturer's certified factory trained representative to provide training for 8 hours for the VA maintenance and operational personnel to adjust, operate and maintain equipment, including self-contained breathing apparatus.
- E. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COR and Commissioning Agent. Provide a minimum of 7 days prior notice.
- F. Provide services of manufacturer's technical representative for four hours to instruct VA personnel in operation and maintenance of computer room air conditioning equipment.

3.4 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS and Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.5 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for four hours to instruct VA personnel in operation and maintenance of units. Coordinate this training with that of the cooling tower, if furnished together.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

SECTION 23 72 00
AIR-TO-AIR ENERGY RECOVERY EQUIPMENT

PART 1 - GENERAL**1.1 DESCRIPTION**

This Section specifies air to air heat pipe heat exchangers air-to-air plate heat exchangers.

1.2 RELATED WORK

- A. Section 00 72 00, GENERAL CONDITIONS.
- B. Section 01 00 00, GENERAL REQUIREMENTS: Requirements for pre-test of equipment.
- C. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- D. Section 01 91 00 - GENERAL COMMISSIONING REQUIREMENTS
- E. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.
- F. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION EQUIPMENT.
- G. Section 23 05 93, TESTING, ADJUSTING and BALANCING FOR HVAC: Requirements for testing, adjusting, and balancing of HVAC system.
- H. Section 23 07 11, HVAC and BOILER PLANT INSULATION: Requirements for piping insulation.
- I. Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.
- J. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: Requirements for controls and instrumentation.
- K. Section 23 21 13, HYDRONIC PIPING: Requirements for piping for expansion tanks.
- L. Section 23 21 23, HYDRONIC PUMPS: Requirements for pumping equipment.
- M. Section 23 31 00, HVAC DUCTS and CASINGS: Requirements for sheet metal ducts and fittings.
- N. Section 23 40 00, HVAC AIR CLEANING DEVICES: Requirements for filters used before heat recovery coils.
- O. Section 23 82 16, AIR COILS: Requirements for run-around system coils.

1.3 QUALITY ASSURANCE

- A. Refer to paragraph, GUARANTEE in specification Section 00 72 00, GENERAL CONDITIONS.

- B. Refer to specification Section 01 00 00, GENERAL REQUIREMENTS for performance tests and instructions to VA personnel.
- C. Refer to paragraph QUALITY ASSURANCE in specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- D. Performance Criteria: Heat recovery equipment shall be provided by a manufacturer who has been manufacturing such equipment and the equipment has a good track record for at least 3 years.
- E. Performance Test: In accordance with PART 3.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Heat Pipe Heat Exchanger
 - 2. Rotary Heat Exchanger
 - 3. Plate Heat Exchanger
 - 4. Run-Around Energy Recovery System
- C. Certificate: Submit, simultaneously with shop drawings, evidence of satisfactory service of the equipment on three similar installations.
- D. Submit type, size, arrangement, and performance details. Present application ratings in the form of tables, charts, or curves.
- E. Provide installation, operating and maintenance instructions, in accordance with Article, INSTRUCTIONS, in Section 01 00 00, GENERAL REQUIREMENTS.
- F. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician, and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air Conditioning, Heating, and Refrigeration Institute (AHRI)
1060-2018.....Performance Rating of Air-to-Air Heat
Exchangers for Energy Recovery Ventilation
Equipment
- C. American Society of Heating, Refrigeration and Air Conditioning
Engineers (ASHRAE):

- 15-2019.....Safety Standard for Refrigeration Systems
(ANSI)
- 52.1-1999.....Gravimetric and Dust-Spot Procedures for
Testing Air-Cleaning Devices Used in General
Ventilation for Removing Particulate Matter
- 52.2-2017.....Method of Testing General Ventilation Air-
Cleaning Devices for Removal Efficiency by
Particle Size
- 62.1-2016.....Ventilation for Acceptable Indoor Air Quality
- 84-2013.....Method of Testing Air-to-Air Heat/Energy
Exchangers
- D. American Society for Testing and materials (ASTM)
 - D635-2018.....Standard Test Method for Rate of Burning and/or
Extent and Time of Burning of Plastics in a
Horizontal Position
 - E84-2014.....Standard Test Method for Surface Burning
Characteristics of Building Materials
- E. American Society of Civil Engineers (ASCE)
 - ASCE 7-2017.....Minimum Design Loads for Buildings and Other
Structures
- F. Underwriters Laboratories, Inc (UL)
 - 1812-2013.....Standard for Ducted Heat Recovery Ventilators
 - 1815-2015.....Standard for Nonducted Heat Recovery
Ventilators

PART 2 - PRODUCTS

2.1 AIR-TO-AIR PLATE HEAT EXCHANGER

- A. Comply with UL Standards 1812.
- B. Plates: Corrugated 0.53 mm (0.021 inch) diamond embossed aluminum
stainless steel enthalpic spacing as recommended by the manufacturer.
- C. Casings shall have integral flanges for flanged duct connections and
shall have lifting holes or lugs.
- D. Drain Pan: Same material as unit casing. Drain-pan surface shall be
covered with molded ABS and shall have drain connections on exhaust and
supply side. Comply with requirements in ASHRAE 62.1.
- E. Extended-Surface, Disposable Panel Filters: MERV 7, 2-inch throw-away
type. Refer to Section 23 40 00 HVAC Air Cleaning Devices.

2.5 AIR FILTERS

Air Filters: Disposable air filters, with a MERV rating of 7, shall be provided standard on all air entering sides of air-to-air heat exchangers and as indicated on the drawings. Comply with requirements in specification Section 23 40 00, HVAC AIR CLEANING DEVICES.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Follow the equipment manufacturer's instructions for handling and installation and setting up of ductwork for makeup and exhaust air steamers for maximum efficiency.
- B. Rotary Air-to-Air Exchanger: Adjust seals and purge as recommended by the manufacturer. Verify correct installation of controls.
- C. Seal ductwork tightly to avoid air leakage.
- D. Install units with adequate spacing and access for cleaning and maintenance of heat recovery coils as well as filters.
- E. Brace heat recovery equipment installed in projects in the Seismic area according to specification Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

3.2 FIELD QUALITY CONTROL

- A. Operational Test: Perform tests as per manufacturer's written instructions for proper and safe operation of the heat recovery system.
 - 1. After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
 - 2. Adjust seals and purge.
 - 3. Test and adjust controls and safeties.
- B. Replace damaged and malfunctioning controls and equipment.
- C. Set initial temperature and humidity set points. Set field-adjustable switches and circuit-breaker trip ranges as indicated.
- D. Prepare test and inspection reports to the COR in accordance with specification Section 01 00 00, GENERAL REQUIREMENTS.

3.3 INSTRUCTIONS

Provide services of manufacturer's technical representative for four hours to instruct VA personnel in operation and maintenance of heat recovery equipment.

3.4 STARTUP AND TESTING

- A. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing

schedules with the COR and Commissioning Agent. Provide a minimum of 7 days prior notice.

3.5 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.6 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for four hours to instruct VA personnel in operation and maintenance of units.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

SECTION 23 82 00
CONVECTION HEATING AND COOLING UNITS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. A complete listing of common acronyms and abbreviations are included in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- B. This section specifies room fan-coil units, unit heaters, and cabinet unit heaters.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- F. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- G. Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
- H. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.
- I. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- J. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- K. Section 23 21 13, HYDRONIC PIPING.
- L. Section 23 31 00, HVAC DUCTS and CASINGS.
- M. Section 23 82 16, AIR COILS.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standards will govern.
- B. Air-Conditioning, Heating, and Refrigeration Institute (ANSI/AHRI):
440-2019.....Performance Rating of Fan-Coil Units
- C. National Fire Protection Association (NFPA):
70-2020.....National Electrical Code
90A-2021.....Standard for the Installation of
Air-Conditioning and Ventilating Systems
- D. Underwriters Laboratories, Inc. (UL):
181-2013(R2017).....Standard for Factory-Made Air Ducts and Air
Connectors
1995-2015(R2018).....Heating and Cooling Equipment

1.4 SUBMITTALS

- A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 23 XX XX, SECTION TITLE", with applicable paragraph identification.
- C. Manufacturer's Literature and Data Including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.
 - 1. Room Fan-Coil units.
 - 2. Unit heaters.
 - 3. Cabinet unit heaters.
- D. Certificates:
 - 1. Compliance with paragraph QUALITY ASSURANCE.
 - 2. Compliance with specified standards.
- E. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replaceable parts, and troubleshooting guide:
 - 1. Include complete list indicating all components of the systems.
 - 2. Include complete diagrams of the internal wiring for each item of equipment.
 - 3. Diagrams shall have their terminals identified to facilitate installation, operation, and maintenance.
- F. Completed System Readiness Checklists provided by the CxA and completed by the contractor, signed by a qualified technician, and dated on the date of completion, in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- G. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

1.5 QUALITY ASSURANCE

- A. Refer to paragraph QUALITY ASSURANCE of Section 23 05 11, COMMON WORK RESULTS FOR HVAC. Provide guarantee in accordance with FAR clause 52.246-21.
- B. Bio-Based Materials: For products designated by the USDA's Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all

performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit <http://www.biopreferred.gov>.

- C. Refer to Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for additional sustainable design requirements.

1.6 AS-BUILT DOCUMENTATION

- A. Comply with requirements in paragraph AS-BUILT DOCUMENTATION of Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

PART 2 - PRODUCTS

2.1 ROOM FAN-COIL UNITS

- A. Capacity Certification: AHRI 440.
- B. Safety Compliance: NEC compliant and UL listed.
- C. Noise Levels: Operating at full cooling capacity, sound power level shall not exceed by more than 5 dB the numerical value of sound pressure levels associated with noise criteria specified in Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT. Select units at intermediate speed, for compliance with the noise criteria.
- D. Chassis: Galvanized steel, acoustically and thermally insulated to attenuate noise and prevent condensation.
- E. Cabinet: Minimum 1.3 mm (18 gauge) steel reinforced and braced. Arrange components and provide adequate space for installation of piping package and control valves. Finish shall be factory-baked enamel color as selected by the architect on all exposed surfaces.
 - 1. Vertical Exposed Cabinet Unit: Provide 1.6 mm (16 gauge) steel front panel with 13 mm (1/2 inch) thick fiberglass insulation and provide screw-type levelers.
 - a. Air Outlet Grilles: Adjustable four-way air deflection located in the top panel.
 - b. Provide two hinged access doors (one each side) equipped with key operated cam-lock fasteners in the unit top panel located to provide access to the unit controls.
 - 2. Horizontal Unit: Provide concealed type as shown. Provide supports and vibration isolators for horizontal units as recommended by the manufacturer.
 - a. Concealed Units: Provide furred-in type with inlet duct collar and outlet duct collar.

F. Fans: Centrifugal, forward curved, double width type wheels, galvanized steel or polyester resin construction, statically and dynamically balanced, direct driven.

1. Motors: Premium efficiency, 3-speed permanent split capacitor type with integral thermal overload protection, for operation at no greater than 1200 RPM.
2. Provide a fan speed selector switch, with off, low, medium, and high positions. Switch shall have a set of auxiliary contacts which are open when the switch is in the "off" position and closed when the switch in any of the other positions. On vertical units, mount switch in a junction box in the cabinet of each unit. On ceiling-suspended horizontal and concealed units, switch shall be wall mounted.

G. Cooling and Heating Coils:

1. Hydronic (two separate coils for cooling and heating): Copper tubes, 10 mm (3/8 inch) minimum inside diameter, not less than 0.43 mm (0.017 inch) thick with copper or aluminum fins. Coils shall be pressure tested for bursting and strength in accordance with Underwriters Laboratories, Inc., requirements for pressure tested coils, and shall be designed to provide adequate heat transfer capacity. Provide manual air vent at high point of each coil and drain at each low point.

H. Piping Package: Factory furnished with unit by the manufacturer or field-installed by the contractor to fit control valves provided by the controls' supplier. Submit manufacturer's detailed drawings of the piping in the end compartments for approval prior to fabrication of the piping packages. Provide ball stop valves on the supply and return pipes and balancing fittings on the return pipes.

I. Drain Pans: Furnish galvanized steel with solderless drain connections and molded polystyrene foam insulating liner:

1. Auxiliary Drain Pan: Located under control valve and piping within the unit enclosure to prevent dripping.
2. Where the unit is located such that drain pan overflow will damage the building provide a secondary drain pan located underneath the unit, constructed to extend a minimum of 50 mm (2 inches) beyond the edges of the unit and be a minimum of 38 mm (1-1/2 inches deep). Provided with a water detection device to deactivate the cooling in the unit.

J. Air Filter (where not provided with filtered return grille):

Manufacturer's standard throwaway type, not less than 25 mm (1 inch) thick, MERV 7, supported to be concealed from sight and be tight fitting to prevent air by-pass. Filters shall have slide out frames and be easily replaced without removing enclosure or any part thereof.

K. Control valves and remote wall mounted space thermostats are to be field installed.

2.3 UNIT HEATERS

- A. General: Horizontal or vertical discharge type for hot water or electric heating medium, as indicated.
- B. Casing: Steel sheet, phosphatized to resist rust and finished in baked enamel. Provide hanger supports.
- C. Fan: Propeller type, direct driven by manufacturer's standard electric motor. Provide resilient mounting. Provide fan guard for horizontal discharge units.
- D. Discharge Air Control:
 - 1. Horizontal Discharge: Horizontal, adjustable louvers.
 - 2. Vertical Discharge: Radial louver diffuser.
- E. Hot Water Coil: Aluminum fins bonded to seamless copper tubing by mechanical expansion of the tubing, designed for 520 kPa (75 psig) working pressure.

2.4 CABINET UNIT HEATERS

- A. General: Vertical or horizontal type for hot water or electric heating medium, as indicated.
- B. Cabinet: Not less than 1.3 mm (18 gauge) steel with front panel for vertical units and hinged front panel for horizontal units. Finish on exposed cabinet shall be factory-baked enamel in manufacturer's standard color as selected by the Architect. Provide 75 mm (3 inch) high sub-base for vertical floor mounted units.
- C. Fan: Centrifugal blower, direct driven by a single phase, two-speed, electric motor with inherent overload protection. Provide resilient motor/fan mount.
- D. Filter: Manufacturer's standard, 25 mm (1 inch) thick, throwaway type MERV 7 filters.
- E. Hot Water Coil: Aluminum fins bonded to seamless copper tubing by mechanical expansion of the tubing, designed for 520 kPa (75 psig) working pressure.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. If an installation is unsatisfactory to the COR, the contractor shall correct the installation at no additional cost or time to the Government.
- B. Work shall be installed as shown and according to the manufacturer's diagrams and recommendations.
- C. Handle and install units in accordance with manufacturer's written instructions.
- D. Support units rigidly so they always remain stationary. Cross-bracing or other means of stiffening shall be provided as necessary. Method of support shall be such that distortion and malfunction of units cannot occur.

3.2 STARTUP AND TESTING

- A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.
- B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.
- C. The CxA will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COR and CxA. Provide a minimum notice of 10 working days prior to startup and testing.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- B. Components provided under this section of the specification will be tested as part of a larger system.

3.4 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for 4 hours to instruct each VA personnel responsible in operation and maintenance of the system.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

SECTION 26 05 11
REQUIREMENTS FOR ELECTRICAL INSTALLATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section applies to all sections of Division 26.
- B. Furnish and install electrical systems, materials, equipment, and accessories in accordance with the specifications and drawings. Capacities and ratings of motors, conductors and cable, switchboards, switchgear, panelboards, generators, automatic transfer switches, and other items and arrangements for the specified items are shown on the drawings.
- C. Conductor ampacities specified or shown on the drawings are based on copper conductors, with the conduit and raceways sized per NEC. Aluminum conductors are prohibited.

1.2 MINIMUM REQUIREMENTS

- A. The latest International Building Code (IBC), Underwriters Laboratories, Inc. (UL), Institute of Electrical and Electronics Engineers (IEEE), and National Fire Protection Association (NFPA) codes and standards are the minimum requirements for materials and installation.
- B. The drawings and specifications shall govern in those instances where requirements are greater than those stated in the above codes and standards.

1.3 TEST STANDARDS

- A. All materials and equipment shall be listed, labeled, or certified by a Nationally Recognized Testing Laboratory (NRTL) to meet Underwriters Laboratories, Inc. (UL), standards where test standards have been established. Materials and equipment which are not covered by UL standards will be accepted, providing those materials and equipment are listed, labeled, certified or otherwise determined to meet the safety requirements of a NRTL. Materials and equipment which no NRTL accepts, certifies, lists, labels, or determines to be safe, will be considered if inspected or tested in accordance with national industrial standards, such as ANSI, NEMA, and NETA. Evidence of compliance shall include certified test reports and definitive shop drawings.
- B. Definitions:

1. Listed: Materials and equipment included in a list published by an organization that is acceptable to the Authority Having Jurisdiction and concerned with evaluation of products or services, that maintains periodic inspection of production or listed materials and equipment or periodic evaluation of services, and whose listing states that the materials and equipment either meets appropriate designated standards or has been tested and found suitable for a specified purpose.
2. Labeled: Materials and equipment to which has been attached a label, symbol, or other identifying mark of an organization that is acceptable to the Authority Having Jurisdiction and concerned with product evaluation, that maintains periodic inspection of production of labeled materials and equipment, and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner.
3. Certified: Materials and equipment which:
 - a. Have been tested and found by a NRTL to meet nationally recognized standards or to be safe for use in a specified manner.
 - b. Are periodically inspected by a NRTL.
 - c. Bear a label, tag, or other record of certification.
4. Nationally Recognized Testing Laboratory: Testing laboratory which is recognized and approved by the Secretary of Labor in accordance with OSHA regulations.

1.4 QUALIFICATIONS (PRODUCTS AND SERVICES)

- A. Manufacturer's Qualifications: The manufacturer shall regularly and currently produce, as one of the manufacturer's principal products, the materials and equipment specified for this project, and shall have manufactured the materials and equipment for at least three years.
- B. Product Qualification:
 1. Manufacturer's materials and equipment shall have been in satisfactory operation, on three installations of similar size and type as this project, for at least three years.
 2. The Government reserves the right to require the Contractor to submit a list of installations where the materials and equipment have been in operation before approval.
- C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render

satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.5 APPLICABLE PUBLICATIONS

- A. Applicable publications listed in all Sections of Division 26 shall be the latest issue, unless otherwise noted.
- B. Products specified in all sections of Division 26 shall comply with the applicable publications listed in each section.

1.6 MANUFACTURED PRODUCTS

- A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, and for which replacement parts shall be available. Materials and equipment furnished shall be new, and shall have superior quality and freshness.
- B. When more than one unit of the same class or type of materials and equipment is required, such units shall be the product of a single manufacturer.
- C. Equipment Assemblies and Components:
 - 1. Components of an assembled unit need not be products of the same manufacturer.
 - 2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
 - 3. Components shall be compatible with each other and with the total assembly for the intended service.
 - 4. Constituent parts which are similar shall be the product of a single manufacturer.
- D. Factory wiring and terminals shall be identified on the equipment being furnished and on all wiring diagrams.
- E. When Factory Tests are specified, Factory Tests shall be performed in the factory by the equipment manufacturer and witnessed by the contractor. In addition, the following requirements shall be complied with:
 - 1. The Government shall have the option of witnessing factory tests. The Contractor shall notify the Government through the COR a minimum of thirty (30) days prior to the manufacturer's performing of the factory tests.

2. When factory tests are successful, contractor shall furnish four (4) copies of the equipment manufacturer's certified test reports to the COR fourteen (14) days prior to shipment of the equipment, and not more than ninety (90) days after completion of the factory tests.
3. When factory tests are not successful, factory tests shall be repeated in the factory by the equipment manufacturer, and witnessed by the Contractor. The Contractor shall be liable for all additional expenses for the Government to witness factory re-testing.

1.7 VARIATIONS FROM CONTRACT REQUIREMENTS

- A. Where the Government or the Contractor requests variations from the contract requirements, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

1.8 MATERIALS AND EQUIPMENT PROTECTION

- A. Materials and equipment shall be protected during shipment and storage against physical damage, vermin, dirt, corrosive substances, fumes, moisture, cold and rain.
 1. Store materials and equipment indoors in clean dry space with uniform temperature to prevent condensation.
 2. During installation, equipment shall be protected against entry of foreign matter, and be vacuum cleaned both inside and outside before testing and operating. Compressed air shall not be used to clean equipment. Remove loose packing and flammable materials from inside equipment.
 3. Damaged equipment shall be repaired or replaced, as determined by the COR.
 4. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
 5. Damaged paint on equipment shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

1.9 WORK PERFORMANCE

- A. All electrical work shall comply with requirements of the latest NFPA 70 (NEC), NFPA 70B, NFPA 70E, NFPA 99, NFPA 110, OSHA Part 1910 subpart J - General Environmental Controls, OSHA Part 1910 subpart K - Medical

and First Aid, and OSHA Part 1910 subpart S - Electrical, in addition to other references required by contract.

- B. Job site safety and worker safety is the responsibility of the Contractor.
- C. Electrical work shall be accomplished with all affected circuits or equipment de-energized. However, energized electrical work may be performed only for the non-destructive and non-invasive diagnostic testing(s), or when scheduled outage poses an imminent hazard to patient care, safety, or physical security. In such case, all aspects of energized electrical work, such as the availability of appropriate/correct personal protective equipment (PPE) and the use of PPE, shall comply with the latest NFPA 70E, as well as the following requirements:
 - 1. Only Qualified Person(s) shall perform energized electrical work. Supervisor of Qualified Person(s) shall witness the work of its entirety to ensure compliance with safety requirements and approved work plan.
 - 2. At least two weeks before initiating any energized electrical work, the Contractor, and the Qualified Person(s) who is designated to perform the work shall visually inspect, verify and confirm that the work area and electrical equipment can safely accommodate the work involved.
 - 3. At least two weeks before initiating any energized electrical work, the Contractor shall develop and submit a job specific work plan and energized electrical work request to the COR, and Medical Center's Chief Engineer or his/her designee. At the minimum, the work plan must include relevant information such as proposed work schedule, area of work, description of work, name(s) of Supervisor and Qualified Person(s) performing the work, equipment to be used, procedures to be used on and near the live electrical equipment, barriers to be installed, safety equipment to be used, and exit pathways.
 - 4. Energized electrical work shall begin only after the Contractor has obtained written approval of the work plan, and the energized electrical work request from the COR, and Medical Center's Chief Engineer or his/her designee. The Contractor shall make these approved documents present and available at the time and place of energized electrical work.

5. Energized electrical work shall begin only after the Contractor has invited and received acknowledgment from the COR, and Medical Center's Chief Engineer or his/her designee to witness the work.
- D. For work that affects existing electrical systems, arrange, phase and perform work to assure minimal interference with normal functioning of the facility. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.
- E. New work shall be installed and connected to existing work neatly, safely, and professionally. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.
- F. Coordinate location of equipment and conduit with other trades to minimize interference.

1.10 EQUIPMENT INSTALLATION AND REQUIREMENTS

- A. Equipment location shall be as close as practical to locations shown on the drawings.
- B. Working clearances shall not be less than specified in the NEC.
- C. Inaccessible Equipment:
1. Where the Government determines that the Contractor has installed equipment not readily accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
 2. "Readily accessible" is defined as being capable of being reached quickly for operation, maintenance, or inspections without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

1.11 EQUIPMENT IDENTIFICATION

- A. In addition to the requirements of the NEC, install an identification sign which clearly indicates information required for use and maintenance of items such as switchboards and switchgear, panelboards, cabinets, motor controllers, fused and non-fused safety switches, generators, automatic transfer switches, separately enclosed circuit breakers, individual breakers and controllers in switchboards, switchgear and motor control assemblies, control devices and other significant equipment.
- B. Identification signs for Normal Power System equipment shall be laminated black phenolic resin with a white core with engraved

lettering. Identification signs for Essential Electrical System (EES) equipment, as defined in the NEC, shall be laminated red phenolic resin with a white core with engraved lettering. Lettering shall be a minimum of 12 mm (1/2 inch) high. Identification signs shall indicate equipment designation, rated bus amperage, voltage, number of phases, number of wires, and type of EES power branch as applicable. Secure nameplates with screws.

- C. Install adhesive arc flash warning labels on all equipment as required by the latest NFPA 70E. Label shall show specific and correct information for specific equipment based on its arc flash calculations. Label shall show the followings:
1. Nominal system voltage.
 2. Equipment/bus name, date prepared, and manufacturer name and address.
 3. Arc flash boundary.
 4. Available arc flash incident energy and the corresponding working distance.
 5. Minimum arc rating of clothing.
 6. Site-specific level of PPE.

1.12 SUBMITTALS

- A. Submit to the COR in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. The Government's approval shall be obtained for all materials and equipment before delivery to the job site. Delivery, storage or installation of materials and equipment which has not had prior approval will not be permitted.
- C. All submittals shall include six copies of adequate descriptive literature, catalog cuts, shop drawings, test reports, certifications, samples, and other data necessary for the Government to ascertain that the proposed materials and equipment comply with drawing and specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify specific materials and equipment being submitted.
- D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.
1. Mark the submittals, "SUBMITTED UNDER SECTION_____".

2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
 3. Submit each section separately.
- E. The submittals shall include the following:
1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, manuals, pictures, nameplate data, and test reports as required.
 2. Elementary and interconnection wiring diagrams for communication and signal systems, control systems, and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
 3. Parts list which shall include information for replacement parts and ordering instructions, as recommended by the equipment manufacturer.
- F. Maintenance and Operation Manuals:
1. Submit as required for systems and equipment specified in the technical sections. Furnish in hardcover binders or an approved equivalent.
 2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, material, equipment, building, name of Contractor, and contract name and number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the material or equipment.
 3. Provide a table of contents and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
 4. The manuals shall include:
 - a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
 - b. A control sequence describing start-up, operation, and shutdown.
 - c. Description of the function of each principal item of equipment.
 - d. Installation instructions.
 - e. Safety precautions for operation and maintenance.
 - f. Diagrams and illustrations.

- g. Periodic maintenance and testing procedures and frequencies, including replacement parts numbers.
 - h. Performance data.
 - i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare and replacement parts, and name of servicing organization.
 - j. List of factory approved or qualified permanent servicing organizations for equipment repair and periodic testing and maintenance, including addresses and factory certification qualifications.
- G. Approvals will be based on complete submission of shop drawings, manuals, test reports, certifications, and samples as applicable.
- H. After approval and prior to installation, furnish the COR with one sample of each of the following:
- 1. A minimum 300 mm (12 inches) length of each type and size of wire and cable along with the tag from the coils or reels from which the sample was taken. The length of the sample shall be sufficient to show all markings provided by the manufacturer.
 - 2. Each type of conduit coupling, bushing, and termination fitting.
 - 3. Conduit hangers, clamps, and supports.
 - 4. Duct sealing compound.
 - 5. Each type of receptacle, toggle switch, lighting control sensor, outlet box, manual motor starter, device wall plate, engraved nameplate, wire and cable splicing and terminating material, and branch circuit single pole molded case circuit breaker.

1.13 SINGULAR NUMBER

- A. Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

Coordinate with the applicable sections
of Division 01 and 02.

1.14 ACCEPTANCE CHECKS AND TESTS

- A. The Contractor shall furnish the instruments, materials, and labor for tests.
- B. Where systems are comprised of components specified in more than one section of Division 26, the Contractor shall coordinate the

installation, testing, and adjustment of all components between various manufacturer's representatives and technicians so that a complete, functional, and operational system is delivered to the Government.

- C. When test results indicate any defects, the Contractor shall repair or replace the defective materials or equipment and repeat the tests for the equipment. Repair, replacement, and re-testing shall be accomplished at no additional cost to the Government.

1.15 WARRANTY

- A. All work performed, and all equipment and material furnished under this Division shall be free from defects and shall remain so for a period of one year from the date of acceptance of the entire installation by the Contracting Officer for the Government.

1.16 INSTRUCTION

- A. Instruction to designated Government personnel shall be provided for the particular equipment or system as required in each associated technical specification section.
- B. Furnish the services of competent and factory-trained instructors to give full instruction in the adjustment, operation, and maintenance of the specified equipment and system, including pertinent safety requirements. Instructors shall be thoroughly familiar with all aspects of the installation and shall be factory-trained in operating theory as well as practical operation and maintenance procedures.
- C. A training schedule shall be developed and submitted by the Contractor and approved by the COR at least 30 days prior to the planned training.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

---END---

SECTION 26 05 19
LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies the furnishing, installation, connection, and testing of the electrical conductors and cables for use in electrical systems rated 600 V and below, indicated as cable(s), conductor(s), wire, or wiring in this section.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire-resistant rated construction.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for conductors and cables.

1.3 QUALITY ASSURANCE

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
1. Shop Drawings:
 - a. Submit sufficient information to demonstrate compliance with drawings and specifications.
 - b. Submit the following data for approval:
 - 1) Electrical ratings and insulation type for each conductor and cable.
 - 2) Splicing materials and pulling lubricant.
 2. Certifications: Two weeks prior to final inspection, submit the following.
 - a. Certification by the manufacturer that the conductors and cables conform to the requirements of the drawings and specifications.

- b. Certification by the Contractor that the conductors and cables have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are reference in the text by designation only.
- B. American Society of Testing Material (ASTM):
- D2301-10.....Standard Specification for Vinyl Chloride
Plastic Pressure-Sensitive Electrical
Insulating Tape
- D2304-10.....Test Method for Thermal Endurance of Rigid
Electrical Insulating Materials
- D3005-10.....Low-Temperature Resistant Vinyl Chloride
Plastic Pressure-Sensitive Electrical
Insulating Tape
- C. National Electrical Manufacturers Association (NEMA):
- WC 70-09.....Power Cables Rated 2000 Volts or Less for the
Distribution of Electrical Energy
- D. National Fire Protection Association (NFPA):
- 70-17.....National Electrical Code (NEC)
- E. Underwriters Laboratories, Inc. (UL):
- 44-14.....Thermoset-Insulated Wires and Cables
- 83-14.....Thermoplastic-Insulated Wires and Cables
- 467-13.....Grounding and Bonding Equipment
- 486A-486B-13.....Wire Connectors
- 486C-13.....Splicing Wire Connectors
- 486D-15.....Sealed Wire Connector Systems
- 486E-15.....Equipment Wiring Terminals for Use with
Aluminum and/or Copper Conductors
- 493-07.....Thermoplastic-Insulated Underground Feeder and
Branch Circuit Cables
- 514B-12.....Conduit, Tubing, and Cable Fittings

PART 2 - PRODUCTS

2.1 CONDUCTORS AND CABLES

- A. Conductors and cables shall be in accordance with ASTM, NEMA, NFPA, UL, as specified herein, and as shown on the drawings.
- B. All conductors shall be copper.

C. Single Conductor and Cable:

1. No. 12 AWG: Minimum size, except where smaller sizes are specified herein or shown on the drawings.
2. No. 8 AWG and larger: Stranded.
3. No. 10 AWG and smaller: Solid; except shall be stranded for final connection to motors, transformers, and vibrating equipment.
4. Insulation: THHN-THWN and XHHW-2. XHHW-2 shall be used for isolated power systems.

D. Color Code:

1. No. 10 AWG and smaller: Solid color insulation or solid color coating.
2. No. 8 AWG and larger: Color-coded using one of the following methods:
 - a. Solid color insulation or solid color coating.
 - b. Stripes, bands, or hash marks of color specified.
 - c. Color using 19 mm (0.75 inches) wide tape.
4. For modifications and additions to existing wiring systems, color coding shall conform to the existing wiring system.
5. Conductors shall be color-coded as follows:

208/120 V	Phase	
Black	A	
Red	B	
Blue	C	
White	Neutral	
* or white with colored (other than green) tracer.		

6. Lighting circuit "switch legs", and 3-way and 4-way switch "traveling wires," shall have color coding that is unique and distinct (e.g., pink and purple) from the color coding indicated above. The unique color codes shall be solid and in accordance with the NEC. Coordinate color coding in the field with the COR.
7. Color code for isolated power system wiring shall be in accordance with the NEC.

2.2 SPLICES

- A. Splices shall be in accordance with NEC and UL.
- B. Above Ground Splices for No. 10 AWG and Smaller:
 1. Solderless, screw-on, reusable pressure cable type, with integral insulation, approved for copper and aluminum conductors.

2. The integral insulator shall have a skirt to completely cover the stripped conductors.
 3. The number, size, and combination of conductors used with the connector, as listed on the manufacturer's packaging, shall be strictly followed.
- C. Above Ground Splices for No. 8 AWG to No. 4/0 AWG:
1. Compression, hex screw, or bolt clamp-type of high conductivity and corrosion-resistant material, listed for use with copper and aluminum conductors.
 2. Insulate with materials approved for the particular use, location, voltage, and temperature. Insulation level shall be not less than the insulation level of the conductors being joined.
 3. Splice and insulation shall be product of the same manufacturer.
 4. All bolts, nuts, and washers used with splices shall be zinc-plated steel.
- D. Above Ground Splices for 250 kcmil and Larger:
1. Long barrel "butt-splice" or "sleeve" type compression connectors, with minimum of two compression indents per wire, listed for use with copper and aluminum conductors.
 2. Insulate with materials approved for the particular use, location, voltage, and temperature. Insulation level shall be not less than the insulation level of the conductors being joined.
 3. Splice and insulation shall be product of the same manufacturer.
- E. Plastic electrical insulating tape: Per ASTM D2304, flame-retardant, cold and weather resistant.

2.3 CONNECTORS AND TERMINATIONS

- A. Mechanical type of high conductivity and corrosion-resistant material, listed for use with copper and aluminum conductors.
- B. Long barrel compression type of high conductivity and corrosion-resistant material, with minimum of two compression indents per wire, listed for use with copper and aluminum conductors.
- C. All bolts, nuts, and washers used to connect connections and terminations to bus bars or other termination points shall be zinc-plated steel.

2.4 CONTROL WIRING

- A. Unless otherwise specified elsewhere in these specifications, control wiring shall be as specified herein, except that the minimum size shall be not less than No. 14 AWG.

- B. Control wiring shall be sized such that the voltage drop under in-rush conditions does not adversely affect operation of the controls.

2.5 WIRE LUBRICATING COMPOUND

- A. Lubricating compound shall be suitable for the wire insulation and conduit and shall not harden or become adhesive.
- B. Shall not be used on conductors for isolated power systems.

PART 3 - EXECUTION

3.1 GENERAL

- A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer's instructions.
- B. Install all conductors in raceway systems.
- C. Splice conductors only in outlet boxes, junction boxes, or pullboxes,.
- D. Conductors of different systems (e.g., 120 V and 277 V) shall not be installed in the same raceway.
- E. Install cable supports for all vertical feeders in accordance with the NEC. Provide split wedge type which firmly clamps each individual cable and tightens due to cable weight.
- F. In panelboards, cabinets, wireways, switches, enclosures, and equipment assemblies, neatly form, train, and tie the conductors with non-metallic ties.
- G. For connections to motors, transformers, and vibrating equipment, stranded conductors shall be used only from the last fixed point of connection to the motors, transformers, or vibrating equipment.
- H. Use expanding foam or non-hardening duct-seal to seal conduits entering a building, after installation of conductors.
- I. Conductor and Cable Pulling:
 - 1. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling. Use lubricants approved for the cable.
 - 2. Use nonmetallic pull ropes.
 - 3. Attach pull ropes by means of either woven basket grips or pulling eyes attached directly to the conductors.
 - 4. All conductors in a single conduit shall be pulled simultaneously.
 - 5. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.
- J. No more than three branch circuits shall be installed in any one conduit.

- K. When stripping stranded conductors, use a tool that does not damage the conductor or remove conductor strands.

3.2 SPLICE AND TERMINATION INSTALLATION

- A. Splices and terminations shall be mechanically and electrically secure and tightened to manufacturer's published torque values using a torque screwdriver or wrench.
- B. Where the Government determines that unsatisfactory splices or terminations have been installed, replace the splices or terminations at no additional cost to the Government.

3.3 CONDUCTOR IDENTIFICATION

- A. When using colored tape to identify phase, neutral, and ground conductors larger than No. 8 AWG, apply tape in half-overlapping turns for a minimum of 75 mm (3 inches) from terminal points, and in junction boxes, pullboxes, and manholes. Apply the last two laps of tape with no tension to prevent possible unwinding. Where cable markings are covered by tape, apply tags to cable, stating size and insulation type.

3.4 FEEDER CONDUCTOR IDENTIFICATION

- A. In each interior pullbox and each underground manhole and handhole, install brass tags on all feeder conductors to clearly designate their circuit identification and voltage. The tags shall be the embossed type, 40 mm (1-1/2 inches) in diameter and 40 mils thick. Attach tags with plastic ties.

3.5 EXISTING CONDUCTORS

- A. Unless specifically indicated on the plans, existing conductors shall not be reused.

3.6 CONTROL WIRING INSTALLATION

- A. Unless otherwise specified in other sections, install control wiring and connect to equipment to perform the required functions as specified or as shown on the drawings.
- B. Install a separate power supply circuit for each system, except where otherwise shown on the drawings.

3.7 CONTROL WIRING IDENTIFICATION

- A. Install a permanent wire marker on each wire at each termination.
- B. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.
- C. Wire markers shall retain their markings after cleaning.

3.8 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests: Inspect physical condition.
2. Electrical tests:
 - a. After installation but before connection to utilization devices, such as fixtures, motors, or appliances, test conductors phase-to-phase and phase-to-ground resistance with an insulation resistance tester. Existing conductors to be reused shall also be tested.
 - b. Applied voltage shall be 500 V DC for 300 V rated cable, and 1000 V DC for 600 V rated cable. Apply test for one minute or until reading is constant for 15 seconds, whichever is longer. Minimum insulation resistance values shall not be less than 25 megohms for 300 V rated cable and 100 megohms for 600 V rated cable.
 - c. Perform phase rotation test on all three-phase circuits.

---END---

SECTION 26 05 26
GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies the furnishing, installation, connection, and testing of grounding and bonding equipment, indicated as grounding equipment in this section.
- B. "Grounding electrode system" refers to grounding electrode conductors and all electrodes required or allowed by NEC, as well as made, supplementary, and lightning protection system grounding electrodes.
- C. The terms "connect" and "bond" are used interchangeably in this section and have the same meaning.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.
- B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.
- C. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit and boxes.
- D. Section 26 24 16, PANELBOARDS: Low-voltage panelboards.
- E. Section 26 32 13, ENGINE GENERATORS: Engine generators.
- F. Section 26 36 23, AUTOMATIC TRANSFER SWITCHES: Automatic transfer switches.

1.3 QUALITY ASSURANCE

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
 - 1. Shop Drawings:
 - a. Submit sufficient information to demonstrate compliance with drawings and specifications.
 - b. Submit plans showing the location of system grounding electrodes and connections, and the routing of aboveground and underground grounding electrode conductors.

2. Test Reports:

- a. Two weeks prior to the final inspection, submit ground resistance field test reports to the COTR.

3. Certifications:

- a. Certification by the Contractor that the grounding equipment has been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. American Society for Testing and Materials (ASTM):
- B1-13.....Standard Specification for Hard-Drawn Copper Wire
- B3-13.....Standard Specification for Soft or Annealed Copper Wire
- B8-11.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
- C. Institute of Electrical and Electronics Engineers, Inc. (IEEE):
- 81-12.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System Part 1: Normal Measurements
- D. National Fire Protection Association (NFPA):
- 70-17.....National Electrical Code (NEC)
- 70E-15.....National Electrical Safety Code
- 99-15.....Health Care Facilities
- E. Underwriters Laboratories, Inc. (UL):
- 44-14 Thermoset-Insulated Wires and Cables
- 83-14 Thermoplastic-Insulated Wires and Cables
- 467-13 Grounding and Bonding Equipment

PART 2 - PRODUCTS

2.1 GROUNDING AND BONDING CONDUCTORS

- A. Equipment grounding conductors shall be insulated stranded copper, except that sizes No. 10 AWG and smaller shall be solid copper. Insulation color shall be continuous green for all equipment grounding conductors, except that wire sizes No. 4 AWG and larger shall be identified per NEC.

- B. Bonding conductors shall be bare stranded copper, except that sizes No. 10 AWG and smaller shall be bare solid copper. Bonding conductors shall be stranded for final connection to motors, transformers, and vibrating equipment.
- C. Conductor sizes shall not be less than shown on the drawings, or not less than required by the NEC, whichever is greater.
- D. Insulation: THHN-THWN and XHHW-2. XHHW-2 shall be used for isolated power systems.

2.2 GROUND RODS

- A. Steel or copper clad steel, 19 mm (0.75 inch) diameter by 3 M (10 feet) long.
- B. Quantity of rods shall be as shown on the drawings, and as required to obtain the specified ground resistance.

2.3 GROUND CONNECTIONS

- A. Below Grade and Inaccessible Locations: Exothermic-welded type connectors.
- B. Above Grade:
 - 1. Bonding Jumpers: Listed for use with aluminum and copper conductors. For wire sizes No. 8 AWG and larger, use compression-type connectors. For wire sizes smaller than No. 8 AWG, use mechanical type lugs. Connectors or lugs shall use zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.
 - 2. Connection to Building Steel: Exothermic-welded type connectors.
 - 3. Connection to Grounding Bus Bars: Listed for use with aluminum and copper conductors. Use mechanical type lugs, with zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.
 - 4. Connection to Equipment Rack and Cabinet Ground Bars: Listed for use with aluminum and copper conductors. Use mechanical type lugs, with zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.

2.4 EQUIPMENT RACK AND CABINET GROUND BARS

- A. Provide solid copper ground bars designed for mounting on the framework of open or cabinet-enclosed equipment racks. Ground bars shall have minimum dimensions of 6.3 mm (0.25 inch) thick x 19 mm (0.75 inch) wide, with length as required or as shown on the drawings. Provide insulators and mounting brackets.

2.5 GROUND TERMINAL BLOCKS

- A. At any equipment mounting location (e.g., backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted, provide mechanical type lugs, with zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.

2.6 GROUNDING BUS BAR

- A. Pre-drilled rectangular copper bar with stand-off insulators, minimum 6.3 mm (0.25 inch) thick x 100 mm (4 inches) high in cross-section, length as shown on the drawings, with hole size, quantity, and spacing per detail shown on the drawings. Provide insulators and mounting brackets.

PART 3 - EXECUTION**3.1 GENERAL**

- A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer's instructions.
- B. Equipment Grounding: Metallic piping, building structural steel, electrical enclosures, raceways, junction boxes, outlet boxes, cabinets, machine frames, and other conductive items in close proximity with electrical circuits, shall be bonded and grounded.
- C. For patient care area electrical power system grounding, conform to the latest NFPA 70 and 99.

3.2 INACCESSIBLE GROUNDING CONNECTIONS

- A. Make grounding connections, which are normally buried or otherwise inaccessible, by exothermic weld.

3.3 SECONDARY VOLTAGE EQUIPMENT AND CIRCUITS

- A. Main Bonding Jumper: Bond the secondary service neutral to the ground bus in the service equipment.
- B. Metallic Piping, Building Structural Steel, and Supplemental Electrode(s):
 - 1. Provide a grounding electrode conductor sized per NEC between the service equipment ground bus and all metallic water pipe systems, building structural steel, and supplemental or made electrodes. Provide jumpers across insulating joints in the metallic piping.
 - 2. Provide a supplemental ground electrode as shown on the drawings and bond to the grounding electrode system.

C. Switchgear, Switchboards, Unit Substations, Panelboards, Motor Control Centers, Engine-Generators, Automatic Transfer Switches, and other electrical equipment:

1. Connect the equipment grounding conductors to the ground bus.
2. Connect metallic conduits by grounding bushings and equipment grounding conductor to the equipment ground bus.

3.4 RACEWAY

A. Conduit Systems:

1. Ground all metallic conduit systems. All metallic conduit systems shall contain an equipment grounding conductor.
2. Non-metallic conduit systems, except non-metallic feeder conduits that carry a grounded conductor from exterior transformers to interior or building-mounted service entrance equipment, shall contain an equipment grounding conductor.
3. Metallic conduit that only contains a grounding conductor, and is provided for its mechanical protection, shall be bonded to that conductor at the entrance and exit from the conduit.
4. Metallic conduits which terminate without mechanical connection to an electrical equipment housing by means of locknut and bushings or adapters, shall be provided with grounding bushings. Connect bushings with a equipment grounding conductor to the equipment ground bus.

B. Feeders and Branch Circuits: Install equipment grounding conductors with all feeders, and power and lighting branch circuits.

C. Boxes, Cabinets, Enclosures, and Panelboards:

1. Bond the equipment grounding conductor to each pullbox, junction box, outlet box, device box, cabinets, and other enclosures through which the conductor passes (except for special grounding systems for intensive care units and other critical units shown).
2. Provide lugs in each box and enclosure for equipment grounding conductor termination.

D. Wireway Systems:

1. Bond the metallic structures of wireway to provide electrical continuity throughout the wireway system, by connecting a No. 6 AWG bonding jumper at all intermediate metallic enclosures and across all section junctions.

2. Install insulated No. 6 AWG bonding jumpers between the wireway system, bonded as required above, and the closest building ground at each end and approximately every 16 M (50 feet).
3. Use insulated No. 6 AWG bonding jumpers to ground or bond metallic wireway at each end for all intermediate metallic enclosures and across all section junctions.
4. Use insulated No. 6 AWG bonding jumpers to ground cable tray to column-mounted building ground plates (pads) at each end and approximately every 15 M (49 feet).
- E. Receptacles shall not be grounded through their mounting screws. Ground receptacles with a jumper from the receptacle green ground terminal to the device box ground screw and a jumper to the branch circuit equipment grounding conductor.
- F. Ground lighting fixtures to the equipment grounding conductor of the wiring system. Fixtures connected with flexible conduit shall have a green ground wire included with the power wires from the fixture through the flexible conduit to the first outlet box.
- G. Fixed electrical appliances and equipment shall be provided with a ground lug for termination of the equipment grounding conductor.
- H. Raised Floors: Provide bonding for all raised floor components as shown on the drawings.
- I. Panelboard Bonding in Patient Care Areas: The equipment grounding terminal buses of the normal and essential branch circuit panel boards serving the same individual patient vicinity shall be bonded together with an insulated continuous copper conductor not less than No. 10 AWG, installed in rigid metal conduit.

3.5 CORROSION INHIBITORS

- A. When making grounding and bonding connections, apply a corrosion inhibitor to all contact surfaces. Use corrosion inhibitor appropriate for protecting a connection between the metals used.

3.6 CONDUCTIVE PIPING

- A. Bond all conductive piping systems, interior and exterior, to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.

3.7 MAIN ELECTRICAL ROOM GROUNDING

- A. Provide ground bus bar and mounting hardware at each main electrical room where incoming feeders are terminated, as shown on the drawings.

Connect to pigtail extensions of the building grounding ring, as shown on the drawings.

3.8 GROUND RESISTANCE

- A. Grounding system resistance to ground shall not exceed 5 ohms. Make any modifications or additions to the grounding electrode system necessary for compliance without additional cost to the Government. Final tests shall ensure that this requirement is met.
- B. Grounding system resistance shall comply with the electric utility company ground resistance requirements.

3.9 ACCEPTANCE CHECKS AND TESTS

- A. Resistance of the grounding electrode system shall be measured using a four-terminal fall-of-potential method as defined in IEEE 81. Ground resistance measurements shall be made before the electrical distribution system is energized or connected to the electric utility company ground system and shall be made in normally dry conditions not fewer than 48 hours after the last rainfall.
- B. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.

---END---

SECTION 26 05 33
RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes, to form complete, coordinated, grounded raceway systems. Raceways are required for all wiring unless shown or specified otherwise.
- B. Definitions: The term conduit, as used in this specification, shall mean any or all the raceway types specified.

1.2 RELATED WORK

- A. Section 06 10 00, ROUGH CARPENTRY: Mounting board for telephone closets.
- B. Section 07 60 00, FLASHING AND SHEET METAL: Fabrications for the deflection of water away from the building envelope at penetrations.
- C. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire rated construction.
- D. Section 07 92 00, JOINT SEALANTS: Sealing around conduit penetrations through the building envelope to prevent moisture migration into the building.
- E. Section 09 91 00, PAINTING: Identification and painting of conduit and other devices.
- F. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Conduits bracing.
- G. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.
- H. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

1.3 QUALITY ASSURANCE

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:

- a. Size and location of main feeders.
- b. Size and location of panels and pull-boxes.
- c. Layout of required conduit penetrations through structural elements.
- d. Submit the following data for approval:
 - 1) Raceway types and sizes.
 - 2) Conduit bodies, connectors, and fittings.
 - 3) Junction and pull boxes, types, and sizes.

2. Certifications: Two weeks prior to final inspection, submit the following:

- a. Certification by the manufacturer that raceways, conduits, conduit bodies, connectors, fittings, junction and pull boxes, and all related equipment conform to the requirements of the drawings and specifications.
- b. Certification by the Contractor that raceways, conduits, conduit bodies, connectors, fittings, junction and pull boxes, and all related equipment have been properly installed.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Iron and Steel Institute (AISI):

S100-12.....North American Specification for the Design of
Cold-Formed Steel Structural Members

C. National Electrical Manufacturers Association (NEMA):

C80.1-15.....Electrical Rigid Steel Conduit

C80.3-15.....Steel Electrical Metal Tubing

C80.6-05.....Electrical Intermediate Metal Conduit

FB1-14.....Fittings, Cast Metal Boxes and Conduit Bodies
for Conduit, Electrical Metallic Tubing and
Cable

- FB2.10-13.....Selection and Installation Guidelines for
Fittings for use with Non-Flexible Conduit or
Tubing (Rigid Metal Conduit, Intermediate
Metallic Conduit, and Electrical Metallic
Tubing)
- FB2.20-14.....Selection and Installation Guidelines for
Fittings for use with Flexible Electrical
Conduit and Cable
- TC-2-13.....Electrical Polyvinyl Chloride (PVC) Tubing and
Conduit
- TC-3-13.....PVC Fittings for Use with Rigid PVC Conduit and
Tubing
- D. National Fire Protection Association (NFPA):
 - 70-17.....National Electrical Code (NEC)
- E. Underwriters Laboratories, Inc. (UL):
 - 1-05.....Flexible Metal Conduit
 - 5-16.....Surface Metal Raceway and Fittings
 - 6-07.....Electrical Rigid Metal Conduit - Steel
 - 50-15.....Enclosures for Electrical Equipment
 - 360-13.....Liquid-Tight Flexible Steel Conduit
 - 467-13.....Grounding and Bonding Equipment
 - 514A-13.....Metallic Outlet Boxes
 - 514B-12.....Conduit, Tubing, and Cable Fittings
 - 514C-14.....Nonmetallic Outlet Boxes, Flush-Device Boxes
and Covers
 - 651-11.....Schedule 40 and 80 Rigid PVC Conduit and
Fittings
 - 651A-11.....Type EB and A Rigid PVC Conduit and HDPE
Conduit
 - 797-07.....Electrical Metallic Tubing
 - 1242-14.....Electrical Intermediate Metal Conduit - Steel

PART 2 - PRODUCTS

2.1 MATERIAL

- A. Conduit Size: In accordance with the NEC, but not less than 13 mm
(0.5-inch) unless otherwise shown. Where permitted by the NEC, 13 mm
(0.5-inch) flexible conduit may be used for tap connections to recessed
lighting fixtures.

B. Conduit:

1. Size: In accordance with the NEC, but not less than 13 mm (0.5-inch).
2. Rigid Steel Conduit (RMC): Shall conform to UL 6 and NEMA C80.1.
3. Rigid Intermediate Steel Conduit (IMC): Shall conform to UL 1242 and NEMA C80.6.
4. Electrical Metallic Tubing (EMT): Shall conform to UL 797 and NEMA C80.3. Maximum size not to exceed 105 mm (4 inches) and shall be permitted only with cable rated 600 V or less.
5. Flexible Metal Conduit: Shall conform to UL 1.
6. Liquid-tight Flexible Metal Conduit: Shall conform to UL 360.
7. Surface Metal Raceway: Shall conform to UL 5.

C. Conduit Fittings:

1. Rigid Steel and Intermediate Metallic Conduit Fittings:
 - a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
 - b. Standard threaded couplings, locknuts, bushings, conduit bodies, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
 - c. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
 - d. Bushings: Metallic insulating type, consisting of an insulating insert, molded, or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
 - e. Erickson (Union-Type) and Set Screw Type Couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case-hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
 - f. Sealing Fittings: Threaded cast iron type. Use continuous drain-type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.
2. Electrical Metallic Tubing Fittings:

- a. Fittings and conduit bodies shall meet the requirements of UL 514B, NEMA C80.3, and NEMA FB1.
 - b. Only steel or malleable iron materials are acceptable.
 - c. Setscrew Couplings and Connectors: Use setscrews of case-hardened steel with hex head and cup point, to firmly seat in wall of conduit for positive grounding.
 - d. Indent-type connectors or couplings are prohibited.
 - e. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.
3. Flexible Metal Conduit Fittings:
- a. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
 - b. Clamp-type, with insulated throat.
4. Liquid-tight Flexible Metal Conduit Fittings:
- a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
 - b. Only steel or malleable iron materials are acceptable.
 - c. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.
5. Surface Metal Raceway Fittings: As recommended by the raceway manufacturer. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, conduit entry fittings, accessories, and other fittings as required for complete system.
6. Expansion and Deflection Couplings:
- a. Conform to UL 467 and UL 514B.
 - b. Accommodate a 19 mm (0.75-inch) deflection, expansion, or contraction in any direction, and allow 30-degree angular deflections.
 - c. Include internal flexible metal braid, sized to guarantee conduit ground continuity and a low-impedance path for fault currents, in accordance with UL 467 and the NEC tables for equipment grounding conductors.
 - d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat-resistant molded rubber material with stainless steel jacket clamps.
- D. Conduit Supports:
- 1. Parts and Hardware: Zinc-coat or provide equivalent corrosion protection.

2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
3. Multiple Conduit (Trapeze) Hangers: Not less than 38 mm x 38 mm (1.5 x 1.5 inches), 12-gauge steel, cold-formed, lipped channels; with not less than 9 mm (0.375-inch) diameter steel hanger rods.
4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

E. Outlet, Junction, and Pull Boxes:

1. Comply with UL-50 and UL-514A.
2. Rustproof cast metal where required by the NEC or shown on drawings.
3. Sheet Metal Boxes: Galvanized steel, except where shown on drawings.

F. Metal Wireways: Equip with hinged covers, except as shown on drawings. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for a complete system.

PART 3 - EXECUTION

3.1 PENETRATIONS

A. Cutting or Holes:

1. Cut holes in advance where they should be placed in the structural elements, such as ribs or beams. Obtain the approval of the COR prior to drilling through structural elements.
2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammers, impact electric, hand, or manual hammer-type drills are not allowed, except when permitted by the COR where working space is limited.

B. Firestop: Where conduits, wireways, and other electrical raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.

C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal the gap around conduit to render it watertight, as specified in Section 07 92 00, JOINT SEALANTS.

3.2 INSTALLATION, GENERAL

- A. In accordance with NEC, NEMA, UL, as shown on drawings, and as specified herein.
- B. Raceway systems used for Essential Electrical Systems (EES) shall be entirely independent of other raceway systems.
- C. Install conduit as follows:
 - 1. In complete mechanically and electrically continuous runs before pulling in cables or wires.
 - 2. Unless otherwise indicated on the drawings or specified herein, installation of all conduits shall be concealed within finished walls, floors, and ceilings.
 - 3. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new conduits.
 - 4. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
 - 5. Cut conduits square, ream, remove burrs, and draw up tight.
 - 6. Independently support conduit at 2.4 M (8 feet) on centers with specified materials and as shown on drawings.
 - 7. Do not use suspended ceilings, suspended ceiling supporting members, lighting fixtures, other conduits, cable tray, boxes, piping, or ducts to support conduits and conduits runs.
 - 8. Support within 300 mm (12 inches) of changes of direction, and within 300 mm (12 inches) of each enclosure to which connected.
 - 9. Close ends of empty conduits with plugs or caps at the rough-in stage until wires are pulled in, to prevent entry of debris.
 - 10. Conduit installations under fume and vent hoods are prohibited.
 - 11. Secure conduits to cabinets, junction boxes, pull-boxes, and outlet boxes with bonding type locknuts. For rigid steel and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
 - 12. Flashing of penetrations of the roof membrane is specified in Section 07 60 00, FLASHING AND SHEET METAL.
 - 13. Conduit bodies shall only be used for changes in direction and shall not contain splices.
- D. Conduit Bends:
 - 1. Make bends with standard conduit bending machines.

2. Conduit hickey may be used for slight offsets and for straightening stubbed out conduits.

3. Bending of conduits with a pipe tee or vise is prohibited.

E. Layout and Homeruns:

1. Install conduit with wiring, including homeruns, as shown on drawings.

2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted and approved by the COR.

3.3 CONCEALED WORK INSTALLATION

A. Above Furred or Suspended Ceilings and in Walls:

1. Conduit for Conductors 600 V and Below: Rigid steel, IMC, or EMT.

Mixing different types of conduits in the same system is prohibited.

2. Align and run conduit parallel or perpendicular to the building lines.

3. Connect recessed lighting fixtures to conduit runs with maximum 1.8 M (6 feet) of flexible metal conduit extending from a junction box to the fixture.

4. Tightening set screws with pliers is prohibited.

5. For conduits running through metal studs, limit field cut holes to no more than 70% of web depth. Spacing between holes shall be at least 457 mm (18 inches). Cuts or notches in flanges or return lips shall not be permitted.

3.4 EXPOSED WORK INSTALLATION

A. Unless otherwise indicated on drawings, exposed conduit is only permitted in mechanical and electrical rooms.

B. Conduit for Conductors 600 V and Below: Rigid steel, IMC, or EMT.

Mixing different types of conduits in the system is prohibited.

C. Align and run conduit parallel or perpendicular to the building lines.

D. Install horizontal runs close to the ceiling or beams and secure with conduit straps.

E. Support horizontal or vertical runs at not over 2.4 M (8 feet) intervals.

F. Surface Metal Raceways: Use only where shown on drawings.

G. Painting:

1. Paint exposed conduit as specified in Section 09 91 00, PAINTING.

2. Paint all conduits containing cables rated over 600 V safety orange. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (2 inch) high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 6 M (20 feet) intervals in between.

3.5 WET OR DAMP LOCATIONS

- A. Use rigid steel or IMC conduits unless as shown on drawings.
- B. Provide sealing fittings to prevent passage of water vapor where conduits pass from warm to cold locations, i.e., refrigerated spaces, constant-temperature rooms, air-conditioned spaces, building exterior walls, roofs, or similar spaces.
- C. Use rigid steel or IMC conduit within 1.5 M (5 feet) of the exterior and below concrete building slabs in contact with soil, gravel, or vapor barriers, unless as shown on drawings. Conduit shall be half-lapped with 10 mil PVC tape before installation. After installation, completely recoat or retape any damaged areas of coating.
- D. Conduits run on roof shall be supported with integral galvanized lipped steel channel, attached to UV-inhibited polycarbonate or polypropylene blocks every 2.4 M (8 feet) with 9 mm (3/8-inch) galvanized threaded rods, square washer, and locknut. Conduits shall be attached to steel channel with conduit clamps.

3.6 MOTORS AND VIBRATING EQUIPMENT

- A. Use flexible metal conduit for connections to motors and other electrical equipment subject to movement, vibration, misalignment, cramped quarters, or noise transmission.
- B. Use liquid-tight flexible metal conduit for installation in exterior locations, moisture or humidity laden atmosphere, corrosive atmosphere, water, or spray wash-down operations, inside airstream of HVAC units, and locations subject to seepage or dripping of oil, grease, or water.
- C. Provide a green equipment grounding conductor with flexible and liquid-tight flexible metal conduit.

3.7 EXPANSION JOINTS

- A. Conduits 75 mm (3 inch) and larger that are secured to the building structure on opposite sides of a building expansion joint require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.

- B. Provide conduits smaller than 75 mm (3 inch) with junction boxes on both sides of the expansion joint. Connect flexible metal conduits to junction boxes with sufficient slack to produce a 125 mm (5 inch) vertical drop midway between the ends of the flexible metal conduit. Flexible metal conduit shall have a green insulated copper bonding jumper installed. In lieu of this flexible metal conduit, expansion and deflection couplings as specified above are acceptable.
- C. Install expansion and deflection couplings where shown.

3.8 CONDUIT SUPPORTS

- A. Safe working load shall not exceed one-quarter of proof test load of fastening devices.
- B. Use pipe straps or individual conduit hangers for supporting individual conduits.
- C. Support multiple conduits runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and an additional 90 kg (200 lbs). Attach each conduit with U-bolts or other approved fasteners.
- D. Support conduit independently of junction boxes, pull-boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.
- E. Fasteners and Supports in Solid Masonry and Concrete:
 - 1. Existing Construction:
 - a. Steel expansion anchors not less than 6 mm (0.25-inch) bolt size and not less than 28 mm (1.125 inch) in embedment.
 - b. Power set fasteners not less than 6 mm (0.25-inch) diameter with depth of penetration not less than 75 mm (3 inch).
 - c. Use vibration and shock-resistant anchors and fasteners for attaching to concrete ceilings.
- F. Hollow Masonry: Toggle bolts.
- G. Bolts supported only by plaster or gypsum wallboard are not acceptable.
- H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.
- I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
- J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.

- K. Spring steel type supports, or fasteners are prohibited for all uses except horizontal and vertical supports/fasteners within walls.
- L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

3.9 BOX INSTALLATION

- A. Boxes for Concealed Conduits:
 - 1. Flush-mounted.
 - 2. Provide raised covers for boxes to suit the wall or ceiling, construction, and finish.
- B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling-in operations or where more than the equivalent of 4-90-degree bends are necessary.
- C. Locate pullboxes so that covers are accessible and easily removed. Coordinate locations with piping and ductwork where installed above ceilings.
- D. Remove only knockouts as required. Plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
- E. Outlet boxes mounted back-to-back in the same wall are prohibited. A minimum 600 mm (24 inch) center-to-center lateral spacing shall be maintained between boxes.
- F. Flush-mounted wall or ceiling boxes shall be installed with raised covers so that the front face of raised cover is flush with the wall. Surface-mounted wall or ceiling boxes shall be installed with surface-style flat or raised covers.
- G. Minimum size of outlet boxes for ground fault circuit interrupter (GFCI) receptacles is 100 mm (4 inches) square x 55 mm (2.125 inches) deep, with device covers for the wall material and thickness involved.
- H. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example, "SIG-FA JB No. 1."
- I. On all branch circuit junction box covers, identify the circuits with black marker.

- - - E N D - - -

SECTION 26 05 73
OVERCURRENT PROTECTIVE DEVICE COORDINATION STUDY

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies the overcurrent protective device coordination study, related calculations, and analysis, indicated as the study in this section.
- B. A short-circuit and selective coordination study, and arc flash calculations and analysis shall be prepared for the electrical overcurrent devices to be installed under this project.
- C. The study shall present a well-coordinated time-current analysis of each overcurrent protective device from the individual device.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.
- B. Section 26 24 16, PANELBOARDS: Low-voltage panelboards.
- C. Section 26 36 23, AUTOMATIC TRANSFER SWITCHES: Automatic transfer switches.

1.3 QUALITY ASSURANCE

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- B. The study shall be prepared by the equipment manufacturer and performed by the equipment manufacturer's licensed electrical engineer.

1.4 SUBMITTALS

- A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
 - 1. Product data on the software program to be used for the study. Software shall be in mainstream use in the industry, shall provide device settings and ratings, and shall show selective coordination by time-current drawings.
 - 2. Complete study as described in paragraph 1.6. Submittal of the study shall be well-coordinated with submittals of the shop drawings for equipment in related specification sections.

3. Certifications: Two weeks prior to final inspection, submit the following.

- a. Certification by the Contractor that the overcurrent protective devices have been set in accordance with the approved study.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. Institute of Electrical and Electronics Engineers (IEEE):
 - 241-90.....Recommended Practice Electrical Systems in Commercial Buildings
 - 242-03.....Recommended Practice for Protection and Coordination of Industrial and Commercial Power Systems
 - 399-97.....Recommended Practice for Industrial and Commercial Power Systems Analysis
 - 1584-02.....Performing Arc-Flash Hazards Calculations
 - 1584A-04.....Performing Arc-Flash Hazards Calculations - Amendment 1
 - 1584B-11.....Performing Arc-Flash Hazards Calculations - Amendment 2
- C. National Fire Protection Association (NFPA):
 - 70-17.....National Electrical Code (NEC)
 - 70E-18.....Standard for Electrical Safety in the Workplace
 - 99-18.....Health Care Facilities Code

1.6 STUDY REQUIREMENTS

- A. The study shall be in accordance with IEEE and NFPA standards.
- B. The study shall include one line diagram, short-circuit and ground fault analysis, protective coordination plots for all overcurrent protective devices, and arc flash calculations and analysis.
- C. One Line Diagram:
 - 1. Show all electrical equipment and wiring to be protected by the overcurrent devices.
 - 2. Show the following specific information:
 - a. Calculated fault impedance, X/R ratios, and short-circuit values at each feeder and branch circuit bus.
 - b. Relay, circuit breaker, and fuse ratings.

- c. Generator kW/kVA and transformer kVA and voltage ratings, percent impedance, X/R ratios, and wiring connections.
- d. Voltage at each bus.
- e. Identification of each bus, matching the identification on the drawings.
- f. Conduit, conductor, and busway material, size, length, and X/R ratios.

D. Short-Circuit Study:

- 1. The study shall be performed using computer software designed for this purpose. Pertinent data and the rationale employed in developing the calculations shall be described in the introductory remarks of the study.
- 2. Calculate the fault impedance to determine the available short-circuit and ground fault currents at each bus. Incorporate applicable motor and/or generator contribution in determining the momentary and interrupting ratings of the overcurrent protective devices.
- 3. Present the results of the short-circuit study in a table. Include the following:
 - a. Device identification.
 - b. Operating voltage.
 - c. Overcurrent protective device type and rating.
 - d. Calculated short-circuit current.

E. Coordination Study:

- 1. Prepare the coordination curves to determine the required settings of overcurrent protective devices to demonstrate selective coordination. Graphically illustrate on log-log paper that adequate time separation exists between devices, including the utility company upstream device if applicable. Plot the specific time-current characteristics of each overcurrent protective device in such a manner that all devices are clearly depicted.
- 2. The following specific information shall also be shown on the coordination curves:
 - a. Device identification.
 - b. Potential transformer and current transformer ratios.
 - c. Three-phase and single-phase ANSI damage points or curves for each cable, transformer, or generator.

- d. Applicable circuit breaker or protective relay characteristic curves.
 - e. No-damage, melting, and clearing curves for fuses.
 - f. Transformer in-rush points.
3. Develop a table to summarize the settings selected for the overcurrent protective devices. Include the following in the table:
- a. Device identification.
 - b. Protective relay or circuit breaker potential and current transformer ratios, sensor rating, and available and suggested pickup and delay settings for each available trip characteristic.
 - c. Fuse rating and type.
- F. Arc Flash Calculations and Analysis:
- 1. Arc flash warning labels shall comply with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
 - 2. Arc flash calculations shall be based on actual over-current protective device clearing time. Maximum clearing time shall be in accordance with IEEE 1584.
 - 3. Arc flash analysis shall be based on the lowest clearing time setting of the over-current protective device to minimize the incident energy level without compromising selective coordination.
 - 4. Arc flash boundary and available arc flash incident energy at the corresponding working distance shall be calculated for all electrical power distribution equipment specified in the project, and as shown on the drawings.
 - 5. Required arc-rated clothing and other PPE shall be selected and specified in accordance with NFPA 70E.

1.7 ANALYSIS

- A. Analyze the short-circuit calculations, and highlight any equipment determined to be underrated as specified. Propose solutions to effectively protect the underrated equipment.

1.8 ADJUSTMENTS, SETTINGS, AND MODIFICATIONS

- A. Final field settings and minor modifications of the overcurrent protective devices shall be made to conform with the study, without additional cost to the Government.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

---END---

SECTION 26 08 00**COMMISSIONING OF ELECTRICAL SYSTEMS****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. The requirements of this Section apply to all sections of Division 26.
- B. This project will have selected building systems commissioned. The complete list of equipment and systems to be commissioned is specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The commissioning process, which the Contractor is responsible to execute, is defined in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. A Commissioning Agent (CxA) appointed by the VA will manage the commissioning process.

1.2 RELATED WORK

- A. Section 01 00 00 GENERAL REQUIREMENTS.
- B. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.
- C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1.3 SUMMARY

- A. This Section includes requirements for commissioning the Facility electrical systems, related subsystems and related equipment. This Section supplements the general requirements specified in Section 01 91 00 General Commissioning Requirements.
- B. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for more details regarding processes and procedures as well as roles and responsibilities for all Commissioning Team members.

1.4 DEFINITIONS

- A. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for definitions.

1.5 COMMISSIONED SYSTEMS

- A. Commissioning of a system or systems specified in Division 26 is part of the construction process. Documentation and testing of these systems, as well as training of the VA's Operation and Maintenance personnel in accordance with the requirements of Section 01 91 00 and of Division 26, is required in cooperation with the VA and the Commissioning Agent.
- B. The Facility electrical systems commissioning will include the systems listed in Section 01 91 00 General Commissioning Requirements:

1.6 SUBMITTALS

- A. The commissioning process requires review of selected Submittals that pertain to the systems to be commissioned. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.
- B. The commissioning process requires Submittal review simultaneously with engineering review. Specific submittal requirements related to the commissioning process are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

PART 2 - PRODUCTS (NOT USED)**PART 3 - EXECUTION****3.1 CONSTRUCTION INSPECTIONS**

- A. Commissioning of Electrical systems will require inspection of individual elements of the electrical systems construction throughout the construction period. The Contractor shall coordinate with the Commissioning Agent in accordance with Section 01 91 00 and the Commissioning plan to schedule electrical systems inspections as required to support the Commissioning Process.

3.2 PRE-FUNCTIONAL CHECKLISTS

- A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning Agent will select a broader sample of checklists for review. If the Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the checklists for the type of equipment will be returned to the Contractor for correction and

resubmission. Refer to SECTION 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for submittal requirements for Pre-Functional Checklists, Equipment Startup Reports, and other commissioning documents.

3.3 CONTRACTORS TESTS

- A. Contractor tests as required by other sections of Division 26 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. All testing shall be incorporated into the project schedule. Contractor shall provide no less than 7 calendar days' notice of testing. The Commissioning Agent will witness selected Contractor tests at the sole discretion of the Commissioning Agent. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

3.4 SYSTEMS FUNCTIONAL PERFORMANCE TESTING

- A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the Resident Engineer. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed. See Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS, for additional details.

3.5 TRAINING OF VA PERSONNEL

- A. Training of the VA operation and maintenance personnel is required in cooperation with the COR and Commissioning Agent. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. Contractor shall submit training agendas and trainer resumes in accordance with the requirements of Section 01 91 00. The instruction shall be scheduled in coordination with the COR after submission and approval of formal training plans. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS and Division 26 Sections for additional Contractor training requirements.

----- END -----

**SECTION 26 09 23
LIGHTING CONTROLS**

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the furnishing, installation, and connection of the lighting controls.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General requirements that are common to more than one section of Division 26.
- B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.
- D. Section 26 24 16, PANELBOARDS: Panelboard enclosure and interior bussing used for lighting control panels.
- E. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.
- F. Section 26 51 00, INTERIOR LIGHTING: Luminaire ballast and drivers used in control of lighting systems.

1.3 QUALITY ASSURANCE

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
 - 1. Shop Drawings:
 - a. Submit the following information for each type of lighting controls.
 - b. Material and construction details.
 - c. Physical dimensions and description.
 - d. Wiring schematic and connection diagram.
 - e. Installation details.
 - 2. Manuals:

- a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.
- b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
- 3. Certifications: Two weeks prior to final inspection, submit the following.
 - a. Certification by the Contractor that the lighting control systems have been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. National Electrical Manufacturer's Association (NEMA):
 - C136.10-10.....American National Standard for Roadway and Area Lighting Equipment—Locking-Type Photocontrol Devices and Mating Receptacles—Physical and Electrical Interchangeability and Testing
 - ICS-1-15.....Standard for Industrial Control and Systems General Requirements
 - ICS-2-05.....Standard for Industrial Control and Systems: Controllers, Contractors, and Overload Relays Rated Not More than 2000 Volts AC or 750 Volts DC: Part 8 - Disconnect Devices for Use in Industrial Control Equipment
 - ICS-6-16.....Standard for Industrial Controls and Systems Enclosures
- C. National Fire Protection Association (NFPA):
 - 70-17.....National Electrical Code (NEC)
- D. Underwriters Laboratories, Inc. (UL):
 - 20-10.....Standard for General-Use Snap Switches
 - 98-16.....Enclosed and Dead-Front Switches
 - 773-16.....Standard for Plug-In Locking Type Photocontrols for Use with Area Lighting

- 773A-16.....Nonindustrial Photoelectric Switches for
Lighting Control
- 916-15.....Standard for Energy Management Equipment
Systems
- 917-06.....Clock Operated Switches
- 924-16.....Emergency Lighting and Power Equipment (for use
when controlling emergency circuits).

PART 2 - PRODUCTS

2.1 INDOOR OCCUPANCY SENSORS

- A. Wall- or ceiling-mounting, solid-state units with a power supply and relay unit, suitable for the environmental conditions in which installed.
1. Operation: Unless otherwise indicated, turn lights on when covered area is occupied and off when unoccupied; with a 1-to-15-minute adjustable time delay for turning lights off.
 2. Sensor Output: Contacts rated to operate the connected relay. Sensor shall be powered from the relay unit.
 3. Relay Unit: Dry contacts rated for 20A ballast load at 120 volt and 277 volt, for 13A tungsten at 120 volt, and for 1 hp at 120 volt.
 4. Mounting:
 - a. Sensor: Suitable for mounting in any position on a standard outlet box.
 - b. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.
 5. Indicator: LED, to show when motion is being detected during testing and normal operation of the sensor.
 6. Bypass Switch: Override the on function in case of sensor failure.
 7. Manual/automatic selector switch.
 8. Automatic Light-Level Sensor: Adjustable from 21.5 to 2152 lx (2 to 200 fc); keep lighting off when selected lighting level is present.
 9. Faceplate for Wall-Switch Replacement Type: Refer to wall plate material and color requirements for toggle switches, as specified in Section 26 27 26, WIRING DEVICES.
- B. Dual-technology Type: Ceiling mounting; combination PIR and ultrasonic detection methods, field-selectable.
1. Sensitivity Adjustment: Separate for each sensing technology.
 2. Detector Sensitivity: Detect occurrences of 150 mm (6-inch) minimum movement of any portion of a human body that presents a target of

not less than 232 sq. cm (36 sq. in) and detect a person of average size and weight moving not less than 305 mm (12 inches) in either a horizontal or a vertical manner at an approximate speed of 305 mm/s (12 inches/s).

C. Detection Coverage: Shall be sufficient to provide coverage as required by sensor locations shown on drawing.

2.2 INDOOR VACANCY SENSOR SWITCH

A. Wall mounting, solid-state units with integral sensor and switch.

1. Operation: Manually turn lights on with switch and sensor detects vacancy to turn lights off.

2. Switch Rating: 120/277 volt, 1200 watts at 277 volt, 800 watts at 120-volt unit.

3. Mounting:

a. Sensor: Suitable for mounting in a standard switch box.

b. Time-Delay and Sensitivity Adjustments: Integral with switch and accessible for reprogramming without removing switch.

4. Indicator: LED, to show when motion is being detected during testing and normal operation of the sensor.

5. Switch: Manual operation to turn lights on and override lights off.

6. Faceplate: Refer to wall plate material and color requirements for toggle switches, as specified in Section 26 27 26, WIRING DEVICES.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, manufacturer's instructions, as shown on the drawings, and as specified.

B. Aiming for wall-mounted and ceiling-mounted motion sensor switches shall be per manufacturer's recommendations.

C. Set occupancy sensor "on" duration to 15 minutes.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations.

B. Upon completion of installation, conduct an operating test to show that equipment operates in accordance with requirements of this section.

C. Test for full range of dimming ballast and dimming controls capability. Observe for visually detectable flicker over full dimming range.

D. Test occupancy sensors for proper operation. Observe for light control over entire area being covered.

3.3 FOLLOW-UP VERIFICATION

Upon completion of acceptance checks and tests, the Contractor shall show by demonstration in service that the lighting control devices are in good operating condition and properly performing the intended function in the presence of COR.

- - - E N D - - -

**SECTION 26 24 16
PANELBOARDS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation, and connection of panelboards.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS:
Requirements that apply to all sections of Division 26.
- B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES:
Low-voltage conductors.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS:
Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits.
- E. Section 26 05 73, OVERCURRENT PROTECTIVE DEVICE COORDINATION STUDY:
Short circuit and coordination study, and requirements for a coordinated electrical system.
- F. Section 26 43 13, SURGE PROTECTIVE DEVICES: Surge protective devices integral to panelboards.

1.3 QUALITY ASSURANCE

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
1. Shop Drawings:
 - a. Submit sufficient information to demonstrate compliance with drawings and specifications.
 - b. Include electrical ratings, dimensions, mounting details, materials, required clearances, terminations, weight, circuit breakers, wiring and connection diagrams, accessories, and nameplate data.

2. Manuals:

- a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals including technical data sheets, wiring diagrams, and information for ordering circuit breakers and replacement parts.

1) Include schematic diagrams, with all terminals identified, matching terminal identification in the panelboards.

2) Include information for testing, repair, troubleshooting, assembly, and disassembly.

- b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.

a. Certification by the manufacturer that the panelboards conform to the requirements of the drawings and specifications.

b. Certification by the Contractor that the panelboards have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. International Code Council (ICC):

IBC-15.....International Building Code

C. National Electrical Manufacturers Association (NEMA):

PB 1-11.....Panelboards

250-14.....Enclosures for Electrical Equipment (1,000V
Maximum)

D. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

70E-18.....Standard for Electrical Safety in the Workplace

E. Underwriters Laboratories, Inc. (UL):

50-15.....Enclosures for Electrical Equipment

67-09.....Panelboards

489-16.....Molded Case Circuit Breakers and Circuit
Breaker Enclosures

PART 2 - PRODUCTS**2.1 GENERAL REQUIREMENTS**

- A. Panelboards shall be in accordance with NEC, NEMA, UL, as specified, and as shown on the drawings.
- B. Panelboards shall have main breaker or main lugs, bus size, voltage, phases, number of circuit breaker mounting spaces, top or bottom feed, flush or surface mounting, branch circuit breakers, and accessories as shown on the drawings.
- C. Panelboards shall be completely factory-assembled with molded case circuit breakers and integral accessories as shown on the drawings or specified herein.
- D. Non-reduced size copper bus bars, rigidly supported on molded insulators, and fabricated for bolt-on type circuit breakers.
- E. Bus bar connections to the branch circuit breakers shall be the "distributed phase" or "phase sequence" type.
- F. Mechanical lugs furnished with panelboards shall be cast, stamped, or machined metal alloys listed for use with the conductors to which they will be connected.
- G. Neutral bus shall be 100% rated, mounted on insulated supports.
- H. Grounding bus bar shall be equipped with screws or lugs for the connection of equipment grounding conductors.
- I. Bus bars shall be braced for the available short-circuit current as shown on the drawings, but not be less than 10,000 A symmetrical for 120/208 V and 120/240 V panelboards.
- J. In two-section panelboards, the main bus in each section shall be full size. The first section shall be furnished with subfeed lugs on the line side of main lugs only, or through-feed lugs for main breaker type panelboards and have field-installed cable connections to the second section as shown on the drawings. Panelboard sections with tapped bus or crossover bus are not acceptable.
- K. Series-rated panelboards are not permitted.

2.2 ENCLOSURES AND TRIMS

- A. Enclosures:
 - 1. Provide galvanized steel enclosures, with NEMA rating as shown on the drawings or as required for the environmental conditions in which installed.
 - 2. Enclosures shall not have ventilating openings.

3. Enclosures may be of one-piece formed steel or of formed sheet steel with end and side panels welded, riveted, or bolted as required.
4. Provide manufacturer's standard option for prepunched knockouts on top and bottom endwalls.
5. Include removable inner dead front cover, independent of the panelboard cover.

B. Trims:

1. Hinged "door-in-door" type.
2. Interior hinged door with hand-operated latch or latches, as required to provide access only to circuit breaker operating handles, not to energized parts.
3. Outer hinged door shall be securely mounted to the panelboard enclosure with factory bolts, screws, clips, or other fasteners, requiring a key or tool for entry. Hand-operated latches are not acceptable.
4. Inner and outer doors shall open left to right.
5. Trims shall be flush, or surface type as shown on the drawings.

2.3 MOLDED CASE CIRCUIT BREAKERS

- A. Circuit breakers shall be per UL, NEC, as shown on the drawings, and as specified.
- B. Circuit breakers shall be bolt-on type.
- C. Circuit breakers shall have minimum interrupting rating as required to withstand the available fault current, but not less than:
 1. 120/208 V Panelboard: 10,000 A symmetrical.
- D. Circuit breaker features shall be as follows:
 1. A rugged, integral housing of molded insulating material.
 2. Silver alloy contacts.
 3. Arc quenchers and phase barriers for each pole.
 4. Quick-make, quick-break, operating mechanisms.
 5. A trip element for each pole, thermal magnetic type with long time delay and instantaneous characteristics, a common trip bar for all poles and a single operator.
 6. Electrically and mechanically trip free.
 7. An operating handle which indicates closed, tripped, and open positions.
 8. An overload on one pole of a multi-pole breaker shall automatically cause all the poles of the breaker to open.

9. Ground fault current interrupting breakers, shunt trip breakers, lighting control breakers (including accessories to switch line currents), or other accessory devices or functions shall be provided where shown on the drawings.
10. For circuit breakers being added to existing panelboards, coordinate the breaker type with existing panelboards. Modify the panel directory accordingly.

2.4 SURGE PROTECTIVE DEVICES

- A. Where shown on the drawings, furnish panelboards with integral surge protective devices. Refer to Section 26 43 13, SURGE PROTECTIVE DEVICES.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Installation shall be in accordance with the manufacturer's instructions, the NEC, as shown on the drawings, and as specified.
- B. Locate panelboards so that the present and future conduits can be conveniently connected.
- C. Install a printed schedule of circuits in each panelboard after approval by the COR. Schedules shall reflect final load descriptions, room numbers, and room names connected to each circuit breaker. Schedules shall be printed on the panelboard directory cards and be installed in the appropriate panelboards.
- D. Mount panelboards such that the maximum height of the top circuit breaker above the finished floor shall not exceed 1980 mm (78 inches).
- E. Provide blank cover for each unused circuit breaker mounting space.
- F. For panelboards located in areas accessible to the public, paint the exposed surfaces of the trims with finishes to match surrounding surfaces after the panelboards have been installed. Do not paint nameplates.

3.2 ACCEPTANCE CHECKS AND TESTS

- A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:
 1. Visual Inspection and Tests:
 - a. Compare equipment nameplate data with specifications and approved shop drawings.
 - b. Inspect physical, electrical, and mechanical condition.
 - c. Verify appropriate anchorage and required area clearances.

- d. Verify that circuit breaker sizes and types correspond to approved shop drawings.
- e. To verify tightness of accessible bolted electrical connections, use the calibrated torque-wrench method or perform thermographic survey after energization.
- f. Vacuum-clean enclosure interior. Clean enclosure exterior.

3.3 FOLLOW-UP VERIFICATION

- A. Upon completion of acceptance checks, settings, and tests, the Contractor shall demonstrate that the panelboards are in good operating condition and properly performing the intended function.

---END---

SECTION 26 27 26
WIRING DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation, connection, and testing of wiring devices.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.
- B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Cables and wiring.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.
- D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit and boxes.
- E. Section 26 51 00, INTERIOR LIGHTING: LED drivers for use with manual dimming controls.

1.3 QUALITY ASSURANCE

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
1. Shop Drawings:
 - a. Submit sufficient information to demonstrate compliance with drawings and specifications.
 - b. Include electrical ratings, dimensions, mounting details, construction materials, grade, and termination information.
 2. Manuals:
 - a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals, including technical data sheets and information for ordering replacement parts.

- b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
- 3. Certifications: Two weeks prior to final inspection, submit the following.
 - a. Certification by the manufacturer that the wiring devices conform to the requirements of the drawings and specifications.
 - b. Certification by the Contractor that the wiring devices have been properly installed and adjusted.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. National Electrical Manufacturers Association (NEMA):
 - WD 1-99(R2015).....General Color Requirements for Wiring Devices
 - WD 6-16 Wiring Devices - Dimensional Specifications
- C. National Fire Protection Association (NFPA):
 - 70-17.....National Electrical Code (NEC)
 - 99-18.....Health Care Facilities
- D. Underwriter's Laboratories, Inc. (UL):
 - 5-16.....Surface Metal Raceways and Fittings
 - 20-10.....General-Use Snap Switches
 - 231-16.....Power Outlets
 - 467-13.....Grounding and Bonding Equipment
 - 498-17.....Attachment Plugs and Receptacles
 - 943-16.....Ground-Fault Circuit-Interrupters
 - 1449-14.....Surge Protective Devices
 - 1472-15.....Solid State Dimming Controls

PART 2 - PRODUCTS

2.1 RECEPTACLES

- A. General: All receptacles shall comply with NEMA, NFPA, UL, and as shown on the drawings.
 - 1. Mounting straps shall be nickel plated brass, brass, nickel plated steel or galvanize steel with break-off plaster ears and shall include a self-grounding feature. Terminal screws shall be brass, brass plated or a copper alloy metal.

2. Receptacles shall have provisions for back wiring with separate metal clamp type terminals (four minimum) and side wiring from four captively held binding screws.
- B. Duplex Receptacles - Hospital-grade: shall be listed for hospital grade, single phase, 20 ampere, 120 volts, 2-pole, 3-wire, NEMA 5-20R, with break-off feature for two-circuit operation.
 1. Bodies shall be ivory in color.
 2. Duplex Receptacles on Emergency Circuit:
 - a. In rooms without emergency powered general lighting, the emergency receptacles shall be of the self-illuminated type.
 3. Ground Fault Current Interrupter (GFCI) Duplex Receptacles: Shall be an integral unit, hospital-grade, suitable for mounting in a standard outlet box, with end-of-life indication and provisions to isolate the face due to improper wiring. GFCI receptacles shall be self-test receptacles in accordance with UL 943.
 - a. Ground fault interrupter shall consist of a differential current transformer, self-test, solid state sensing circuitry and a circuit interrupter switch. Device shall have nominal sensitivity to ground leakage current of 4-6 milliamperes and shall function to interrupt the current supply for any value of ground leakage current above five milliamperes (+ or - 1 milliampere) on the load side of the device. Device shall have a minimum nominal tripping time of 0.025 second.
 - b. Self-test function shall be automatically initiated within 5 seconds after power is activated to the receptacles. Self-test function shall be periodically and automatically performed every 3 hours or less.
 - c. End-of-life indicator light shall be a persistent flashing or blinking light to indicate that the GFCI receptacle is no longer in service.
 4. Tamper-Resistant Duplex Receptacles:
 - a. Bodies shall be ivory in color.
 - 1) Shall permit current to flow only while a standard plug is in the proper position in the receptacle.
 - 2) Screws exposed while the wall plates are in place shall be the tamperproof type.
- C. Receptacles - 20, 30, and 50 ampere, 250 Volts: Shall be complete with appropriate cord grip plug.

- D. Weatherproof Receptacles: Shall consist of a duplex receptacle, mounted in box with a gasketed, weatherproof, cast metal cover plate and cap over each receptacle opening. The cap shall be permanently attached to the cover plate by a spring-hinged flap. The weatherproof integrity shall not be affected when heavy duty specification or hospital grade attachment plug caps are inserted. Cover plates on outlet boxes mounted flush in the wall shall be gasketed to the wall in a watertight manner.

2.2 TOGGLE SWITCHES

- A. Toggle switches shall be totally enclosed tumbler type with nylon bodies. Handles shall be ivory in color unless otherwise specified or shown on the drawings.
1. Shall be single unit toggle, butt contact, quiet AC type, heavy-duty general-purpose use with an integral self-grounding mounting strap with break-off plaster ears and provisions for back wiring with separate metal wiring clamps and side wiring with captively held binding screws.
 2. Switches shall be rated 20 amperes at 120-277 Volts AC.

2.3 MANUAL DIMMING CONTROL

- A. Electronic full-wave manual slide dimmer with on/off switch and audible frequency and EMI/RFI suppression filters.
- B. Manual dimming controls shall be fully compatible with LED dimming driver and be approved by the driver manufacturer, shall operate over full specified dimming range, and shall not degrade the performance or rated life of the electronic dimming ballast and lamp.
- C. Provide single-pole, three-way or four-way, as shown on the drawings.
- D. Manual dimming control and faceplates shall be ivory in color unless otherwise specified.

2.4 WALL PLATES

- A. Wall plates for switches and receptacles shall be type 302 stainless steel. Oversize plates are not acceptable.
- B. For receptacles or switches mounted adjacent to each other, wall plates shall be common for each group of receptacles or switches.
- C. In areas requiring tamperproof wiring devices, wall plates shall be type 302 stainless steel, and shall have tamperproof screws and beveled edges.
- D. Duplex Receptacles on Emergency Circuit: Wall plates shall be type 302 stainless steel, with the word "EMERGENCY" engraved in 6 mm (1/4 inch) red letters.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Installation shall be in accordance with the NEC and as shown as on the drawings.
- B. Install wiring devices after wall construction and painting is complete.
- C. The ground terminal of each wiring device shall be bonded to the outlet box with an approved green bonding jumper, and also connected to the branch circuit equipment grounding conductor.
- D. Outlet boxes for toggle switches and manual dimming controls shall be mounted on the strike side of doors.
- E. Provide barriers in multi-gang outlet boxes to comply with the NEC.
- F. Coordinate the electrical work with the work of other trades to ensure that wiring device flush outlets are positioned with box openings aligned with the face of the surrounding finish material. Pay special attention to installations in cabinet work, and in connection with laboratory equipment.
- G. Exact field locations of floors, walls, partitions, doors, windows, and equipment may vary from locations shown on the drawings. Prior to locating sleeves, boxes and chases for roughing-in of conduit and equipment, the Contractor shall coordinate exact field location of the above items with other trades.
- H. Install wall switches 1.2 M (48 inches) above floor, with the toggle OFF position down.
- I. Install wall dimmers 1.2 M (48 inches) above floor.
- J. Install receptacles 450 mm (18 inches) above floor, and 152 mm (6 inches) above counter backsplash or workbenches. Install specific-use receptacles at heights shown on the drawings.
- K. Install horizontally mounted receptacles with the ground pin to the right.
- L. When required or recommended by the manufacturer, use a torque screwdriver. Tighten unused terminal screws.
- M. Label device plates with a permanent adhesive label listing panel and circuit feeding the wiring device.

3.2 ACCEPTANCE CHECKS AND TESTS

- A. Perform manufacturer's required field checks in accordance with the manufacturer's recommendations, and the latest NFPA 99. In addition, include the following:

1. Visual Inspection and Tests:
 - a. Inspect physical and electrical conditions.
 - b. Vacuum-clean surface metal raceway interior. Clean metal raceway exterior.
 - c. Test wiring devices for damaged conductors, high circuit resistance, poor connections, inadequate fault current path, defective devices, or similar problems using a portable receptacle tester. Correct circuit conditions, remove malfunctioning units and replace with new, and retest as specified above.
 - d. Test GFCI receptacles.
2. Receptacle testing in the Patient Care Spaces, such as retention force of the grounding blade of each receptacle, shall comply with the latest NFPA 99.

---END---

SECTION 26 29 11
MOTOR CONTROLLERS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation, connection, and testing of motor controllers, including all low- and medium-voltage motor controllers and manual motor controllers, indicated as motor controllers in this section, and low-voltage variable speed motor controllers.
- B. Motor controllers, whether furnished with the equipment specified in other sections or otherwise (with the exception of elevator motor controllers specified in Division 14 and fire pump controllers specified in Division 21), shall meet this specification and all related specifications.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS:
Requirements that apply to all sections of Division 26.
- B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES:
Low-voltage conductors.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS:
Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits.

1.3 QUALITY ASSURANCE

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
 - 1. Shop Drawings:
 - a. Submit sufficient information to demonstrate compliance with drawings and specifications.
 - b. Include electrical ratings, dimensions, weights, mounting details, materials, overcurrent protection devices, overload

relays, sizes of enclosures, wiring diagrams, starting characteristics, interlocking, and accessories.

2. Manuals:

- a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.
 - 1) Wiring diagrams shall have their terminals identified to facilitate installation, maintenance, and operation.
 - 2) Wiring diagrams shall indicate internal wiring for each item of equipment and interconnections between the items of equipment.
 - 3) Elementary schematic diagrams shall be provided for clarity of operation.
 - 4) Include the catalog numbers for the correct sizes of overload relays for the motor controllers.
 - b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
3. Certifications: Two weeks prior to final inspection, submit the following.
- a. Certification by the manufacturer that the motor controllers conform to the requirements of the drawings and specifications.
 - b. Certification by the Contractor that the motor controllers have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. Institute of Electrical and Electronic Engineers (IEEE):
 - 519-14.....Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems
 - C37.90.1-12.....Standard Surge Withstand Capability (SWC) Tests for Relays and Relay Systems Associated with Electric Power Apparatus
- C. International Code Council (ICC):
 - IBC-15.....International Building Code

D. National Electrical Manufacturers Association (NEMA):

- ICS 1-00 (R2015).....Industrial Control and Systems: General Requirements
- ICS 1.1-84 (R2015).....Safety Guidelines for the Application, Installation and Maintenance of Solid-State Control
- ICS 2-00 (R2005).....Industrial Control and Systems Controllers, Contactors, and Overload Relays Rated 600 Volts
- ICS 4-15.....Industrial Control and Systems: Terminal Blocks
- ICS 6-93 (R2016).....Industrial Control and Systems: Enclosures
- ICS 7-14.....Industrial Control and Systems: Adjustable-Speed Drives
- ICS 7.1-14.....Safety Standards for Construction and Guide for Selection, Installation, and Operation of Adjustable-Speed Drive Systems

E. National Fire Protection Association (NFPA):

- 70-17.....National Electrical Code (NEC)

F. Underwriters Laboratories Inc. (UL):

- 508A-13.....Industrial Control Panels
- 508C-16.....Power Conversion Equipment
- 1449-14.....Surge Protective Devices

PART 2 - PRODUCTS**2.1 MOTOR CONTROLLERS**

- A. Motor controllers shall comply with IEEE, NEMA, NFPA, UL, and as shown on the drawings.
- B. Motor controllers shall be separately enclosed, unless part of another assembly. For installation in motor control centers, provide plug-in, draw-out type motor controllers up through NEMA size 4. NEMA size 5 and above require bolted connections.
- C. Motor controllers shall be combination type, with magnetic controller per Paragraph 2.3 below and with circuit breaker disconnecting means, with external operating handle with lock-open padlocking positions and ON-OFF position indicator.
 - 1. Circuit Breakers:
 - a. Bolt-on thermal-magnetic type with a minimum interrupting rating as indicated on the drawings.
 - b. Equipped with automatic, trip free, non-adjustable, inverse-time, and instantaneous magnetic trips for less than 400A. The magnetic

trip shall be adjustable from 5x to 10x for breakers 400A and greater.

c. Additional features shall be as follows:

- 1) A rugged, integral housing of molded insulating material.
- 2) Silver alloy contacts.
- 3) Arc quenchers and phase barriers for each pole.
- 4) Quick-make, quick-break, operating mechanisms.
- 5) A trip element for each pole, a common trip bar for all poles, and one operator for all poles.

D. Enclosures:

1. Enclosures shall be NEMA-type rated 1, 3R, or 12 as indicated on the drawings or as required per the installed environment.
2. Enclosure doors shall be interlocked to prevent opening unless the disconnecting means is open. A "defeater" mechanism shall allow for inspection by qualified personnel with the disconnect means closed. Provide padlocking provisions.
3. All metal surfaces shall be thoroughly cleaned, phosphatized, and factory primed prior to applying light gray baked enamel finish.

E. Motor control circuits:

1. Shall operate at not more than 120 Volts.
2. Shall be grounded, except where the equipment manufacturer recommends that the control circuits be isolated.
3. For each motor operating over 120 Volts, incorporate a separate, heavy duty, control transformer within each motor controller enclosure.
4. Incorporate primary and secondary overcurrent protection for the control power transformers.

F. Overload relays:

1. Thermal Temperature Probe Thermal Relay Electronic type. Devices shall be NEMA type.
2. One for each pole.
3. External overload relay reset pushbutton on the door of each motor controller enclosure.
4. Overload relays shall be matched to nameplate full-load current of actual protected motor and with appropriate adjustment for duty cycle.

G. Hand-Off-Automatic (H-O-A) switch is required unless specifically stated on the drawings as not required for a particular controller. H-

O-A switch shall be operable without opening enclosure door. H-O-A switch is not required for manual motor controllers.

- H. Incorporate into each control circuit a 120 Volt, electronic time-delay relay (ON delay), minimum adjustable range from 0.3 to 10 minutes, with transient protection. Time-delay relay is not required where H-O-A switch is not required.
- I. Unless noted otherwise, equip each motor controller with not less than two normally open (N.O.) and two normally closed (N.C.) auxiliary contacts.
- J. Provide green (RUN) and red (STOP) pilot lights.
- K. Motor controllers incorporated within equipment assemblies shall also be designed for the specific requirements of the assemblies.
- L. Additional requirements for specific motor controllers, as indicated in other specification sections, shall also apply.

2.2 MANUAL MOTOR CONTROLLERS

- A. Shall be in accordance with applicable requirements of 2.1 above.
- B. Manual motor controllers shall have the following features:
 - 1. Controllers shall be general-purpose Class A, manually operated type with full voltage controller for induction motors, rated in horsepower.
 - 2. Units shall include thermal overload relays, on-off operator, red pilot light, normally open auxiliary contacts.
- C. Fractional horsepower manual motor controllers shall have the following features:
 - 1. Controllers shall be general-purpose Class A, manually operated type with full voltage controller for fractional horsepower induction motors.
 - 2. Units shall include thermal overload relays, red pilot light, and toggle operator.

2.3 MAGNETIC MOTOR CONTROLLERS

- A. Shall be in accordance with applicable requirements of 2.1 above.
- B. Controllers shall be general-purpose, Class A magnetic controllers for induction motors rated in horsepower. Minimum NEMA size 0.
- C. Where combination motor controllers are used, combine controller with protective or disconnect device in a common enclosure.
- D. Provide phase loss protection for each controller, with contacts to de-energize the controller upon loss of any phase.

- E. Unless otherwise indicated, provide full voltage non-reversing across-the-line mechanisms for motors less than 75 HP, closed by coil action, and opened by gravity. For motors 75 HP and larger, provide reduced-voltage or variable speed controllers as shown on the drawings. Equip controllers with 120 VAC coils and individual control transformer unless otherwise noted.

2.4 REDUCED VOLTAGE MOTOR CONTROLLERS

- A. Shall be in accordance with applicable portions of 2.1 above.
- B. Shall have closed circuit transition.
- C. Shall limit inrush currents to not more than 70 percent of the locked rotor current.
- D. Provide phase loss protection for each motor controller, with contacts to de-energize the motor controller upon loss of any phase.

2.5 LOW-VOLTAGE VARIABLE SPEED MOTOR CONTROLLERS (VSMC)

- A. VSMC shall be in accordance with applicable portions of 2.1 above.
- B. VSMC shall be electronic, with adjustable frequency and voltage, three phase output, capable of driving standard NEMA B three-phase induction motors at full rated speed. The control technique shall be pulse width modulation (PWM), where the VSMC utilizes a full wave bridge design incorporating diode rectifier circuitry. Silicon controlled rectifiers or other control techniques are not acceptable.
- C. VSMC shall be suitable for variable torque loads and shall be capable of providing sufficient torque to allow the motor to break away from rest upon first application of power.
- D. VSMC shall be capable of operating within voltage parameters of plus 10 to minus 15 percent of line voltage and be suitably rated for the full load amps of the maximum watts (HP) within its class.
- E. Minimum efficiency shall be 95 percent at 100 percent speed and 85 percent at 50 percent speed.
- F. The displacement power factor of the VSMC shall not be less than 95 percent under any speed or load condition.
- G. VSMC current and voltage harmonic distortion shall not exceed the values allowed by IEEE 519.
- H. Operating and Design Conditions:
 - 1. Elevation: 6,000feet Above Mean Sea Level (AMSL)
 - 2. Temperatures: Maximum +90°F Minimum -10°F
 - 3. Relative Humidity: 95%
 - 4. VSMC Location: Un-Air-conditioned space

- I. VSMC shall have the following features:
1. Isolated power for control circuits.
 2. Manually resettable overload protection for each phase.
 3. Adjustable current limiting circuitry to provide soft motor starting. Maximum starting current shall not exceed 200 percent of motor full load current.
 4. Independent acceleration and deceleration time adjustment, manually adjustable from 2 to 2000 seconds. Set timers to the equipment manufacturer's recommended time in the above range.
 5. Control input circuitry that will accept 4 to 20 mA current or 0-10 VDC voltage control signals from an external source.
 6. Automatic frequency adjustment from 1 Hz to 300 Hz.
 7. Circuitry to initiate an orderly shutdown when any of the conditions listed below occur. The VSMC shall not be damaged by any of these electrical disturbances and shall automatically restart when the conditions are corrected. The VSMC shall be able to restart into a rotating motor operating in either the forward or reverse direction and matching that frequency.
 - a. Incorrect phase sequence.
 - b. Single phasing.
 - c. Overvoltage in excess of 10 percent.
 - d. Undervoltage in excess of 15 percent.
 - e. Running overcurrent above 110 percent (VSMC shall not automatically reset for this condition.)
 - f. Instantaneous overcurrent above 150 percent (VSMC shall not automatically reset for this condition).
 - g. Short duration power outages of 12 cycles or less (i.e., distribution lineswitching, generator testing, and automatic transfer switch operations.)
 8. Automatic Reset/Restart: Attempt three restarts after VSMC fault or on return of power after an interruption and before shutting down for manual reset or fault correction, with adjustable delay time between restart attempts.
 9. Power-Interruption Protection: To prevent motor from re-energizing after a power interruption until motor has stopped, unless "Bidirectional Autospeed Search" feature is available and engaged.
 10. Bidirectional Autospeed Search: Capable of starting VSMC into rotating loads spinning in either direction and returning motor to

- set speed in proper direction, without causing damage to VSMC, motor, or load.
- J. VSMC shall include an input circuit breaker which will disconnect all input power, interlocked with the door so that the door cannot be opened with the circuit breaker in the closed position.
- K. VSMC shall include a 5% line reactor and a RFI/EMI filter.
- L. Surge Suppression: Provide three-phase protection against damage from supply voltage surges in accordance with UL 1449.
- M. VSMC shall include front-accessible operator station, with sealed keypad and digital display, which allows complete programming, operating, monitoring, and diagnostic capabilities.
1. Typical control functions shall include but not be limited to:
 - a. HAND-OFF-AUTOMATIC-RESET, with manual speed control in HAND mode.
 - b. NORMAL-BYPASS.
 - c. NORMAL-TEST, which allows testing and adjusting of the VSMC while in bypass mode.
 2. Typical monitoring functions shall include but not be limited to:
 - a. Output frequency (Hz).
 - b. Motor speed and status (run, stop, fault).
 - c. Output voltage and current.
 3. Typical fault and alarm functions shall include but not be limited to:
 - a. Loss of input signal, under- and over-voltage, inverter overcurrent, motor overload, critical frequency rejection with selectable and adjustable deadbands, instantaneous line-to-line and line-to-ground overcurrent, loss-of-phase, reverse-phase, and short circuit.
 - b. System protection indicators indicating that the system has shut down and will not automatically restart.
- N. VSMC shall include two N.O. and two N.C. dry contacts rated 120 Volts, 10 amperes, 60 Hz.
- O. Hardware, software, network interfaces, gateways, and programming to control and monitor the VSMC by control systems specified in other specification sections, including but not limited to Divisions 22 and 23.
- P. Network communications ports: As required for connectivity to control systems specified in other specification sections, including but not limited to Divisions 22 and 23.

- Q. Communications protocols: As required for communications with control systems specified in other specification sections, including but not limited to Divisions 22 and 23.
- R. Bypass controller: Provide contactor-style bypass, arranged to bypass the inverter.
 - 1. Inverter Output Contactor and Bypass Contactor: Load-break NEMA-rated contactor.
 - 2. Motor overload relays.
 - 3. HAND-OFF-AUTOMATIC bypass control.
- S. Bypass operation: Transfers motor between inverter output and bypass circuit, manually, automatically, or both. VSMC shall be capable of stable operation (starting, stopping, and running), and control by fire alarm and detection systems, with motor completely disconnected from the inverter output. Transfer between inverter and bypass contactor and retransfer shall only be allowed with the motor at zero speed.
- T. Inverter Isolating Switch: Provide non-load-break switch arranged to isolate inverter and permit safe troubleshooting and testing of the inverter, both energized and de-energized, while motor is operating in bypass mode. Include padlockable, door-mounted handle mechanism.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install motor controllers in accordance with the NEC, as shown on the drawings, and as recommended by the manufacturer.
- B. Install manual motor controllers in flush enclosures in finished areas.
- C. Set field-adjustable switches, auxiliary relays, time-delay relays, timers, and electronic overload relay pickup and trip ranges.
- D. Program variable speed motor controllers per the manufacturer's instructions and in coordination with other trades so that a complete and functional system is delivered.
- E. Adjust trip settings of circuit breakers and motor circuit protectors with adjustable instantaneous trip elements. Initially adjust at six times the motor nameplate full-load ampere ratings and attempt to start motors several times, allowing for motor cooldown between starts. If tripping occurs on motor inrush, adjust settings in increments until motors start without tripping. Do not exceed eight times the motor full-load amperes (or 11 times for NEMA Premium Efficiency motors if required). Where these maximum settings do not allow starting of a motor, notify COTR before increasing settings.

3.2 ACCEPTANCE CHECKS AND TESTS

- A. Perform manufacturer's required field tests in accordance with the manufacturer's recommendations. In addition, include the following:
1. Visual Inspection and Tests:
 - a. Compare equipment nameplate data with specifications and approved shop drawings.
 - b. Inspect physical, electrical, and mechanical condition.
 - c. Verify appropriate anchorage, required area clearances, and correct alignment.
 - d. Verify that circuit breaker, motor circuit protector, and fuse sizes and types correspond to approved shop drawings.
 - e. Verify overload relay ratings are correct.
 - f. Vacuum-clean enclosure interior. Clean enclosure exterior.
 - g. Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method in accordance with manufacturer's published data.
 - h. Test all control and safety features of the motor controllers.
 - i. For low-voltage variable speed motor controllers, final programming and connections shall be by a factory-trained technician. Set all programmable functions of the variable speed motor controllers to meet the requirements and conditions of use.

3.3 FOLLOW-UP VERIFICATION

- A. Upon completion of acceptance checks, settings, and tests, the Contractor shall show by demonstration in service that the motor controllers are in good operating condition and properly performing the intended functions.

3.4 SPARE PARTS

- A. Two weeks prior to the final inspection, provide one complete set of spare fuses for each motor controller.

3.5 INSTRUCTION

- A. Furnish the services of a factory-trained technician for two 4-hour training periods for instructing personnel in the maintenance and operation of the motor controllers, on the dates requested by the COTR.

---END---

SECTION 26 29 21
ENCLOSED SWITCHES AND CIRCUIT BREAKERS

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies the furnishing, installation, and connection of fused and unfused disconnect switches (indicated as switches in this section), and separately enclosed circuit breakers for use in electrical systems rated 600 V and below.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS:
Requirements that apply to all sections of Division 26.
- B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES:
Low-voltage conductors.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS:
Requirements for personnel safety and to provide a low impedance path for possible ground faults.
- D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits.
- E. Section 26 24 16, PANELBOARDS: Molded-case circuit breakers.

1.3 QUALITY ASSURANCE

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
1. Shop Drawings:
 - a. Submit sufficient information to demonstrate compliance with drawings and specifications.
 - b. Submit the following data for approval:
 - 1) Electrical ratings, dimensions, mounting details, materials, required clearances, terminations, weight, fuses, circuit breakers, wiring and connection diagrams, accessories, and device nameplate data.
 2. Manuals:

- a. Submit complete maintenance and operating manuals including technical data sheets, wiring diagrams, and information for ordering fuses, circuit breakers, and replacement parts.
 - 1) Include schematic diagrams, with all terminals identified, matching terminal identification in the enclosed switches and circuit breakers.
 - 2) Include information for testing, repair, troubleshooting, assembly, and disassembly.
- b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
- 3. Certifications: Two weeks prior to final inspection, submit the following.
 - a. Certification by the manufacturer that the enclosed switches and circuit breakers conform to the requirements of the drawings and specifications.
 - b. Certification by the Contractor that the enclosed switches and circuit breakers have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. International Code Council (ICC):
 - IBC-15.....International Building Code
- C. National Electrical Manufacturers Association (NEMA):
 - FU 1-12.....Low Voltage Cartridge Fuses
 - KS 1-13.....Heavy Duty Enclosed and Dead-Front Switches
(600 Volts Maximum)
- D. National Fire Protection Association (NFPA):
 - 70-17.....National Electrical Code (NEC)
- E. Underwriters Laboratories, Inc. (UL):
 - 98-16.....Enclosed and Dead-Front Switches
 - 248 1-11.....Low Voltage Fuses
 - 489-13.....Molded Case Circuit Breakers and Circuit
Breaker Enclosures

PART 2 - PRODUCTS**2.1 FUSED SWITCHES RATED 600 AMPERES AND LESS**

- A. Switches shall be in accordance with NEMA, NEC, UL, as specified, and as shown on the drawings.
- B. Shall be NEMA classified General Duty (GD) for 240 V switches, and NEMA classified Heavy Duty (HD) for 480 V switches.
- C. Shall be horsepower (HP) rated.
- D. Shall have the following features:
 - 1. Switch mechanism shall be the quick-make, quick-break type.
 - 2. Copper blades, visible in the open position.
 - 3. An arc chute for each pole.
 - 4. External operating handle shall indicate open and closed positions and have lock-open padlocking provisions.
 - 5. Mechanical interlock shall permit opening of the door only when the switch is in the open position, defeatable to permit inspection.
 - 6. Fuse holders for the sizes and types of fuses specified.
 - 7. Solid neutral for each switch being installed in a circuit which includes a neutral conductor.
 - 8. Ground lugs for each ground conductor.
 - 9. Enclosures:
 - a. Shall be the NEMA types shown on the drawings.
 - b. Where the types of switch enclosures are not shown, they shall be the NEMA types most suitable for the ambient environmental conditions.
 - c. Shall be finished with manufacturer's standard gray baked enamel paint over pretreated steel.

2.2 UNFUSED SWITCHES RATED 600 AMPERES AND LESS

- A. Shall be the same as fused switches, but without provisions for fuses.

2.3 MOTOR RATED TOGGLE SWITCHES

- A. Type 1, general purpose for single-phase motors rated up to 1 horsepower.
- B. Quick-make, quick-break toggle switch with external reset button and thermal overload protection matched to nameplate full-load current of actual protected motor.

2.4 CARTRIDGE FUSES

- A. Shall be in accordance with NEMA FU 1.
- B. Feeders: Class RK1, fast acting

C. Motor Branch Circuits: Class RK1, time delay.

D. Other Branch Circuits: Class RK1, time delay.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer's instructions.

B. Fused switches shall be furnished complete with fuses. Arrange fuses such that rating information is readable without removing the fuses.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:

- a. Compare equipment nameplate data with specifications and approved shop drawings.
- b. Inspect physical, electrical, and mechanical condition.
- c. Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method.
- d. Vacuum-clean enclosure interior. Clean enclosure exterior.

3.3 SPARE PARTS

A. Two weeks prior to the final inspection, furnish one complete set of spare fuses for each fused disconnect switch installed on the project. Deliver the spare fuses to the COR.

---END---

SECTION 26 36 23
AUTOMATIC TRANSFER SWITCHES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation, connection, and testing of open-transition automatic transfer switches with bypass isolation, indicated as automatic transfer switches or ATS in this section.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS:
Requirements that apply to all sections of Division 26.
- B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES:
Low-voltage conductors.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS:
Requirements for personal safety and to provide a low impedance path for possible ground fault currents.
- D. Section 26 05 33, RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS: Conduits.
- E. Section 26 05 73, OVERCURRENT PROTECTIVE DEVICE COORDINATION STUDY:
Short circuit and coordination study, and requirements for a coordinated electrical system.

1.3 QUALITY ASSURANCE

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- B. A factory-authorized representative shall be capable of providing emergency maintenance and repairs at the project site within 4 hours maximum of notification.
- C. Automatic transfer switch, bypass/isolation switch, and annunciation control panels shall be products of the same manufacturer.

1.4 FACTORY TESTS

- A. ATS shall be thoroughly tested at the factory to assure that there are no electrical or mechanical defects.
- B. Factory Tests shall be in accordance with Paragraph, MANUFACTURED PRODUCTS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
1. Perform visual inspection to verify that each ATS is as specified.

2. Perform mechanical test to verify that ATS sections are free of mechanical defects.
3. Perform insulation resistance test to ensure electrical integrity and continuity of entire system.
4. Perform main switch contact resistance test.
5. Perform electrical tests to verify complete system electrical operation.

1.5 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:

- a. Submit sufficient information to demonstrate compliance with drawings and specifications.
- b. Include voltage rating, continuous current rating, number of phases, withstand and closing rating, dimensions, weights, mounting details, conduit entry provisions, front view, side view, equipment and device arrangement, elementary and interconnection wiring diagrams, factory relay settings, and accessories.
- c. For automatic transfer switches that are networked together to a common means of annunciation and/or control, submit interconnection diagrams as well as site and building plans, showing connections for normal and emergency sources of power, load, control and annunciation components, and interconnecting communications paths. Equipment locations on the diagrams and plans shall match the site, building, and room designations on the drawings.
- d. Complete nameplate data, including manufacturer's name and catalog number.
- e. A copy of the markings that are to appear on the automatic transfer switches when

2. Manuals:

- a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.

- 1) Schematic signal and control diagrams, with all terminals identified, matching terminal identification in the automatic transfer switches.
 - 2) Include information for testing, repair, troubleshooting, assembly, disassembly, and factory recommended/required periodic maintenance procedures and frequency.
 - 3) Provide a replacement and spare parts list. Include a list of tools and instruments for testing and maintenance purposes.
- b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
- 1) Include complete "As Installed" diagrams that indicate all pieces of equipment and their interconnecting wiring.
 - 2) Include complete diagrams of the internal wiring for each piece of equipment, including "As Installed" revisions of the diagrams.
 - 3) The wiring diagrams shall identify the terminals to facilitate installation, maintenance, operation, and testing.
3. Certifications:
- a. When submitting the shop drawings, submit a certified test report from a recognized independent testing laboratory that a representative sample has passed UL 1008 prototype testing.
 - b. Two weeks prior to final inspection, submit the following.
 - 1) Certification by the manufacturer that the ATS conform to the requirements of the drawings and specifications.
 - 2) Certification by the Contractor that transfer switches have been properly installed, adjusted, and tested.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. Institute of Electrical and Electronic Engineers (IEEE):
- 446-95.....Emergency and Standby Power Systems for
Industrial and Commercial Applications
- C37.90.1-12.....Surge Withstand Capability (SWC) Tests for
Relays and Relay Systems Associated with
Electric Power Apparatus

- C62.41.1-02.....Guide on the Surges Environment in Low-Voltage
(1000 V and Less) AC Power Circuits
- C62.41.2-02.....Recommended Practice on Characterization of
Surges in Low-Voltage (1000 V and Less) AC
Power Circuits
- C. International Code Council (ICC):
IBC-15.....International Building Code
- D. National Electrical Manufacturers Association (NEMA):
250-14.....Enclosures for Electrical Equipment (1000 Volts
Maximum)
- ICS 6-06.....Enclosures
- ICS 4-15.....Application Guideline for Terminal Blocks
- MG 1-16.....Motors and Generators
- E. National Fire Protection Association (NFPA):
70-17.....National Electrical Code (NEC)
- 99-15.....Health Care Facilities
- 110-16.....Emergency and Standby Power Systems
- F. Underwriters Laboratories, Inc. (UL):
50-15.....Enclosures for Electrical Equipment
- 508-99.....Industrial Control Equipment
- 891-05.....Switchboards
- 1008-14.....Transfer Switch Equipment

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS

- A. Automatic transfer switches shall comply with IEEE, NEMA, NFPA, UL, and have the following features:
1. Automatic transfer switches shall be open transition switches, 4-pole, draw-out construction, electrically operated, mechanically held open contact type, without integral overcurrent protection. Automatic transfer switches utilizing automatic or non-automatic molded case circuit breakers, insulated case circuit breakers, or power circuit breakers as switching mechanisms are not acceptable.
 2. Automatic transfer switches shall be completely factory-assembled and wired such that only external circuit connections are required in the field.
 3. Each automatic transfer switch shall be equipped with an integral bypass/isolation switch.

4. Ratings:
 - a. Phases, voltage, continuous current, poles, and withstand and closing ratings shall be as shown on the drawings.
 - b. Transfer switches are to be rated for continuous duty at specified continuous current rating on 60Hz systems.
 - c. Maximum automatic transfer switch rating: 800 A.
5. Markings:
 - a. Markings shall be in accordance with UL 1008.
6. Tests:
 - a. Automatic transfer switches shall be tested in accordance with UL 1008. The contacts of the transfer switch shall not weld during the performance of withstand and closing tests when used with the upstream overcurrent device and available fault current specified.
7. Surge Withstand Test:
 - a. Automatic transfer switches utilizing solid-state devices in sensing, relaying, operating, or communication equipment or circuits shall comply with IEEE C37.90.1.
8. Housing:
 - a. Enclose automatic transfer switches in wall- or floor-mounted steel cabinets, with metal gauge not less than No. 14, in accordance with UL 508, or in a switchboard assembly in accordance with UL 891, as shown on the drawings.
 - b. Enclosure shall be constructed so that personnel are protected from energized bypass-isolation components during automatic transfer switch maintenance.
 - c. Automatic transfer switch components shall be removable without disconnecting external source or load power conductors.
 - d. Finish: Cabinets shall be given a phosphate treatment, painted with rust-inhibiting primer, and finish-painted with the manufacturer's standard enamel or lacquer finish.
 - e. Viewing Ports: Provide viewing ports so that contacts may be inspected without disassembly.
9. Operating Mechanism:
 - a. Actuated by an electrical operator.
 - b. Electrically and mechanically interlocked so that the main contact cannot be closed simultaneously in either normal and emergency position.

- c. Normal and emergency main contacts shall be mechanically locked in position by the operating linkage upon completion of transfer. Release of the locking mechanism shall be possible only by normal operating action.
 - d. Contact transfer time shall not exceed six cycles.
 - e. Operating mechanism components and mechanical interlocks shall be insulated or grounded.
10. Contacts:
- a. Main contacts: silver alloy.
 - b. Neutral contacts: silver alloy, with same current rating as phase contacts.
 - c. Current carrying capacity of arcing contacts shall not be used in the determination of the automatic transfer switch rating and shall be separate from the main contacts.
 - d. Main and arcing contacts shall be visible for inspection with cabinet door open and barrier covers removed.
11. Manual Operator:
- a. Capable of operation by one person in either direction under no load.
12. Replaceable Parts:
- a. Include the main and arcing contacts individually or as units, as well as relays, and control devices.
 - b. Automatic transfer switch contacts and accessories shall be replaceable from the front without removing the switch from the cabinet and without removing main conductors.
13. Sensing Features:
- a. Undervoltage Sensing for Each Phase of Normal Source: Sense low phase-to-ground voltage on each phase. Pickup voltage shall be adjustable from 85 to 100% of nominal, and dropout voltage is adjustable from 75 to 98% of pickup value. Factory set for pickup at 90% and dropout at 85%.
 - b. Adjustable Time Delay: For override of normal-source voltage sensing to delay transfer and engine start signals. Adjustable from zero to six seconds, and factory set for one second.
 - c. Voltage/Frequency Lockout Relay: Prevent premature transfer to the engine-generator. Pickup voltage shall be adjustable from 85 to 100% of nominal. Factory set for pickup at 90%. Pickup

frequency shall be adjustable from 90 to 100% of nominal. Factory set for pickup at 95%.

- d. Time Delay for Retransfer to Normal Source: Adjustable from 0 to 30 minutes, and factory set for 10 minutes to automatically defeat delay on loss of voltage or sustained undervoltage of emergency source, provided normal supply has been restored.
 - e. Test Switch: Simulate normal-source failure.
 - f. Switch-Position Indication: Indicate source to which load is connected.
 - g. Source-Available Indication: Supervise sources via transfer switch normal- and emergency-source sensing circuits.
 - h. Normal Power Indication: Indicate "Normal Source Available."
 - i. Emergency Power Indication: Indicate "Emergency Source Available."
 - j. Transfer Override Control: Overrides automatic retransfer control so that automatic transfer switch shall remain connected to emergency power source regardless of condition of normal source. Control panel shall indicate override status.
 - k. Engine Starting Contacts: One isolated and normally closed and one isolated and normally open; rated 5 A at 30 V DC minimum.
 - l. Engine Shutdown Contacts: Time delay adjustable from zero to 15 minutes, and factory set for 5 minutes. Contacts shall initiate shutdown at remote engine-generator controls after retransfer of load to normal source.
14. Controls:
- a. Controls shall provide indication of switch status and be equipped with alarm diagnostics.
 - b. Controls shall control operation of the automatic transfer switches.
15. Factory Wiring: Train and bundle factory wiring and label either by color-code or by numbered/lettered wire markers. Labels shall match those on the shop drawings.
16. Annunciation, Control, and Programming Interface Components:
- Devices for communicating with remote programming devices, annunciators, or control panels// and paralleling switchgear// shall have open-protocol communication capability matched with remote device.

2.2 BYPASS-ISOLATION SWITCH

- A. Provide each automatic transfer switch with two-way bypass-isolation manual type switch. The bypass-isolation switch shall permit load bypass to either normal or emergency power source and complete isolation of the automatic transfer switch, independent of transfer switch position. Bypass and isolation shall be possible under all conditions including when the automatic transfer switch is removed from service.
- B. Operation: The bypass-isolation switch shall have provisions for operation by one person through the movement of a maximum of two handles at a common dead front panel in no more than 15 seconds. Provide a lock, which must energize to unlock the bypass switch, to prevent bypassing to a dead source. Provide means to prevent simultaneous connection between normal and emergency sources.
 - 1. Bypass to normal (or emergency): Operation of bypass handle shall allow direct connection of the load to the normal (or emergency) source, without load interruption or by using a break-before-make design or provide separate load interrupter contacts to momentarily interrupt the load.
 - a. Ensure continuity of auxiliary circuits necessary for proper operation of the system.
 - b. A red indicating lamp shall light when the automatic transfer switch is bypassed.
 - c. Bypassing source to source: If the power source is lost while in the bypass position, bypass to the alternate source shall be achievable without re-energization of the automatic transfer switch service and load connections.
 - 2. Isolation: Operation of the isolating handle shall isolate all live power conductors to the automatic transfer switch without interruption of the load.
 - a. Interlocking: Provide interlocking as part of the bypass-isolation switch to eliminate personnel-controlled sequence of operation, and to prevent operation to the isolation position until the bypass function has been completed.
 - b. Padlocking: Include provisions to padlock the isolating handle in the isolated position.
 - c. Visual verification: The isolation blades shall be visible in the isolated position.

3. Testing: It shall be possible to test (normal electrical operation) the automatic transfer switch and engine-generator(s) with the isolation contacts closed and the load bypassed without interruption of power to the load.

C. Ratings: The electrical capabilities and ratings of the bypass-isolation switch shall be compatible with those of the associated automatic transfer switch, including any required additional withstand tests.

2.3 REMOTE ANNUNCIATOR SYSTEM

A. Remote annunciator panel shall annunciate conditions for indicated automatic transfer switches. Annunciation shall include the following:

1. Sources available, as defined by actual pickup and dropout settings of automatic transfer switch controls.
2. Switch position.
3. Switch in test mode.
4. Failure of communication link.

B. Remote annunciator panel shall be visual and audible type with LED display panel, audible signal, and silencing switch.

1. Panel shall indicate each automatic transfer switch monitored, the location of automatic transfer switch, and the identity of load it serves.
2. Mounting: Steel cabinet, flush or surface mounted, as shown on the drawings.

2.4 REMOTE ANNUNCIATOR AND CONTROL SYSTEM

A. Include the following functions for indicated automatic transfer switches:

1. Indication of sources available, as defined by actual pickup and dropout settings of automatic transfer switch controls.
2. Indication of automatic transfer switch position.
3. Indication of automatic transfer switch in test mode.
4. Indication of failure of communication link.
5. Key-switch or user-code access to control functions of panel.
6. Control of automatic transfer switch test initiation.
7. Control of automatic transfer switch operation in either direction.
8. Control of time-delay bypass for transfer to normal source.

B. Malfunction of remote annunciator and control system or communication link shall not affect functions of automatic transfer switches.

Automatic transfer switch sensing, controlling, or operating functions

shall not depend on remote annunciator and control system for proper operation.

C. Remote annunciation and control system shall include the following features:

1. Touchscreen type operator interface.
2. Control and indication means grouped together for each automatic transfer switch.
3. Label each indication and control group. Indicate the automatic transfer switch it controls, the location of the automatic transfer switch, and the identity of the load that it serves.
4. Digital Communication Capability: Matched to that of automatic transfer switches supervised.
5. Mounting: Steel cabinet, flush or surface mounted, as shown on the drawings.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install automatic transfer switches and associated remote components in accordance with the NEC, as shown on the drawings, and manufacturer's instructions.
- B. Anchor automatic transfer switches with rustproof bolts, nuts, and washers not less than 12 mm (1/2 inch) diameter, in accordance with manufacturer's instructions, and as shown on drawings.

3.2 ACCEPTANCE CHECKS AND TESTS

- A. An authorized representative of the automatic transfer switch manufacturer shall technically supervise and participate during all the field adjustments and tests. Major adjustments and field tests shall be witnessed by the COR. The manufacturer's representative shall certify in writing that the equipment has been installed, adjusted, and tested in accordance with the manufacturer's recommendations.
- B. Perform manufacturer's required field tests in accordance with the manufacturer's recommendations. In addition, include the following:
 1. Visual Inspection and Tests:
 - a. Compare equipment nameplate data with specifications and approved shop drawings.
 - b. Inspect physical, electrical, and mechanical condition.
 - c. Confirm correct application of manufacturer's recommended lubricants.

- d. Verify appropriate anchorage, required area clearances, and correct alignment.
 - e. Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method or performing thermographic survey after energization.
 - f. Verify grounding connections.
 - g. Verify ratings of sensors.
 - h. Vacuum-clean enclosure interior. Clean enclosure exterior.
 - i. Exercise all active components.
 - j. Verify that manual transfer warning signs are properly placed.
 - k. Verify the correct operation of all sensing devices, alarms, and indicating devices.
2. Electrical tests:
- a. Perform insulation-resistance tests.
 - b. After energizing circuits, demonstrate the interlocking sequence and operational function for each automatic transfer switch at least three times.
 - 1) Test bypass-isolation unit functional modes and related automatic transfer switch operations.
 - 2) Power failure of normal source shall be simulated by opening upstream protective device. This test shall be performed a minimum of five times.
 - 3) Power failure of emergency source with normal source available shall be simulated by opening upstream protective device for emergency source. This test shall be performed a minimum of five times.
 - 4) Low phase-to-ground voltage shall be simulated for each phase of normal source.
 - 5) Operation and settings shall be verified for specified automatic transfer switch operational feature, such as override time delay, transfer time delay, return time delay, engine shutdown time delay, exerciser, auxiliary contacts, and supplemental features.
 - 6) Verify pickup and dropout voltages by data readout or inspection of control settings.
 - 7) Verify that bypass and isolation functions perform correctly, including the physical removal of the automatic transfer switch while in bypass mode.

- d. When any defects are detected, correct the defects, and repeat the tests as requested by the COR at no additional cost to the Government.

3.3 FIELD SETTINGS VERIFICATION

- A. The automatic transfer switch settings shall be verified in the field by an authorized representative of the manufacturer.

3.4 FOLLOW-UP VERIFICATION

- A. Upon completion of acceptance checks and tests, the Contractor shall show by demonstration in service that the automatic transfer switches are in good operating condition and properly performing the intended function.

3.5 INSTRUCTION

- A. Furnish the services of a factory-trained technician for one 4-hour training period for instructing personnel in the maintenance and operation of the automatic transfer switches, on the dates requested by the COR.

---END---

SECTION 26 43 13
SURGE PROTECTIVE DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation, and connection of Type 2 Surge Protective Devices, as defined in NFPA 70, and indicated as SPD in this section.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.
- B. Section 26 24 16, PANELBOARDS: For factory-installed or external SPD.

1.3 QUALITY ASSURANCE

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
1. Shop Drawings:
 - a. Submit sufficient information to demonstrate compliance with drawings and specifications.
 - b. Include electrical ratings and device nameplate data.
 2. Manuals:
 - a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals including technical data sheets, wiring diagrams, and information for ordering replacement parts.
 - b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
 3. Certifications: Two weeks prior to final inspection, submit the following.
 - a. Certification by the manufacturer that the SPD conforms to the requirements of the drawings and specifications.
 - b. Certification by the Contractor that the SPD has been properly installed.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. Institute of Engineering and Electronic Engineers (IEEE):
 - IEEE C62.41.2-02.....Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits
 - IEEE C62.45-08.....Surge Testing for Equipment Connected to Low-Voltage (1000 V and Less) AC Power Circuits
- C. National Fire Protection Association (NFPA):
 - 70-17.....National Electrical Code (NEC)
- D. Underwriters Laboratories, Inc. (UL):
 - UL 1283-15.....Electromagnetic Interference Filters
 - UL 1449-14.....Surge Protective Devices

PART 2 - PRODUCTS**2.1 PANELBOARD SPD**

- A. General Requirements:
 - 1. Comply with UL 1449 and IEEE C62.41.2.
 - 2. Modular design with field-replaceable modules, or non-modular design.
 - 3. Fuses, rated at 200 kA interrupting capacity.
 - 4. Bolted compression lugs for internal wiring.
 - 5. Integral disconnect switch.
 - 6. Redundant suppression circuits.
 - 7. LED indicator lights for power and protection status.
 - 8. Audible alarm, with silencing switch, to indicate when protection has failed.
 - 9. Form-C contacts rated at 5 A and 250-V ac, one normally open and one normally closed, for remote monitoring of protection status.
Contacts shall reverse on failure of any surge diversion module or on opening of any current-limiting device.
 - 10. Four-digit transient-event counter.
- B. Surge Current per Phase: Minimum 120kA per phase.

2.2 ENCLOSURES

- A. Enclosures : NEMA 1.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer's instructions.
- B. Factory-installed SPD: Switchgear, switchboard, or panelboard manufacturer shall install SPD at the factory.
- C. Field-installed SPD: Contractor shall install SPD with conductors or buses between SPD and points of attachment as short and straight as possible. Do not exceed manufacturer's recommended lead length. Do not bond neutral and ground.
 - 1. Provide a circuit breaker as a dedicated disconnecting means for SPD as shown on drawings.
- D. Do not perform insulation resistance tests on switchgear, switchboards, panelboards, or feeders with the SPD connected. Disconnect SPD before conducting insulation resistance tests, and reconnect SPD immediately after insulation resistance tests are complete.

3.2 ACCEPTANCE CHECKS AND TESTS

- A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:
 - 1. Visual Inspection and Tests:
 - a. Compare equipment nameplate data with specifications and approved shop drawings.
 - b. Inspect physical, electrical, and mechanical condition.
 - c. Verify that disconnecting means and feeder size and maximum length to SPD corresponds to approved shop drawings.
 - d. Verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method.
 - e. Vacuum-clean enclosure interior. Clean enclosure exterior.
 - f. Verify the correct operation of all sensing devices, alarms, and indicating devices.

3.3 FOLLOW-UP VERIFICATION

- A. After completion of acceptance checks and tests, the Contractor shall show by demonstration in service that SPD are in good operating condition and properly performing the intended function.

3.4 INSTRUCTION

- A. Provide the services of a factory-trained technician for one 2-hour training period for instructing personnel in the maintenance and operation of the SPD, on the date requested by the COR.

`---END---

**SECTION 26 51 00
INTERIOR LIGHTING**

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies the furnishing, installation, and connection of the interior lighting systems. The terms "lighting fixture," "fixture," and "luminaire" are used interchangeably.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS:
Requirements that apply to all sections of Division 26.
- B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES:
Low-voltage conductors.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS:
Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.
- D. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.

1.3 QUALITY ASSURANCE

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
1. Shop Drawings:
 - a. Submit the following information for each type of lighting fixture designated on the LIGHTING FIXTURE SCHEDULE, arranged in order of lighting fixture designation.
 - b. Material and construction details, include information on housing and optics system.
 - c. Physical dimensions and description.
 - d. Wiring schematic and connection diagram.
 - e. Installation details.
 - f. Energy efficiency data.
 - g. Photometric data based on laboratory tests complying with IES Lighting Measurements testing and calculation guides.

- h. Lamp data including lumen output (initial and mean), color rendition index (CRI), rated life (hours), and color temperature (degrees Kelvin).
 - i. Ballast data including ballast type, starting method, ambient temperature, ballast factor, sound rating, system watts, and total harmonic distortion (THD).
 - j. For LED lighting fixtures, submit US DOE LED Lighting Facts label, and IES L70 rated life.
2. Manuals:
- a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.
 - b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
3. Certifications: Two weeks prior to final inspection, submit the following.
- a. Certification by the Contractor that the interior lighting systems have been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. American Society for Testing and Materials (ASTM):
C635/C635M REV A-13.....Manufacture, Performance, and Testing of Metal
Suspension Systems for Acoustical Tile and Lay-
in Panel Ceilings
- C. Environmental Protection Agency (EPA):
40 CFR 261.....Identification and Listing of Hazardous Waste
- D. Federal Communications Commission (FCC):
CFR Title 47, Part 15...Radio Frequency Devices
CFR Title 47, Part 18...Industrial, Scientific, and Medical Equipment
- E. Illuminating Engineering Society of North America (IESNA):
LM-79-08.....Electrical and Photometric Measurements of
Solid-State Lighting Products

- LM-80-15.....Measuring Lumen Maintenance of LED Light
Sources
- LM-82-12.....Characterization of LED Light Engines and LED
Lamps for Electrical and Photometric Properties
as a Function of Temperature
- F. Institute of Electrical and Electronic Engineers (IEEE):
- C62.41-91(R1995).....Surge Voltages in Low Voltage AC Power Circuits
- G. International Code Council (ICC):
- IBC-15.....International Building Code
- H. National Electrical Manufacturer's Association (NEMA):
- C78.376-14.....Chromaticity of Fluorescent Lamps
- C82.1-04(R2015).....Lamp Ballasts - Line Frequency Fluorescent Lamp
Ballasts
- C82.2-02(R2016).....Method of Measurement of Fluorescent Lamp
Ballasts
- C82.4-17.....Lamp Ballasts - Ballasts for High-Intensity
Discharge and Low-Pressure Sodium (LPS) Lamps
(Multiple-Supply Type)
- C82.11-17.....Lamp Ballasts - High Frequency Fluorescent Lamp
Ballasts
- LL 9-11.....Dimming of T8 Fluorescent Lighting Systems
- SSL 1-16.....Electronic Drivers for LED Devices, Arrays, or
Systems
- I. National Fire Protection Association (NFPA):
- 70-17.....National Electrical Code (NEC)
- 101-18.....Life Safety Code
- J. Underwriters Laboratories, Inc. (UL):
- 496-17.....Lampholders
- 542-05.....Fluorescent Lamp Starters
- 844-12.....Luminaires for Use in Hazardous (Classified)
Locations
- 924-16.....Emergency Lighting and Power Equipment
- 935-01.....Fluorescent-Lamp Ballasts
- 1029-94.....High-Intensity-Discharge Lamp Ballasts
- 1029A-06.....Ignitors and Related Auxiliaries for HID Lamp
Ballasts
- 1598-08.....Luminaires
- 1574-04.....Track Lighting Systems

2108-15.....Low-Voltage Lighting Systems

8750-15.....Light Emitting Diode (LED) Light Sources for

PART 2 - PRODUCTS

2.1 LIGHTING FIXTURES

- A. Shall be in accordance with NFPA, UL, as shown on drawings, and as specified.
- B. Sheet Metal:
 - 1. Shall be formed to prevent warping and sagging. Housing, trim and lens frame shall be true, straight (unless intentionally curved), and parallel to each other as designed.
 - 2. Wireways and fittings shall be free of burrs and sharp edges and shall accommodate internal and branch circuit wiring without damage to the wiring.
 - 3. When installed, any exposed fixture housing surface, trim frame, door frame, and lens frame shall be free of light leaks.
 - 4. Hinged door frames shall operate smoothly without binding. Latches shall function easily by finger action without the use of tools.
- C. Recessed fixtures mounted in an insulated ceiling shall be listed for use in insulated ceilings.
- D. Mechanical Safety: Lighting fixture closures (lens doors, trim frame, hinged housings, etc.) shall be retained in a secure manner by captive screws, chains, aircraft cable, captive hinges, or fasteners such that they cannot be accidentally dislodged during normal operation or routine maintenance.
- E. Metal Finishes:
 - 1. The manufacturer shall apply standard finish (unless otherwise specified) over a corrosion-resistant primer, after cleaning to free the metal surfaces of rust, grease, dirt, and other deposits. Edges of pre-finished sheet metal exposed during forming, stamping, or shearing processes shall be finished in a similar corrosion resistant manner to match the adjacent surface(s). Fixture finish shall be free of stains or evidence of rusting, blistering, or flaking, and shall be applied after fabrication.
 - 2. Interior light reflecting finishes shall be white with not less than 85 percent reflectances, except where otherwise shown on the drawing.
 - 3. Exterior finishes shall be as shown on the drawings.

- F. Lighting fixtures shall have a specific means for grounding metallic wireways and housings to an equipment grounding conductor.

2.2 LED EXIT LIGHT FIXTURES

- A. Exit light fixtures shall meet applicable requirements of NFPA and UL.
- B. Housing and door shall be die-cast aluminum.
- C. For general purpose exit light fixtures, door frame shall be hinged, with latch. For vandal-resistant exit light fixtures, door frame shall be secured with tamper-resistant screws.
- D. Finish shall be satin or fine-grain brushed aluminum.
- E. There shall be no radioactive material used in the fixtures.
- F. Fixtures:
1. Inscription panels shall be cast or stamped aluminum a minimum of 2.25 mm (0.090 inch) thick, stenciled with 150 mm (6 inch) high letters, baked with red color stable plastic or fiberglass. Lamps shall be luminous Light Emitting Diodes (LED) mounted in center of letters on red color stable plastic or fiberglass.
 2. Double-Faced Fixtures: Provide double-faced fixtures where required or as shown on drawings.
 3. Directional Arrows: Provide directional arrows as part of the inscription panel where required or as shown on drawings. Directional arrows shall be the "chevron-type" of similar size and width as the letters and meet the requirements of NFPA 101.
- G. Voltage : Multi-voltage (120 - 277V).

2.3 LED LIGHT FIXTURES

- A. General:
1. LED light fixtures shall be in accordance with IES, NFPA, UL, as shown on the drawings, and as specified.
 2. LED light fixtures shall be Reduction of Hazardous Substances (RoHS)-compliant.
 3. LED drivers shall include the following features unless otherwise indicated:
 - a. Minimum efficiency: 85% at full load.
 - b. Minimum Operating Ambient Temperature: -20° C. (-4° F.)
 - c. Input Voltage: 120 - 277V (±10%) at 60 Hz.
 - d. Integral short circuit, open circuit, and overload protection.
 - e. Power Factor: ≥ 0.95.
 - f. Total Harmonic Distortion: ≤ 20%.
 - g. Comply with FCC 47 CFR Part 15.

4. LED modules shall include the following features unless otherwise indicated:
 - a. Comply with IES LM-79 and LM-80 requirements.
 - b. Minimum CRI 80 and color temperature 3000° K unless otherwise specified in LIGHTING FIXTURE SCHEDULE.
 - c. Minimum Rated Life: 50,000 hours per IES L70.
 - d. Light output lumens as indicated in the LIGHTING FIXTURE SCHEDULE.
- B. LED Downlights:
 1. Housing, LED driver, and LED module shall be products of the same manufacturer.
- C. LED Troffers:
 1. LED drivers, modules, and reflector shall be accessible, serviceable, and replaceable from below the ceiling.
 2. Housing, LED driver, and LED module shall be products of the same manufacturer.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Installation shall be in accordance with the NEC, manufacturer's instructions, and as shown on the drawings or specified.
- B. Align, mount, and level the lighting fixtures uniformly.
- C. Wall-mounted fixtures shall be attached to the studs in the walls, or to a 20-gauge metal backing plate that is attached to the studs in the walls. Lighting fixtures shall not be attached directly to gypsum board.
- D. Lighting Fixture Supports:
 1. Shall provide support for all of the fixtures. Supports may be anchored to channels of the ceiling construction, to the structural slab or to structural members within a partition, or above a suspended ceiling.
 2. Shall maintain the fixture positions after cleaning and relamping.
 3. Shall support the lighting fixtures without causing the ceiling or partition to deflect.
 4. Hardware for recessed fixtures:
 - a. Where the suspended ceiling system is supported at the four corners of the fixture opening, hardware devices shall clamp the fixture to the ceiling system structural members, or plaster

frame at not less than four points in such a manner as to resist spreading of the support members and safely lock the fixture into the ceiling system.

- b. Where the suspended ceiling system is not supported at the four corners of the fixture opening, hardware devices shall independently support the fixture from the building structure at four points.
5. Hardware for surface mounting fixtures to suspended ceilings:
- a. In addition to being secured to any required outlet box, fixtures shall be bolted to a grid ceiling system at four points spaced near the corners of each fixture. The bolts shall be not less than 6 mm (1/4 inch) secured to channel members attached to and spanning the tops of the ceiling structural grid members. Non-turning studs may be attached to the ceiling structural grid members or spanning channels by special clips designed for the purpose, provided they lock into place and require simple tools for removal.
 - b. In addition to being secured to any required outlet box, fixtures shall be bolted to ceiling structural members at four points spaced near the corners of each fixture. Pre-positioned 6 mm (1/4 inch) studs or threaded plaster inserts secured to ceiling structural members shall be used to bolt the fixtures to the ceiling. In lieu of the above, 6 mm (1/4 inch) toggle bolts may be used on new or existing ceiling provided the plaster and lath can safely support the fixtures without sagging or cracking.
 - c. In addition to the above, the following is required for fixtures exceeding 9 kg (20 pounds) in weight.
 - 1) Where fixtures mounted in ASTM Standard C635 "Intermediate Duty" and "Heavy Duty" ceilings and weigh between 9 kg and 25 kg (20 pounds and 56 pounds), provide two 12-gauge safety hangers hung slack between diagonal corners of the fixture and the building structure.
 - 2) Where fixtures weigh over 25 kg (56 pounds), they shall be independently supported from the building structure by approved hangers. Two-way angular bracing of hangers shall be provided to prevent lateral motion.

- d. Where ceiling cross runners are installed for support of lighting fixtures, they must have a carrying capacity equal to that of the main ceiling runners and be rigidly secured to the main runners.
6. Surface mounted lighting fixtures:
- a. Fixtures shall be bolted against the ceiling independent of the outlet box at four points spaced near the corners of each unit. The bolts (or stud-clips) shall be minimum 6 mm (1/4 inch) bolt, secured to main ceiling runners and/or secured to cross runners. Non-turning studs may be attached to the main ceiling runners and cross runners with special non-friction clip devices designed for the purpose, provided they bolt through the runner, or are also secured to the building structure by 12-gauge safety hangers. Studs or bolts securing fixtures weighing in excess of 25 kg (56 pounds) shall be supported directly from the building structure.
 - b. Where ceiling cross runners are installed for support of lighting fixtures, they must have a carrying capacity equal to that of the main ceiling runners and be rigidly secured to the main runners.
 - c. Fixtures less than 6.8 kg (15 pounds) in weight and occupying less than 3715 sq cm (two square feet) of ceiling area may, when designed for the purpose, be supported directly from the outlet box when all the following conditions are met.
 - 1) Screws attaching the fixture to the outlet box pass through round holes (not key-hole slots) in the fixture body.
 - 2) The outlet box is attached to a main ceiling runner (or cross runner) with approved hardware.
 - 3) The outlet box is supported vertically from the building structure.
 - d. Fixtures mounted in open construction shall be secured directly to the building structure with approved bolting and clamping devices.
7. Outlet boxes for support of lighting fixtures (where permitted) shall be secured directly to the building structure with approved devices or supported vertically in a hung ceiling from the building structure with a nine-gauge wire hanger, and be secured by an approved device to a main ceiling runner or cross runner to prevent any horizontal movement relative to the ceiling.
- E. The electrical and ceiling trades shall coordinate to ascertain that approved lighting fixtures are furnished in the proper sizes and

installed with the proper devices (hangers, clips, trim frames, flanges, etc.), to match the ceiling system being installed.

F. Bond lighting fixtures to the grounding system as specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

G. At completion of project, replace all defective components of the lighting fixtures at no cost to the Government.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform the following:

1. Visual Inspection:

- a. Verify proper operation by operating the lighting controls.
- b. Visually inspect for damage to fixtures, lenses, reflectors, diffusers, and louvers. Clean fixtures, lenses, reflectors, diffusers, and louvers that have accumulated dust, dirt, or fingerprints during construction.

2. Electrical tests:

- a. Exercise dimming components of the lighting fixtures over full range of dimming capability by operating the control devices(s) in the presence of the COTR. Observe for visually detectable flicker over full dimming range and replace defective components at no cost to the Government.

3.3 FOLLOW-UP VERIFICATION

A. Upon completion of acceptance checks and tests, the Contractor shall show by demonstration in service that the lighting systems are in good operating condition and properly performing the intended function.

---END---

SECTION 27 05 11
REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section includes common requirements to communications installations and applies to all sections of Division 27 and Division 28.
- B. Provide completely functioning communications systems.
- C. Comply with VAAR 852.236.91 and FAR clause 52.236-21 in circumstance of a need for additional detail or conflict between drawings, specifications, reference standards or code.

1.2 REFERENCES

- A. Abbreviations and Acronyms
 - 1. Refer to <http://www.cfm.va.gov/til/sdetail.asp> for Division 00, ARCHITECTURAL ABBREVIATIONS.
 - 2. Additional Abbreviations and Acronyms:

A	Ampere
AC	Alternating Current
AE	Architect and Engineer
AFF	Above Finished Floor
AHJ	Authority Having Jurisdiction
ANSI	American National Standards Institute
AWG	American Wire Gauge (refer to STP and UTP)
AWS	Advanced Wireless Services
BCT	Bonding Conductor for Telecommunications (also Telecommunications Bonding Conductor (TBC))
BDA	Bi-Directional Amplifier
BICSI	Building Industry Consulting Service International
BIM	Building Information Modeling
BOM	Bill of Materials
BTU	British Thermal Units
BU CR	Back-up Computer Room
BTS	Base Transceiver Station
CAD	AutoCAD
CBOPC	Community Based Out Patient Clinic

CBC	Coupled Bonding Conductor
CBOC	Community Based Out Patient Clinic (refer to CBOPC, OPC, VAMC)
CCS	TIP's Cross Connection System (refer to VCCS and HCCS)
CFE	Contractor Furnished Equipment
CFM	US Department of Veterans Affairs Office of Construction and Facilities Management
CFR	Consolidated Federal Regulations
CIO	Communication Information Officer (Facility, VISN or Region)
cm	Centimeters
CO	Central Office
COR	Contracting Officer Representative
CPU	Central Processing Unit
CSU	Customer Service Unit
CUP	Conditional Use Permit(s) - Federal/GSA for VA
dB	Decibel
dBm	Decibel Measured
dBmV	Decibel per milli-Volt
DC	Direct Current
DEA	United States Drug Enforcement Administration
DSU	Data Service Unit
EBC	Equipment Bonding Conductor
ECC	Engineering Control Center (refer to DCR, EMCR)
EDGE	Enhanced Data (Rates) for GSM Evolution
EDM	Electrical Design Manual
EMCR	Emergency Management Control Room (refer to DCR, ECC)
EMI	Electromagnetic Interference (refer to RFI)
EMS	Emergency Medical Service
EMT	Electrical Metallic Tubing or thin wall conduit
ENTR	Utilities Entrance Location (refer to DEMARC, POTS, LEC)

EPBX	Electronic Digital Private Branch Exchange
ESR	Vendor's Engineering Service Report
FA	Fire Alarm
FAR	Federal Acquisition Regulations in Chapter 1 of Title 48 of Code of Federal Regulations
FMS	VA's Headquarters or Medical Center Facility's Management Service
FR	Frequency (refer to RF)
FTS	Federal Telephone Service
GFE	Government Furnished Equipment
GPS	Global Positioning System
GRC	Galvanized Rigid Metal Conduit
GSM	Global System (Station) for Mobile
HCCS	TIP's Horizontal Cross Connection System (refer to CCS & VCCS)
HDPE	High Density Polyethylene Conduit
HDTV	Advanced Television Standards Committee High-Definition Digital Television
HEC	Head End Cabinets(refer to HEIC, PA)
HEIC	Head End Interface Cabinets(refer to HEC, PA)
HF	High Frequency (Radio Band; Re FR, RF, VHF & UHF)
HSPA	High Speed Packet Access
HZ	Hertz
IBT	Intersystem Bonding Termination (NEC 250.94)
IC	Intercom
ICRA	Infectious Control Risk Assessment
IDEN	Integrated Digital Enhanced Network
IDC	Insulation Displacement Contact
IDF	Intermediate Distribution Frame
ILSM	Interim Life Safety Measures
IMC	Rigid Intermediate Steel Conduit
IRM	Department of Veterans Affairs Office of Information Resources Management

ISDN	Integrated Services Digital Network
ISM	Industrial, Scientific, Medical
IWS	Intra-Building Wireless System
LAN	Local Area Network
LBS	Location Based Services, Leased Based Systems
LEC	Local Exchange Carrier (refer to DEMARC, PBX & POTS)
LED	Light Emitting Diode
LMR	Land Mobile Radio
LTE	Long Term Evolution, or 4G Standard for Wireless Data Communications Technology
M	Meter
MAS	Medical Administration Service
MATV	Master Antenna Television
MCR	Main Computer Room
MCOR	Main Computer Operators Room
MDF	Main Distribution Frame
MH	Manholes or Maintenance Holes
MHz	Megahertz (10^6 Hz)
mm	Millimeter
MOU	Memorandum of Understanding
MW	Microwave (RF Band, Equipment or Services)
NID	Network Interface Device (refer to DEMARC)
NEC	National Electric Code
NOR	Network Operations Room
NRTL	OSHA Nationally Recognized Testing Laboratory
NS	Nurse Stations
NTIA	U.S. Department of Commerce National Telecommunications and Information Administration
OEM	Original Equipment Manufacturer
OI&T	Office of Information and Technology
OPC	VA's Outpatient Clinic (refer to CBOC, VAMC)
OSH	Department of Veterans Affairs Office of Occupational Safety and Health

OSHA	United States Department of Labor Occupational Safety and Health Administration
OTDR	Optical Time-Domain Reflectometer
PA	Public Address System (refer to HE, HEIC, RPEC)
PBX	Private Branch Exchange (refer to DEMARC, LEC, POTS)
PCR	Police Control Room (refer to SPCC, could be designated SCC)
PCS	Personal Communications Service (refer to UPCS)
PE	Professional Engineer
PM	Project Manager
PoE	Power over Ethernet
POTS	Plain Old Telephone Service (refer to DEMARC, LEC, PBX)
PSTN	Public Switched Telephone Network
PSRAS	Public Safety Radio Amplification Systems
PTS	Pay Telephone Station
PVC	Poly-Vinyl Chloride
PWR	Power (in Watts)
RAN	Radio Access Network
RBB	Rack Bonding Busbar
RE	Resident Engineer or Senior Resident Engineer
RF	Radio Frequency (refer to FR)
RFI	Radio Frequency Interference (refer to EMI)
RFID	RF Identification (Equipment, System or Personnel)
RMC	Rigid Metal Conduit
RMU	Rack Mounting Unit
RPEC	Radio Paging Equipment Cabinets(refer to HEC, HEIC, PA)
RTLS	Real Time Location Service or System
RUS	Rural Utilities Service
SCC	Security Control Console (refer to PCR, SPCC)
SMCS	Spectrum Management and Communications Security (COMSEC)

SFO	Solicitation for Offers
SME	Subject Matter Experts (refer to AHJ)
SMR	Specialized Mobile Radio
SMS	Security Management System
SNMP	Simple Network Management Protocol
SPCC	Security Police Control Center (refer to PCR, SMS)
STP	Shielded Balanced Twisted Pair (refer to UTP)
STR	Stacked Telecommunications Room
TAC	VA's Technology Acquisition Center, Austin, Texas
TCO	Telecommunications Outlet
TER	Telephone Equipment Room
TGB	Telecommunications Grounding Busbar (also Secondary Bonding Busbar (SBB))
TIP	Telecommunications Infrastructure Plant
TMGB	Telecommunications Main Grounding Busbar (also Primary Bonding Busbar (PBB))
TMS	Traffic Management System
TOR	Telephone Operators Room
TP	Balanced Twisted Pair (refer to STP and UTP)
TR	Telecommunications Room (refer to STR)
TWP	Twisted Pair
UHF	Ultra High Frequency (Radio)
UMTS	Universal Mobile Telecommunications System
UPCS	Unlicensed Personal Communications Service (refer to PCS)
UPS	Uninterruptible Power Supply
USC	United States Code
UTP	Unshielded Balanced Twisted Pair (refer to TP and STP)
UV	Ultraviolet
V	Volts
VAAR	Veterans Affairs Acquisition Regulation
VACO	Veterans Affairs Central Office

VAMC	VA Medical Center (refer to CBOC, OPC, VACO)
VCCS	TIP's Vertical Cross Connection System (refer to CCS and HCCS)
VHF	Very High Frequency (Radio)
VISN	Veterans Integrated Services Network (refers to geographical region)
VSWR	Voltage Standing Wave Ratio
W	Watts
WEB	World Electronic Broadcast
WiMAX	Worldwide Interoperability (for MW Access)
WI-FI	Wireless Fidelity
WMTS	Wireless Medical Telemetry Service
WSP	Wireless Service Providers

B. Definitions:

1. Access Floor: Pathway system of removable floor panels supported on adjustable pedestals to allow cable placement in area below.
2. BNC Connector (BNC): United States Military Standard MIL-C-39012/21 bayonet-type coaxial connector with quick twist mating/unmating, and two lugs preventing accidental disconnection from pulling forces on cable.
3. Bond: Permanent joining of metallic parts to form an electrically conductive path to ensure electrical continuity and capacity to safely conduct any currents likely to be imposed to earth ground.
4. Bundled Microducts: All forms of jacketed microducts.
5. Conduit: Includes all raceway types specified.
6. Conveniently Accessible: Capable of being reached without use of ladders, or without climbing or crawling under or over obstacles such as, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.
7. Distributed (in house) Antenna System (DAS): An Emergency Radio Communications System installed for Emergency Responder (or first responders and Government personnel) use while inside facility to maintain contact with each respective control point; refer to Section 27 53 19, DISTRIBUTED RADIO ANTENNA (WITHIN BUILDING) EQUIPMENT AND SYSTEMS.

8. DEMARC, Extended DMARC or ENTR: Service provider's main point of demarcation owned by LEC or service provider and establishes a physical point where service provider's responsibilities for service and maintenance end. This point is called NID, in data networks.
9. Effectively Grounded: Intentionally bonded to earth through connections of low impedance having current carrying capacity to prevent buildup of currents and voltages resulting in hazard to equipment or persons.
10. Electrical Supervision: Analyzing a system's function and components (i.e. cable breaks / shorts, inoperative stations, lights, LEDs and states of change, from primary to backup) on a 24/7/365 basis; provide aural and visual emergency notification signals to minimum two remote designated or accepted monitoring stations.
11. Electrostatic Interference (ESI) or Electrostatic Discharge Interference: Refer to EMI and RFI.
12. Project 25 (2014) (P25 (TIA-102 Series)): Set of standards for local, state and Federal public safety organizations and agencies digital LMR services. P25 is applicable to LMR equipment authorized or licensed under the US Department of Commerce National Telecommunications and Information Administration or FCC rules and regulations and is a required standard capability for all LMR equipment and systems.
13. Grounding Electrode Conductor: (GEC) Conductor connected to earth grounding electrode.
14. Grounding Electrode System: Electrodes through which an effective connection to earth is established, including supplementary, communications system grounding electrodes and GEC.
15. Grounding Equalizer or Backbone Bonding Conductor (BBC): Conductor that interconnects elements of telecommunications grounding infrastructure.
16. Head End (HE): Equipment, hardware and software, or a master facility at originating point in a communications system designed for centralized communications control, signal processing, and distribution that acts as a common point of connection between equipment and devices connected to a network of interconnected equipment, possessing greatest authority for allowing information to be exchanged, with whom other equipment is subordinate.
17. Microducts: All forms of air blown fiber pathways.

18. Ohm: A unit of restive measurement.
19. Received Signal Strength Indication (RSSI): A measurement of power present in a received RF signal.
20. Service Provider Demarcation Point (SPDP): Not owned by LEC or service provider, but designated by Government as point within facility considered the DEMARC.
21. Sound (SND): Changing air pressure to audible signals over given time span.
22. System: Specific hardware, firmware, and software, functioning together as a unit, performing task for which it was designed.
23. Telecommunications Bonding Backbone (TBB): Conductors of appropriate size (minimum 53.49 mm² [1/0 AWG]) stranded copper wire, that connect to Grounding Electrode System and route to telecommunications main grounding busbar (TMGB) and circulate to interconnect various TGBs and other locations shown on drawings.
24. Voice over Internet Protocol (VoIP): A telephone system in which voice signals are converted to packets and transmitted over LAN network using Transmission Control Protocol (TCP)/Internet Protocol (IP). VA'S VoIP is not listed or coded for life and public safety, critical, emergency or other protection functions. When VoIP system or equipment is provided instead of PBX system or equipment, each TR (STR) and DEMARC requires increased AC power provided to compensate for loss of PBX's telephone instrument line power; and, to compensate for absence of PBX's UPS capability.
25. Wide Area Network (WAN): A digital network that transcends localized LANs within a given geographic location. VA'S WAN/LAN is not nationally listed or coded for life and public safety, critical, emergency or other safety functions.

1.3 APPLICABLE PUBLICATIONS

- A. Applicability of Standards: Unless documents include more stringent requirements, applicable construction industry standards have same force and effect as if bound or copied directly into the documents to extent referenced. Such standards are made a part of these documents by reference.
 1. Each entity engaged in construction must be familiar with industry standards applicable to its construction activity.

2. Obtain standards directly from publication source, where copies of standards are needed to perform a required construction activity.

B. Government Codes, Standards and Executive Orders: Refer to

<http://www.cfm.va.gov/TIL/cPro.asp>:

1. Federal Communications Commission, (FCC) CFR, Title 47:

Part 15	Restrictions of use for Part 15 listed RF Equipment in Safety of Life Emergency Functions and Equipment Locations
Part 47	Chapter A, Paragraphs 6.1-6.23, Access to Telecommunications Service, Telecommunications Equipment and Customer Premises Equipment
Part 58	Television Broadcast Service
Part 73	Radio and Television Broadcast Rules
Part 90	Rules and Regulations, Appendix C
Form 854	Antenna Structure Registration
Chapter XXIII	National Telecommunications and Information Administration (NTIA, P/O Commerce, Chapter XXIII) the 'Red Book'- Chapters 7, 8 & 9 compliments CFR, Title 47, FCC Part 15, RF Restriction of Use and Compliance in "Safety of Life" Functions & Locations

2. US Department of Agriculture, (Title 7, USC, Chapter 55, Sections 2201, 2202 & 2203:RUS 1755 Telecommunications Standards and Specifications for Materials, Equipment and Construction:

RUS Bull 1751F-630	Design of Aerial Cable Plants
RUS Bull 1751F-640	Design of Buried Cable Plant, Physical Considerations
RUS Bull 1751F-643	Underground Plant Design
RUS Bull 1751F-815	Electrical Protection of Outside Plants,
RUS Bull 1753F-201	Acceptance Tests of Telecommunications Plants (PC-4)
RUS Bull 1753F-401	Splicing Copper and Fiber Optic Cables (PC-2)
RUS Bull 345-50	Trunk Carrier Systems (PE-60)
RUS Bull 345-65	Shield Bonding Connectors (PE-65)
RUS Bull 345-72	Filled Splice Closures (PE-74)
RUS Bull 345-83	Gas Tube Surge Arrestors (PE-80)

3. US Department of Commerce/National Institute of Standards Technology, (NIST):

FIPS PUB 1-1	Telecommunications Information Exchange
FIPS PUB 100/1	Interface between Data Terminal Equipment (DTE) Circuit Terminating Equipment for operation with Packet Switched Networks, or Between Two DTEs, by Dedicated Circuit
FIPS PUB 140/2	Telecommunications Information Security Algorithms
FIPS PUB 143	General Purpose 37 Position Interface between DTE and Data Circuit Terminating Equipment
FIPS 160/2	Electronic Data Interchange (EDI),
FIPS 175	Federal Building Standard for Telecommunications Pathway and Spaces
FIPS 191	Guideline for the Analysis of Local Area Network Security
FIPS 197	Advanced Encryption Standard (AES)
FIPS 199	Standards for Security Categorization of Federal Information and Information Systems
4. US Department of Defense, (DoD):
- | | |
|-----------------|---|
| MIL-STD-188-110 | Interoperability and Performance Standards for
Data Modems |
| MIL-STD-188-114 | Electrical Characteristics of Digital Interface
Circuits |
| MIL-STD-188-115 | Communications Timing and Synchronizations
Subsystems |
| MIL-C-28883 | Advanced Narrowband Digital Voice Terminals |
| MIL-C-39012/21 | Connectors, Receptacle, Electrical, Coaxial,
Radio Frequency, (Series BNC (Uncabled), Socket
Contact, Jam Nut Mounted, Class 2) |
5. US Department of Health and Human Services:
The Health Insurance Portability and Accountability Act of 1996
(HIPAA) Privacy, Security and Breach Notification Rules
6. US Department of Justice:
2010 Americans with Disabilities Act Standards for Accessible Design
(ADAAD).
7. US Department of Labor, (DoL) - Public Law 426-62 - CFR, Title 29,
Part 1910, Chapter XVII - Occupational Safety and Health
Administration (OSHA), Occupational Safety and Health Standards):

- Subpart 7 Approved NRTLs; obtain a copy at
<https://www.osha.gov/dts/otpca/nrtl/nrtllist.html>
 - Subpart 35 Compliance with NFPA 101, Life Safety Code
 - Subpart 36 Design and Construction Requirements for Exit
Routes
 - Subpart 268 Telecommunications
 - Subpart 305 Wiring Methods, Components, and Equipment for
General Use
 - Subpart 508 Americans with Disabilities Act Accessibility
Guidelines; technical requirement for
accessibility to buildings and facilities by
individuals with disabilities
8. US Department of Transportation, (DoT):
- a. Public Law 85-625, CFR, Title 49, Part 1, Subpart C - Federal
Aviation Administration (FAA):AC 110/460-ID & AC 707 / 460-2E -
Advisory Circulars Standards for Construction of Antenna Towers,
and 7450 and 7460-2 - Antenna Construction Registration Forms.
9. US Department of Veterans Affairs (VA): Office of Telecommunications
(OI&T), MP-6, PART VIII, TELECOMMUNICATIONS, CHAPTER 5, AUDIO, RADIO
AND TELEVISION (and COMSEC) COMMUNICATIONS SYSTEMS: Spectrum
Management and COMSEC Service (SMCS), AHJ for:
- a. CoG, "Continuance of Government" communications guidelines and
compliance.
 - b. COMSEC, "VA wide coordination and control of security classified
communication assets."
 - c. COOP, "Continuance of Operations" emergency communications
guidelines and compliance.
 - d. FAA, FCC, and US Department of Commerce National
Telecommunications and Information Administration, "VA wide RF
Co-ordination, Compliance and Licensing."
 - e. Handbook 6100 - Telecommunications: Cyber and Information
Security Office of Cyber and Information Security, and Handbook
6500 - Information Security Program.
 - f. Low Voltage Special Communications Systems "Design, Engineering,
Construction Contract Specifications and Drawings Conformity,
Proof of Performance Testing, VA Compliance and Life Safety
Certifications for CFM and VA Facility Low Voltage Special

Communications Projects (except Fire Alarm, Telephone and Data Systems)."

- g. SATCOM, "Satellite Communications" guidelines and compliance, and Security and Law Enforcement Systems - "Coordinates the Design, Engineering, Construction Contract Specifications and Drawings Conformity, Proof of Performance Testing, VA Compliance, DEA and Public Safety Certification(s) for CFM and VA Facility Security Low Voltage Special Communications and Physical Security Projects.
 - h. VHA's National Center for Patient Safety - Veterans Health Administration (VHA) Warning System, Failure of Medical Alarm Systems using Paging Technology to Notify Clinical Staff, July 2004.
 - i. VA's CEOSH, concurrence with warning identified in VA Directive 7700.
 - j. Wireless and Handheld Devices, "Guidelines and Compliance,"
 - k. Office of Security and Law Enforcement: VA Directive 0730 and Health Special Presidential Directive (HSPD)-12.
- C. NRTL Standards: Refer to <https://www.osha.gov/laws-regs/regulations/standardnumber/1926>
- 1. Canadian Standards Association (CSA); same tests as presented by UL
 - 2. Communications Certifications Laboratory (CEL); same tests as presented by UL.
 - 3. Intertek Testing Services NA, Inc., (ITSNA), formerly Edison Testing Laboratory (ETL) same tests as presented by UL).
 - 4. Underwriters Laboratory (UL):

1-2005	Flexible Metal Conduit
5-2011	Surface Metal Raceway and Fittings
6-2007	Rigid Metal Conduit
44-010	Thermoset-Insulated Wires and Cables
50-1995	Enclosures for Electrical Equipment
65-2010	Wired Cabinets
83-2008	Thermoplastic-Insulated Wires and Cables
96-2005	Lightning Protection Components
96A-2007	Installation Requirements for Lightning Protection Systems
360-2013	Liquid-Tight Flexible Steel Conduit
444-2008	Communications Cables

467-2013	Grounding and Bonding Equipment
486A-486B-2013	Wire Connectors
486C-2013	Splicing Wire Connectors
486D-2005	Sealed Wire Connector Systems
486E-2009	Standard for Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors
493-2007	Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable
497/497A/497B/497C	
497D/497E	Protectors for Paired Conductors/Communications Circuits/Data Communications and Fire Alarm Circuits/coaxial circuits/voltage protections/Antenna Lead In
510-2005	Polyvinyl Chloride, Polyethylene and Rubber Insulating Tape
514A-2013	Metallic Outlet Boxes
514B-2012	Fittings for Cable and Conduit
514C-1996	Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers
651-2011	Schedule 40 and 80 Rigid PVC Conduit
651A-2011	Type EB and A Rigid PVC Conduit and HDPE Conduit
797-2007	Electrical Metallic Tubing
884-2011	Underfloor Raceways and Fittings
1069-2007	Hospital Signaling and Nurse Call Equipment
1242-2006	Intermediate Metal Conduit
1449-2006	Standard for Transient Voltage Surge Suppressors
1479-2003	Fire Tests of Through-Penetration Fire Stops
1480-2003	Speaker Standards for Fire Alarm, Emergency, Commercial and Professional use
1666-2007	Standard for Wire/Cable Vertical (Riser) Tray Flame Tests
1685-2007	Vertical Tray Fire Protection and Smoke Release Test for Electrical and Fiber Optic Cables
1861-2012	Communication Circuit Accessories
1863-2013	Standard for Safety, communications Circuits Accessories

1865-2007	Standard for Safety for Vertical-Tray Fire Protection and Smoke-Release Test for Electrical and Optical-Fiber Cables
2024-2011	Standard for Optical Fiber Raceways
2024-2014	Standard for Cable Routing Assemblies and Communications Raceways
2196-2001	Standard for Test of Fire Resistive Cable
60950-1 ed. 2-2014	Information Technology Equipment Safety

D. Industry Standards:

1. Advanced Television Systems Committee (ATSC):

A/53 Part 1: 2013	ATSC Digital Television Standard, Part 1, Digital Television System
A/53 Part 2: 2011	ATSC Digital Television Standard, Part 2, RF/Transmission System Characteristics
A/53 Part 3: 2013	ATSC Digital Television Standard, Part 3, Service Multiplex and Transport System Characteristics
A/53 Part 4: 2009	ATSC Digital Television Standard, Part 4, MPEG-2 Video System Characteristics
A/53 Part 5: 2014	ATSC Digital Television Standard, Part 5, AC-3 Audio System Characteristics
A/53 Part 6: 2014	ATSC digital Television Standard, Part 6, Enhanced AC-3 Audio System Characteristics

2. American Institute of Architects (AIA): 2006 Guidelines for Design & Construction of Health Care Facilities.

3. American Society of Mechanical Engineers (ASME):

A17.1 (2013)	Safety Code for Elevators and Escalators Includes Requirements for Elevators, Escalators, Dumbwaiters, Moving Walks, Material Lifts, and Dumbwaiters with Automatic Transfer Devices
17.3 (2011)	Safety Code for Existing Elevators and Escalators
17.4 (2009)	Guide for Emergency Personnel
17.5 (2011)	Elevator and Escalator Electrical Equipment

4. American Society for Testing and Materials (ASTM):

B1 (2001)	Standard Specification for Hard-Drawn Copper Wire

B8 (2004)	Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
D1557 (2012)	Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort 56,000 ft-lbf/ft ³ (2,700 kN-m/m ³)
D2301 (2004)	Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape
B258-02 (2008)	Standard Specification for Standard Nominal Diameters and Cross-Sectional Areas of AWG Sizes of Solid Round Wires Used as Electrical Conductors
D709-01 (2007)	Standard Specification for Laminated Thermosetting Materials
D4566 (2008)	Standard Test Methods for Electrical Performance Properties of Insulations and Jackets for Telecommunications Wire and Cable
5. American Telephone and Telegraph Corporation (AT&T) - Obtain following AT&T Publications at <https://ebiznet.sbc.com/sbcnebs/>
- | | |
|---------------------|--|
| ATT-TP-76200 (2013) | Network Equipment and Power Grounding, Environmental, and Physical Design Requirements |
| ATT-TP-76300 (2012) | Merged AT&T Affiliate Companies Installation Requirements |
| ATT-TP-76305 (2013) | Common Systems Cable and Wire Installation and Removal Requirements - Cable Racks and Raceways |
| ATT-TP-76306 (2009) | Electrostatic Discharge Control |
| ATT-TP-76400 (2012) | Detail Engineering Requirements |
| ATT-TP-76402 (2013) | AT&T Raised Access Floor Engineering and Installation Requirements |
| ATT-TP-76405 (2011) | Technical Requirements for Supplemental Cooling Systems in Network Equipment Environments |
| ATT-TP-76416 (2011) | Grounding and Bonding Requirements for Network Facilities |
| ATT-TP-76440 (2005) | Ethernet Specification |
| ATT-TP-76450 (2013) | Common Systems Equipment Interconnection Standards for AT&T Network Equipment Spaces |
| ATT-TP-76461 (2008) | Fiber Optic Cleaning |

- ATT-TP-76900 (2010) AT&T Installation Testing Requirement
- ATT-TP-76911 (1999) AT&T LEC Technical Publication Notice
6. British Standards Institution (BSI):
- BS EN 50109-2 Hand Crimping Tools - Tools for The Crimp Termination of Electric Cables and Wires for Low Frequency and Radio Frequency Applications - All Parts & Sections. October 1997
7. Building Industry Consulting Service International (BICSI):
- ANSI/BICSI 002-2011 Data Center Design and Implementation Best Practices
- ANSI/BICSI 004-2012 Information Technology Systems Design and Implementation Best Practices for Healthcare Institutions and Facilities
- ANSI/NECA/BICSI 568-2006 Standard for Installing Commercial Building Telecommunications Cabling
- NECA/BICSI 607-2011 Standard for Telecommunications Bonding and Grounding Planning and Installation Methods for Commercial Buildings
- ANSI/BICSI 005-2013 Electronic Safety and Security (ESS) System Design and Implementation Best Practices
8. Electronic Components Assemblies and Materials Association, (ECA).
- ECA EIA/RS-270 (1973) Tools, Crimping, Solderless Wiring Devices - Recommended Procedures for User Certification
- EIA/ECA 310-E (2005) Cabinets, and Associated Equipment
9. Facility Guidelines Institute: 2010 Guidelines for Design and Construction of Health Care Facilities.
10. Insulated Cable Engineers Association (ICEA):
- ANSI/ICEA S-80-576-2002 Category 1 & 2 Individually Unshielded Twisted-Pair Indoor Cables for Use in Communications Wiring Systems
- ANSI/ICEA S-84-608-2010 Telecommunications Cable, Filled Polyolefin Insulated Copper Conductor, S-87-640 (2011) Optical Fiber Outside Plant Communications Cable
- ANSI/ICEA

S-90-661-2012	Category 3, 5, & 5e Individually Unshielded Twisted-Pair Indoor Cable for Use in General Purpose and LAN Communication Wiring Systems
S-98-688 (2012)	Broadband Twisted Pair Cable Aircore, Polyolefin Insulated, Copper Conductors
S-99-689 (2012)	Broadband Twisted Pair Cable Filled, Polyolefin Insulated, Copper Conductors
ICEA S-102-700 (2004)	Category 6 Individually Unshielded Twisted Pair Indoor Cables (With or Without an Overall Shield) for use in Communications Wiring Systems Technical Requirements
11. Institute of Electrical and Electronics Engineers (IEEE):
- | | |
|-----------------------------------|--|
| ISSN 0739-5175 | March-April 2008 Engineering in Medicine and Biology Magazine, IEEE (Volume: 27, Issue:2) Medical Grade-Mission Critical-Wireless Networks |
| IEEE C2-2012 | National Electrical Safety Code (NESC) |
| C62.41.2-2002/
Cor 1-2012 IEEE | Recommended Practice on Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits 4) |
| C62.45-2002 | IEEE Recommended Practice on Surge Testing for Equipment Connected to Low-Voltage (1000 V and Less) AC Power Circuits |
| 81-2012 IEEE | Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Grounding System |
| 100-1992 | IEEE the New IEEE Standards Dictionary of Electrical and Electronics Terms |
| 602-2007 | IEEE Recommended Practice for Electric Systems in Health Care Facilities |
| 1100-2005 | IEEE Recommended Practice for Powering and Grounding Electronic Equipment |
12. International Code Council:
- | | |
|--------------|---|
| AC193 (2014) | Mechanical Anchors in Concrete Elements |
|--------------|---|
13. International Organization for Standardization (ISO):

- ISO/TR 21730 (2007) Use of Mobile Wireless Communication and Computing Technology in Healthcare Facilities - Recommendations for Electromagnetic Compatibility (Management of Unintentional Electromagnetic Interference) with Medical Devices
14. National Electrical Manufacturers Association (NEMA):
- NEMA 250 (2008) Enclosures for Electrical Equipment (1,000V Maximum)
- ANSI C62.61 (1993) American National Standard for Gas Tube Surge Arresters on Wire Line Telephone Circuits
- ANSI/NEMA FB 1 (2012) Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing EMT) and Cable
- ANSI/NEMA OS 1 (2009) Sheet-Steel Outlet Boxes, Device Boxes, Covers, and Box Supports
- NEMA SB 19 (R2007) NEMA Installation Guide for Nurse Call Systems
- TC 3 (2004) Polyvinyl Chloride (PVC) Fittings for Use with Rigid PVC Conduit and Tubing
- NEMA VE 2 (2006) Cable Tray Installation Guidelines
15. National Fire Protection Association (NFPA):
- 70E-2015 Standard for Electrical Safety in the Workplace
- 70-2014 National Electrical Code (NEC)
- 72-2013 National Fire Alarm Code
- 75-2013 Standard for the Fire Protection of Information Technological Equipment
- 76-2012 Recommended Practice for the Fire Protection of Telecommunications Facilities
- 77-2014 Recommended Practice on Static Electricity
- 90A-2015 Standard for the Installation of Air Conditioning and Ventilating Systems
- 99-2015 Health Care Facilities Code
- 101-2015 Life Safety Code
- 241 Safeguarding construction, alternation and Demolition Operations
- 255-2006 Standard Method of Test of Surface Burning Characteristics of Building Materials

262 - 2011	Standard Method of Test for Flame Travel and Smoke of Wires and Cables for Use in Air-Handling Spaces
780-2014	Standard for the Installation of Lightning Protection Systems
1221-2013	Standard for the Installation, Maintenance, and Use of Emergency Services Communications Systems
5000-2015	Building Construction and Safety Code
16. Society for Protective Coatings (SSPC):
SSPC SP 6/NACE No.3 (2007) Commercial Blast Cleaning
 17. Society of Cable Telecommunications Engineers (SCTE):
ANSI/SCTE 15 2006 Specification for Trunk, Feeder and Distribution Coaxial Cable
 18. Telecommunications Industry Association (TIA):

TIA-120 Series	Telecommunications Land Mobile communications (APCO/Project 25) (January 2014)
TIA TSB-140	Additional Guidelines for Field-Testing Length, Loss and Polarity of Optical Fiber Cabling Systems (2004)
TIA-155	Guidelines for the Assessment and Mitigation of Installed Category 6 Cabling to Support 10GBASE-T (2010)
TIA TSB-162-A	Telecommunications Cabling Guidelines for Wireless Access Points (2013)
TIA-222-G	Structural Standard for Antenna Supporting Structures and Antennas (2014)
TIA/EIA-423-B	Electrical Characteristics of Unbalanced Voltage Digital Interface Circuits (2012)
TIA-455-C	General Requirements for Standard Test Procedures for Optical Fibers, Cables, Transducers, Sensors, Connecting and Terminating Devices, and other Fiber Optic Components (August 2014)
TIA-455-53-A	FOTP-53 Attenuation by Substitution Measurements for Multimode Graded-Index Optical Fibers in Fiber Assemblies (Long Length) (September 2001)

TIA-455-61-A	FOTP-61 Measurement of Fiber of Cable Attenuation Using an OTDR (July 2003)
TIA-472D000-B	Fiber Optic Communications Cable for Outside Plant Use (July 2007)
ANSI/TIA-492-B	62.5- μ Core Diameter/125- μ m Cladding Diameter Class 1a Graded-Index Multimode Optical Fibers (November 2009)
ANSI/TIA-492AAAB-A	50- μ m Core Diameter/125- μ m Cladding Diameter Class IA Graded-Index Multimode Optically Optimized American Standard Fibers (November 2009)
TIA-492CAAA	Detail Specification for Class IVa Dispersion-Unshifted Single-Mode Optical Fibers (September 2002)
TIA-492E000	Sectional Specification for Class IVd Nonzero-Dispersion Single-Mode Optical Fibers for the 1,550 nm Window (September 2002)
TIA-526-7-B	Measurement of Optical Power Loss of Installed Single-Mode Fiber Cable Plant - OFSTP-7 (December 2008)
TIA-526.14-A	Optical Power Loss Measurements of Installed Multimode Fiber Cable Plant - SFSTP-14 (August 1998)
TIA-568	Revision/Edition: C Commercial Building Telecommunications Cabling Standard Set: (TIA-568-C.0-2 Generic Telecommunications Cabling for Customer Premises (2012), TIA-568-C.1-1 Commercial Building Telecommunications Cabling Standard Part 1: General Requirements (2012), TIA-568-C.2 Commercial Building Telecommunications Cabling Standard-Part 2: Balanced Twisted Pair Cabling Components (2009), TIA-568-C.3-1 Optical Fiber Cabling Components Standard, (2011) AND TIA-568-C.4 Broadband Coaxial Cabling and Components Standard (2011) with addendums and erratas
TIA-569	Revision/Edition C Telecommunications Pathways and Spaces (March 2013)

TIA-574	Position Non-Synchronous Interface between Data Terminal equipment and Data Circuit Terminating Equipment Employing Serial Binary Interchange (May 2003)
TIA/EIA-590-A	Standard for Physical Location and Protection of Below Ground Fiber Optic Cable Plant (July 2001)
TIA-598-D	Optical Fiber Cable Color Coding (January 2005)
TIA-604-10-B	Fiber Optic Connector Intermateability Standard (August 2008)
ANSI/TIA-606-B	Administration Standard for Telecommunications Infrastructure (2012)
TIA-607-B	Generic Telecommunications Bonding and Grounding (Earthing) For Customer Premises (January 2013)
TIA-613	High Speed Serial Interface for Data Terminal Equipment and Data Circuit Terminal Equipment (September 2005)
ANSI/TIA-758-B	Customer-owned Outside Plant Telecommunications Infrastructure Standard (April 2012)
ANSI/TIA-854	A Full Duplex Ethernet Specification for 1000 Mb/s (1000BASE-TX) Operating over Category 6 Balanced Twisted-Pair Cabling (2001)
ANSI/TIA-862-A	Building Automation Systems Cabling Standard (April 2011)
TIA-942-A	Telecommunications Infrastructure Standard for Data Centers (March 2014)
TIA-1152	Requirements for Field Testing Instruments and Measurements for Balanced Twisted Pair Cabling (September 2009)
TIA-1179	Healthcare Facility Telecommunications Infrastructure Standard (July 2010)

1.4 SINGULAR NUMBER

- A. Where any device or part of equipment is referred in singular number (such as " rack"), reference applies to as many such devices as are required to complete installation.

1.5 RELATED WORK

- A. Specification Order of Precedence: FAR Clause 52.236-21, VAAR Clause 852.236-71.
 - 1. Field Cutting and Patching: Section 09 91 00, PAINTING.
 - 2. Additional submittal requirements: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
 - 3. Availability and source of references and standards specified in applicable publications: Section 01 42 19, REFERENCE STANDARDS.
 - 4. Closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction: Section 07 84 00, FIRESTOPPING.
 - 5. Sealant and caulking materials and their application: Section 07 92 00, JOINT SEALANTS.
 - 6. General electrical requirements that are common to more than one section of Division 26: Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
 - 7. Electrical conductors and cables in electrical systems rated 600 V and below: Section 26 05 21, LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW).
 - 8. Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents: Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.
 - 9. Conduit and boxes: Section 26 05 33, RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS.
 - 10. Wiring devices: Section 26 27 26, WIRING DEVICES.

1.6 ADMINISTRATIVE REQUIREMENTS

- A. Assign a single communications project manager to serve as point of contact for Government, contractor, and design professional.
- B. Be proactive in scheduling work.
 - 1. Use of premises is restricted at times directed by COR.
 - 2. Movement of materials: Unload materials and equipment delivered to site. Pay costs for rigging, hoisting, lowering and moving equipment on and around site, in building or on roof.
 - 3. Coordinate installation of required supporting devices and sleeves to be set in poured-in-place concrete and other structural components, as they are constructed.
 - 4. Sequence, coordinate, and integrate installations of materials and equipment for efficient flow of Work.

5. Coordinate connection of materials, equipment, and systems with exterior underground and overhead utilities and services. Comply with requirements of governing regulations, franchised service companies, and controlling agencies; provide required connection for each service.
 6. Initiate and maintain discussion regarding schedule for ceiling construction and install cables to meet that schedule.
- C. Contact the Office of Telecommunications, Special Communications Team (0050P2H3) (202)461-5310 to have a Government-accepted Telecommunications COR assigned to project for telecommunications review, equipment and system approval and coordination with other VA personnel.
- D. Communications Project Manager Responsibilities:
1. Assume responsibility for overall telecommunications system integration and coordination of work among trades, subcontractors, and authorized system installers.
 2. Coordinate with related work indicated on drawings or specified.
 3. Manage work related to telecommunications system installation in a manner approved by manufacturer.

1.7 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Provide parts list including quantity of spare parts.
- C. Provide manufacturer product information. Government reserves the right to require a list of installations where products have been in operation.
- D. Provide Source Quality Control Submittal:
1. Submit written certification from OEM indicating that proposed supervisor of installation and proposed provider of warranty maintenance are authorized representatives of OEM. Include individual's legal name, contact information and OEM credentials in certification.
 2. Submit written certification from OEM that wiring and connection diagrams meet Government Life Safety Guidelines, NFPA, NEC, NRTL, these specifications, and Joint Commission requirements and instructions, requirements, recommendations, and guidance set forth by OEM for the proper performance of system.

3. Pre-acceptance Certification: Certification in accordance with procedure outlined in Section 01 00 00, GENERAL REQUIREMENTS and specific Division 27 qualification documentation.
- E. Installer Qualifications: Submit three installations of similar size and complexity furnished and installed by installer; include:
1. Installation location and name.
 2. Owner's name and contact information including, address, telephone and email.
 3. Date of project start and date of final acceptance.
 4. System project number.
 5. Three paragraph description of each system related to this project; include function, operation, and installation.
- F. Provide delegated design submittals (e.g. seismic support design).
- G. Submittals are required for all equipment anchors and supports. Include weights, dimensions, center of gravity, standard connections, manufacturer's recommendations and behavior problems (e.g., vibration, thermal expansion,) associated with equipment or conduit. Anchors and supports to resist seismic load based on seismic design categories per section 4.0 of VA seismic design requirements H-18-8 dated August, 2013.
- H. Test Equipment List:
1. Supply test equipment of accuracy better than parameters to be tested.
 2. Submit test equipment list including make and model number:
 - a. ANSI/TIA-1152 Level IIIe IV twisted pair cabling test instrument.
 - b. Fiber optic insertion loss power meter with light source.
 - c. Optical time domain reflectometer (OTDR).
 - d. Volt-Ohm meter.
 - e. Digital camera.
 - f. Bit Error Test Set (BERT).
 - g. Signal level meter.
 - h. Time domain reflectometer (TDR) with strip chart recorder (Data and Optical Measuring.
 - i. Spectrum analyzer.
 3. Supply only test equipment with a calibration tag from Government-accepted calibration service dated not more than 12 months prior to test.
 4. Provide sample test and evaluation reports.

I. Submittal Drawings:

1. Telecommunications Space Plans/Elevations: Provide enlarged floor plans of telecommunication spaces indicating layout of equipment and devices, including receptacles and grounding provisions. Submit detailed plan views and elevations of telecommunication spaces showing racks, termination blocks, and cable paths. Include following rooms:
 - a. Telecommunications rooms.
 - b. Building Entrance Facility/Demarcation rooms.
 - c. Server rooms/Data Center.
 - d. Equipment rooms.
 - e. Antenna Head End rooms.
2. Logical Drawings: Provide logical riser or schematic drawings for all systems.
 - a. Provide riser diagrams systems and interconnection drawings for equipment assemblies; show termination points and identify wiring connections.
3. Access Panel Schedule on Submittal Drawings: Coordinate and prepare a location, size, and function schedule of access panels required to fully service equipment.

J. Provide sustainable design submittals.

K. Furnish electronic certified test reports to COR prior to final inspection and not more than 90 days after completion of tests.

1.8 CLOSEOUT SUBMITTALS

A. Provide following closeout submittals prior to project closeout date:

1. Warranty certificate.
2. Evidence of compliance with requirements such as low voltage certificate of inspection.
3. Project record documents.
4. Instruction manuals and software that are a part of system.

B. Maintenance and Operation Manuals: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1. Prepare a manual for each system and equipment specified.
2. Furnish on portable storage drive in PDF format or equivalent accepted by COR.
3. Furnish complete manual as specified in specification section, fifteen days prior to performance of systems or equipment test.
4. Furnish remaining manuals prior to final completion.

5. Identify storage drive "MAINTENANCE AND OPERATION MANUAL" and system name.
 6. Include name, contact information and emergency service numbers of each subcontractor installing system or equipment and local representatives for system or equipment.
 7. Provide a Table of Contents and assemble files to conform to Table of Contents.
 8. Operation and Maintenance Data includes:
 - a. Approved shop drawing for each item of equipment.
 - b. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of equipment.
 - c. A control sequence describing start-up, operation, and shutdown.
 - d. Description of function of each principal item of equipment.
 - e. Installation and maintenance instructions.
 - f. Safety precautions.
 - g. Diagrams and illustrations.
 - h. Test Results and testing methods.
 - i. Performance data.
 - j. Pictorial "exploded" parts list with part numbers. Emphasis to be placed on use of special tools and instruments. Indicate sources of supply, recommended spare parts, and name of servicing organization.
 - k. Warranty documentation indicating end date and equipment protected under warranty.
 - l. Appendix; list qualified permanent servicing organizations for support of equipment, including addresses and certified personnel qualifications.
- C. Record Wiring Diagrams:
1. Red Line Drawings: Keep one E size 91.44 cm x 121.92 cm (36 inches x 48 inches) set of floor plans, on site during work hours, showing installation progress marked and backbone cable labels noted. Make these drawings available for examination during construction meetings or field inspections.
 2. General Drawing Specifications: Detail and elevation drawings to be D size 61 cm x 91.44 cm (24 inches x 36 inches) with a minimum scale of 0.635 cm = 30.48 cm (1/4 inch = 12 inches). ER, TR and other enlarged detail floor plan drawings to be D size 61 cm x 91.44 cm (24" x 36") with a minimum scale of 0.635 cm = 30.48 cm (1/4 inch =

- 12 inches). Building composite floor plan drawings to be D size 61 cm x 91.44 cm (24 inches x 36 inches) with a minimum scale of 3.175 mm = 30.48 cm (1/8 inch = 1' 0 inch).
3. Building Composite Floor Plans: Provide building floor plans showing work area outlet locations and configuration, types of jacks, distance for each cable, and cable routing locations.
 4. Floor plans to include:
 - a. Final room numbers and actual backbone cabling and pathway locations and labeling.
 - b. Inputs and outputs of equipment identified according to labels installed on cables and equipment
 - c. Device locations with labels.
 - d. Conduit.
 - e. Head-end equipment.
 - f. Wiring diagram.
 - g. Labeling and administration documentation.
 5. Submit Record Wiring Diagrams within five business days after final cable testing.
 6. Deliver Record Wiring Diagrams as CAD files in .dwg format.
 7. Deliver four complete sets of electronic record wiring diagrams to COR on portable storage drive.
- D. Service Qualifications: Submit name and contact information of service organizations providing service to this installation within eight hours of receipt of notification service is needed.

1.9 MAINTENANCE MATERIAL SUBMITTALS - NOT USED

1.10 QUALITY ASSURANCE

- A. Manufacturer's Qualifications: Manufacturer must produce, as a principal product, the equipment and material specified for this project, and have manufactured item for at least three years.
- B. Product and System Qualification:
 1. OEM must have three installations of equipment submitted presently in operation of similar size and type as this project, that have continuously operated for a minimum of three years.
 2. Government reserves the right to require a list of installations where products have been in operation before approval.
 3. Authorized representative of OEM must be responsible for design, satisfactory operation of installed system, and certification.

- C. Trade Contractor Qualifications: Trade contractor must have completed three or more installations of similar systems of comparable size and complexity with regards to coordinating, engineering, testing, certifying, supervising, training, and documentation. Identify these installations as a part of submittal.
- D. System Supplier Qualifications: System supplier must be authorized by OEM to warranty installed equipment.
- E. Telecommunications technicians assigned to system must be trained, and certified by OEM on installation and testing of system; provide written evidence of current OEM certifications for installers.
- F. Manufactured Products:
 - 1. Comply with FAR clause 52.236-5 for material and workmanship.
 - 2. When more than one unit of same class of equipment is required, units must be product of a single manufacturer.
 - 3. Equipment Assemblies and Components:
 - a. Components of an assembled unit need not be products of same manufacturer.
 - b. Manufacturers of equipment assemblies, which include components made by others, to assume complete responsibility for final assembled unit.
 - c. Provide compatible components for assembly and intended service.
 - d. Constituent parts which are similar must be product of a single manufacturer.
 - 4. Identify factory wiring on equipment being furnished and on wiring diagrams.
- G. Testing Agencies: Government reserves the option of witnessing factory tests. Notify COR minimum 15 working days prior to manufacturer performing the factory tests.
 - 1. When equipment fails to meet factory test and re-inspection is required, contractor is liable for additional expenses, including expenses of Government.

1.11 DELIVERY, STORAGE, AND HANDLING

- A. Delivery and Acceptance Requirements:
 - 1. Government's approval of submittals must be obtained for equipment and material before delivery to job site.
 - 2. Deliver and store materials to job site in OEM's original unopened containers, clearly labeled with OEM's name and equipment catalog

numbers, model and serial identification numbers for COR to inventory cable, patch panels, and related equipment.

B. Storage and Handling Requirements:

1. Equipment and materials must be protected during shipment and storage against physical damage, dirt, moisture, cold and rain:
 - a. Store and protect equipment in a manner that precludes damage or loss, including theft.
 - b. Protect painted surfaces with factory installed removable heavy kraft paper, sheet vinyl or equivalent.
 - c. Protect enclosures, equipment, controls, controllers, circuit protective devices, and other like items, against entry of foreign matter during installation; vacuum clean both inside and outside before testing and operating.

C. Coordinate storage.

1.12 FIELD CONDITIONS

- A. Where variations from documents are requested in accordance with GENERAL CONDITIONS and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, connecting work and related components must include additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.
- B. A contract adjustment or additional time will not be granted because of field conditions pursuant to FAR 52.236-2 and FAR 52.236-3; a contract adjustment or additional time will not be granted for additional work required for complete and usable construction and systems pursuant to FAR 52.246-12.

1.13 WARRANTY

- A. Comply with FAR clause 52.246-21, except as follows:
 1. Warranty material and equipment to be free from defects, workmanship, and remain so for a period of one year for Emergency Systems from date of final acceptance of system by Government; provide OEM's equipment warranty document to COR.
 2. Government maintenance personnel must have ability to contact OEM for emergency maintenance and logistic assistance, remote diagnostic testing, and assistance in resolving technical problems at any time; contractor and OEM must provide this capability.

PART 2 - PRODUCTS

2.1 PERFORMANCE AND DESIGN CRITERIA

- A. Provide communications spaces and pathways conforming to TIA 569, at a minimum.
- B. In cases of renovations in historic or otherwise restrictive buildings, where it has been determined as impossible to follow above stated guidelines, exceptions must not modify maximum distances set forth in TIA 568 and 569; and exceptions must not in any way effect performance of entire TIP system.
- C. Modification to administrative issues requires written approvals from COR with concurrence from SMCS 0050P2H3, OEM, contractor, and local authorities.

2.2 EQUIPMENT IDENTIFICATION

- A. Provide laminated black phenolic resin with a white core nameplates with minimum 6 mm (1/4 inch) high engraved lettering.
- B. Nameplates furnished by manufacturer as standard catalog items, unless other method of identification is indicated.

2.3 UNDERGROUND WARNING TAPE

- A. Underground Warning: Standard 4-Mil polyethylene 76 mm (3 inch) wide tape detectable type; red with black letters imprinted with "CAUTION BURIED ELECTRIC LINE BELOW", orange with black letters imprinted with "CAUTION BURIED TELEPHONE LINE BELOW" or orange with black letters imprinted with "CAUTION BURIED FIBER OPTIC LINE BELOW", as applicable.

2.4 WIRE LUBRICATING COMPOUND

- A. Provide non-hardening or forming adhesive coating cable lubricants suitable for cable jacket material and raceway.

2.5 FIREPROOFING TAPE

- A. Provide flexible, conformable fabric tape of organic composition and coated one side with flame-retardant elastomer.
- B. Tape must be self-extinguishing and cannot support combustion; arc-proof and fireproof.
- C. Tape cannot deteriorate when subjected to water, gases, salt water, sewage, or fungus; and tape must be resistant to sunlight and ultraviolet light.
- D. Application must withstand a 200-ampere arc for minimum 30 seconds.
- E. Securing Tape: Glass cloth electrical tape minimum 0.18 mm (7 mils) thick and 19 mm (3/4 inch) wide.

2.6 UNDERGROUND CABLES

- A. In Vault or Manhole:

1. Provide underground closure suitable to house a straight, butt, and branch splice in a protective housing into which can be poured an encapsulating compound
2. Closure must be suitable thermoplastic, thermo-set, or stainless steel material supplying structural strength to pass mechanical and electrical requirements in a vault or maintenance hole (manhole) environment.

B. Re-Enterable Encapsulating Compound: Product maintaining chemical stability of closure.

C. Provide gel-filled splice cases in accordance with RUS Bull 345-72.

2.7 AERIAL (ABOVEGROUND) ENCLOSURES - NOT USED

2.8 TEMPORARY TIP PATHS (OVERHEAD TRACKS, ROAD/PATH BRIDGES, ETC.)- NOT USED

2.9 ACCESS PANELS

- A. Panels: 304 mm x 304 mm (12 inches by 12 inches, or size allowed by location to provide optimum access to equipment for maintenance and service.
- B. Provide access panels and doors as required to allow service of materials and equipment that require inspection, replacement, repair or service.
- C. Provide access panels where items installed require access and are concealed in floor, wall, furred space or above ceiling; ceilings consisting of lay-in or removable splined tiles do not require access panels.
- D. Provide access panels with same fire rating classification as surface penetrated.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Penetrations and Sleeves:
 1. Lay out penetration and sleeve openings in advance, to permit provision in work.
 2. Set sleeves in forms before concrete is poured.
 3. Set sleeves prior to installation of structure for passage of pipes, conduit, ducts, etc.
 4. Provide sleeves and packing materials at penetrations of foundations, walls, slabs, partitions, and floors.
 5. Make sleeves that penetrate outside walls, basement slabs, footings, and beams waterproof.

6. Fill slots, sleeves and other openings in floors or walls if not used.
 - a. Fill spaces in openings after installation of conduit or cable.
 - b. Provide fill for floor penetrations to prevent passage of water, smoke, fire, and fumes.
 - c. Provide fire resistant fill in rated floors and walls, to prevent passage of air, smoke and fumes.
 7. Install sleeves through floors watertight and extend minimum 50.8 mm (2 inches) above floor surface.
 8. Match and set sleeves flush with adjoining floor, ceiling, and wall finishes where raceways passing through openings are exposed in finished rooms.
 9. Annular space between conduit and sleeve must be minimum 6 mm (1/4 inch).
 10. Do not provide sleeves for slabs-on-grade, unless specified or indicated otherwise.
 11. Comply with requirements for firestopping, for sleeves through rated fire walls and smoke partitions.
 12. Do not support piping risers or conduit on sleeves.
 13. Identify unused sleeves and slots for future installation.
 14. Provide core drilling if walls are poured or otherwise constructed without sleeves and wall penetration is required; do not penetrate structural members.
- B. Core Drilling:
1. Avoid core drilling whenever possible.
 2. Coordinate openings with other trades and utilities and prevent damage to structural reinforcement.
 3. Investigate existing conditions in vicinity of required opening prior to coring, including an x-ray of floor if determined necessary by competent person or COR.
 4. Protect areas from damage.
- C. Verification of In-Place Conditions:
1. Verify location, use and status of all material, equipment, and utilities that are specified, indicated, or determined necessary for removal.
 - a. Verify materials, equipment, and utilities to be removed are inactive, not required, or in use after completion of project.

- b. Replace with equivalent any material, equipment and utilities that were removed by the contractor that are required to be left in place.
- 2. Existing Utilities: Do not interrupt utilities serving facilities occupied by Government or others unless permitted under following conditions and then only after arranging to provide temporary utility services, according to requirements indicated:
 - a. Notify COR in writing at least 14 days in advance of proposed utility interruptions.
 - b. Do not proceed with utility interruptions without Government's written permission.
- D. Provide suspended platforms, strap hangers, brackets, shelves, stands or legs for floor, wall and ceiling mounting of equipment as required.
- E. Provide steel supports and hardware for installation of hangers, anchors, guides, and other support hardware.
- F. Obtain and analyze catalog data, weights, and other pertinent data required for coordination of equipment support provisions and installation.
- G. Verify site conditions and dimensions of equipment to ensure access for proper installation of equipment without disassembly that would void warranty.

3.2 INSTALLATION - GENERAL

- A. Coordinate systems, equipment, and materials installation with other building components.
- B. Install systems, materials, and equipment to conform with approved submittal data, including coordination drawings.
- C. Conform to VAAR 852.236.91 arrangements indicated, recognizing that work may be shown in diagrammatic form or have been impracticable to detail all items because of variances in manufacturers' methods of achieving specified results.
- D. Install systems, materials, and equipment level and plumb, parallel and perpendicular to other building systems and components, where installed in both exposed and un-exposed spaces.
- E. Install equipment according to manufacturers' written instructions.
- F. Install wiring and cabling between equipment and related devices.
- G. Install cabling, wiring, and equipment to facilitate servicing, maintenance, and repair or replacement of equipment components. Connect

equipment for ease of disconnecting, with minimum interference of adjacent other installations.

- H. Provide access panel or doors where units are concealed behind finished surfaces.
- I. Arrange for chases, slots, and openings in other building components during progress of construction, to allow for wiring, cabling, and equipment installations.
- J. Where mounting heights are not detailed or dimensioned, install systems, materials, and equipment to provide maximum headroom and access for service and maintenance as possible.
- K. Install systems, materials, and equipment giving priority to systems required to be installed at a specified slope.
- L. Avoid interference with structure and with work or other trades, preserving adequate headroom and clearing doors and passageways to satisfaction of COR and code requirements.
- M. Install equipment and cabling to distribute equipment loads on building structural members provided for equipment support under other sections; install and support roof-mounted equipment on structural steel or roof curbs as appropriate.
- N. Provide supplementary or miscellaneous items, appurtenances, devices and materials for a complete installation.

3.3 EQUIPMENT INSTALLATION

- A. Locate equipment as close as practical to locations shown on drawings.
- B. Note locations of equipment requiring access on record drawings.
- C. Access and Access Panels: Verify access panel locations and construction with COR.
- D. Inaccessible Equipment:
 - 1. Where Government determines that contractor has installed equipment not conveniently accessible for operation and maintenance, equipment must be removed and reinstalled as directed and without additional cost to Government.

3.4 EQUIPMENT IDENTIFICATION

- A. Install an identification sign which clearly indicates information required for use and maintenance of equipment.
- B. Secure identification signs with screws.

3.5 CUTTING AND PATCHING

- A. Perform cutting and patching according to contract general requirements and as follows:

1. Remove samples of installed work as specified for testing.
 2. Perform cutting, fitting, and patching of equipment and materials required to uncover existing infrastructure in order to provide access for correction of improperly installed existing or new work.
 3. Remove and replace defective work.
 4. Remove and replace non-conforming work.
- B. Cut, remove, and legally dispose of selected equipment, components, and materials, including removal of material, equipment, devices, and other items indicated to be removed and items made obsolete by new work.
- C. Provide and maintain temporary partitions or dust barriers adequate to prevent spread of dust and dirt to adjacent areas.
- D. Protect adjacent installations during cutting and patching operations.
- E. Protect structure, furnishings, finishes, and adjacent materials not indicated or scheduled to be removed.
- F. Patch finished surfaces and building components using new materials specified for original installation and experienced installers.

3.6 FIELD QUALITY CONTROL

- A. Provide work according to VAAR 852.236.91 and FAR clause 52.236-5.
- B. Provide minimum clearances and work required for compliance with NFPA 70, National Electrical Code (NEC), and manufacturers' instructions; comply with additional requirements indicated for access and clearances.
- C. Verify all field conditions and dimensions that affect selection and provision of materials and equipment, and provide any disassembly, reassembly, relocation, demolition, cutting and patching required to provide work specified or indicated, including relocation and reinstallation of existing wiring and equipment.
1. Protect facility, equipment, and wiring from damage.
- D. Submit written notice that:
1. Project has been inspected for compliance with documents.
 2. Work has been completed in accordance with documents.
- E. Non-Conforming Work: Conduct project acceptance inspections, final completion inspections, substantial completion inspections, and acceptance testing and demonstrations after verification of system operation and completeness by Contractor.
- F. For project acceptance inspections, final completion inspections, substantial completion inspections, and testing/demonstrations that require more than one site visit by COR or design professional to

verify project compliance for same material or equipment, Government reserves right to obtain compensation from contractor to defray cost of additional site visits that result from project construction or testing deficiencies and incompleteness, incorrect information, or non-compliance with project provisions.

1. COR will notify contractor, of hourly rates and travel expenses for additional site visits, and will issue an invoice to Contractor for additional site visits.
2. Contractor is not be eligible for extensions of project schedule or additional charges resulting from additional site visits that result from project construction or testing deficiencies/incompleteness, incorrect information, or non-compliance with Project provisions.

G. Tests:

1. Interim inspection is required at approximately 50 percent of installation.
2. Request inspection ten working days prior to interim inspection start date by notifying COR in writing; this inspection must verify equipment and system being provided adheres to installation, mechanical and technical requirements of construction documents.
3. Inspection to be conducted by OEM and factory-certified contractor representative, and witnessed by COR, facility and SMCS 0050P2H3 representatives.
4. Check each item of installed equipment to ensure appropriate NRTL listing labels and markings are fixed in place.
5. Verify cabling terminations in DEMARC, MCR, TER, SCC, ECC, TRs and head end rooms, workstation locations and TCO adhere to color code for T568B pin assignments and cabling connections are in compliance with TIA standards.
6. Visually confirm minimum Category 6A cable marking at TCOs, CCSs locations, patch cords and origination locations.
7. Review entire communications circulating ground system, each TGB and grounding connection, grounding electrode and outside lightning protection system.
8. Review cable tray, conduit and path/wire way installation practice.
9. OEM and contractor to perform:
 - a. Fiber optical cable field inspection tests via attenuation measurements on factory reels; provide results along with OEM certification for factory reel tests.

10. Relocate failed cable reels to a secured location for inventory, as directed by COR, and then remove from project site within two working days; provide COR with written confirmation of defective cable reels removal from project site.
 11. Provide results of interim inspections to COR.
 12. If major or multiple deficiencies are discovered, additional interim inspections could be required until deficiencies are corrected, before permitting further system installation.
 - a. Additional inspections are scheduled at direction of COR.
 - b. Re-inspection of deficiencies noted during interim inspections, must be part of system's Final Acceptance Proof of Performance Test.
 - c. The interim inspection cannot affect the system's completion date unless directed by COR.
 13. Facility COR will ensure test documents become a part of system's official documentation package.
- H. Pretesting: Re-align, re-balance, sweep, re-adjust and clean entire system and leave system working for a "break-in" period, upon completing installation of system and prior to Final Acceptance Proof of Performance Test. System RF transmitting equipment must not be connected to keying or control lines during "break-in" period.
1. Pretesting Procedure:
 - a. Verify systems are fully operational and meet performance requirements, utilizing accepted test equipment and spectrum analyzer.
 - b. Pretest and verify system functions and performance requirements conform to construction documents and, that no unwanted physical, aural and electronic effects, such as signal distortion, noise pulses, glitches, audio hum, poling noise are present.
 2. Measure and record signal, aural and control carrier levels of each DAS RF, voice and data channel, at each of the following minimum points in system:
 - a. Utility provider entrance.
 - b. Buried conduit duct locations.
 - c. Maintenance Holes (Manholes) and hand holes.
 - d. ENTR or DEMARC.
 - e. PBX interconnections.
 - f. MCR interconnections.

- g. MCOR interconnections.
 - h. TER interconnections.
 - i. TOR interconnections.
 - j. Control room interconnections.
 - k. TR interconnections.
 - l. System interfaces in locations listed herein.
 - m. HE interconnections.
 - n. Communications circulating ground system.
 - o. UPS areas.
 - p. Each general floor areas.
 - q. Others as required by AHJ (SMCS 0050P2H3).
3. Provide recorded system pretest measurements and certification that the system is ready for formal acceptance test to COR.
- I. Acceptance Test:
- 1. Schedule an acceptance test date after system has been pretested, and pretest results and certification submitted to COR.
 - 2. Give COR fifteen working days written notice prior to date test is expected to begin; include expected duration of time for test in notification.
 - 3. Test in the presence of the following:
 - a. COR.
 - b. OEM representatives.
 - c. VACO:
 - 1) CFM representative.
 - 2) AHJ-SMCS 0050P2H3, (202)461-5310.
 - d. VISN-CIO, Network Officer and VISN representatives.
 - e. Facility:
 - 1) FMS Service Chief, Bio-Medical Engineering and facility representatives.
 - 2) OI&T Service Chief and OI&T representatives.
 - 3) Safety Officer, Police Chief and facility safety representatives.
 - f. Local Community Safety Personnel:
 - 1) Fire Marshal representative.
 - 2) Disaster Coordinator representative.
 - 3) EMS Representatives: Police, Sherriff, City, County or State representatives.

4. Test system utilizing accepted test equipment to certify proof of performance and Life and Public Safety compliance, FCC, NRTL, NFPA and OSHA compliance.
 - a. Rate system as acceptable or unacceptable at conclusion of test; make only minor adjustments and connections required to show proof of performance.
 - 1) Demonstrate and verify that system complies with performance requirements under operating conditions.
 - 2) Failure of any part of system that precludes completion of system testing, and which cannot be repaired within four hours, terminates acceptance test of that portion of system.
 - 3) Repeated failures that result in a cumulative time of eight hours to affect repairs is cause for entire system to be declared unacceptable.
 - 4) If system is declared unacceptable, retesting must be rescheduled at convenience of Government and costs borne by the contractor.

J. Acceptance Test Procedure:

1. Physical and Mechanical Inspection: The test team representatives must tour major areas to determine system and sub-systems are completely and properly installed and are ready for acceptance testing.
2. A system inventory including available spare parts must be taken at this time.
3. Each item of installed equipment must be re-checked to ensure appropriate NRTL (i.e. UL) certification listing labels are affixed.
4. Confirm that deficiencies reported during Interim Inspections and Pretesting are corrected prior to start of Acceptance Test.
5. Inventory system diagrams, record drawings, equipment manuals, pretest results.
6. Failure of system to meet installation requirements of specifications is grounds for terminating testing and to schedule re-testing.

K. Operational Test:

1. Government's Condition of Acceptance of System Language:
 - a. Without Acceptance: Until system fully meets conditions of construction documents, system's ownership, use, operation and warranty commences at Government's final acceptance date.

- b. With Conditional Acceptance: Stating conditions that need to be addressed by contractor or OEM and stating system's use and operation to commence immediately while its warranty commences only at Government's agreed final extended acceptance date.
- c. With Full Acceptance: Stating system's ownership, use, operation and warranty to immediately commence at Government's agreed to date of final acceptance.
- L. Acceptance Test Conclusion: Reschedule testing on deficiencies and shortages with COR, after COR and SMCS AHJ jointly agree to results of the test, using the generated punch list or discrepancy list. Perform retesting to comply with these specifications at contractor's expense.
- M. Proof of Performance Certification:
 - 1. If system is declared acceptable, AHJ (SMCS 0050P2H3) provides COR notice stating system processes to required operating standards and functions and is Government accepted for use by facility.
 - 2. Validate items with COR needing to be provided to complete project contract (i.e. charts & diagrams, manuals, spare parts, system warranty documents executed, etc.). Once items have been provided, COR contacts FMS service chief to turn over system from CFM oversight for beneficial use by facility.
 - 3. If system is declared unacceptable without conditions, rescheduled testing expenses are to be borne by contractor.

3.7 CLEANING

- A. Remove debris, rubbish, waste material, tools, construction equipment, machinery and surplus materials from project site and clean work area, prior to final inspection and acceptance of work.
- B. Put building and premises in neat and clean condition.
- C. Remove debris on a daily basis.
- D. Remove unused material, during progress of work.
- E. Perform cleaning and washing required to provide acceptable appearance and operation of equipment to satisfaction of COR.
- F. Clean exterior surface of all equipment, including concrete residue, dirt, and paint residue, after completion of project.
- G. Perform final cleaning prior to project acceptance by COR.
- H. Remove paint splatters and other spots, dirt, and debris; touch up scratches and mars of finish to match original finish.
- I. Clean devices internally using methods and materials recommended by manufacturer.

- J. Tighten wiring connectors, terminals, bus joints, and mountings, to include lugs, screws and bolts according to equipment manufacturer's published torque tightening values for equipment connectors. In absence of published connection or terminal torque values, comply with torque values specified in UL 486A-486B.

3.8 TRAINING

- A. Provide training in accordance with subsection, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.
- B. Provide training for equipment or system as required in each associated specification.
- C. Develop and submit training schedule for approval by COR, at least 30 days prior to planned training.

3.9 PROTECTION

- A. Protection of Fireproofing:
1. Install clips, hangers, clamps, supports and other attachments to surfaces to be fireproofed, if possible, prior to start of spray fireproofing work.
 2. Install conduits and other items that would interfere with proper application of fireproofing after completion of spray fire proofing work.
 3. Patch and repair fireproofing damaged due to cutting or course of work must be performed by installer of fireproofing and paid for by trade responsible for damage.
- B. Maintain equipment and systems until final acceptance.
- C. Ensure adequate protection of equipment and material during installation and shutdown and during delays pending final test of systems and equipment because of seasonal conditions.

- - - E N D - - -

SECTION 27 05 33
CONDUITS AND BACKBOXES FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies conduit, fittings, and boxes to form raceway systems for communications cabling.

1.2 RELATED WORK

- A. Sealing around penetrations to maintain integrity of fire rated construction: Section 07 84 00, FIRESTOPPING.
- B. Sealing around conduit penetrations through building envelope to prevent moisture migration into building: Section 07 92 00, JOINT SEALANTS.
- C. Identification and painting of conduit and other devices: Section 09 91 00, PAINTING.
- D. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

1.3 SUBMITTALS

- A. In accordance with Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS, submit the following:
1. Size and location of cabinets, splice boxes, and pull boxes.
 2. Layout of required conduit penetrations through structural elements.
 3. Catalog cuts marked with specific item proposed and area of application identified.
- B. Certification: Provide letter prior to final inspection, certifying material is in accordance with construction documents and properly installed.

PART 2 - PRODUCTS**2.1 MATERIAL**

- A. Minimum Conduit Size: 1 inch unless specifically noted otherwise on drawings.
- B. Conduit:
1. Rigid Galvanized Steel: Conform to UL 6, ANSI C80.1.
 2. Rigid Intermediate Steel Conduit (IMC): Conform to UL 1242, ANSI C80.6.
 3. Electrical Metallic Tubing (EMT):
 - a. Maximum Size: 105 mm (4 inches).

- b. Install only for cable rated 600 volts or less.
 - c. Conform to UL 797, ANSI C80.3.
 - 4. Flexible Galvanized Steel Conduit: Conform to UL 1.
 - 5. Liquid-tight Flexible Metal Conduit: Conform to UL 360.
 - 6. Direct Burial Plastic Conduit: Conform to UL 651 and UL 651A, heavy wall PVC, or high-density polyethylene (HDPE).
 - 7. Surface Metal Raceway: Conform to UL 5.
- C. Conduit Fittings:
- 1. Rigid Galvanized Steel and Rigid Intermediate Steel Conduit Fittings:
 - a. Provide fittings meeting requirements of UL 514B and ANSI/ NEMA FB 1.
 - b. Sealing: Provide threaded cast iron type. Use continuous drain type sealing fittings to prevent passage of water and vapor. In concealed work, install sealing fittings in flush steel boxes with blank cover plates having same finishes as other electrical plates in room.
 - c. Standard Threaded Couplings, Locknuts, Bushings, and Elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
 - d. Locknuts: Bonding type with sharp edges for digging into metal wall of an enclosure.
 - e. Bushings: Metallic insulating type, consisting of an insulating insert molded or locked into metallic body of fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
 - f. Erickson (union-type) and Set Screw Type Couplings:
 - 1) Couplings listed for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete.
 - 2) Use set screws of case hardened steel with hex head and cup point to seat in conduit wall for positive ground.
 - g. Provide OEM approved fittings.
 - 2. Electrical Metallic Tubing Fittings:
 - a. Conform to UL 514B and ANSI/ NEMA FB1; only steel or malleable iron materials are acceptable.
 - b. Couplings and Connectors: Concrete tight and rain tight, with connectors having insulated throats.
 - 1) Use gland and ring compression type couplings and connectors for conduit sizes 50 mm (2 inches) and smaller.

- 2) Use set screw type couplings with four set screws each for conduit sizes over 50 mm (2 inches).
- 3) Use set screws of case-hardened steel with hex head and cup point to seat in wall of conduit for positive grounding.
- c. Indent type connectors or couplings are not permitted.
- d. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are not permitted.
- e. Provide OEM approved fittings.
3. Flexible Steel Conduit Fittings:
 - a. Conform to UL 514B; only steel or malleable iron materials are acceptable.
 - b. Provide clamp type, with insulated throat.
 - c. Provide OEM approved fittings.
4. Liquid-tight Flexible Metal Conduit Fittings:
 - a. Conform to UL 514B and ANSI/ NEMA FB1; only steel or malleable iron materials are acceptable.
 - b. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening.
 - c. Provide connectors with insulated throats to prevent damage to cable jacket.
 - d. Provide OEM approved fittings.
5. Direct Burial Plastic Conduit Fittings: Provide fittings meeting requirements of UL 514C and NEMA TC3, and as recommended by conduit manufacturer.
6. Expansion and Deflection Couplings:
 - a. Conform to UL 467 and UL 514B.
 - b. Accommodate 19 mm (3/4 inch) deflection, expansion, or contraction in any direction, and allow 30-degree angular deflections.
 - c. Include internal flexible metal braid sized to ensure conduit ground continuity and fault currents in accordance with UL 467, and NEC code tables for ground conductors.
 - d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat resistant molded rubber material with stainless steel jacket clamps.
- D. Conduit Supports:
 1. Parts and Hardware: Provide zinc-coat or equivalent corrosion protection.

2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
 3. Multiple Conduit (Trapeze) Hangers: Minimum 38 mm by 38 mm (1-1/2 by 1-1/2 inch), 2.78 mm (12 gage) steel, cold formed, lipped channels; with minimum 9 mm (3/8 inch) diameter steel hanger rods.
 4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.
- E. Outlet, Splice, and Pull Boxes:
1. Conform to UL-50 and UL-514A.
 2. Cast metal where required by NEC or shown, and equipped with rustproof boxes.
 3. Sheet Metal Boxes: Galvanized steel, except where otherwise shown.
 4. Install flush mounted wall or ceiling boxes with raised covers so that front face of raised cover is flush with wall.
 5. Install surface mounted wall or ceiling boxes with surface style flat or raised covers.
- F. Warning Tape: Standard, 4-Mil polyethylene 76 mm (3 inch) wide tape detectable type, red with black letters, and imprinted with "CAUTION BURIED COMMUNICATIONS CABLE BELOW".
- G. Flexible Nonmetallic Communications Raceway (Innerduct) and Fittings:
1. General: Provide UL 910 listed plenum, riser, and general purpose corrugated pliable communications raceway.
 2. Provide Communications Raceway with a factory installed 567 kg (1250 lb.) tensile pre-lubricated pull tape.
 3. Use only metallic straps, hangers and fittings to support raceway from building structure. Cable ties are not permitted for securing raceway to building structure.
 4. Provide fittings to be installed in spaces used for environmental air made of materials that do not exceed flammability, smoke generation, ignitibility, and toxicity requirements of environmental air space.
 5. Size: Metric Designator 53 (trade size 2) or smaller.
 6. Outside Plant: Plenum-rated where each innerduct is 75 mm (3 inches) and larger.
 7. Inside Plant: Listed and marked for installation in plenum airspaces and minimum 25 mm (1 inch) inside diameter.
 8. Plenum: Non-metallic communications raceway.

- a. Constructed of low smoke emission, flame retardant PVC with corrugated construction.
- b. UL 94 V-0 rating for flame spreading limitation.
- 9. Provide innerduct reel lengths as necessary to ensure ducts are continuous.
- 10. Provide pulling accessories used for innerduct including but not limited to, inner duct lubricants, spreaders, applicators, grips, swivels, harnesses, and line missiles (blown air) compatible with materials being pulled.
- H. Outlet Boxes:
 - 1. Flush wall mounted minimum 11.9 cm (4-11/16 inches) square, 9.2 cm (3-5/8 inches) deep pressed galvanized steel.
- I. Weatherproof Outlet Boxes: Surface mount two gang, 67 mm (2-5/8 inches) deep weatherproof cast aluminum with powder coated finish internal threads on hubs 19 mm (3/4 inch) minimum.

PART 3 - EXECUTION

3.1 EQUIPMENT INSTALLATION AND REQUIREMENTS

- A. Penetrations:
 - 1. Cutting or Holes:
 - a. Locate holes in advance of installation. Where proposed in structural sections, obtain approval of structural engineer and COR prior to drilling through structural sections.
 - b. Make holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammer, impact electric, hand or manual hammer type drills are not permitted; COR may grant limited permission by request, in condition of limited working space.
 - c. Fire Stop: Where conduits, wireways, and other communications raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.
 - 1) Fill and seal clearances between raceways and openings with fire stop material.
 - 2) Install only retrofittable, non-hardening, and reusable firestop material that can be removed and reinstalled to seal around cables inside conduits.

d. Waterproofing at Floor, Exterior Wall, and Roof Conduit

Penetrations: Seal clearances around conduit and make watertight as specified in Section 07 92 00, JOINT SEALANTS or as directed by waterproofing manufacturer.

B. Conduit Installation:

1. Minimum conduit size of 1 inch unless specifically noted otherwise on plans, and not less than size required for 40 percent fill.
2. Install insulated bushings on all conduit ends.
3. Install pull boxes after every 180 degrees of bends (two 90-degree bends) or every 100ft. Size boxes per TIA 569.
4. Extend vertical conduits/sleeves through floors minimum 75 mm (3 inches) above floor and minimum 75 mm (3 inches) below ceiling of floor below.
5. Terminate conduit runs to and from a backboard in a TR or interstitial space at top or bottom of backboard. Install conduits to enter telecommunication rooms next to wall and flush with backboard.
6. Where drilling is necessary for vertical conduits, locate holes so as not to affect structural sections.
7. Seal empty conduits located in telecommunications rooms or on backboards to prevent entrance of moisture and gases and to meet fire resistance requirements.
8. Provide pull wire in all empty conduits; sleeves through floor are exceptions.
9. Complete each entire conduit run installation before pulling in cables.
10. Flattened, dented, or deformed conduit is not permitted.
11. Ensure conduit installation does not encroach into ceiling height head room, walkways, or doorways.
12. Cut conduit square with a hacksaw, ream, remove burrs, and draw tight.
13. Install conduit mechanically continuous.
14. Independently support conduit at 2.44 m (8 feet) on center; do not use other supports (i.e., suspended ceilings, suspended ceiling supporting members, luminaires, conduits, mechanical piping, or mechanical ducts).
15. Support conduit within 300 mm (1 foot) of changes of direction, and within 300 mm (1 foot) of each enclosure to which connected.

16. Close ends of empty conduit with plugs or caps to prevent entry of debris, until cables are pulled in.
17. Attach conduits to cabinets, splice cases, pull boxes and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on inside of enclosure, made up wrench tight. Do not make conduit connections to box covers.
18. Do not use aluminum conduits in wet locations.
19. Unless otherwise indicated on drawings or specified herein, conceal conduits within finished walls, floors and ceilings.
20. Conduit Bends:
 - a. Make bends with standard conduit bending machines; observe minimum bend radius for cable type and outside diameter.
 - b. Conduit hickey is permitted only for slight offsets, and for straightening stubbed conduits.
 - c. Bending of conduits with a pipe tee or vise is not permitted.
 - d. Minimum radius of communication conduit bends:

Sizes of Conduit Trade Size	Radius of Conduit Bends mm, Inches
3/4	150 (6)
1	230 (9)
1-1/4	350 (14)
1-1/2	430 (17)
2	525 (21)
2-1/2	635 (25)
3	775 (31)
3-1/2	900 (36)
4	1125 (45)

21. Layout and Homeruns - Deviations: Make only where necessary to avoid interferences and only after drawings showing proposed deviations have been submitted and approved by COR.
- C. Concealed Work Installation:
1. In Concrete:
 - a. Conduit: Rigid steel or IMC.
 - b. Align and run conduit in direct lines.
 - c. Install conduit through concrete beams only when the following occurs:

- 1) Where shown on structural drawings.
 - 2) As accepted by COR prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
- d. Installation of conduit in concrete that is less than 75 mm (3 inches) thick is prohibited.
- 1) Conduit outside diameter larger than 1/3 of slab thickness is prohibited.
 - 2) Space between Conduits in Slabs: Approximately six conduit diameters apart, except one conduit diameter at conduit crossings.
 - 3) Install conduits approximately in center of slab to ensure a minimum of 19 mm (3/4 inch) of concrete around conduits.
- e. Make couplings and connections watertight. Use thread compounds that are NRTL listed conductive type to ensure low resistance ground continuity through conduits. Tightening set screws with pliers is not permitted.
- D. Furred or Suspended Ceilings and in Walls:
1. Rigid steel, IMC or rigid aluminum. Different type conduits mixed indiscriminately in same system is not permitted.
 2. Align and run conduit parallel or perpendicular to building lines.
 3. Tightening set screws with pliers is not permitted.
- E. Exposed Work Installation:
1. Unless otherwise indicated on drawings, exposed conduit is only permitted in telecommunications rooms.
 - a. Provide rigid steel, IMC or rigid aluminum.
 - b. Different type of conduits mixed indiscriminately in system is not permitted.
 2. Align and run conduit parallel or perpendicular to building lines.
 3. Install horizontal runs close to ceiling or beams and secure with conduit straps.
 4. Support horizontal or vertical runs at not over 2400 mm (96 inches) intervals.
 5. Painting:
 - a. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
 - b. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color.

- c. Provide labels where conduits pass through walls and floors and at maximum 6000 mm (20 foot) intervals in between.

F. Expansion Joints:

1. Conduits 75 mm (3 inches) and larger, that are secured to building structure on opposite sides of a building expansion joint, require expansion and deflection couplings. Install couplings in accordance with manufacturer's recommendations.
2. Provide conduits smaller than 75 mm (3 inches) with pull boxes on both sides of expansion joint. Connect conduits to expansion and deflection couplings as specified.
3. Install expansion and deflection couplings where shown.

G. Seismic Areas:

1. In seismic areas, follow H-18-8 Seismic Design Requirements.
2. Rigidly secure conduit to building structure on opposite sides of a building expansion joint with pull boxes on both sides of joint.
3. Connect conduits to pull boxes with 375 mm (15 inches) of slack flexible conduit.
4. Install green copper wire minimum #6 AWG in flexible conduit for bonding jumper.

H. Conduit Supports, Installation:

1. Select AC193 code listed mechanical anchors or fastening devices with safe working load not to exceed 1/4 of proof test load.
2. Use pipe straps or individual conduit hangers for supporting individual conduits. Maximum distance between supports is 2.5 m (8 foot) on center.
3. Support multiple conduit runs with trapeze hangers. Use trapeze hangers designed to support a load equal or greater than sum of the weights of the conduits, wires, hanger itself, and 90 kg (200 pounds). Attach each conduit with U-bolts or other accepted fasteners.
4. Support conduit independent of pull boxes, luminaires, suspended ceiling components, angle supports, duct work, and similar items.
5. Fastenings and Supports in Solid Masonry and Concrete:
 - a. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing concrete.
 - b. Existing Construction:

- 1) Code AC193 listed wedge type steel expansion anchors minimum 6 mm (1/4 inch) bolt size and minimum 28 mm (1-1/8 inch) embedment.
 - 2) Power set fasteners minimum 6 mm (1/4 inch) diameter with depth of penetration minimum 75 mm (3 inches).
 - 3) Use vibration and shock resistant anchors and fasteners for attaching to concrete ceilings.
 6. Fastening to Hollow Masonry: Toggle bolts are permitted.
 7. Fastening to Metal Structures: Use machine screw fasteners or other devices designed and accepted for application.
 8. Bolts supported only by plaster or gypsum wallboard are not acceptable.
 9. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
 10. Do not support conduit from chain, wire, or perforated strap.
 11. Spring steel type supports or fasteners are not permitted except horizontal and vertical supports/fasteners within walls.
 12. Vertical Supports:
 - a. Install riser clamps and supports for vertical conduit runs in accordance with NEC.
 - b. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.
- I. Box Installation:
1. Boxes for Concealed Conduits:
 - a. Flush mounted.
 - b. Provide raised covers for boxes to suit wall or ceiling, construction and finish. In spaces not controlled by VA (i.e., common hallways) covers must be lockable.
 2. In addition to boxes shown, install additional boxes where needed to prevent damage to cables during pulling.
 3. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
 4. Stencil or install phenolic nameplates on covers of boxes to identify system served; for example "SIG-FA JB No. 1".

5. Outlet boxes mounted back-to-back in same wall are not permitted. A minimum 600 mm (24 inches) center-to-center lateral spacing must be maintained between boxes.

J. Flexible Nonmetallic Communications Raceway (Innerduct), Installation:

1. Install Innerduct in cable tray. Innerduct may not be free-hung.
2. Install only in accessible spaces not subject to physical damage or corrosive influences.
3. Make bends manually to assure internal diameter of tubing is not effectively reduced.
4. Extend each segment of innerduct minimum 300 mm (12 inches) beyond end of service conduit tie or cable tray. Restrain innerduct ends with wall mount clamps and seal when cable is installed.

3.2 TESTING

- A. Examine fittings and locknuts for secureness.
- B. Test RMC, IMC and EMT systems for electrical continuity and resistance to ground.

- - - E N D - - -

SECTION 27 05 36
CABLE TRAYS FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL**1.1 DESCRIPTION:**

This section specifies requirements for telecommunications cabling cable tray and raceway equipment.

1.2 SUMMARY

Section Includes:

A. Cable Tray.

1.3 REFERENCES

A. VA Infrastructure Standard for Telecommunications Spaces.

1.4 RELATED WORK:

A. Grounding and bonding: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

1.5 SUBMITTALS:

A. Submit in accordance with Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

PART 2 - PRODUCTS**2.1 CABLE TRAY.**

A. Design. Wire basket with tray insert. Maximum 2" x 4" wire mesh construction. Constructed of round, smooth wire with continuous top side to minimize cable sheath damage.

B. Finish. Coated to prevent rust.

C. Size. Cable tray shall be sized to hold the maximum expected cable load at not more than 40% fill and not more than 6" maximum cable depth.

D. Accessories. Provide and install the following components and accessories as necessary to achieve the design:

1. Overhead mounting equipment (thread-rod, unistrut, nuts, washers, etc.) suitable for the supporting structural elements.

2. Tray section splicing hardware.

3. Tray insert.

4. Cable waterfalls.

5. Ground strap kits.

6. Bend radius limiters.

2.2 FIBER OPTIC CABLE RACEWAY. (NOT USED)

2.3 LADDER RACK. (NOT USED)

PART 3 - EXECUTION

3.1 IMPLEMENTATION:

- A. Cable tray shall be used in horizontal applications. Ladder rack is used in vertical applications.
- B. A #6 bare copper conductor will be installed the entire length of the cable tray and bonded at the Telecommunications Room (TR) to the ground bar. Each cable tray section shall be bonded together with bonding conductors.
- C. Support horizontal cable tray not less than every 5' (shorter spans if recommended by the equipment manufacturer).

- - - E N D - - -

SECTION 31 63 20
MICROPILES

PART 1 GENERAL

1.01 SCOPE

- A. This work shall consist of Micropiles; designed, furnished, installed and tested in accordance with these specifications and as shown on the contract drawings.

1.02 LOAD-CARRYING CAPACITY

- A. Unless otherwise directed, the contractor shall select the Micropile type and the installation method, and determine the length and diameter. The contractor shall be responsible for design and installing in accordance with the testing subsection of this specification. Contractor's proposal for said work shall explain in detail the materials, methods, and design assumptions he will employ.

1.03 QUALIFICATION

- A. The contractor performing the work described in the specification shall have installed Micropiles for a minimum of five years. At the time of bid, the contractor shall submit a list containing at least five projects on which the contractor has installed Micropiles. A brief description of each project and a reference shall be included for each project listed. As a minimum, the reference shall include an individual's name and current phone number. Acceptable prequalified contractors are Keller Group and Nicholson Construction Company.
- B. Prior to the start of work, the contractor shall submit a list identifying the design engineer, drill operators and on-site supervisors who will be assigned to the project. The list shall contain a summary of each individual's experience and it shall be complete enough for Albertson Engineering, Inc. to determine whether or not each individual has satisfied the following qualifications.
 - 1. The contractor shall assign a professional engineer to supervise the work with at least three years of experience in the design and construction of Micropiles. Engineer shall be a professional engineer licensed by the state of South Dakota. The use of manufacturer's representatives does not satisfy the requirements of this section. Drill operators and on-site supervisors shall have a minimum of one year experience installing Micropiles with the contractor's organization.
- C. Work shall not be started on any piling nor any materials ordered until approval of the contractor's qualifications is given. The Owner may suspend the Micropile work if the contractor substitutes unqualified personnel for approved personnel; the contractor shall be fully liable for additional costs resulting from the suspension of work and no adjustment in contract time resulting from the suspension of work will be allowed.
- D. The contractor shall submit a detailed narrative within his proposal describing the construction method he intends to employ and encompassing all aspects, peripheral or otherwise, of his site operation.
- E. The owner (and his agents) reserves the right to reject any or all bids on the basis of price or in the belief that the narrative content does not reveal that the contractor has given due thought to the construction process.

1.04 SUBMITTALS

- A. The contractor shall prepare and submit to Albertson Engineering, Inc. for review and approval, working drawings and design submission describing the Micropile system or systems intended for use. The working drawings and design submission shall be submitted 30 calendar days prior to the commencement of the Micropile work. The working drawing and design submission shall include the following:
 - 1. A drawings showing the location and orientation of each Micropile and micropile Cap (if applicable) including: Micropile size; Micropile design load; Type and Size of each Micropile; Micropile pilecap size; reinforcing; and connection to micropiles.
- B. Design documents, including calculations, by professional engineer retained to prepare design of micropile, pilecap, and related items.
- C. The contractor shall submit to Albertson Engineering, Inc. for review and approval or rejection mill test reports for the steel piling components.
- D. Detailed drilling records.
- E. The Contractor shall submit the grout mix designs, including details of all materials to be incorporated, and the procedure for mixing and placing the grout to the Owner for approval. This submittal shall include certified test results verifying the acceptability of the proposed mix designs.
- F. The contractor shall submit to Albertson Engineering, Inc. for review and approval or rejection calibration data for each test jack, pressure gauge and master pressure gauge to be used. The calibration tests shall have been performed by an independent testing laboratory and test shall have been performed within 60 calendar days of the date submitted. Testing cannot commence until the engineer has approved the jack, pressure gauge and master pressure gauge calibration.
- G. The contractor shall submit to Albertson Engineering, Inc. within 30 calendar days after completion of the Micropile work a report containing:
 - 1. As-built drawings showing the locations of the Micropiles and the piles length.
 - 2. Steel manufacturer's mill test reports for the steel pile components incorporated in the installation.
 - 3. Detailed drilling records.
 - 4. Grouting records indicating the specific gravity of grout and quantity injected.
 - 5. Micropile test results and graphs.
- H. All submittals related to micropiles, pilecaps for micropiles or similar shall be reviewed and approved by engineer responsible for design of micropiles and pilecaps prior to submittal for approval by Albertson Engineering, Inc.

PART 2 PRODUCTS

2.01 CEMENT

- A. Type I, II or III conforming to AASHTO M85 shall be used for grout. In some applications where voids exist, sand may be added to the grout.

2.02 ADMIXTURES

- A. Admixtures which control bleed, improve flowability, reduce water content and retard set may be used in the grout subject to the approval of the engineer. Admixtures, if used, shall be compatible manufacturer's recommendation.

2.03 WATER

- A. Water for mixing grout shall be potable.

2.04 STEEL PILE COMPONENTS

- A. Mill test reports for the all-thread bar: pipe wall thickness, pipe diameter, and steel type.

PART 3 EXECUTION

3.01 DRILLING

- A. Unless otherwise directed, core drilling, rotary drilling, percussion drilling, auger drilling, driven casing or other acceptable means can be used. The Micropile can be installed in the drill hole after drilling or it can be advanced by the drill.

3.02 GROUTING

- A. The contractor shall use a neat cement grout or a sand-cement grout with a minimum 28 day unconfined compressive strength of 4,000 psi. The cement shall not contain lumps or other indications of hydration. Admixtures, if used, shall be mixed in accordance with the manufacturer's recommendation.
- B. The grouting equipment shall produce a grout free of lumps and undispersed cement. The pump shall be equipped with a pressure gauge to monitor grout pressures. The pressure gauge shall be capable of measuring pressure of at least 150 psi or twice the actual grout pressures used by the contractor, whichever is greater. The grouting equipment shall be sized to enable the grout to be pumped in one continuous operation. The mixer should be capable of continuously agitating the grout.
- C. The grout shall be injected from the lowest point of the drill hole. The grout may be pumped through grout tubes, casing, hollow-stem-augers or drill rods. The quantity of the grout and the grout pressures shall be recorded. The grout pressures and grout takes shall be controlled to prevent excessive heave in cohesive soils or fracturing of rock formations. The entire Micropile shall be filled with grout.
- D. Upon completion of grouting, the grout tube may remain in the hole but it shall be filled with grout.
- E. After grouting, the Micropile shall not be loaded for a minimum of three days.

3.03 TESTING

- A. A minimum of one test pile shall be loaded to twice the design load. The load test shall be evaluated by the contractor and micropile design engineer to determine compliance with job performance requirements.
- B. The load shall be applied with a calibrated hydraulic jack. A leveling plate shall be attached to the surface of the test pile and the jack shall be set in position with the load centered on the pile.

- C. The tests shall be performed in accordance with ASTM D 1143-81, Testing of Piles under Axial Compressive Load.
- D. The test load shall be applied in compliance with ASTM D 1143-81, Paragraph 5.6 Quick Pile Test. In essence the load shall be applied in intervals in increments of 20 percent of the anticipated working load to maximum of a least 200 percent of the working load. The maximum load shall be maintained for 1 hour or until the settlement is less than or equal to 0.001 foot per hour. Load increments shall be maintained as applied as described in ASTM D 1143.81, Paragraph 5.4. Load increments shall be maintained as applied as described in ASTM D1143-81, Paragraph 5.4. Readings of settlements and rebounds shall be referred to a constant elevation benchmark and shall be recorded to 1/1000 of a foot for each increment or decrement of load.
- E. Following the 1-hour hold on the maximum load, the test piles shall be rebound as described in ASTM D 1143.81, Paragraph 6.2. Six settlement and rebounded readings shall be made in addition to the initial and final readings (total of 8) during each load or rebound cycle.
- F. The rebound curve shall be established by unloading in decrements of 75, 50, 25 and 10 percent of the total applied load.
- G. The test pile may be a production pile, as approved by the micropile design engineer and Albertson Engineering, Inc.
- H. Contractor guarantees that should the test pile fail to give acceptable results, he will modify his design and install and test another pile at his expense.
- I. At Contractor option, testing can be eliminated if the following is used in design: a theoretical safety factor of 3.0 for skin friction and 2.0 for all other safety factors.

END OF SECTION

SECTION 32 05 23
CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS

PART 1 - GENERAL**1.1 SUMMARY**

- A. Section Includes:
 - 1. Pedestrian Pavement: Walks.

1.2 RELATED REQUIREMENTS

- A. Field Testing: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Step Nosings and Railings: Section 05 50 00, METAL FABRICATIONS.
- C. Subgrade Preparation and Subbase Compaction: Section 31 20 00, EARTHWORK.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American Association of State Highway and Transportation Officials (AASHTO):
 - 1. M147-65-UL-04 - Materials for Aggregate and Soil-Aggregate Subbase, Base and Surface Courses.
 - 2. M233-86 - Boiled Linseed Oil Mixture for Treatment of Portland Cement Concrete.
- C. American Concrete Institute (ACI):
 - 1. 305R-10 - Guide to Hot Weather Concreting.
 - 2. 306R-10 - Guide to Cold Weather Concreting.
- D. American National Standards Institute (ANSI):
 - 1. B101.3 - Wet DOCF of Common Hard Surface Floor Materials (Including Action and Limit Thresholds for the Suitable Assessment of the Measured Values).
- E. ASTM International (ASTM):
 - 1. A615/A615M-16 - Deformed and Plain Carbon Steel Bars for Concrete Reinforcement.
 - 2. A996/A996M-15 - Rail-Steel and Axle-Steel Deformed Bars for Concrete Reinforcement.
 - 3. A1064/A1064M-16 - Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete.
 - 4. C33/C33M-16 - Concrete Aggregates.
 - 5. C94/C94M-16 - Ready Mixed Concrete.
 - 6. C143/C143M-15a - Slump of Hydraulic Cement Concrete.
 - 7. C150/C150M-16 - Portland Cement.
 - 8. C171-16 - Sheet Materials for Curing Concrete.

9. C260/C260M-10a - Air Entraining Admixtures for Concrete.
10. C309-11 - Liquid Membrane Forming Compounds for Curing Concrete.
11. C494/C494M-15a - Chemical Admixtures for Concrete.
12. C618-15 - Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete.
13. C979/C979M-16 - Pigments for Integrally Colored Concrete.
14. C989/C989M-14 - Slag Cement for Use in Concrete and Mortars.
15. C1240-15 - Silica Fume Used in Cementitious Mixtures.
16. D1751-04(2013)e1 - Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types).
17. D5893/D5893M-10 - Cold Applied, Single Component, Chemically Curing Silicone Joint Sealant for Portland Cement Concrete Pavements.
18. D6690-15 - Joint and Crack Sealants, Hot Applied, for Concrete and Asphalt Pavements.

1.4 PREINSTALLATION MEETINGS

- A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.
 1. Required Participants:
 - a. Contracting Officer's Representative.
 - b. Contractor.
 - c. Installer.
 2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
 - a. Installation schedule.
 - b. Installation sequence.
 - c. Preparatory work.
 - d. Protection before, during, and after installation.
 - e. Installation.
 - f. Terminations.
 - g. Transitions and connections to other work.
 - h. Inspecting and testing.
 - i. Other items affecting successful completion.
 3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

- B. Submittal Drawings:
 - 1. Show size, configuration, and fabrication and installation details.
 - 2. Show reinforcing.
 - 3. Include jointing plan for concrete pavements, curbs and gutters.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Installation instructions.
- D. Test reports: Certify products comply with specifications.
 - 1. Concrete materials.
 - 2. Select subbase materials.
 - 3. Field test reports.
- E. Certificates: Certify products comply with specifications.
 - 1. Expansion joint filler.
 - 2. Reinforcement.
 - 3. Curing materials.
 - 4. Concrete protective coating.
- F. Qualifications: Substantiate qualifications comply with specifications.
 - 1. Installer with project experience list.
 - 2. Land surveyor.
- G. Concrete mix design.
- H. Select subbase job-mix design.
- I. Proposed hot and cold weather concreting methods.
- J. Land surveyor's construction staking notes, before placing concrete.
 - 1. Identify discrepancies between field conditions and Drawings.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications:
 - 1. Regularly installs specified products.
 - 2. Installed specified products with satisfactory service on five similar installations.
 - a. Project Experience List: Provide contact names and addresses for completed projects.
- B. Land Surveyor: Professional land surveyor or engineer registered to provide land surveys in jurisdiction where project is located.
- C. Preconstruction Testing:
 - 1. Engage independent testing laboratory to perform tests and submit reports.
 - a. Deliver samples to laboratory in number and quantity required for testing.

2. Concrete mix design.
3. Select subbase job-mix design. Report the following:
 - a. Material sources.
 - b. Gradation.
 - c. Plasticity index.
 - d. Liquid limit.
 - e. Laboratory compaction curves indicating maximum density at optimum moisture content.

1.7 DELIVERY

- A. Bulk Products: Deliver bulk products away from buildings, utilities, pavement, and existing turf and planted areas. Maintain dry bulk product storage away from contaminants.

1.8 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight facility.
- B. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

- A. Hot Weather Concreting Procedures: ACI 305R.
- B. Cold Weather Concreting Procedures: ACI 306R.
 1. Use non-corrosive, non-chloride accelerator admixture.
 2. Do not use calcium chloride, thiocyanates or admixtures containing more than 0.05 percent chloride ions.

1.10 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 CONCRETE MATERIALS

- A. Portland Cement: ASTM C150/C150M, Type I or II.
- B. Pozzolans:
 1. Fly Ash: ASTM C618, Class C or F including supplementary optional physical requirements.
 2. Slag: ASTM C989/C989M; Grade 80.
 3. Silica Fume: ASTM C1240.
- C. Coarse Aggregate: ASTM C33/C33M; size No. 4 or smaller to suit application.
- D. Fine Aggregate: ASTM C33/C33M.
- E. Mixing Water: Fresh, clean, and potable.
- F. Air-Entraining Admixture: ASTM C260/C260M.

- G. Chemical Admixtures: ASTM C494/C494M.
- H. Welded Wire Fabric: ASTM A1064/A1064M, plain; Grade 450 (65); sized as indicated.
- I. Expansion Joint Filler: ASTM D1751.
- J. Sheet Materials for Curing Concrete: ASTM C171.
- K. Color Pigment: ASTM C979/C979M, colored and white powder pigments.

2.2 SELECT SUBBASE

- A. Subbase: AASHTO M147; Grade B.
 - 1. Select granular material composed of sand, sand-gravel, crushed stone, crushed or granulated slag, with or without soil binder, or combinations of these materials.

SUBBASE GRADING REQUIREMENTS							
Sieve Size		Percentage Passing by Mass					
		Grades					
(mm)	(in)	A	B	C	D	E	F
50	2	100	100				
25	1		75-95	100	100	100	100
9.5	3/8	30-65	40-75	50-85	60-100		
4.47	No. 4	25-55	30-60	35-65	50-85	55-100	70-100
2.00	No. 10	15-40	20-45	25-50	40-70	40-100	55-100
0.425	No. 40	8-20	15-30	15-30	25-45	20-50	30-70
0.075	No. 200	2-8	5-20	5-15	5-20	6-20	8-25

- B. Other Acceptable Gradations: Materials within three to five percent, plus or minus, of specified gradation, or as recommended by the geotechnical engineer and approved by the Contracting Officer's Representative.

2.3 FORMS

- A. Forms: Wood, plywood, metal, or other materials, approved by Contracting Officer's Representative, of grade or type suitable to obtain type of finish specified.
 - 1. Plywood: Exterior grade, free of defects and patches on contact surface.
 - 2. Lumber: Sound, grade-marked, S4S stress graded softwood, minimum 50 mm (2 inches) thick, free from warp, twist, loose knots, splits, or other defects.
 - 3. Form Coating: As recommended by Architect/Engineer.

B. Provide forms suitable in cross-section, depth, and strength to resist springing during depositing and consolidating concrete.

1. Do not use forms varying from straight line more than 3 mm in 3000 mm (1/8 inch in 10 feet), horizontally and vertically.

C. Provide flexible or curved forms for forming radii.

2.4 CONCRETE CURING MATERIALS

A. Concrete curing materials, conform to one of the following:

1. Burlap: Minimum 233 g/sq. m (7 ounces/sq. yd.) dry.
2. Sheet Materials for Curing Concrete: ASTM C171.
3. Curing Compound: ASTM C309, Type 1 clear; liquid membrane forming type, without paraffin or petroleum.

2.5 CONCRETE MIXES

A. Design concrete mixes according to ASTM C94/C94M, Option C.

B. Concrete Type: Air-entrained. See Table I.

TABLE I - CONCRETE TYPES					
Concrete Type	Minimum 28 Day Compressive Strength f'c MPa (psi)	Non-Air-Entrained		Air-Entrained	
		Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio	Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio
A	35 (5000)1,3	375 (630)	0.45	385 (650)	0.40
B	30 (4000)1,3	325 (550)	0.55	340 (570)	0.50
C	25 (3000)1,3	280 (470)	0.65	290 (490)	0.55
D	25 (3000)1,2	300 (500)	*	310 (520)	*
Footnotes:					
1. If trial mixes are used, achieve compressive strength 8.3 MPa (1,200 psi) in excess of f'c. For concrete strengths greater than 35 MPa (5,000 psi), achieve compressive strength 9.7 MPa (1,400 psi) in excess of f'c.					
2. For Concrete Exposed to High Sulfate Content Soils: Maximum water cement ratio is 0.44.					
3. Laboratory Determined according to ACI 211.1 for normal weight concrete.					

C. Maximum Slump: ASTM C143/C143M. See Table II.

TABLE II - MAXIMUM SLUMP	
APPLICATION	MAXIMUM SLUMP
Curb & Gutter	75 mm (3 inches)
Pedestrian Pavement	75 mm (3 inches)

TABLE II - MAXIMUM SLUMP	
APPLICATION	MAXIMUM SLUMP
Vehicular Pavement	50 mm (2 inches) Machine Finished
	100 mm (4 inches) Hand Finished
Equipment Pad	75 to 100 mm (3 to 4 inches)

2.6 ACCESSORIES

- A. Equipment and Tools: Obtain Contracting Officer's Representative's, approval of equipment and tools needed for handling materials and performing work before work begins.
- B. Maintain equipment and tools in satisfactory working condition.
- C. Sealants:
 - 1. Concrete Paving Expansion Joints: ASTM D5893/D5893M, Type SL, single component, self-leveling, silicone joint sealant.
 - 2. Concrete Paving Joints: ASTM D6690, Type IV, hot-applied, single component joint sealant.
- D. Concrete Protective Coating: AASHTO M233 linseed oil mixture.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Prepare, construct, and finish subgrade. See Section 31 20 00, EARTHWORK.
- D. Maintain subgrade in smooth, compacted condition, in conformance with the required section and established grade until the succeeding operation has been accomplished.

3.2 SELECT SUBBASE

- A. Placing:
 - 1. Place subbase material on prepared subgrade in uniform layer to required contour and grades, and to maximum 200 mm (8 inches) loose depth.
 - 2. When required compacted thickness exceeds 150 mm (6 inches), place subbase material in equal thickness layers.
 - 3. When subbase elevation is 13 mm (1/2 inch) or more below required grade, excavate subbase minimum 75 mm (3 inches) deep. Place and compact subbase to required grade.
- B. Compaction:
 - 1. Perform compaction with approved hand or mechanical equipment well suited to the material being compacted.

2. Maintain subbase at optimum moisture content for compaction.
3. Compact each subbase layer to minimum 95 percent or 100 percent of maximum density.

C. Subbase Tolerances:

1. Variation from Indicated Grade: Maximum 9 mm (3/8 inch).
2. Variation from Indicated Thickness: Maximum 13 mm (1/2 inch).

D. Protection:

1. Protect subbase from damage until concrete is placed.
2. Reconstruct damaged subbase before placing concrete.

3.3 SETTING FORMS

A. Form Substrate:

1. Compact form substrate to uniformly support forms along entire length.
2. Correct substrate imperfections and variations by cutting, filling, and compacting.

B. Form Setting:

1. Set forms to indicated line and grade with tight joints. Rigidly brace forms preventing movement.
2. Remove forms when removal will not damage concrete and when required for finishing.
3. Clean and oil forms before each use.
4. Correct forms, when required, immediately before placing concrete.

C. Land Surveyor: Establish control, alignment, and grade for forms.

1. Notify Contracting Officer's Representative immediately when discrepancies exist between field conditions and drawings.
2. Correct discrepancies greater than 25 mm (1 inch) before placing concrete.

D. Form Tolerances:

1. Variation from Indicated Line: Maximum 6 mm (1/4 inch).
2. Variation from Indicated Grade: Maximum 3 mm in 3000 mm (1/8 inch in 10 feet).

3.4 PLACING REINFORCEMENT

- A. Keep reinforcement clean from contamination preventing concrete bond.
- B. Install reinforcement shown on drawings.
- C. Support and securely tie reinforcing steel to prevent displacement during concrete placement.
- D. Obtain Contracting Officer's Representative's reinforcement placement approval before placing concrete.

3.5 JOINTS - GENERAL

- A. Place joints, where shown on approved submittal Drawings.
 - 1. Conform to details shown.
 - 2. Install joints perpendicular to finished concrete surface.
- B. Make joints straight and continuous from edge to edge of pavement.

3.6 CONSTRUCTION JOINTS

- A. Locate transverse construction joints between slabs of vehicular pavement as shown on approved submittal Drawings.
- B. Place transverse construction joints of type shown, where indicated, and whenever concrete placement is suspended for more than 30 minutes.

3.7 CONTRACTION JOINTS

- A. Tool or cut joints to width, depth, and radius edge shown on drawings using grooving tool, jointer, or saw.
- B. Construct joints in curbs and gutters by inserting 3 mm (1/8 inch) steel plates conforming to curb and gutter cross sections.
 - 1. Keep plates in place until concrete can hold its shape.
- C. Finish joint edges with edging tool.
- D. Score pedestrian pavement with grooving tool or jointer.

3.8 EXPANSION JOINTS

- A. Form expansion joints with expansion joint filler of thickness shown on drawings.
 - 1. Locate joints around perimeter of structures and features abutting site work concrete.
 - 2. Create complete, uniform separation between structure and site work concrete.
- B. Extend expansion joint material full depth of concrete with top edge of joint filler below finished concrete surface where sealant is indicated on Drawings.
- C. Cut and shape material matching cross section.
- D. Anchor with approved devices to prevent displacing during placing and finishing operations.
- E. Round joint edges with edging tool.

3.9 PLACING CONCRETE - GENERAL

- A. Preparation before Placing Concrete:
 - 1. Obtain Contracting Officer's Representative approval.
 - 2. Remove debris and other foreign material.
 - 3. Uniformly moisten substrate, without standing water.

- B. Convey concrete from mixer to final location without segregation or loss of ingredients. Deposit concrete to minimize handling.
- C. During placement, consolidate concrete by spading or vibrating to minimize voids, honeycomb, and rock pockets.
 - 1. Vibrate concrete against forms and along joints.
 - 2. Avoid excess vibration and handling causing segregation.
- D. Place concrete continuously between joints without bulkheads.
- E. Install construction joint in concrete placement suspended for more than 30 minutes.
- F. Replace concrete with cracks, chips, bird baths, and other defects to nearest joints, approved by Contracting Officer's Representative.

3.10 PLACING CONCRETE FOR PEDESTRIAN PAVEMENT

- A. Place concrete in one layer conforming to cross section shown on Drawings after consolidating and finishing.
- B. Deposit concrete near joints without disturbing joints. Do not place concrete directly onto joint assemblies.
- C. Strike concrete surface to proper section ready for consolidation.
- D. Consolidate concrete by tamping and spading or with approved mechanical finishing equipment.
- E. Finish concrete surface with wood or metal float.
- F. Construct concrete pads and pavements with sufficient slope to drain, preventing standing water.

3.11 FORM REMOVAL

- A. Keep forms in place minimum 12 hours after concrete placement. Remove forms without damaging concrete.
- B. Do not use bars or heavy tools against concrete to remove forms. Repair damage concrete found after form removal.

3.12 CONCRETE FINISHING - GENERAL

- A. Follow operation sequence below, unless otherwise indicated on Drawings:
 - 1. Consolidating, floating, striking, troweling, texturing, and joint edging.
- B. Use edging tool with 6 mm (1/4 inch) radius.
- C. Keep finishing equipment and tools clean and suitable for use.

3.13 CONCRETE FINISHING - PEDESTRIAN PAVEMENT

- A. Walks:
 - 1. Finish concrete surfaces with metal float, troweled smooth, and finished with a broom moistened with clear water.

2. Finish slab edges and formed transverse joints with edger.
3. Broom surfaces transverse to traffic direction.
 - a. Use brooming to eliminate flat surface produced by edger.
 - b. Produce uniform corrugations, maximum 1.5 mm (1/16 inch) deep profile.
4. Provide surface uniform in color and free of surface blemishes, form marks, and tool marks.
5. Paving Tolerances:
 - a. Variation from Indicated Plane: Maximum 5 mm in 3000 mm (3/16 inch in 10 feet).
 - b. Variation from Indicated Thickness: Maximum 6 mm (1/4 inch).
6. Replace paving within joint boundary when paving exceeds specified tolerances.

3.14 CONCRETE CURING

- A. Concrete Protection:
 1. Protect unhardened concrete from rain and flowing water.
 2. Provide sufficient curing and protection materials available and ready for use before concrete placement begins.
 3. Protect concrete to prevent pavement cracking from ambient temperature changes during curing period.
 - a. Replace pavement damaged by curing method allowing concrete cracking.
 - b. Employ another curing method as directed by Contracting Officer's Representative.
- B. Cure concrete for minimum 7 days by one of the following methods appropriate to weather conditions preventing moisture loss and rapid temperature change:
 1. Burlap Mat: Provide minimum two layers kept saturated with water during curing period. Overlap Mats at least 150 mm (6 inches).
 2. Sheet Materials:
 - a. Wet exposed concrete surface with fine water spray and cover with sheet materials.
 - b. Overlap sheets minimum 300 mm (12 inches).
 - c. Securely anchor sheet materials preventing displacement.
 3. Curing Compound:
 - a. Protect joints indicated to receive sealants preventing contamination from curing compound.

- b. Insert moistened paper or fiber rope into joint or cover joint with waterproof paper.
- c. Apply curing compound before concrete dries.
- d. Apply curing compound in two coats at right angles to each other.
- e. Application Rate: Maximum 5 sq. m/L (200 sq. ft./gallon), both coats.
- f. Immediately reapply curing compound to surfaces damaged during curing period.

3.15 CONCRETE PROTECTIVE COATING

- A. Apply protective coating of linseed oil mixture to exposed-to-view concrete surfaces, drainage structures, and features that project through, into, or against concrete exterior improvements to protect the concrete against deicing materials.
- B. Complete backfilling and curing operation before applying protective coating.
- C. Dry and thoroughly clean concrete before each application.
- D. Apply two coats, with maximum coverage of 11 sq. m/L (50 sq. yds./gal.); first coat, and maximum 16 sq. m/L (70 sq. yds./gal.); second coat, except apply commercially prepared mixture according to manufacturer's instructions.
- E. Protect coated surfaces from vehicular and pedestrian traffic until dry.
- F. Do not heat protective coating, and do not expose protective coating to open flame, sparks, or fire adjacent to open containers or applicators. Do not apply material at temperatures lower than 10 degrees C (50 degrees F).

3.16 FIELD QUALITY CONTROL

- A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.
 - 1. Compaction.
 - a. Pavement subgrade.
 - b. Curb, gutter, and sidewalk.
 - 2. Concrete:
 - a. Delivery samples.
 - b. Field samples.
 - 3. Slip Resistance: Steps and pedestrian paving.

3.17 CLEANING

- A. After completing curing:
 - 1. Remove burlap and sheet curing materials.
 - 2. Sweep concrete clean, removing foreign matter from the joints.
 - 3. Seal joints as specified.

3.18 PROTECTION

- A. Protect exterior improvements from traffic and construction operations.
 - 1. Prohibit traffic on paving for minimum seven days after placement, or longer as directed by Contracting Officer's Representative.
- B. Remove protective materials immediately before acceptance.
- C. Repair damage.
 - 1. Replace concrete containing excessive cracking, fractures, spalling, and other defects within joint boundary, when directed by Contracting Officer's Representative, and at no additional cost to the Government.

- - - E N D - - -

SECTION 32 31 13
CHAIN LINK FENCES AND GATES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Chain link fence, gates and accessories.

1.2 RELATED REQUIREMENTS

- A. Temporary Construction Fence: Section 01 00 00, GENERAL REQUIREMENTS.
- B. Grounding: Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
1. A121-13 - Metallic Coated Carbon Steel Barbed Wire.
 2. A392-11a - Zinc-Coated Steel Chain-Link Fence Fabric.
 3. A491-11 - Aluminum Coated Steel Chain Link Fence Fabric.
 4. A817-12 - Metal-Coated Steel Wire for Chain-Link Fence Fabric and Marcellled Tension Wire.
 5. B429 - Aluminum-Alloy Extruded Structural Pipe and Tube.
 6. F567-14a - Installation of Chain-Link Fence.
 7. F626-14 - Fence Fittings.
 8. F668-11 - Polyvinyl Chloride (PVC) and Other Organic Polymer-Coated Steel Chain Link Fence Fabric.
 9. F900-11 - Industrial and Commercial Swing Gates.
 10. F1184-16 - Industrial and Commercial Horizontal Slide Gates.
 11. F1664-08(2013) - Polyvinyl Chloride (PVC) and Other Conforming Organic Polymer Coated Steel Tension Wire used with Chain Link Fence.
 12. F1665-08(2013) - Polyvinyl Chloride (PVC) and Other Conforming Organic Polymer Coated Steel Barbed Wire used with Chain Link Fence.
 13. F2200-14 - Automated Vehicular Gate Construction.
 14. F1043-16 - Strength and Protective Coatings on Steel Industrial Fence Framework.
 15. F1083-16 - Pipe, Steel, Hot-Dipped Zinc-Coated (Galvanized) Welded, for Fence Structures.
- C. Chain Link Fence Manufacturing Institute (CLFMI):
1. Product Manual.

- D. Federal Specifications (Fed. Spec.):
 - 1. FF-P-110J - Padlock, Changeable Combination.

- E. Master Painters Institute (MPI):
 - 1. No. 18 - Primer, Zinc Rich, Organic.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Show size, configuration, and fabrication and installation details.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Installation instructions.
- D. Certificates: Certify products comply with specifications.
 - 1. Fence alignment.
 - 2. Zinc-coating.
- E. Qualifications: Substantiate qualifications comply with specifications.
 - 1. Manufacturer with project experience list.
 - 2. Installer with project experience list.

1.5 QUALITY ASSURANCE

- A. Manufacturer Qualifications:
 - 1. Regularly manufactures specified products.
 - 2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
 - a. Project Experience List: Provide contact names and addresses for completed projects.
- B. Installer Qualifications:
 - 1. Regularly installs specified products.
 - 2. Installed specified products with satisfactory service on five similar installations for minimum five years.
 - a. Project Experience List: Provide contact names and addresses for completed projects.
- C. Welders and Welding Procedures Qualifications: AWS D1.1/D1.1M.

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Protect products from damage during handling and construction operations.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS**2.1 PRODUCTS - GENERAL**

- A. Basis of Design: See Contract Drawings.
- B. Provide fences and gates from one manufacturer.

2.2 CHAIN-LINK FENCING AND GATES

- A. General: Conform to CLFMI Product Manual.
- B. Chain Link Fabric: 50 mm (2 inch) mesh, 3.76 mm(0.15 inches), 1.8 m (72 inches) high, top selvage and bottom selvage.
 - 1. Zinc-Coated Steel Fabric: ASTM A392, hot dipped galvanized before or after weaving.
 - a. Class 2 - 610 g/sq. m (2.0 oz/sq. ft.).
 - 2. Polymer Coated Steel Fabric: ASTM F668.
 - a. Class 2b fused and adhered.
 - b. Color: Black.
 - 3. Fabric Selvage: K&T, Knuckle finish at one end, twist at other.
 - a. Fabric less than 1.8 m (72 inches) width, knuckle finish top and bottom.
- C. Fence Framework:
 - 1. Round Steel Pipe and Rail: ASTM F1043, Group IA Heavy Industrial Fence Framework, ASTM F1083 schedule 40 galvanized pipe.
 - a. Line post: 60 mm (2.375 inch) diameter.
 - b. End, Corner, Pull post: 60 mm (2.375 inch) diameter.
 - c. Brace rails, top, bottom, and intermediate rails, 42 mm (1.660 inch) diameter, 3.38 kg/m (2.27 lb./ft.).
 - 2. Polymer Coated Framework: ASTM F668 PVC coating fused and adhered to the exterior zinc coating of the post or rail.
 - a. Coating Thickness (Minimum):
 - 1) PVC and Polyolefin: 0.25 mm (10 mils).
 - b. Color: Match fabric.

2.3 TENSION WIRE

- A. Metallic Coated Steel Marcellled Tension Wire: ASTM A817, Type II 4.5 mm (0.177 inches) marcellled wire.

- B. Polymer Coated Steel Tension Wire: ASTM F1664, Class 2a, 4.5 mm (0.177 inches) wire. Wire gauge specified is the core wire gauge.

2.4 FITTINGS

- A. General: ASTM F626.
- B. Tension and Brace Bands: Galvanized pressed steel.
- C. Terminal Post Caps, Line Post Loop Tops, Rail and Brace Ends, Boulevard Clamps, Rail Sleeves: Pressed steel galvanized.
- D. Truss Rod Assembly: Steel truss rod with a pressed steel tightener.
- E. Tension Bars: Galvanized steel one-piece length 50 mm (2 inches) less than the fabric height.
- F. Polymer Coated Color Fittings: Polymer coating minimum thickness 0.15 mm (0.006 inches) fused and adhered to zinc coated fittings and match color to fence system.

2.5 TIE WIRE and HOG RINGS

- A. Galvanized: Minimum zinc coating 366 g/sq. m (1.20 oz./sq. ft.); 3.76 mm (0.148 inch) diameter steel wire.
- B. Polymer coated; match coating, class and color to that of the chain link fabric.

2.6 GATES

- A. Swing Gates: ASTM F900 single swing type.
 - 1. Galvanized steel:
 - a. Frame: ASTM F1043 and ASTM F1083 Group IA schedule 40 pipe 48.3 mm (1.900 inches) OD. Apply galvanized repair paint on welded joints.
 - 1) Vertical and Horizontal Spacing: Maximum 2400 mm (8 ft.).
 - b. Hardware:
 - 1) Hinges: 180 degree gate hinges per leaf.
 - 2) Positive locking gate latch, 7.9 mm (5/16 inches) thick by 44 mm (1 3/4 inches).
 - 3) Padlocks: By VA .
 - 2. Polymer Coated Frames and Posts: Match fence. Field coat hardware with liquid polymer touch up.

2.7 CONCRETE

- A. Concrete: As specified in Section 03 30 00, Cast-in-Place Concrete.

2.8 FINISHES

- A. Steel Paint Finish:
 - 1. Powder-Coat Finish: Manufacturer's standard two-coat finish system as follows:

- a. One coat primer.
- b. One coat thermosetting topcoat.
- c. Dry-film Thickness: 0.05 mm (2 mils) minimum.
- d. Color: Refer to Section 09 06 00, SCHEDULE FOR FINISHES.

B. Finish exposed surfaces after fabrication.

2.9 ACCESSORIES

- A. Primers:
- B. Barrier Coating: ASTM D1187/D1187M.
- C. Welding Materials: AWS D1.1/D1.1M, type to suit application.
- D. Galvanizing Repair Paint: MPI No. 18.
- E. Touch-Up Paint: Match shop finish.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Remove existing fences and gates to permit new installation.
 - 1. Dispose of other removed materials.
- D. Apply barrier coating to steel surfaces in contact with dissimilar metals and cementitious materials to minimum 0.7 mm (30 mils) dry film thickness.

3.2 INSTALLATION

- A. Layout fence and locate position of post.
- B. Installation:
 - 1. General: Comply with ASTM F567.
 - 2. Framework:
 - a. Posts: Set plumb in concrete footings with 600 mm (24 inches) minimum depth.
 - 1) Minimum Footing Diameter: Four times largest cross section of post, up to 100 mm (4 inches) O.D. and three times largest cross section of post greater than 100 mm (4 inches) O.D.
 - 2) Provide larger footings for gate posts. Top of post concrete footing, at grade crowned to shed water away from the post.
 - 3) Space line posts not exceeding 3 m (10 ft.) on center.
 - b. Top rail: Install 6.4 m (21 ft.) lengths of rail continuous thru line post or barb arm loop top. Splice rail using top rail sleeves minimum 150 mm (6 inches) long.
 - 1) Secure rail to terminal post by brace band and rail end.

- 2) Field cut and secure bottom rail or intermediate rail to line posts with boulevard bands or rail ends and brace bands.
 - 3) Provide mid rail for fences 3.7 m (12 feet) high or higher.
 - c. Terminal posts: Brace and truss end, corner, pull and gate posts for fence 1.8 m (6 ft.) and higher and for fences 1.5 m (5 ft.) in height without top rail.
 - d. Tension wire: Install tension wire 100 mm (4 inches) up from bottom of fabric. Fences without top rail, install tension wire 100 mm (4 inches) down from the top of the fabric.
 - 1) Stretched taut tension wire independently, between terminal posts and secure with brace band.
 - 2) Secure tension wire to chain link fabric with 3.76 mm (0.15 inch) hog rings 450 mm (18 inches) on center and to each line post with tie wire.
 - 3) Install top tension wire through barb arm loop for fences with barbed wire and no top rail.
- C. Chain Link Fabric:
1. Install fabric inside of the framework with ground clearance of 50 mm (2 inches) maximum.
 2. Stretch fabric between terminal posts and secure with tension bar.
 3. Wrap tie wire around the post or rail. Attached to fabric wire picket on both sides. Cut off and bend excess wire to prevent injury.
- D. Gate:
1. Swing Gates: Comply with ASTM F567. Outward swing. Gates plumb in closed position with 75 mm (3 inches) bottom clearance. Install electrically operated gates according to manufacturer's instructions.
- E. Nuts and Bolts:
1. Bolts: Install carriage bolts with head on the secure side of the fence. Peened over all bolts shall be to prevent removal of the nut.
- F. Electrical Grounding:
1. Grounding: Grounding, when required, as specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.
- G. Touch up damaged factory finishes.
1. Repair galvanized surfaces with galvanized repair paint.
 2. Repair painted surfaces with touch up primer.

3.3 CLEANING

- A. Clean exposed fence surfaces. Remove contaminants and stains.

3.4 PROTECTION

- A. Protect fence from traffic and construction operations.
- B. Repair damage.

- - - E N D - - -

