

**ASBESTOS ABATEMENT NOTES**

- GENERAL CONTRACTOR NOTES**
1. PROVIDE SOLID BARRIER WALLS BETWEEN RENOVATION AREAS AND OCCUPIED AREAS AS REQUIRED.
  2. REMOVE ALL MOVABLE OBJECTS WITHIN SCHEDULED ABATEMENT AREAS PRIOR TO COMMENCEMENT OF ABATEMENT ACTIVITIES.
  3. PROVIDE TEMPORARY HOSE CONNECTIONS, APPROPRIATE DRAIN CONNECTIONS AND ELECTRICAL PANEL FOR ABATEMENT CONTRACTOR, (ENSURE PANEL IS CONNECTED TO EMERGENCY GENERATOR).
  4. WORK TIME RESTRICTIONS:
    - A. PART OF CORRIDOR TO REMAIN OPEN AT ALL TIMES.
    - B. ACCESS TO ROOMS MUST BE MAINTAINED AT ALL TIMES (EXCEPT POSSIBLY OUTSIDE BUSINESS HOURS WHEN WORK COULD BE COORDINATED AND COMPLETED).
    - C. WORK MUST BE COORDINATED WITH THE IMMEDIATE REINSTALLATION OF FINISHES SO CORRIDOR DOES NOT REMAIN IN AN UNFINISHED STATE.

- ABATEMENT CONTRACTOR NOTES**
1. COORDINATE LOCKOUT OF AIR HANDLING UNITS AND EXHAUST FANS WITH THE VA AND MECHANICAL CONTRACTOR PRIOR TO CONDUCTING ABATEMENT ACTIVITIES. IF LOCKOUT OF THE HVAC SYSTEM IS NOT POSSIBLE, SEAL ALL INTAKE AND EXHAUST VENTS IN THE REGULATED AREA WITH DUCT TAPE AND 2 LAYERS OF 6-MIL POLY OR REMOVE DIFFUSERS AND CAP SUPPLY AND RETURN DUCTS. SEAL ANY SEAMS IN HVAC SYSTEM COMPONENTS THAT PASS THROUGH THE REGULATED AREA.
  2. ALL TEMPORARY WATER SERVICE CONNECTIONS MUST INCLUDE A BACKFLOW PREVENTER, BE COORDINATED WITH GENERAL CONTRACTOR AND MET WITH VA APPROVAL.
  3. CONTRACTOR WILL ABATE ALL ACM IN SPECIFIED AREAS IN ACCORDANCE WITH SPECIFICATION SECTIONS 02-82-13.19.
  4. CONTRACTOR TO COORDINATE ACCESS TO ALL SPACES SERVED BY CORRIDOR C-205 AND CORRIDOR C-206. ABATEMENT WORK TO BE SCHEDULED OFF-HOURS AND/OR DURING VETERAN HOLIDAYS.


- ABATEMENT**
- 1 REMOVE 12" FLOOR TILE & MASTIC 570 SQUARE FEET
  - 2 REMOVE TOP LAYER OF FLOOR TILE AND 2ND LAYER FLOOR TILE & MASTIC (ACM) 882 SQUARE FEET

**OMIT ABATEMENT UNDER DEDUCT ALTERNATE BID EXCEPT HATCHED AREA**

**SECOND FLOOR ASBESTOS ABATEMENT PLAN**  
1/8"=1'-0"

I:\Server Project Draw\1301\_Frogg\_W\_Health\_Care\_System\10\_Bldg\_46\_2nd\_Floor\0201\0201\Second\_Abatement.dwg, Jul 28, 2016 - 10:49am

Revisions	Date




Dept. of Veterans Affairs  
Health Care System  
2101 Elm Street North  
Fargo, ND 58102



IMAGE GROUP INC.  
403 CENTER AVENUE, SUITE 300  
MOORHEAD, MN 56560

MAGE GROUP INC, Architecture & Interiors  
TRIO ENVIRONMENTAL, Environmental Consultants  
OSBERMILLER NELSON ENGINEERING, Mechanical Engineers  
MEN ENGINEERING, Electrical Engineers

I hereby certify that this plan specification, or report was prepared by me or under my direct supervision, and that I am duly Certified Asbestos Abatement Project Designer under the laws of the state of North Dakota.  
*[Signature]*  
Date 07/29/2016 Cert. No. 259

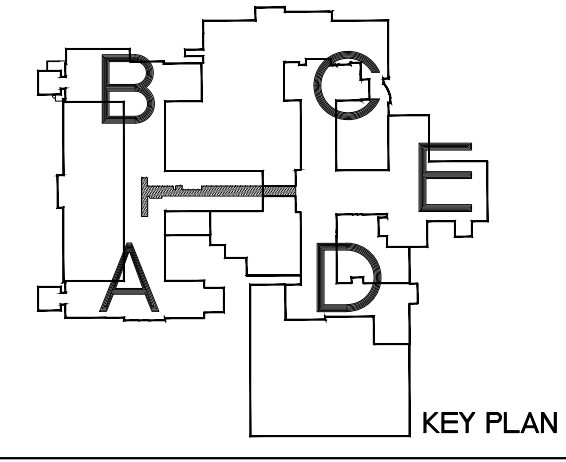

Drawing Title <b>SECOND FLOOR ASBESTOS ABATEMENT PLAN</b>		Project Title <b>RENOVATE 2ND FLOOR, BLDG 46 FOR MEDICAL SPECIALTIES</b>		Date <b>JULY 29, 2016</b>
VA Project No. <b>437-14-110</b>	Contract No. <b>VA263-P-1217 VA263-C-</b>	Designed By <b>RM</b>	Checked By <b>RM</b>	Drawn By <b>AH</b>
Building No. <b>46</b>	AutocAD File Name <b>Second_Asbestos.dwg</b>	Location <b>FARGO VA HEALTH CARE SYSTEM FARGO, ND</b>	Drawing No. <b>AB1</b>	Dwg. 13 of 36

